

# Adaptive Complexity Model Predictive Control

Joseph Norby, Ardalan Tajbakhsh, Yanhao Yang, and Aaron M. Johnson

**Abstract**—This work introduces a formulation of model predictive control (MPC) which adaptively reasons about the complexity of the model based on the task while maintaining feasibility and stability guarantees. Existing MPC implementations often handle computational complexity by shortening prediction horizons or simplifying models, both of which can result in instability. Inspired by related approaches in behavioral economics, motion planning, and biomechanics, our method solves MPC problems with a simple model for dynamics and constraints over regions of the horizon where such a model is feasible and a complex model where it is not. The approach leverages an interleaving of planning and execution to iteratively identify these regions, which can be safely simplified if they satisfy an exact template/anchor relationship. We show that this method does not compromise the stability and feasibility properties of the system, and measure performance in simulation experiments on a quadrupedal robot executing agile behaviors over terrains of interest. We find that this adaptive method enables more agile motion and expands the range of executable tasks compared to fixed-complexity implementations.

**Index Terms**—Optimization and Optimal Control, Legged Robots, Underactuated Robots, Dynamics.

## I. INTRODUCTION

As demand for robotic systems increases in industries like environmental monitoring, industrial inspection, disaster recovery, and material handling [1–3], so too has the need for motion planning and control algorithms that efficiently handle the complexity of their dynamics and constraints. Legged systems in particular are well suited for these applications due to their ability to traverse unstructured terrains with behaviors such as that shown in Fig. 1, yet they are so far largely restricted to conservative behaviors due to this complexity. A common approach to overcome these challenges is to break up the problem into a hierarchy of sub-problems which reason over progressively shorter horizons with increasing model complexity. This hierarchy improves computational efficiency which can be used to detect obstacles further away, react more quickly to disturbances, or reduce energy costs. However, this hierarchy is vulnerable to failures caused by omitting portions of the underlying model, raising a fundamental question of how to balance model fidelity and computational efficiency.

Inspiration for answering this question can be drawn from other scientific fields, in particular behavioral economics and neuromechanics. The famous “Thinking: Fast and Slow” framework theorizes that human cognitive function can be described with two systems which respectively handle rapid, simple processing and slow, deliberative reasoning such that

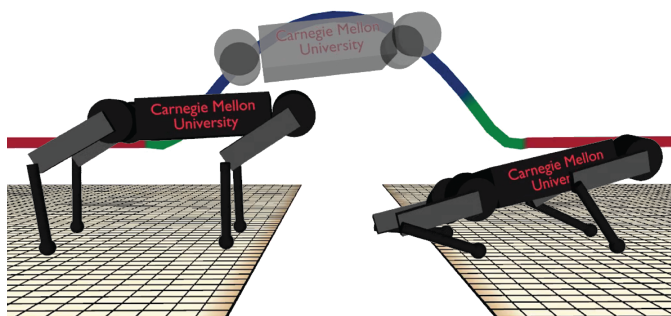


Fig. 1: Adaptive complexity model predictive control selectively simplifies the model to promote efficiency without sacrificing stability. For example, during a legged leaping task joint information may be required during takeoff and landing but can be omitted elsewhere without affecting the behavior.

“[the complex, slow system] is activated when an event is detected that violates the model of the world that [the simple, fast system] maintains” [4]. Extending this concept to the field of motion planning yields meta-planning methods which change their structure to leverage simple, fast models where possible and complex, slow ones where the simple model is inaccurate [5,6]. However, it is not well understood under what exact conditions a given dynamical system may leverage a simple model without sacrificing stability and feasibility, nor is it clear when a more complex model should be used without making the computational overhead intractable.

To investigate these questions, we employ the templates and anchors approach for analyzing model hierarchies [7]. This framework describes relations between dynamical systems where complex behaviors (anchors) can be captured by simpler models (templates), and its connections to legged locomotion are well-studied in both animals and robots. From these observations we draw three hypotheses:

- 1) From the templates and anchors relationship we can derive sufficient conditions which identify regions of a behavior where complex dynamics and constraints can be safely simplified without compromising stability and feasibility (i.e. regions where the robot is following the template model).
- 2) Legged systems often operate in environments where these conditions are satisfied during the majority of behaviors and therefore stability and feasibility guarantees can often be retained even with simplified models.
- 3) During behaviors in which these conditions are not met, a controller which leverages adaptive complexity online can improve performance over fixed-complexity formulations by enabling more efficient motion planning

\*This material is based upon work supported in part by Chevron CTC and the National Science Foundation under Grants DGE-1745016 and ECCS-1924723.

The authors are with the Department of Mechanical Engineering, Carnegie Mellon University, Pittsburgh, PA 15213, USA, {jnorby, atajbakh, yanhaoy, amj1}@andrew.cmu.edu

while retaining stability guarantees.

We evaluate these hypotheses by constructing a formulation of model predictive control (MPC) that actively adapts the model complexity to the task. This is achieved by iteratively identifying regions of the horizon where the behavior can be safely expressed with a simpler model. This formulation is most efficient when the two models satisfy a relationship known as “exact anchoring” [8], and in the worst case converges to the standard all-complex MPC formulation. We evaluate Hypothesis 1 by showing that this algorithm provides formal stability and feasibility properties with respect to the complex system. We evaluate Hypotheses 2 and 3 by applying this algorithm to a quadrupedal system and conducting simulation experiments on common environments which legged platforms may encounter. These results show that the majority of the behaviors in these environments admit feasible simplifications and that the resulting improvement in computational efficiency enables an increase in top speed and decrease in task duration compared to a system without these reductions. We also show that retaining knowledge of the dynamics and constraints in the complex system expands the range of executable tasks compared to a system which uniformly applies these reductions. In the particular case of legged leaping, this approach enables receding horizon execution of a body-length leaping behavior while considering joint constraints, which expands the leaping ability over prior methods which do not consider these constraints.

The organization of this paper is as follows: Section II covers related work in greater detail, and Section III formulates the problem and introduces notation. Section IV provides an overview of the algorithm, whose formal properties are explored in Section V. This algorithm is applied to legged locomotion models in Section VI, and performance for these systems is quantified in Section VII. Section VIII concludes by discussing limitations and future extensions enabled by this work.

## II. RELATED WORK

Dynamic motion planning and control for systems with intermittent contact is inherently difficult. However, enabling agile autonomy for such systems is critical for real-world applications that require the robot to touch the world. In particular, legged robots have significant potential for real-world deployment. But, they often suffer from difficulties arising from hybrid dynamics, high state dimensionality, and non-convex constraints on their kinematics and dynamics. Such problems render even basic motion planning problems PSPACE-complete [9], and as a result existing algorithms to solve them globally for dynamic legged systems cannot operate in real-time [10–13].

In general, the most common approach used to address the planning and control challenges of legged locomotion has been through leveraging some kind of model reduction, wherein the problem is solved with a reduced subset of the state and dynamics. The solution of this simpler problem is then passed to another system with a more complex model which fills in the additional details. The hierarchical nature of

this approach enables optimization of each algorithm based on salient features of the problem such as the timescales of the dynamics or rates of sensor information. Examples of this approach include efficient global planners focused on exploration [14–17] to local planners that plan contact phases over a few gait cycles [18] to whole-body controllers with full-order representations over very small horizons [19–21]. While these hierarchies have been shown to be capable of producing dynamic locomotion, they face a fundamental problem in that dynamics or constraints in the omitted space can render the desired motion sub-optimal or even infeasible. Conservative assumptions in the simple model may fail to produce solutions in difficult environments, and optimistic assumptions may lead to infeasible behaviors that the more myopic complex system may not recognize until too late.

Several methods have been explored to resolve the interface between these layers. One straightforward approach is to use the complex model to assess the simple solution, either by providing a boolean feasible/infeasible classification, computing some value function, or indicating new search directions [22–25]. This can be efficient since checking a solution in a higher-order space is easier than searching for one, although it does not allow the simple model to directly reason about the dynamics or constraints in the complex space.

Another promising way to resolve this is to employ an adaptive planning framework to reason over different models based on the task and constraints. One flavor of this approach plans over a mixture of models of varying degrees of fidelity with some pre-defined rules that guide when to use each and how to transition between them [17,26,27]. Other approaches leverage an adaptive composition of models with different safety bounds to trade between performance and robustness or expand the problem dimensionality as needed to find collision-free paths. [5,6,28–30]. Our approach is more similar to the latter in terms of the underlying adaptation mechanism, but differs in that we derive the exact conditions under which transitioning between models of varying fidelity can be done without sacrificing stability and feasibility. Furthermore, we demonstrate how such a mechanism can be applied to a receding horizon framework for online planning and control.

Similar planning and control problems can also be solved online using receding horizon methods. In particular, model predictive control (MPC) is an iterative receding-horizon optimization framework that has been commonly used to solve constrained optimal control problems [31]. In the context of dynamic legged locomotion, MPC often computes feasible body and/or joint trajectories in order to track a higher level reference plan while respecting dynamic, state, and control constraints. Works such as [32–34] compute the desired ground reaction forces using a single rigid body model, which are realized as joint torques using a whole-body controller. Although computationally efficient, this approach typically uses a single simplified model under the assumption that motions of the legs have minimal effects on the body. This can be limiting in performing more aggressive motions such as those that require flight phases or on robots with high “Centroidal Inertia Isotropy” [35].

While simplified model MPC approaches assume a rep-

representative reduced-order model (template) exists that fairly approximates the full-order model (anchor), they often do not examine the validity of this approximation. Some approaches have studied safe controller synthesis for the template model while ensuring constraint satisfaction of the anchor model through bounding the differences of the two models using reachability analysis [36], approximate simulation properties [37], or learning any unmodeled differences [38]. Another approach uses pre-defined ratios to mix the complex model for the immediate future with the simple model for longer horizon planning, which results in more robust locomotion compared to fixed-complexity formulations [39]. Our approach takes inspiration from these in that it defines the exact conditions under which the higher order model can be simplified without violation of formal guarantees, but critically differs in that we adaptively mix models of varying fidelity within any planning horizon based on local feasibility. This allows us to leverage the fidelity of the complex model when necessary while taking advantage of the computation speed enabled by the simple model for planning longer horizon motions.

Many of these hierarchical planning and control approaches have been shown to effectively perform agile and dynamic motions in simulation and hardware. However, they often struggle in generating and executing motions that require the robot to operate at its kinematic and dynamic limits. These motions are critical in enabling behaviours like stepping and leaping over gaps, stairs, and non-traversable obstacles, which are essential in navigating unstructured terrains. Previous approaches have relied on executing trajectories that have been optimized offline or prior to execution, lack longer horizon planning, or do not consider joint kinematics or constraints [40–44]. Our approach allows the robot to plan for these agile behaviours in a receding-horizon manner while reasoning about constraints over a significantly long horizon, which is shown to expand leaping capabilities in simulation.

### III. PRELIMINARIES

To clarify the operation of adaptive complexity MPC and its properties, we define a formulation for model predictive control and the closed-loop system it yields following [45]. Consider a nonlinear, discrete-time, dynamical system which evolves on state manifold  $X$  under admissible controls  $\mathcal{U}$  and with dynamics  $f$ ,

$$x_{k+1} = f(x_k, u_k) \quad (1)$$

where  $x_k \in X, u_k \in \mathcal{U}$  are the current state and control at time  $k$ , and  $x_{k+1} \in X$  is the successor state. Let  $\mathcal{X}$  be the set of all feasible states within manifold  $X$ . Let  $z_k := (x_k, u_k)$  define a state-control pair such that  $x_{k+1} = f(z_k)$ , and let feasible states and controls be defined by the set  $\mathcal{Z} = \mathcal{X} \times \mathcal{U}$ . Let the set  $\mathcal{X}_N$  denote the basin of attraction of the controller parameterized by  $N$ . We list a few standard assumptions on the system in (1) and the set  $\mathcal{X}_N$ :

**Assumption 1.** (A)  $f(0, 0) = 0$  (the origin is an equilibrium point).  
 (B)  $\exists u \in \mathcal{U} \mid f(x, u) \in \mathcal{X}_N \forall x \in \mathcal{X}_N$  ( $\mathcal{X}_N$  is control positive invariant).

(C)  $\mathcal{X}$  and  $\mathcal{U}$  are compact and contain the origin in their interiors.

To formalize model predictive control, first define a predicted control trajectory with horizon  $N$  as  $\mathbf{u} = [u_0, u_1, \dots, u_{N-1}]$  and a predicted state trajectory as  $\mathbf{x} = [x_0, x_1, \dots, x_N]$ . For simplicity we define the resulting predicted state-control pair trajectory as  $\mathbf{z} = [z_0, z_1, \dots, z_{N-1}]$  such that  $z_i = (x_i, u_i)$ , where  $i$  denotes the index within the horizon defined at time  $k$ . The optimal control problem (OCP) solved in the standard NMPC formulation with terminal cost and region is thus  $\mathcal{P}(x_k)$ ,

$$\mathcal{P}(x_k) : \quad V_N^*(x_k) = \min_{\mathbf{u}} \sum_{i=0}^{N-1} L(z_i) + V_t(x_N) \quad (2a)$$

$$\text{s.t.} \quad x_{i+1} = f(z_i) \quad \forall i = 0, \dots, N-1 \quad (2b)$$

$$z_i \in \mathcal{Z} \quad \forall i = 0, \dots, N-1 \quad (2c)$$

$$x_0 = x_k \quad (2d)$$

$$x_N \in \mathcal{X}_t \quad (2e)$$

where  $L(\cdot), V_t(\cdot)$  are the stage and terminal costs,  $\mathcal{Z}$  is the set of feasible state-control pairs, and  $\mathcal{X}_t$  is a terminal set. Let  $\mathbf{u}^*$  be the control trajectory corresponding to the optimal solution of (2). The control law defined by NMPC is determined by solving (2) at each time  $k$  and applying the first control, i.e.  $u_k = u_{0|k}^*$ . This defines the state feedback policy  $h(x_k)$  and resulting closed loop system  $f_h(x_k)$ ,

$$h(x_k) := u_{0|k}^* \quad (3)$$

$$f_h(x_k) := f(x_k, h(x_k)) \quad (4)$$

Standard stability proofs for NMPC formulations typically rely on showing that the closed-loop system admits a Lyapunov function which is upper and lower bounded by strictly increasing functions of state and is strictly decreasing in time (for asymptotic stability) or bounded in magnitude by the control input (for Input-to-State Stability). We borrow the standard definitions of strictly increasing functions  $\mathcal{K}$  and  $\mathcal{K}_\infty$  as well as Lyapunov functions and asymptotic stability from [46].

For the closed-loop system in (4) to yield provable stability, assume the following properties on  $L(\cdot), V_t(\cdot)$ , and  $\mathcal{X}_t$ .

**Assumption 2.** (A)  $\exists \alpha_L, \alpha_U, \alpha_{L,f}, \alpha_{U,f} \in \mathcal{K}_\infty \mid \alpha_U(|x|) \leq L(x, u) \leq \alpha_L(|x|) \forall x \in \mathcal{X}, u \in \mathcal{U}$  and  $\alpha_{U,t}(|x|) \leq V_t(x) \leq \alpha_{L,t}(|x|) \forall x \in \mathcal{X}_t$  (stage and terminal cost are upper and lower bounded by  $\mathcal{K}_\infty$  functions).

(B) A solution to (2) exists for all  $x_k \in \mathcal{X}_N$ .

(C) The functions  $L(x, u), V_t(x)$ , and  $f$  are all twice differentiable with respect to  $x$  and  $u$ .

(D)  $\exists \alpha_{V_t} \in \mathcal{K}_\infty, h_t(x) \mid V_t(f(x, h_t(x))) - V_t(x) \leq -\alpha_{V_t}(|x|) \forall x \in \mathcal{X}_t$  (terminal control law decreases cost).

(E) The control law defined in (3) satisfies Assumption 1A.

It is a known result that under these conditions, the system defined in (4) is asymptotically stable for all  $x_0 \in \mathcal{X}_N$  [31,46].

## IV. ADAPTIVE COMPLEXITY MPC

### A. Algorithm Overview

The core idea of adaptive complexity is to leverage models of differing complexity to simplify the model in regions where

feasibility is assured and only increase complexity as needed to guarantee feasibility and stability properties. Our approach is to define a simplicity set  $S_k$  at each time  $k$  which indicates whether state-action pairs at a given time in the horizon after  $k$  can be simplified, and piece-wise dynamics that can propagate the state both into and out of this set. Conditions on this set  $S_k$  can be directly drawn from the literature on templates and anchors [7] – elements of  $S_k$  represent times corresponding to state-action pairs that follow a feasible, attracting, invariant submanifold within the complex (“anchor”) space, i.e. follow the “template” dynamics. In other words, membership in  $S_k$  implies that the system remains on the manifold after applying the complex dynamics and without violating constraints. This knowledge allows the system to optimize directly on the manifold in these regions, omitting the lifted component of the system and thus improving efficiency, while retaining these components when the feasibility or invariant properties are no longer satisfied. Note that while this work assumes one template per anchor, it could be further extended to include multiple templates describing different reductions of the anchor dynamics.

### B. Complex and Simple System Definitions

Let the original system defined in (1) be “complex” which is clarified by the superscript  $(\cdot)^c$ . Let the “simple” system be denoted with the superscript  $(\cdot)^s$  such that the state  $x^s$  lies on the manifold  $X^s$ , where  $\dim X^s < \dim X^c$ . These states are related by the state reduction  $\psi_x : X^c \rightarrow X^s$  defined as  $x^s = \psi_x(x^c)$ . Let each system have controls  $u^c$  and  $u^s$  defined over manifolds  $U^c$  and  $U^s$  which are related by the control reduction  $\psi_u : U^c \times X^c \rightarrow U^s$  defined as  $u^s = \psi_u(u^c, x^c)$ . Define the state-control pairs as  $z^c = (x^c, u^c)$  and  $z^s = (x^s, u^s)$  which lie on manifolds  $Z^c := X^c \times U^c$  and  $Z^s := X^s \times U^s$ . This permits the definition of the reduction  $\psi : Z^c \rightarrow Z^s$  defined as  $z^s = \psi(z^c) = (\psi_x(x^c), \psi_u(u^c, x^c))$ . Note that these many-to-one projection defines which components of the complex system are retained in the simple system.

Define the mapping  $\psi^\dagger$  such that  $\psi \circ \psi^\dagger = I$ , where  $I$  is the identity matrix. Let  $\psi_x^\dagger$  and  $\psi_u^\dagger$  give the outputs of  $\psi^\dagger$  corresponding to state and control variables respectively. This choice defines a particular heuristic – among many possible operators – for how states and controls in the null-space of  $\psi(\cdot)$  should correspond to the simple system. For stability purposes we choose that this maps to the origin (i.e. the reference) for variables contained in the null space of  $\psi$ .

The dynamics and constraints for the complex system have already been defined in Section III. Define the dynamics  $f^s$  and constraints of the simple system  $Z^s$ ,

$$x_{k+1}^s = f^s(z_k^s) \quad (5)$$

$$z_k^s \in Z^s. \quad (6)$$

Let the basin of attraction of the complex system be denoted  $\mathcal{X}_{N^c}$  under horizon length  $N^c$ .

### C. Adaptive System Definition

We seek an adaptive control law which leverages the simple system when the system can feasibly remain on the manifold

$Z^s$  and the complex system when it cannot. Define another set of state and control variables  $x_i^a$ ,  $u_i^a$ , and  $z_i^a$  which represent the adaptive mixed system which is used to solve the OCP. We use  $S_k$  to assign these quantities at a time  $i$  in the horizon to a particular manifold,

$$z_i^a = \begin{cases} z_i^c \in Z^c, & i \notin S_k \\ z_i^s \in Z^s, & i \in S_k \end{cases} \quad (7)$$

The adaptive states and controls can be either lifted to the complex manifold  $z^l \in Z^c$  or reduced (projected) to the simple manifold  $z^r \in Z^s$  by leveraging  $\psi$  and  $\psi^\dagger$  at time  $i$ ,

$$z_i^l = \begin{cases} z_i^a, & i \notin S_k \\ \psi^\dagger(z_i^a), & i \in S_k \end{cases} \quad (8)$$

$$z_i^r = \begin{cases} \psi(z_i^a), & i \notin S_k \\ z_i^a, & i \in S_k \end{cases} \quad (9)$$

Next we define the dynamics of the adaptive system which are used to solve the OCP,

$$x_{i+1}^a = f^a(z_i^a) := \begin{cases} f^c(z_i^a) & i, i+1 \notin S_k \\ \psi \circ f^c(z_i^a) & i \notin S_k, i+1 \in S_k \\ f^c \circ \psi^\dagger(z_i^a) & i \in S_k, i+1 \notin S_k \\ f^s(z_i^a) & i, i+1 \in S_k \end{cases} \quad (10)$$

where  $x_{i+1}^a$  is the successor state in the adaptive system. The OCP for the adaptive system uses these dynamics to construct feasible motions over a prediction horizon  $N^a \geq N^c$ .

Denote a predicted adaptive control sequence over horizon  $N^a$  as  $\mathbf{u}^a = [u_0^a, u_1^a, \dots, u_{N^a-1}^a]$ , a predicted adaptive state sequence as  $\mathbf{x}^a = [x_0^a, x_1^a, \dots, x_{N^a}^a]$ , and a predicted adaptive state-control pair sequence as  $\mathbf{z}^a = [z_0^a, z_1^a, \dots, z_{N^a-1}^a]$ . Let the lifted and reduced forms of these trajectories be denoted as  $\mathbf{z}^l$  and  $\mathbf{z}^r$ . We define the constraints  $Z_i^a$  in the adaptive system,

$$Z_i^a := \begin{cases} Z^c & i \notin S_k \\ Z^s & i \in S_k \end{cases}. \quad (11)$$

With these definitions in place we now state the OCP  $\mathcal{P}^a(x_k^c)$  which is solved to determine the control input  $u_k^c$ ,

$$\mathcal{P}^a(x_k^c) : \quad V_{N^a}^*(x_k^c) = \min_{\mathbf{u}^a} \sum_{i=0}^{N^a-1} L^a(z_i^a) + V_t(x_{N^a}^a) \quad (12a)$$

$$\text{s.t.} \quad x_{i+1}^a = f^a(z_i^a) \quad \forall i = 0, \dots, N^a - 1 \quad (12b)$$

$$z_i^a \in Z_i^a \quad \forall i = 0, \dots, N^a - 1 \quad (12c)$$

$$x_0^a = x_k^c \quad (12d)$$

$$x_{N^a}^a \in \mathcal{X}_t^c \quad (12e)$$

where the adaptive cost function is equal to the complex system cost evaluated on the lifted state-control pair,

$$L^a(z_i^a) = \begin{cases} L^c(z_i^a) & i \notin S_k \\ L^c(\psi^\dagger(z_i^a)) & i \in S_k \end{cases} \quad (13)$$

Let  $\mathcal{X}_{N^a}$  be the set of states for which the solution to (12) exists. Let the optimal value function found in (12) correspond to the control trajectory  $\mathbf{u}^{*a} = [u_0^{*a}, u_1^{*a}, \dots, u_{N^a-1}^{*a}]$  and

corresponding lifted trajectory  $\mathbf{u}^{*l}$ . The control law defined by adaptive complexity MPC is determined by solving (12) at each time  $k$  and applying the first control, i.e.  $u_k^c = u_{0|k}^{*l}$ . Define the state feedback policy  $h^a(x_k^c)$  and resulting closed loop system  $f_{h^a}^c(x_k^c)$ ,

$$h^a(x_k^c) := u_{0|k}^{*l} \quad (14)$$

$$f_{h^a}^c(x_k^c) := f^c(x_k^c, h^a(x_k^c)) \quad (15)$$

Note that each term in the OCP defined in (12) converges to its complex counterpart if  $S_k = \{\}$ , so the behavior of the original MPC closed-loop system defined in (1) can always be retained. However, we seek to find the minimal complexity required to still ensure stability of the closed-loop system.

#### D. Conditions on the Complexity Set

The set  $S_k$  clearly cannot be arbitrary in order to maintain stability, as ignoring some uncontrolled component of the system dynamics could easily cause undesired behavior. To avoid this we define a notion of the admissibility of  $S_k$  which is needed to show that the state and control trajectory in the adaptive space matches their realizations in the complex system.

**Definition 1.** (Admissibility of  $S_k$ ) The simplicity set  $S_k^a$  defined at time  $k$  is admissible if the following conditions hold for all  $i \in S_k$ ,

$$i \in 1, 2, \dots, N^a - 1 \quad (16a)$$

$$\psi^\dagger \circ \psi(z_i^l) \in \mathcal{Z}^c \quad (16b)$$

$$\psi_x^\dagger \circ f^s \circ \psi(z_i^l) = f^c(z_i^l) \quad (16c)$$

$$\psi_x^\dagger \circ \psi \circ f^c(z_{i-1}^l) = f^c(z_{i-1}^l). \quad (16d)$$

The condition (16a) requires that the first and last state be complex, which ensures the predicted trajectory matches the actual dynamics and that the system is able to reach the (possibly complex) terminal state. The conditions (16b) require that the state and control on the manifold at  $i$  are feasible in the complex space, (16d) requires the dynamics from the prior state and control lead to the manifold, and (16c) requires that the dynamics applied to the current state yields a successor state on the manifold, i.e. the complex space “exactly anchors” the simple space (in the sense of [8, Appendix A]). These concepts are illustrated in Fig. 2. To codify the admissibility of a simplicity set  $S_k$ , define the set of possible simplicity sets as  $\mathcal{S}$ , and the set of all admissible sets as  $\mathcal{S}_a$ . Membership in  $\mathcal{S}_a$  can be determined by computing the lifted prediction trajectory  $\mathbf{z}^l$  and checking the conditions in (16) for each  $i \in S_k$ . Also note that removing any element from an admissible simplicity set does not invalidate the admissibility property.

In order to show the stability of adaptive complexity MPC, we require that  $S_k$  be admissible for all  $k$ .

**Assumption 3.**  $S_k \in \mathcal{S}_a \forall k \geq 0$ .

The remaining challenge is ensuring the admissibility of  $S_k$ , which is inductively handled by Algorithm 1 and for which recursive admissibility is proven in Sec. V-C. There

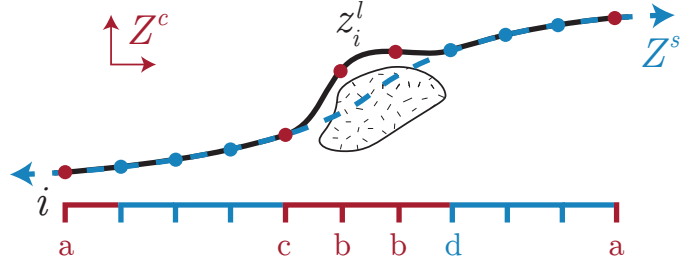


Fig. 2: Elements in the horizon  $i$  are in the set  $S_k$  if they are feasible and stay on the manifold  $Z^s$  (illustrated as a blue dashed 1D curve). The adaptive system allows  $z_i^l$  to leave this submanifold while remaining in the manifold  $Z^c$  (the surrounding white 2D space). Elements in the set  $S_k$  are denoted in blue, elements not in this set are denoted in red and labeled with the condition of (16) they satisfy or violate.

are multiple methods to ensure the initial  $S_0$  is admissible, such as initializing with  $S_0 = \{\}$  which is guaranteed to be admissible, or iteratively solving (12) and updating  $S_0$  until an admissible set is found. After an initial set is found, successor sets can be found by combining two simplicity sets,  $S_k^a$  and  $S^f$ . The set  $S_k^a$  adaptively identifies regions that can be safely simplified, while  $S^f$  requires that certain elements always remain complex for stability and admissibility, in particular the first and last element. After a solve,  $S_k^a$  is updated by checking (16) to determine which states can be simplified. Its elements are then shifted in time, i.e.  $S_{k+1}^a = \{i - 1 \mid i \in S_k^a\}$ , and combined with the fixed set to yield the successor simplicity set  $S_{k+1} = S_{k+1}^a \cap S^f$ . This approach is sufficient to guarantee admissibility in the nominal case with a perfect model, where the only new portion of the optimal trajectory is the last element which is always covered by  $S^f$ . Robustness can be improved at the expense of computational effort by expanding  $S^f$  to include more elements to ensure  $S_k$  remains admissible under disturbances. This is similar to the MPC formulation in [39], but includes the adaptive term  $S_k^a$  to ensure feasibility across the entire horizon.

#### E. Formal Definition of Adaptive Complexity MPC Algorithm

With the control law we can now summarize adaptive complexity MPC as an iterative algorithm shown in Algorithm 1. This procedure combines the fixed and adaptive simplicity sets, solves the OCP, updates the adaptive simplicity set from its solution, then applies the first element of the control trajectory. Note that this algorithm is no different from standard MPC formulations with the exception of the definition of the simplicity set and lifting of the resulting trajectory.

## V. THEORETICAL ANALYSIS

This section describes the theoretical properties of adaptive complexity MPC. We first show that constraints of the original OCP in (2) are satisfied by solutions of the adaptive OCP in (12) under assumptions on the admissibility of  $S_k$  (Sec. V-A). We use this result to show recursive feasibility of the adaptive

---

**Algorithm 1** Adaptive Complexity Model Predictive Control
 

---

**Given**  $x_0^c, S_0, S^f, N^a$   
 $k \leftarrow 0$   
 $S_0^a \leftarrow S_0$   
**repeat**  
 $S_k \leftarrow S_k^a \cap S^f$   
 $\mathbf{z}^{*a} \leftarrow \mathcal{P}^a(x_k^c)|_{N^a, S_k} \quad \triangleright (12)$   
 $\mathbf{z}^{*l} \leftarrow \psi^\dagger(\mathbf{z}^{*a}) \quad \triangleright (8)$   
 $u_k^c \leftarrow u_{0|k}^{*l} \quad \triangleright (14)$   
 $x_{k+1}^c \leftarrow f^c(x_k^c, u_k^c) \quad \triangleright (15)$   
 $S_{k+1}^a \leftarrow \{i - 1 \mid i \in S_k^a \wedge z_i^l \text{ satisfies (16)}\}$   
 $k \leftarrow k + 1$   
**until finished**

---

OCP and thus asymptotic stability of the origin of the closed loop system (Sec. V-B). We show that Algorithm 1 satisfies the assumption on admissibility of  $S_k$  (Sec. V-C), and that the basin of attraction of the resulting system is no smaller than the original complex MPC system and possibly larger since the horizon length could be expanded with the additional computational capabilities (Sec. V-D).

#### A. Optimal Control Problem Constraint Satisfaction

We begin by showing that admissibility of  $S_k$  results in a lifted trajectory which matches the solution to the closed-loop dynamics of the actual complex system, and therefore the constraints of the original OCP in (2) are satisfied by solutions of the adaptive OCP in (12). Let the solutions of the closed-loop dynamics starting at state  $x_k^c$  under a given control trajectory  $\mathbf{u}^c$  for duration  $i$  be expressed by the function  $\phi$  defined as  $\phi(i, x_k^c, \mathbf{u}^c) := x_{k+i}^c$ .

**Proposition 1.** *Suppose Assumption 3 is satisfied. The predicted state at time  $i$  is equal to the solution to the complex dynamical system under the lifted predicted controls, i.e.  $x_i^l = \phi(i, x_0^c, \mathbf{u}^l)$ .*

*Proof.* We prove this by induction. For the base case  $i = 0$ , since  $0 \notin S_k$ ,  $x_0^l = x_0^c = \phi(0, x_0^c, \mathbf{u}^l)$ . For the induction step we need to show that  $x_i^l = \phi(i, x_0^c, \mathbf{u}^l)$  implies  $x_{i+1}^l = \phi(i+1, x_0^c, \mathbf{u}^l)$ . We obtain  $\phi(i+1, x_0^c, \mathbf{u}^l)$  by applying the closed-loop complex dynamics to  $\phi(i, x_0^c, \mathbf{u}^l)$  with the control determined by  $\mathbf{u}^l$  to both sides,

$$x_i^l = \phi(i, x_0^c, \mathbf{u}^l) \quad (17)$$

$$f^c(x_i^l, \mathbf{u}_i^l) = f^c(\phi(i, x_0^c, \mathbf{u}^l), \mathbf{u}_i^l) \quad (18)$$

$$f^c(z_i^l) = \phi(i+1, x_0^c, \mathbf{u}^l) \quad (19)$$

Thus we need to show that  $x_{i+1}^l = f^c(z_i^l)$  which would show that  $z_i^l$  would satisfy. We proceed by cases based on inclusion in  $S_k$ .

*Case 1.*  $i \notin S_k, i+1 \notin S_k$ . This case corresponds to a portion of the trajectory entirely in the complex space. By the definition of the adaptive system dynamics in (10),

$$x_{i+1}^l = x_{i+1}^a = f^c(z_i^a) = f^c(z_i^l) \quad (20)$$

*Case 2.*  $i \notin S_k, i+1 \in S_k$ . This case corresponds to a portion of the trajectory which decreases in complexity. By the definition of the adaptive system dynamics in (10) and the construction of  $S_k$  in (16),

$$x_{i+1}^l = \psi_x^\dagger(x_{i+1}^a) = \psi_x^\dagger \circ \psi \circ f^c(z_i^a) = f^c(z_i^a) = f^c(z_i^l) \quad (21)$$

*Case 3.*  $i \in S_k, i+1 \notin S_k$ . This case corresponds to a portion of the trajectory which increases in complexity. By the definition of the adaptive system dynamics in (10) and the construction of  $S_k$  in (16),

$$x_{i+1}^l = x_{i+1}^a = f^c \circ \psi^\dagger(z_i^a) = f^c(z_i^l) \quad (22)$$

*Case 4.*  $i \in S_k, i+1 \in S_k$ . This case corresponds to a portion of the trajectory entirely in the simple space. By the definition of the adaptive system dynamics in (10) and the construction of  $S_k$  in (16),

$$x_{i+1}^l = \psi_x^\dagger(x_{k+1}^a) = \psi_x^\dagger \circ f^s(z_i^a) = \psi_x^\dagger \circ f^s \circ \psi(z_i^l) = f^c(z_i^l) \quad (23)$$

Thus the induction step holds, completing the proof.  $\square$

We must also show that state and control trajectories which satisfy the adaptive state and control constraints  $\mathcal{Z}^a$  also satisfy the complex equivalent  $\mathcal{Z}^c$  by nature of the admissibility of set  $S_k$ .

**Proposition 2.** *Suppose Assumption 3 is satisfied. If  $z_i^a \in \mathcal{Z}^a$ , then  $z_i^l \in \mathcal{Z}^c$ .*

*Proof.* Proceed by cases based on inclusion in  $S_k$ .

*Case 1.*  $i \notin S_k$ . In this case,  $z_i^l = z_i^a$ . By the definition of  $\mathcal{Z}^a$  in (11),  $z_i^l \in \mathcal{Z}^c$ .

*Case 2.*  $i \in S$ . In this case,  $z_i^l = \psi^\dagger(z_i^a)$ . Since  $S_k \in \mathcal{S}_a$ ,  $z_i^l \in \mathcal{Z}^c$  by (16b).  $\square$

Next we show that satisfying the initial and terminal state constraints in the adaptive system implies satisfaction of the same constraints in the complex space.

**Proposition 3.** *Suppose Assumption 3 is satisfied. If  $x_0^a = x_k^c$  then  $x_0^l = x_k^c$ , and if  $x_{N^a}^a \in \mathcal{X}_t^c$ , then  $x_{N^a}^l \in \mathcal{X}_t^c$ .*

*Proof.* Since  $i = 0 \notin S_k$ ,  $x_0^l = x_0^a = x_k^c$ . Since  $i = N^a \notin S_k$ ,  $x_{N^a}^l = x_{N^a}^a \in \mathcal{X}_t^c$ .  $\square$

#### B. Adaptive Complexity Feasibility and Stability

With these propositions in place we can now prove that the OCP defined in (12) is recursively feasible for states in  $\mathcal{X}_{N^a}$  and that this set is invariant in the complex system. This is done by following the form of the proofs in [31], which constructs a feasible solution (in the absence of modeling errors) to the OCP at the successor state by combining the current solution with the terminal set feedback policy  $u_t(x^c)$ . This approach is illustrated in Fig. 3. Define this control sequence as  $\tilde{\mathbf{u}}^a$  and its lifted counterpart  $\tilde{\mathbf{u}}^l$ ,

$$\tilde{\mathbf{u}}^a(x_k^c) = [u_1^{*a}, \dots, u_{N^a-1}^{*a}, u_t(\hat{x})] \quad (24)$$

$$\tilde{\mathbf{u}}^l(x_k^c) = \psi_u^\dagger(\tilde{\mathbf{u}}^a(x_k^c)) \quad (25)$$



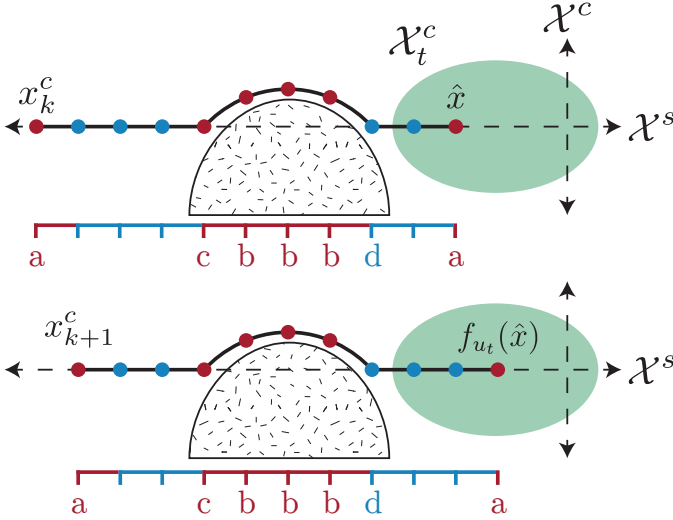


Fig. 3: Adaptive complexity MPC retains recursive feasibility and admissibility by updating the simplicity set and solution at time  $k + 1$  with the corresponding terms from time  $k$  along with the new state and control determined from the terminal policy  $u_t$  which is applied with the terminal set  $\mathcal{X}_t^c$ . Letters at bottom indicate the condition of (16) that element satisfies or violates. The complex manifold  $\mathcal{X}^c$  is the 2D space while  $\mathcal{X}^s$  is the embedded 1D submanifold.

where  $\hat{x} = \phi(N^a, x_k^c, \mathbf{u}^{*l})$  is the terminal state at time  $N^a$  resulting from initial state  $x_k^c$  and control  $\mathbf{u}^{*l}(x_k^c)$  (under Proposition 1). We now show that this control satisfies the requirements for recursive feasibility.

**Proposition 4.** *Suppose Assumptions 1 – 3 are satisfied. Let  $x_k^c \in \mathcal{X}_{N^a}^c$  and let  $x_{k+1}^c := f_{h^a}^c(x_k^c)$  denote the successor state (under adaptive complexity model predictive control) to  $x_k^c$ . Then  $\tilde{\mathbf{u}}^a(x_k^c)$  defined in (24) is feasible for  $\mathcal{P}_N^a(f_{h^a}^c(x_k^c))$  and  $\mathcal{X}_{N^a}^c$  is positively invariant (for the system  $x_{k+1}^c = f_{h^a}^c(x_k^c)$ ).*

*Proof.* This proof follows standard methods for demonstrating recursive feasibility [31], see Appendix A for the complete proof.  $\square$

We must also show that the cost function decreases along any solution of  $x_{k+1}^c = f_{h^a}^c(x_k^c)$  given these previous assumptions as this is necessary for the stability proof:

**Proposition 5.** *Suppose Assumptions 1 – 3 are satisfied. Then*

$$V_N^{*a}(f_{h^a}^c(x_k^c)) - V_N^{*a}(x_k^c) \leq -L^c(x_k^c, h^a(x_k^c)) \quad (26)$$

*Proof.* See Appendix A.  $\square$

We can now prove asymptotic stability of the origin of the closed loop system using standard Lyapunov-based methods. This supports Hypothesis 1 which states that adaptive complexity MPC yields provable stability properties reliant on template and anchor conditions.

**Theorem 6.** *Suppose Assumptions 1 – 3 are satisfied. Then there exists functions  $\alpha_1, \alpha_2, \alpha_3 \in \mathcal{K}_\infty$  which upper and lower bound the cost, i.e.,*

$$\alpha_1(|x_k^c|) \geq V_N^{*a}(x_k^c) \geq \alpha_2(|x_k^c|) \quad (27a)$$

$$V_N^{*a}(x_{k+1}^c) - V_N^{*a}(x_k^c) \leq -\alpha_3(|x_k^c|) \quad (27b)$$

and thus the origin of the system,

$$x_{k+1}^c = f_{h^a}^c(x_k^c) \quad (28)$$

is asymptotically stable with a region of attraction  $\mathcal{X}_{N^a}^c$ .

*Proof.* See Appendix A.  $\square$

### C. Recursive Admissibility of $S_k$

Theorem 6 shows that adaptive complexity MPC is stable under Assumption 3 which states that  $S_k$  is admissible. Next we prove that this holds for all time under Algorithm 1, again assuming no modeling errors. Robustness considerations remain an intriguing area for future investigation.

**Lemma 7.** *Let  $x_0^c \in \mathcal{X}_{N^a}^c$ . Then  $S_k \in \mathcal{S}_a \forall k \geq 0$  under Algorithm 1.*

*Proof.* We proceed by induction. The base case  $k = 0$  is met by the assumption that  $S_0 \in \mathcal{S}_a$ . For the induction step we must show that  $S_k \in \mathcal{S}_a$  implies  $S_{k+1} \in \mathcal{S}_a$ . By Proposition 4,  $z_{k+1}^{*l}$  consists of each of the last  $N^a - 1$  elements of  $z_k^{*l}$ , plus the new terminal state-control pair  $(\hat{x}, u_t(\hat{x}))$ . Since under Algorithm 1 elements of  $S_{k+1}^a$  are the time-shifted elements of  $S_k^a$  which satisfy the admissibility conditions (16), these conditions are satisfied for all  $i \in S_{k+1}^a$ . Since by the definition of  $S_{k+1} = S_{k+1}^a \cap S^f$  where  $i = N^a \notin S^f$ , the new terminal state-action pair is always in the complex space, and hence (16) are satisfied for all  $i \in S_{k+1}$  and thus  $S_{k+1} \in \mathcal{S}_a$ .  $\square$

Note that the terminal state-control pair may not meet the reduction conditions in (16), meaning that it must remain in the complex space. This is handled by assuming the last finite element in the horizon is complex, and checking (16) after solving the OCP to determine if the new index can be allowed into  $S_k$  or must remain complex.

### D. Basin of Attraction Comparison

We have shown that both the original MPC formulation for the complex system in (4) and the adaptive complexity MPC system in (15) are asymptotically stable about the origin with basins of attraction  $\mathcal{X}_{N^c}^c$  and  $\mathcal{X}_{N^a}^c$ , respectively. We now show that the size of their basins of attraction is dependent on the horizon lengths  $N^c$  and  $N^a$ .

**Lemma 8.** *If  $N^c \leq N^a$  then  $\mathcal{X}_{N^c}^c \subseteq \mathcal{X}_{N^a}^c$ , and if  $N^c < N^a$  then  $\mathcal{X}_{N^c}^c \subset \mathcal{X}_{N^a}^c$ .*

*Proof.* Let  $x_0^c \in \mathcal{X}_{N^c}^c$ , thus the OCP  $\mathcal{P}_{N^c}(x_0^c)$  has a solution  $\mathbf{u}^*$  satisfying the constraints in (2). Let  $S_0$  be the initial admissibility set of this solution determined by evaluating the conditions in (16). Construct an adaptive control trajectory  $\mathbf{u}^a$ ,

$$u_i^a = \begin{cases} u_i^* & i \notin S_0 \\ \psi_u(u_i^*) & i \in S_0 \end{cases} \quad (29)$$

for all  $i = 0, 1, \dots, N^c - 1$ , which implies  $\mathbf{u}^l = \mathbf{u}^*$ . By Propositions 1 – 3 the constraints on the OCPs (2) and (12) are equivalent, and thus  $\mathbf{u}^a$  is a valid solution of (12) which implies that  $x_0^c \in \mathcal{X}_{N^a}$  and thus  $\mathcal{X}_{N^c} \subseteq \mathcal{X}_{N^a}$ .

To show that  $N^c < N^a \rightarrow \mathcal{X}_{N^c} \subset \mathcal{X}_{N^a}$ , consider a point  $x_0^c \notin \mathcal{X}_{N^c}$  and some feasible control  $u_0^c \in \mathcal{U}$  such that  $z_0^c := (x_0^c, u_0^c) \in \mathcal{Z}^c$  and  $x_1^c = f^c(z_0^c) \in \mathcal{X}_{N^c}$ . Let  $u_1^*$  be the control sequence yielded by solving the OCP  $\mathcal{P}_{N^c}(x_1^c)$ . Let the control sequence  $\mathbf{u}_0^a = [u_0^c, \mathbf{u}_1^*]$ , and let  $N^a = N^c + 1$ . Since the state  $x_1^c \in \mathcal{X}_{N^a}$ , by Propositions 1 – 3 the state, control and terminal constraints of (12) are satisfied for  $z_i^a \forall i = 1, 2, \dots, N^c$ , and since  $z_0^c \in \mathcal{Z}^c$ , the state and control constraints are satisfied for  $i = 0$ . Thus all the constraints of (12) are satisfied, and therefore  $x_0^c \in \mathcal{X}_{N^a}$ . The property  $\mathcal{X}_{N^c} \subset \mathcal{X}_{N^a}$  follows.  $\square$

The property that longer horizon lengths yield larger basins of attraction is a known result of MPC theory – as horizon lengths go to infinity, MPC converges to infinite-horizon optimal control [31]. Horizon lengths are generally limited by computational effort, so if simplifying the problem allows for longer horizons under equal computational capabilities without violating system constraints, the resulting controller has a larger basin of attraction. We note this theoretical result, although in the following experiments we leave horizon length fixed and allow solve time variations rather than the reverse as this yields a more consistent representation of computational constraints. Also note that since membership in the basin of attraction implies that a solution to the OCP exists, Lemma 8 implies that adaptive complexity maintains the completeness properties of the original MPC formulation in the complex system (assuming a suitable algorithm which can solve the OCP in (12)).

Additionally, it should be noted that although feasible solutions of the adaptive OCP are also feasible solutions of original complex OCP, they may not be optimal with respect to the original OCP cost function. Reducing the system at a particular time is in essence constraining it to the simple manifold at that time. The conditions stated above require that doing so be feasible and yield a decreasing cost, yet it is possible that doing so could yield a trajectory of higher cost across the whole trajectory than if this constraint were lifted. As such this approach may result in a slight sacrifice in cost optimality in favor of a simpler problem.

## VI. APPLICATION TO LEGGED SYSTEMS

To demonstrate the validity of the proposed adaptive complexity MPC in controlling dynamical systems and to provide examples for the quantities defined above, we apply the approach for a legged robot systems. This section defines the complex and simple models which are used for implementing the algorithm, as well as the mappings between them. The complex model includes states and constraints on both the body and feet of the robot (and thus also joint information through kinematics calculations) whereas the simple model only considers body motion.

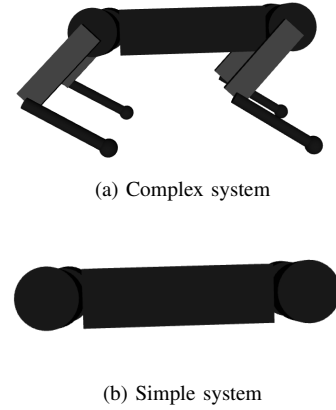


Fig. 4: The complex model includes body and foot states which together define joint states, while the simple model only consists of body states.

### A. Definition of Complex Legged System

The complex system represents a model of the robot that includes body and foot states as shown in Fig. 4. This formulation permits the calculation of joint kinematic data via known kinematics functions while maintaining some level of decoupling between body and leg dynamics. We define the states of the complex system  $x^c \in \mathbb{R}^{12+6n}$  with  $n$  denoting the number of legs,

$$x^c = \begin{bmatrix} q_{\text{lin}} \\ q_{\text{ang}} \\ q_{\text{foot}} \\ \dot{q}_{\text{lin}} \\ \omega \\ \dot{q}_{\text{foot}} \end{bmatrix} \quad (30)$$

where  $q_{\text{lin}}$  defines the body linear position,  $q_{\text{ang}}$  defines the body orientation through a vector parameterization such as Euler angles,  $q_{\text{foot}}$  defines the foot positions, and  $\omega$  is the angular velocity (with  $\hat{\omega}$  its skew-symmetric equivalent).

Define the control inputs  $u^c \in \mathbb{R}^{6n}$ ,

$$u^c = \begin{bmatrix} u_{\text{body}} \\ u_{\text{foot}} \end{bmatrix} \quad (31)$$

where  $u_{\text{body}} \in \mathbb{R}^{3n}$  are the desired ground reaction forces at each foot in the world frame coordinates, and  $u_{\text{foot}} \in \mathbb{R}^{3n}$  denote the forces which accelerate the feet during swing, but do not act on the robot body. This parameterization decouples the effects of the body and leg dynamics, which amounts to a massless leg assumption for the body dynamics [47, Sec. 2.3] while still capturing kinematic constraints and second-order dynamics of the leg motion during swing. Note that these forces on the physical system correspond to the same actuators as any given leg is either in stance or swing – this separation is primarily to distinguish between control authority available in the simple and complex systems. Let  $u_{\text{body},i} \in \mathbb{R}^3$  and  $p_i \in \mathbb{R}^3$  be the ground reaction forces and foot positions respectively for stance leg  $i$ . Following the standard formulation for single rigid body dynamics models,



e.g. as in [48], define the continuous time dynamics of this system  $f^c(x^c, u^c)$ ,

$$f^c(x^c, u^c) = \begin{bmatrix} \dot{q}_{\text{lin}} \\ R(q_{\text{ang}})\omega \\ \dot{q}_{\text{foot}} \\ \frac{1}{m} \sum_i^n u_{\text{body},i} - g \\ W(q_{\text{lin}}, q_{\text{foot}}, \omega, u_{\text{body}}) \\ u_{\text{foot}} \end{bmatrix} \quad (32)$$

where  $R(q_{\text{ang}}) \in SO(3)$  is the rotation matrix corresponding to orientation parameterization  $q_{\text{ang}}$ ,  $m$  is the body mass,  $g$  is the gravity vector, and the shorthand function  $W(\cdot)$  maps the state and control to the angular acceleration,

$$W(q_{\text{lin}}, q_{\text{foot}}, \omega, u_{\text{body}}) = I^{-1} \left( R^T \sum_j^n ((q_{\text{foot},j} - q_{\text{lin}}) \times u_{\text{body},j}) - \hat{\omega} I \omega \right) \quad (33)$$

where  $I$  is the inertia matrix in the body frame. The discrete time formulation of the dynamics in (32) can be obtained with a suitable integration scheme such as forward Euler.

Next, we define the constraints of the complex system  $\mathcal{Z}^c$ . Kinematic constraints for legged systems are generally functions of joint limits rather than body or foot variables. As a result, we add the joint information to the optimization as slack variables and use them to define constraints. Let  $\theta, \dot{\theta}, \tau \in \mathbb{R}^{n \cdot n_j}$  be the joint positions, velocities, and torques, respectively, where  $n_j$  is the number of joints per leg. These slack variables are constrained,

$$FK(q, \theta) = q_{\text{foot}} \quad (34a)$$

$$J(q, \theta) [\dot{q}_{\text{lin}}^T, \omega^T, \dot{\theta}^T]^T = \dot{q}_{\text{foot}} \quad (34b)$$

$$\tau = -J_{\text{body}}(q, \theta)^T u_{\text{body}} \quad (34c)$$

where  $FK(q, \theta)$  is the forward kinematics function of the system and  $J(q, \theta)$  is the leg Jacobian which relates motion of the body and joints to foot motion in the world frame, and  $J_{\text{body}}$  are the columns of this matrix corresponding to joint motion.

With these variables in place we can now state the constraints in the complex system,

$$\theta_{\min} \leq \theta \leq \theta_{\max} \quad (35a)$$

$$\dot{\theta}_{\min} \leq \dot{\theta} \leq \dot{\theta}_{\max} \quad (35b)$$

$$\tau_{\min} \leq \tau \leq \tau_{\max} \quad (35c)$$

$$u_{\text{body},\min} \leq u_{\text{body}} \leq u_{\text{body},\max} \quad (35d)$$

$$D u_{\text{body}} = 0 \quad (35e)$$

$$u_{\text{body}} \in \mathcal{FC} \quad (35f)$$

$$-\tau_{\max} \left( 1 + \frac{\dot{\theta}}{\dot{\theta}_{\max}} \right) \leq \tau \leq \tau_{\max} \left( 1 - \frac{\dot{\theta}}{\dot{\theta}_{\max}} \right) \quad (35g)$$

$$h(q_{\text{foot}}) \geq 0 \quad (35h)$$

where  $(\cdot)_{\min}$  and  $(\cdot)_{\max}$  represent variable bounds, (35e) enforces a contact schedule with selection matrix  $D$ , (35f) enforces that the GRF at each foot lies within the non-adhesive friction cone  $\mathcal{FC}$ , (35g) enforces a linear motor model, and

(35h) enforces non-penetration of the terrain via the ground clearance  $h(q_{\text{foot}})$ . Together the constraints in (35) define the set  $\mathcal{Z}^c$ .

The stage and terminal costs for the OCP of the complex system can then be defined,

$$L^c(x^c, u^c) = x^{cT} Q x^c + u^{cT} R u^c \quad (36)$$

$$V_f^c(x^c) = x^{cT} Q_t x^c \quad (37)$$

where  $Q, Q_t$ , and  $R$  are positive definite matrices.

## B. Definition of Simple Legged System

The simple system represents the reduced-order model of the robot that uses only the body states and ignores the foot and joint states, as shown in Fig. 4. This is a commonly used model reduction technique in the legged locomotion literature. The state of the simple system is defined as  $x^s \in \mathbb{R}^{12}$ . The control inputs  $u \in \mathbb{R}^{3n}$  of the simple system consists of only the GRFs from the complex system, such that  $u^s = u_{\text{body}}$ . The dynamics in the simple system are the components of the complex dynamics corresponding to the simple system states defined as  $f^s(x^s, u^s)$ . The constraints in the simple space are only constraint bounds on the input  $u_{\text{body}}$ , identical to equations (35d)–(35f). Note that the introduction of the torque constraints in (35c) and (35g) accurately capture actuation limits, and thus the heuristic GRF limits in (35d) can be selected optimistically in the simple case as the system will adaptively apply the more accurate constraints as needed to ensure feasibility.

Although the cost in the adaptive OCP is based on the cost function defined for the complex system, we define the stage and terminal costs of the simple system as  $L^s$  and  $V_t^s$  which are used in the following experiments for the non-adaptive configurations. Note that the cost for the simple system is structurally identical to the complex system with the difference in the states, controls,  $Q, R$ , and  $Q_t$  matrices representing the simple system variables instead.

## C. Relations Between Complex and Simple Legged Systems

With these systems defined, we can now relate the two with the projections  $\psi_x, \psi_u$  and define our heuristic lifts  $\psi_x^\dagger, \psi_u^\dagger$ . The projections select components to retain within the simple system,

$$\psi_x(x^c) = \begin{bmatrix} q_{\text{lin}} \\ q_{\text{ang}} \\ \dot{q}_{\text{lin}} \\ \omega \end{bmatrix} = x^s \quad (38)$$

$$\psi_u(u^c) = [u_{\text{body}}] = u^s \quad (39)$$

In order to define the lifting functions, assume that we have a reference  $\bar{x}_k^c, \bar{u}_k^c$  in the complex system space which is dynamically consistent, i.e.  $\bar{x}_{k+1}^c = f^c(\bar{x}_k^c, \bar{u}_k^c)$ . Although Section V assumes a time-invariant system (and thus a constant reference) for simplicity of the analysis, the results could be applied to time-varying systems and thus the tracking of a trajectory. We leave the formal extension to these systems

as future work, but note that the stability of MPC for time-varying systems is well established [45]. Dropping the index  $k$  for clarity, this reference allows the definition of the lifting operator  $\psi^\dagger$ ,

$$\psi_x^\dagger(x^s) = \begin{bmatrix} q_{\text{lin}} \\ q_{\text{ang}} \\ \bar{q}_{\text{foot}} \\ \dot{q}_{\text{lin}} \\ \omega \\ \dot{\bar{q}}_{\text{foot}} \end{bmatrix} \quad (40)$$

$$\psi_u^\dagger(u^s) = \begin{bmatrix} u_{\text{body}} \\ \bar{u}_{\text{foot}} \end{bmatrix} \quad (41)$$

Note that when tracking a reference, the state is typically mapped to tracking error such that stability of the origin corresponds to stability of the reference trajectory, i.e.  $\hat{x}^c = x^c - \bar{x}^c$ . We can now state the conditions for admissibility for this system, which require the that variables in the null space of  $\psi$  lie on the reference and are feasible.

**Lemma 9.** *For a given state-control pair  $z_i^\dagger$  which lie on a trajectory of the system defined in (32), a reduction at  $i \in [1, \dots, N - 1]$  is admissible (Definition 1) if  $q_{\text{foot}} = \bar{q}_{\text{foot}}$ ,  $\dot{q}_{\text{foot}} = \dot{\bar{q}}_{\text{foot}}$ ,  $u_{\text{foot}} = \bar{u}_{\text{foot}}$ , and  $z_i^\dagger$  satisfies the constraints in (35).*

*Proof.* See Appendix B.  $\square$

## VII. EXPERIMENTAL EVALUATION

This section presents experiments deploying adaptive complexity MPC on a simulated quadrupedal robot to quantify its performance and benchmark against other formulations of MPC. In particular we compare against three other model configurations – “Simple” and “Complex” respectively employ only the simple and complex model dynamics and constraints, and “Mixed” employs the complex model for the first one-quarter of the horizon and the simple model for remainder, similar to [39]. The “Adaptive” configuration follows Algorithm 1 with  $S^f = \{2, \dots, N^a - 2\}$  so that the first and last finite elements are always complex. This meets the terminal state admissibility condition in (16a) and also ensures that new elements entering the horizon will be complex to meet Assumption 3 in lieu of a hard-to-find terminal controller  $h_t(x)$  that meets the conditions in Assumption 2.

In each experiment, the robot is provided a reference trajectory which defines the required task over the given environment. We use three environments to evaluate the algorithm performance in the presence of varying constraints. The “Acceleration” environment requires the robot to rapidly accelerate and decelerate over 7.5 body lengths (3 m) of flat terrain to measure the ability of the configuration to stabilize the system during agile motions. The “Step” environment consists of a one-half leg length (20 cm) step which requires navigating state constraints such as joint limits to traverse. The “Gap” environment consists of a body-length (40 cm) gap which the robot must leap across, testing the controller’s ability to handle these kinematic constraints in addition to input constraints such as actuator limits and friction.

We quantify performance in the Acceleration environment by measuring the average completion time and resulting top speed achievable with a 100% success rate over ten trials. Success is defined as reaching the goal within a one-half body length (20 cm) and zero velocity without the body contacting the ground. Performance in the Step and Gap environments is measured via the success rate over ten trials, as well as average solve time and norm of the total control input (sum of ground reaction forces) averaged over the successful trials. For the Step and Gap environments, the robot is initialized to a random position within one-half body length in the transverse plane from a nominal position.

In each environment a fixed reference trajectory for the body is provided from the global planner described in [17], and the reference foot trajectories are chosen online before each MPC iteration with a Raibert-like heuristic [49] and a threshold on traversability, as described in [50]. We fix the prediction horizon at two gait cycles ( $N^c = N^a = 24$ ) with a timestep of  $\Delta t = 0.03$  s and measure the relative solve times as discussed in Sec. V-D, although future work could implement an adaptive horizon approach to keep solve time fixed.

Once the reference information has been obtained, we construct the NLP with the appropriate complexity structure and solve it with IPOPT [51]. We configure IPOPT to enable warm start initialization and provide it the primal and dual variables from the prior solve (appropriately shifted) for rapid convergence. Once the problem is solved, the MPC control output is then mapped from ground reaction forces to joint torques via the Jacobian-transpose method, and the resulting swing foot trajectories are tracked with PD control. See [50] for more details on the implementation of the low-level controller. All experiments were performed using Gazebo 9 with the ODE physics engine, and all processes were executed on a machine running Ubuntu 18.04 with an Intel Core i7-12700K CPU at 4.9 GHz and with 64 GB of RAM. The Acceleration environment is simulated in real-time to measure the effect of solve time on stability. The simulations were slowed down by a factor of 2x for the Step environment and 5x for the Gap environment (with a maximum solve time of  $4\Delta t = 0.12$  s) since resolving the constraints in these tasks are still computationally intensive.

### A. Acceleration Environment

A series of snapshots of the Adaptive configuration performing the Acceleration task are shown in Fig. 5. Since the peak acceleration of the system occurs at the beginning and end of the trajectory, rapidly converging on a feasible solution to the OCP is essential. Crucially, performing this task does not require exact knowledge of the joint constraints and thus computational efficiency is key.

Results for each configuration are shown in Table I with state trajectories of candidate trials in Fig. 6. The Simple configuration exhibits the best performance with a 100% increase in top speed over Complex and a 43% reduction in completion time. Mixed performs next best at an 80% increase in top speed and 37% reduction in completion time,

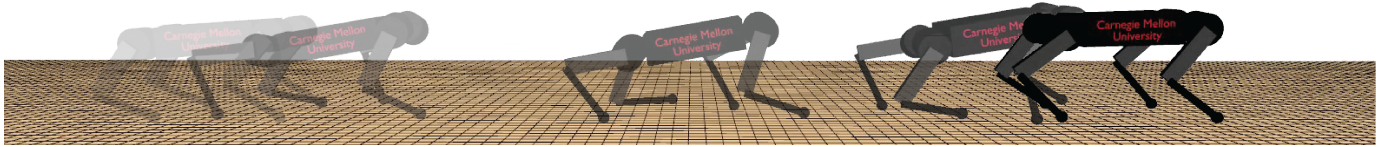


Fig. 5: The Acceleration environment requires the robot to rapidly move forwards 3 m and come to a rest. Snapshots are equally distributed in time, with increasing opacity corresponding to progression forwards in time.

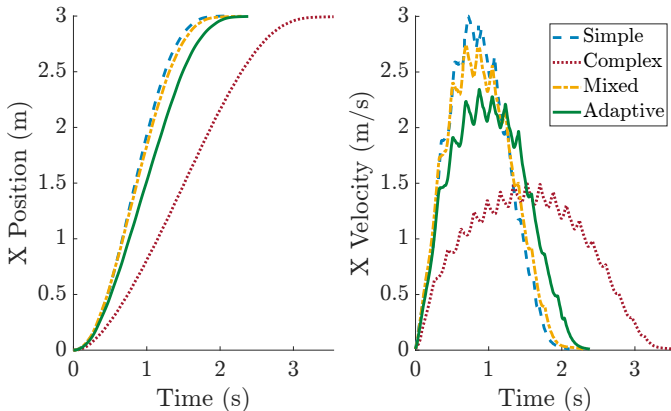


Fig. 6: The position and velocity trajectories for the Acceleration experiment show that the additional computation required by the Complex configuration significantly reduces its performance. Each curve corresponds to one trial at the maximum feasible commanded acceleration.

TABLE I: Experimental data for the Acceleration environment

Config	% Horizon Simplified	Completion Time (s)	Max Velocity (m/s)
Simple	100	2.0	3.0
Complex	0	3.5	1.5
Mixed	75	2.2	2.7
Adaptive	86	2.4	2.3

followed by Adaptive at a 50% increase in top speed and 31% reduction in completion time. These reflect the relative complexity of each configuration – since the Complex system must reason about extraneous constraints over the entire horizon, it takes longer to solve the problem and is thus less capable of stabilizing high-acceleration behaviors. The Simple configuration conversely excels since it is solving a reduced problem. The Mixed and Adaptive systems consist mostly of simple finite elements and thus retain this benefit, although the Adaptive configuration performance is slightly degraded since more complex elements are added at the beginning of the behavior during the period of high acceleration. These results support Hypothesis 3 which states that the reducing the model yields improved locomotion performance through more efficient computation.

### B. Step Environment

A series of snapshots of the Adaptive configuration navigating the Step environment are shown in the top row of Fig. 7a. The key constraints which must be resolved are the joint limits

of the robot and the height of the toe, as the system must ensure the toe clears the step while also ensuring the rear legs can still reach the terrain for support.


Results from each MPC configuration are shown in Fig. 7 and quantitatively summarized in Table 7f. The state trajectories are shown in Fig. 7b. The Simple, Mixed, and Adaptive configurations are able to complete the task and reach the goal, while the Complex configuration fails due to excessive solve times. However, the lack of constraint information in the Simple configuration and the myopia of the Mixed configuration result in large control actions when crossing the step which nearly destabilize the system. Meanwhile, the Complex and Adaptive configurations are able to see the step sooner and react by increasing the walking height and rotating the body to more safely navigate the step (arrows in Fig. 7b), although only the Adaptive framework does so while respecting solve time constraints.

The computational effort of each configuration is shown in Fig. 7c. Unsurprisingly the Simple configuration is consistently the fastest since its model is the most sparse and it is unaware of the nonlinear joint kinematic constraints, while the Complex configuration consistently takes the longest, especially to find an initial solution and also once it sees the step. Both the Mixed and Adaptive configurations have intermediate nominal solve times, but differ when the step approaches. The Adaptive configuration immediately takes much longer to solve the problem as it needs to reason about this new information, but once a valid solution is found it settles back to its nominal solve time as more complex elements are converted back to simple ones. Meanwhile the Mixed formulation only increases in solve time when the step is within its shorter window of complex elements, and planning the large control forces required to navigate the step on such short notice causes a large and sustained increase in solve time.


The degree of horizon simplification is shown in Fig. 7d. While the fixed-complexity configurations remain uniform for the entire task, the Adaptive configuration clearly leverages additional complexity when encountering the step. However, even in the worst case around half of the horizon remains simplified, the effects of which are seen in the lower solve times compared to the Complex configuration. These horizons are visually shown in Fig. 7e, which shows the prediction horizon at each time with complex and simple elements distinguished by different colors. The Adaptive configuration clearly changes around  $k = 2.5s$  as the step comes into view. As elements in the terminal region require leaving the simple manifold, adaptive complexity MPC fills in new elements with additional complexity. When the terminal region returns




(a) The Step environment requires navigating kinematic constraints. Snapshots are shown of the trajectories under the Adaptive configuration. Non-steppable regions are indicated with darker shading.

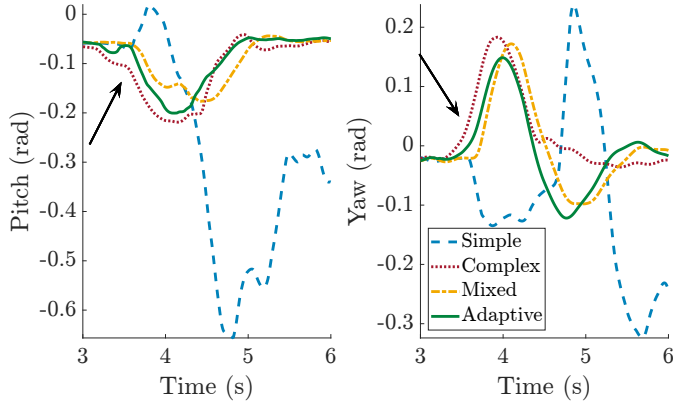


(b) Step environment state trajectories. Complex (red) and Adaptive (green) show changes to pitch and yaw (indicated by the arrows) before the Simple (blue) and Mixed (gold) configurations.

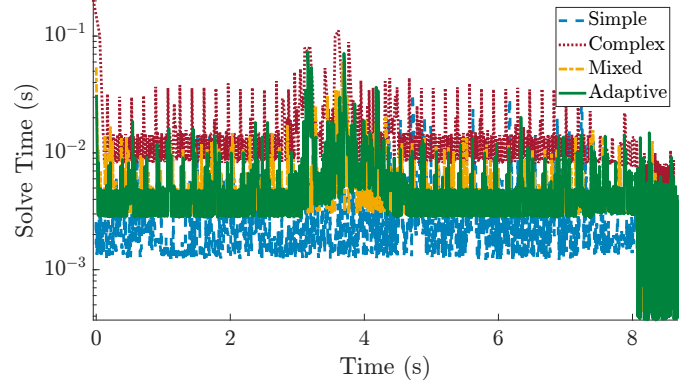

(c) Step environment solve times. The increase four seconds into the behavior corresponds to navigating the step.

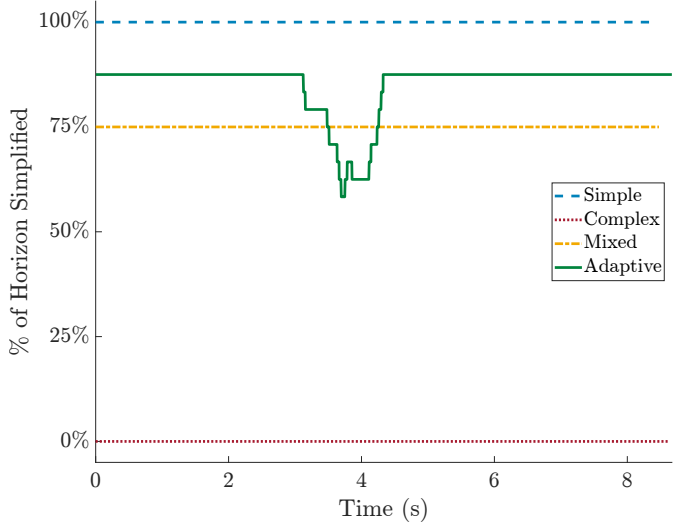

(d) Step environment horizon simplification percentage. The Adaptive configuration is able to simplify the problem for most of the behavior, and quickly recover these simplifications once the difficult behavior is resolved.

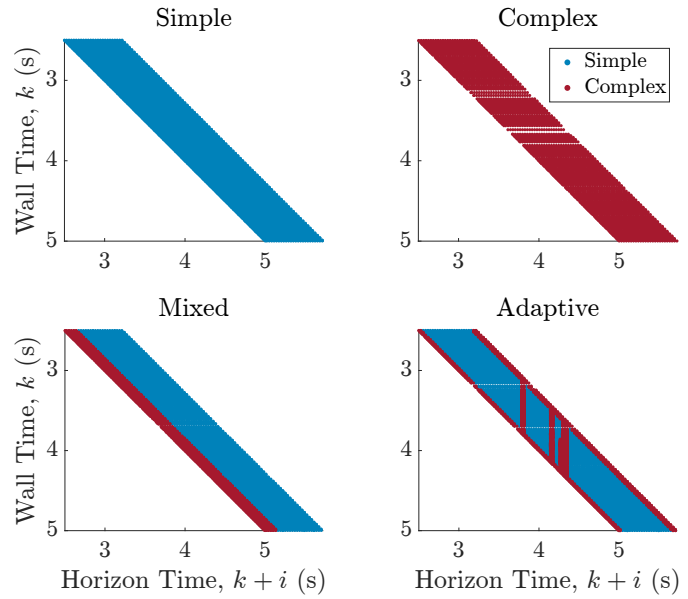

(e) Step environment prediction horizons. Horizons at each time are indicated by horizontal slices of finite elements (dots), where dot color indicates model complexity. The vertical bands of increased complexity correspond to instances where joints in the front and back legs approach singularities.

Config	Success Rate	Mean Solve Time (ms)	Slow Solve Rate (%)	Mean Control (N)
Simple	10/10	2.2	0.039	43
Complex	9/10	11	16	16
Mixed	7/10	4.3	3.9	22
Adaptive	10/10	4.3	2.6	17

(f) Experimental data for the Step environment.

Fig. 7: Data for Step environment. The Adaptive configuration is able to leverage admissible reductions for the majority of the behavior while retaining the ability to react quickly to the kinematic constraints required to navigate the step.

to the simple manifold, the algorithm recognizes this and allows simple elements back into the horizon. Together, these results support Hypothesis 2 which states that reductions are frequently admissible for candidate terrains, and Hypothesis 3 which states that capturing the complex dynamics and constraints expands the range of executable tasks.

### C. Gap Environment

A series of snapshots of the Adaptive configuration navigating the Gap environment are shown in Fig. 8a. Due to the state-dependent actuator limits which reduces peak torque as joint velocity increases, the system must accelerate early to ensure enough velocity to land safely on the other side. Joint kinematics also limit how far forward the legs can reach to prepare for landing, so the system must be aware of these constraints before takeoff to ensure sufficient controllability.

Results for each configuration in the Gap environment are shown in Figs. 8 and quantitatively summarized in Table 8f. Only the Adaptive configuration has both the efficiency and model fidelity required to solve this task reliably. The Complex configuration fails in the majority of the trials due to its excessive computational effort, while the Simple and Mixed configurations never succeed because they lack the requisite constraint knowledge and thus do not leap far enough. Like in the Step environment, the configurations which are able to recognize constraints near the end of the horizon (Adaptive and Complex) do so immediately by lowering towards the ground to obtain a longer leaping stroke and accelerating forwards to ensure enough velocity to reach the other side of the gap, as shown in Fig. 8b.

The solve times for the Gap environment shown in Fig. 8c demonstrate similar trends as during the Step environment. Both Simple and Mixed formulations maintain their performance until they fail to cross the gap, which quickly causes failed solves. Both Complex and Adaptive configurations have periods of longer solves to plan the leaping and landing phase, but the Adaptive formation is able to recover faster solve times sooner due to its ability to convert complex element to simple ones near the end of the leap. This is further supported by the data in Table 8f which shows a threefold reduction in Adaptive solve times exceeding one timestep compared to the Complex configuration. The mechanism for this reduction is further illustrated in the simplification percentages shown in Fig. 8d and the prediction horizons shown in Fig. 8e. Even in the worst-case portion of the behavior, the Adaptive configuration retains 25% simplification of the horizon, and once more feasible elements begin entering the horizon the Adaptive configuration can take advantage of the reduced complexity to improve solve times. These results support Hypotheses 2 and 3.

## VIII. CONCLUSION

This work presents a formulation of adaptive complexity MPC which actively identifies regions where dynamics and constraints can be simplified without compromising the feasibility or stability of the original system. Analysis of the proposed approach demonstrates that under key conditions these

simplifications do not compromise the stability properties of the original system, and can enable new behaviors by acting quickly to perform agile motions or looking further into the future to execute behaviors. These advantages are demonstrated on a simulated quadrupedal robot performing agile behaviors with challenging environmental constraints, and in particular expanding the leaping capability through receding horizon execution with knowledge of joint constraints.

While the MPC formulation presented here was primarily evaluated in locomotion applications, future work could investigate its applicability to other domains that employ hierarchical structures, such as manipulation. For example, often in manipulation settings the internal joints of the manipulator are neglected and planning is primarily conducted in the space of object motions and forces. Adaptive complexity MPC would enable an efficient handling of manipulator kinematics only when necessary so that the system can respect these constraints while largely retaining the benefits of improved efficiency, including faster reactions to unexpected object motion or longer planning horizons.

A primary limitation of adaptive complexity MPC is its reliance on the formulation of the additional constraints and dynamics of the complex system. Introducing additional numerical complexity such as non-convexity can make solving the OCP more susceptible to local minima or poor convergence rates, which are then transferred to the adaptive configuration. This is most notable in the Step environment, in which the Simple configuration demonstrated remarkable ability to complete the task without constraint knowledge due to its numerical robustness. Ongoing work into well-conditioned OCP formulations or methods which identify which constraints are most necessary would benefit the approaches discussed here.


Another current drawback of adaptive complexity is robustness to unexpected errors in the simplicity set caused by model mismatch or disturbances. In particular, introducing additional complexity in the interior of the horizon can degrade the initialization of the OCP – this could be alleviated by recent approaches which warm-start the OCP with experiential data [52], or possibly avoided by applying robust MPC techniques [53]. In addition, many hierarchical systems leverage reduced-order models to generate reference trajectories entirely in the simple system, making infeasible references highly relevant. Investigations into adapting model complexity to handle infeasible references such as [54] would be crucial to expand this work to a broader class of systems.

## APPENDIX


### A. Proofs Required for Adaptive Complexity MPC Stability

The proof of Proposition 4 shows recursive feasibility by finding a feasible solution to the adaptive OCP at the successor state.


*Proof (Proposition 4).* Since  $x_k^c \in \mathcal{X}_{Na}$ , there exists a solution  $\mathbf{u}^{*a}(x_k^c)$  to  $\mathcal{P}_N^a(x_k^c)$ . Because  $\mathbf{u}^{*a}(x_k^c)$  is a solution of (12), by Proposition 3 the corresponding predicted terminal state  $\hat{x} \in \mathcal{X}_t^c$ . Let the successor control sequence  $\tilde{\mathbf{u}}^a(x_k^c)$  be defined by (24). We claim this sequence is feasible for the OCP  $\mathcal{P}_N^a(x_{k+1}^c)$  solved at successor state  $x_{k+1}^c := f_{h^a}^c(x^c)$ .




(a) The Gap environment requires navigating both kinematic and dynamic constraints. Snapshots are shown of the trajectories under the Adaptive configuration.

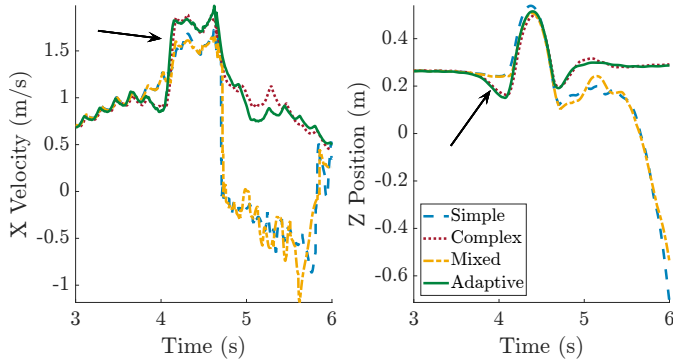


(b) Gap environment state trajectories. Complex (red) and Adaptive (green) show changes to horizontal velocity and vertical position (indicated by the arrows) before the Simple (blue) and Mixed (gold) configurations.

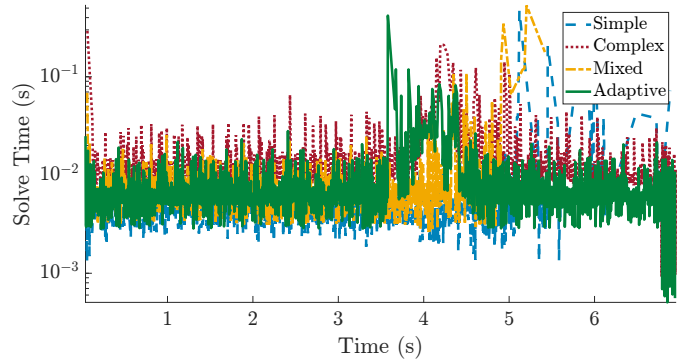

(c) Gap environment solve times. The increase four seconds into the behavior corresponds to navigating the gap. The sustained increases for the Simple and Mixed configurations correspond to failed solves after unsuccessful landing.

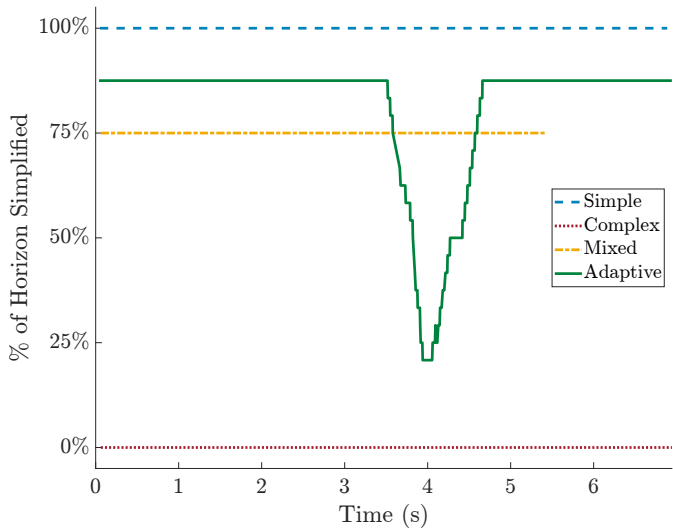

(d) Gap environment horizon simplification percentage. Similarly to the Step environment, the Adaptive configuration is able to simplify most of the horizon, with the most complexity occurring when both takeoff and touchdown are within the horizon.

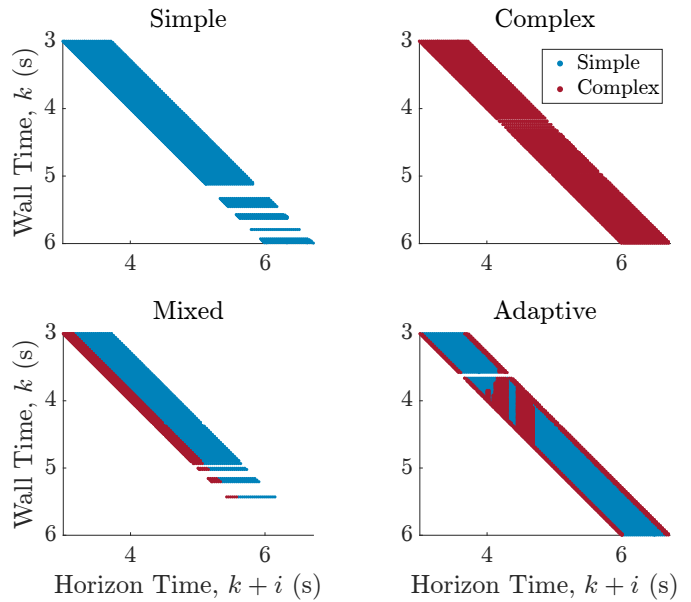

(e) Gap environment prediction horizons. Horizons at each time are indicated by horizontal slices of finite elements (dots), where dot color indicates model complexity. The vertical bands of increased complexity correspond to takeoff and touchdown.

Config	Success Rate	Mean Solve Time (ms)	Slow Solve Rate (%)	Mean Control (N)
Simple	0/10	–	–	–
Complex	9/10	13	13	33
Mixed	0/10	–	–	–
Adaptive	10/10	7.5	4.3	31

(f) Experimental data for the Gap environment.

Fig. 8: Data for Gap environment. The Adaptive and Complex configurations are able to reason about constraints at the end of the horizon, allowing them to alter the leap to increase forward velocity and successfully land.



Firstly, the controls  $u_1^{*l}, \dots, u_{N^a-1}^{*l}$  which are elements of  $\mathbf{u}^{*l}(x_k^c)$  which was a solution to (12), all lie in  $\mathcal{Z}^c$  by Proposition 2. It follows from Assumption 2 (since  $\hat{x} \in \mathcal{X}_t^c$ ) that  $u_t(\hat{x}) \in \mathcal{Z}^c$ , and thus every element of  $\tilde{\mathbf{u}}^l(x^c)$  satisfies the control constraint of (12).

Next we consider the state constraint. By Proposition 1 the state sequence resulting from initial state  $x_k^c$  and control sequence  $\tilde{\mathbf{u}}^l(x_k^c)$  is  $\tilde{\mathbf{x}}^c := [\tilde{x}_0^c, \tilde{x}_1^c, \dots, \tilde{x}_{N^a}^c]$  where,

$$\tilde{x}_j^c = x_{j+1}^{*l}, \quad j = 0, \dots, N^a - 1 \quad (42)$$

$$\tilde{x}_{N^a}^c = f_{u_t}^c(\hat{x}) \quad (43)$$

and  $\tilde{x}_0^c = x_1^{*l} = f^c(x^c, u_{x^c}^{*l}(0)) = f_{h^a}^c(x^c)$ . By Proposition 2, the states  $x_1^{*l}, \dots, \hat{x}$  satisfy the state constraint. Since  $\hat{x} \in \mathcal{X}_t^c$ , Assumption 2 implies that  $f_{u_t}^c(\hat{x}) \in \mathcal{X}^c \subset \mathcal{X}_{N^a}^c$ , so that every element of the state sequence  $\tilde{\mathbf{x}}^c = [\tilde{x}_0^c, \tilde{x}_1^c, \dots, \tilde{x}_{N^a}^c]$  satisfies the state constraint, and the new terminal state  $\tilde{x}_{N^a}^c = f_{u_t}^c(\hat{x})$  satisfies the stability constraint. Hence  $\tilde{\mathbf{u}}^l(x^c)$  is feasible for  $\mathcal{P}_N^a(f_{h^a}^c(x_k^c))$  and  $f_{h^a}^c(x_k^c) \in \mathcal{X}_{N^a}^a$ .  $\square$

The proof of Proposition 5 shows that the OCP cost function decreases along the closed loop system by leveraging shared terms in the solutions along with the observation that the cost of a state in the simple system is equal to the cost of that state lifted into the complex system.

*Proof (Proposition 5).* The sequence pairs  $(\mathbf{u}^{*a}(x_k^c), \tilde{\mathbf{u}}^a(x_k^c))$  and  $(\mathbf{x}^{*a}, \tilde{\mathbf{x}}^a)$  have common elements and thus the cost sequence can be simplified,

$$\begin{aligned} V_{N^a}^{*a}(f_{h^a}^c(x_k^c)) - V_{N^a}^{*a}(x_k^c) &\leq V_{N^a}^a(x_{k+1}^c, \tilde{\mathbf{u}}^a(x^c)) - V_{N^a}^a(x^c, \mathbf{u}^{*a}(x^c)) \\ &= (L^c(\hat{x}, u_t(\hat{x})) + V_t(f_{u_t}(\hat{x}))) \\ &\quad - (L^c(x^c, h^a(x^c)) + V_t(\hat{x})) \\ &\quad + (L^c(x_{k+1}^c, u_1^{*a}) - L^a(x_{k+1}^c, u_1^{*a})) \\ &= -L^c(x^c, h^a(x^c)) + L^c(\hat{x}, u_t(\hat{x})) \\ &\quad + V_t(f_{u_t}(\hat{x})) - V_t(\hat{x}) \end{aligned} \quad (44)$$

where the property  $L^c(x_{k+1}^c, u_1^{*a}) - L^a(x_{k+1}^c, u_1^{*a}) = 0$  comes from the definition of the adaptive cost in (13) and the observation that  $\psi^\dagger$  maps to the origin for variables in the null space of  $\psi$ . Since  $\hat{x} \in \mathcal{X}_t^c$ , Assumption 2 implies,

$$V_t(f_{u_t}(\hat{x})) - V_t(\hat{x}) \leq -L^c(\hat{x}, u_t(\hat{x})) \quad (45)$$

Hence (26) is satisfied for every  $x_k^c \in \mathcal{X}_{N^a}^c$ .  $\square$

The proof of Theorem 6 follows from the prior propositions:

*Proof (Theorem 6).* The inequalities in (27a) follow from the structure of the value function defined in Assumption 2. The descent inequality in (27b) is given by the structure of the value function along with Proposition 5. Asymptotic stability of the origin with region of attraction  $\mathcal{X}_{N^a}$  follows from standard Lyapunov theory [45, Appendix B].  $\square$

## B. Proof of admissibility conditions for legged system

*Proof (Lemma 9).* The conditions under which the legged system described in Section VI can be admissibly simplified rely on the feasibility of the reference trajectory. Lemma 9 states that an index within a lifted trajectory of the legged system can be admissibly reduced if the lifted components of the state-control pair  $q_{\text{foot}}, \dot{q}_{\text{foot}}$ , and  $u_{\text{foot}}$  all lie on the trajectory and satisfy the constraints in (35). We proceed by each condition for admissibility defined in (16), noting that (16a) is trivially satisfied by the assumptions of the lemma.

The condition in (16b) requires that constraints would be satisfied if the system were reduced, i.e.  $\psi^\dagger \circ \psi(z_i^l) \in \mathcal{Z}^c$ . By the conditions given on the values of  $z_i^l$  in the null space of  $\psi$  and the definition of  $\psi^\dagger$ , it follows that  $\psi^\dagger \circ \psi(z_i^l) = z_i^l$ . Since  $z_i^l \in \mathcal{Z}^c$ , it follows that  $\psi^\dagger \circ \psi(z_i^l) \in \mathcal{Z}^c$ .

The condition in (16c) requires that the complex system is exactly anchored by the simple system at that index in the trajectory, i.e.  $\psi_x^\dagger \circ f^s \circ \psi(z_i^l) = f^c(z_i^l)$ . We show this by directly applying the dynamics and mappings in Section VI, dropping the index  $i$  for simplicity,

$$\begin{aligned} \psi_x^\dagger \circ f^s \circ \psi(z^l) &= \psi_x^\dagger \circ \begin{bmatrix} \dot{q}_{\text{lin}} \\ R(q_{\text{ang}})\omega \\ \frac{1}{m} \sum_j^n u_{\text{body},j} - g \\ W(q_{\text{lin}}, \bar{q}_{\text{foot}}, \omega, u_{\text{body}}) \end{bmatrix} \\ &= \begin{bmatrix} \dot{q}_{\text{lin}} \\ R(q_{\text{ang}})\omega \\ \dot{q}_{\text{foot}} \\ \frac{1}{m} \sum_j^n u_{\text{body},j} - g \\ W(q_{\text{lin}}, \bar{q}_{\text{foot}}, \omega, u_{\text{body}}) \\ \bar{u}_{\text{foot}} \end{bmatrix} \\ &= f^c(z^l) \end{aligned}$$

Lastly, the condition in (16d) requires that the dynamics at the prior state lead to the manifold, i.e.  $\psi_x^\dagger \circ \psi \circ f^c(z_{i-1}^l) = f^c(z_{i-1}^l)$ . Since the trajectory  $z^l$  is valid for the system in (32),  $x_i^l = f^c(z_{i-1}^l)$ . Additionally, since  $\psi^\dagger \circ \psi(z_i^l) = z_i^l$ , it follows that  $\psi_x^\dagger \circ \psi(z_i^l) = x_i^l$ . Thus  $\psi_x^\dagger \circ \psi \circ f^c(z_{i-1}^l) = f^c(z_{i-1}^l)$ .  $\square$

## ACKNOWLEDGMENTS

The authors would like to thank Larry Biegler and Max Likhachev for insightful discussions on the theoretical properties of MPC and other motion planning algorithms.

## REFERENCES

- [1] C. D. Bellicoso, M. Bjelonic, L. Wellhausen, *et al.*, "Advances in real-world applications for legged robots," *Journal of Field Robotics*, vol. 35, no. 8, pp. 1311–1326, 2018.
- [2] M. Hutter, C. Gehring, A. Lauber, *et al.*, "ANYmal—Toward legged robots for harsh environments," *Advanced Robotics*, vol. 31, no. 17, pp. 918–931, 2017.
- [3] H. Kolvenbach, D. Wisth, R. Buchanan, *et al.*, "Towards autonomous inspection of concrete deterioration in sewers with legged robots," *Journal of Field Robotics*, vol. 37, no. 8, pp. 1314–1327, 2020.
- [4] D. Kahneman, *Thinking, Fast and Slow*. Macmillan, 2011.
- [5] K. Gochev, B. Cohen, J. Butzke, *et al.*, "Path planning with adaptive dimensionality," in *Symposium on Combinatorial Search*, 2011.
- [6] D. Fridovich-Keil, S. L. Herbert, J. F. Fisac, *et al.*, "Planning, fast and slow: A framework for adaptive real-time safe trajectory planning," in *IEEE International Conference on Robotics and Automation*, 2018, pp. 387–394.

- [7] R. J. Full and D. E. Koditschek, "Templates and anchors: neuromechanical hypotheses of legged locomotion on land," *Journal of Experimental Biology*, vol. 202, no. 23, pp. 3325–3332, 1999.
- [8] T. Libby, A. M. Johnson, E. Chang-Siu, *et al.*, "Comparative design, scaling, and control of appendages for inertial reorientation," *IEEE Transactions on Robotics*, vol. 32, no. 6, pp. 1380–1398, 2016.
- [9] J. H. Reif, "Complexity of the mover's problem and generalizations," in *Symposium on Foundations of Computer Science*. IEEE Computer Society, 1979, pp. 421–427.
- [10] K. Hauser, T. Bretl, J.-C. Latombe, *et al.*, "Motion planning for legged robots on varied terrain," *The International Journal of Robotics Research*, vol. 27, no. 11–12, pp. 1325–1349, 2008.
- [11] K. Mombaur, "Using optimization to create self-stable human-like running," *Robotica*, vol. 27, no. 3, pp. 321–330, 2009.
- [12] M. Posa, C. Cantu, and R. Tedrake, "A direct method for trajectory optimization of rigid bodies through contact," *The International Journal of Robotics Research*, vol. 33, no. 1, pp. 69–81, 2014.
- [13] H. Dai, A. Valenzuela, and R. Tedrake, "Whole-body motion planning with centroidal dynamics and full kinematics," in *IEEE International Conference on Humanoid Robots*, 2014, pp. 295–302.
- [14] S. Bartoszyk, P. Kasprzak, and D. Belter, "Terrain-aware motion planning for a walking robot," in *IEEE International Workshop on Robot Motion and Control*, 2017, pp. 29–34.
- [15] P. Fernbach, S. Tonneau, A. Del Prete, and M. Taïx, "A kinodynamic steering-method for legged multi-contact locomotion," in *IEEE/RSJ International Conference on Intelligent Robots and Systems*, 2017, pp. 3701–3707.
- [16] S. Tonneau, A. Del Prete, J. Pettré, *et al.*, "An efficient acyclic contact planner for multiped robots," *IEEE Transactions on Robotics*, vol. 34, no. 3, pp. 586–601, 2018.
- [17] J. Norby and A. M. Johnson, "Fast global motion planning for dynamic legged robots," in *IEEE/RSJ International Conference on Intelligent Robots and Systems*, 2020, pp. 3829–3836.
- [18] A. W. Winkler, C. D. Bellicoso, M. Hutter, and J. Buchli, "Gait and trajectory optimization for legged systems through phase-based end-effector parameterization," *IEEE Robotics and Automation Letters*, vol. 3, no. 3, pp. 1560–1567, 2018.
- [19] L. Sentis and O. Khatib, "A whole-body control framework for humanoid robots operating in human environments," in *IEEE International Conference on Robotics and Automation*, 2006, pp. 2641–2648.
- [20] S. Kuindersma, R. Deits, M. Fallon, *et al.*, "Optimization-based locomotion planning, estimation, and control design for the Atlas humanoid robot," *Autonomous Robots*, vol. 40, no. 3, pp. 429–455, 2016.
- [21] M. Neunert, M. Stäuble, M. Gifftaler, *et al.*, "Whole-body nonlinear model predictive control through contacts for quadrupeds," *IEEE Robotics and Automation Letters*, vol. 3, no. 3, pp. 1458–1465, 2018.
- [22] M. Zucker, N. Ratliff, M. Stolle, *et al.*, "Optimization and learning for rough terrain legged locomotion," *The International Journal of Robotics Research*, vol. 30, no. 2, pp. 175–191, 2011.
- [23] E. Plaku, L. E. Kavraki, and M. Y. Vardi, "Motion planning with dynamics by a synergistic combination of layers of planning," *IEEE Transactions on Robotics*, vol. 26, no. 3, pp. 469–482, 2010.
- [24] D. McConachie, T. Power, P. Mitrano, and D. Berenson, "Learning when to trust a dynamics model for planning in reduced state spaces," *IEEE Robotics and Automation Letters*, vol. 5, no. 2, pp. 3540–3547, 2020.
- [25] J. Carpentier, R. Budhiraja, and N. Mansard, "Learning feasibility constraints for multi-contact locomotion of legged robots," in *Robotics: Science and Systems*, 2017.
- [26] M. Kapadia, A. Beacco, F. Garcia, *et al.*, "Multi-domain real-time planning in dynamic environments," in *ACM SIGGRAPH/Eurographics Symposium on Computer Animation*, 2013, pp. 115–124.
- [27] M. Brandao, M. Fallon, and I. Havoutis, "Multi-controller multi-objective locomotion planning for legged robots," in *IEEE/RSJ international conference on intelligent robots and systems*, 2019, pp. 4714–4721.
- [28] H. Zhang, J. Butzke, and M. Likhachev, "Combining global and local planning with guarantees on completeness," in *IEEE International Conference on Robotics and Automation*, 2012, pp. 4500–4506.
- [29] B. Styler and R. Simmons, "Plan-time multi-model switching for motion planning," in *International Conference on Automated Planning and Scheduling*, vol. 27, 2017, pp. 558–566.
- [30] A. Dornbush, K. Vijayakumar, S. Bardapurkar, *et al.*, "A single-planner approach to multi-modal humanoid mobility," in *IEEE International Conference on Robotics and Automation*, 2018, pp. 4334–4341.
- [31] F. Allgöwer and A. Zheng, *Nonlinear Model Predictive Control*. Birkhäuser, 2012, vol. 26.
- [32] J. Di Carlo, P. M. Wensing, B. Katz, *et al.*, "Dynamic locomotion in the MIT Cheetah 3 through convex model-predictive control," in *IEEE/RSJ International Conference on Intelligent Robots and Systems*, 2018, pp. 1–9.
- [33] A. Laurenzi, E. M. Hoffman, and N. G. Tsagarakis, "Quadrupedal walking motion and footstep placement through linear model predictive control," in *IEEE/RSJ International Conference on Intelligent Robots and Systems*, 2018, pp. 2267–2273.
- [34] Y. Shi, P. Wang, M. Li, *et al.*, "Model predictive control for motion planning of quadrupedal locomotion," in *IEEE International Conference on Advanced Robotics and Mechatronics*, 2019, pp. 87–92.
- [35] Y. Sim and J. Ramos, "Tello leg: The study of design principles and metrics for dynamic humanoid robots," *arXiv preprint arXiv:2203.00644*, 2022.
- [36] J. Liu, P. Zhao, Z. Gan, *et al.*, "Leveraging the template and anchor framework for safe, online robotic gait design," in *IEEE International Conference on Robotics and Automation*, 2020, pp. 10 869–10 875.
- [37] V. Kurtz, R. R. da Silva, P. M. Wensing, and H. Lin, "Formal connections between template and anchor models via approximate simulation," in *IEEE-RAS International Conference on Humanoid Robots*, 2019, pp. 64–71.
- [38] A. Pandala, R. T. Fawcett, U. Rosolia, *et al.*, "Robust predictive control for quadrupedal locomotion: Learning to close the gap between reduced- and full-order models," *IEEE Robotics and Automation Letters*, vol. 7, no. 3, pp. 6622–6629, 2022.
- [39] H. Li, R. Frei, and P. M. Wensing, "Model hierarchy predictive control of robotic systems," *IEEE Robotics and Automation Letters*, 2021.
- [40] A. M. Johnson and D. E. Koditschek, "Legged self-manipulation," *IEEE Access*, vol. 1, pp. 310–334, 2013.
- [41] Q. Nguyen, M. J. Powell, B. Katz, *et al.*, "Optimized jumping on the MIT Cheetah 3 robot," in *IEEE International Conference on Robotics and Automation*, 2019, pp. 7448–7454.
- [42] H. Kolvenbach, E. Hampp, P. Barton, *et al.*, "Towards jumping locomotion for quadruped robots on the moon," in *IEEE/RSJ International Conference on Intelligent Robots and Systems*, 2019, pp. 5459–5466.
- [43] M. Chignoli, S. Morozov, and S. Kim, "Rapid and reliable quadruped motion planning with omnidirectional jumping," in *2022 International Conference on Robotics and Automation (ICRA)*. IEEE, 2022, pp. 6621–6627.
- [44] B. Ponton, M. Khadiv, A. Meduri, and L. Righetti, "Efficient multi-contact pattern generation with sequential convex approximations of the centroidal dynamics," *IEEE Transactions on Robotics*, vol. 37, no. 5, pp. 1661–1679, 2021.
- [45] J. B. Rawlings, D. Q. Mayne, and M. Diehl, *Model Predictive Control: Theory, Computation, and Design*. Nob Hill Publishing Madison, 2017, vol. 2.
- [46] D. Limon, T. Alamo, D. M. Raimondo, *et al.*, "Input-to-state stability: a unifying framework for robust model predictive control," in *Nonlinear Model Predictive Control*. Springer, 2009, pp. 1–26.
- [47] A. M. Johnson, S. E. Burden, and D. E. Koditschek, "A hybrid systems model for simple manipulation and self-manipulation systems," *International Journal of Robotics Research*, vol. 35, no. 11, pp. 1354–1392, September 2016.
- [48] M. Chignoli and P. M. Wensing, "Variational-based optimal control of underactuated balancing for dynamic quadrupeds," *IEEE Access*, vol. 8, pp. 49 785–49 797, 2020.
- [49] M. H. Raibert, *Legged Robots that Balance*. MIT press, 1986.
- [50] J. Norby, Y. Yang, A. Tajbakhsh, *et al.*, "Quad-SDK: Full stack software framework for agile quadrupedal locomotion," in *ICRA Workshop on Legged Robots*, May 2022.
- [51] A. Wächter and L. T. Biegler, "On the implementation of an interior-point filter line-search algorithm for large-scale nonlinear programming," *Mathematical Programming*, vol. 106, no. 1, pp. 25–57, 2006.
- [52] N. Mansard, A. DelPrete, M. Geisert, *et al.*, "Using a memory of motion to efficiently warm-start a nonlinear predictive controller," in *IEEE International Conference on Robotics and Automation*, 2018, pp. 2986–2993.
- [53] A. Bemporad and M. Morari, "Robust model predictive control: A survey," in *Robustness in identification and control*. Springer, 1999, pp. 207–226.
- [54] I. Batkovic, M. Ali, P. Falcone, and M. Zanon, "Model predictive control with infeasible reference trajectories," *arXiv preprint arXiv:2109.04846*, 2021.