

Supporting Capabilities For Underground Facilities

Alvine Kamaha^{*1}, Brianna Mount², and Richard Schnee³

¹University of California, Los Angeles, Department of Physics & Astronomy, Los Angeles, CA 90095-1547

²Black Hills State University, School of Natural Sciences, Spearfish, SD 57799-0002, USA

³South Dakota School of Mines and Technology, Rapid City, SD 57701-3901, USA

Abstract

The 2021 particle physics community study, known as “Snowmass 2021”, has brought together particle physicists around the world to create a unified vision for the field over the next decade. One of the areas of focus is the Underground Facilities (UF) frontier, which addresses underground infrastructure and the scientific programs and goals of underground-based experiments. To this effect, the UF Supporting Capabilities topical group created two surveys for the community to identify potential gaps between the supporting capabilities of facilities and those needed by current and future experiments. Capabilities surveyed are discussed in this report and include underground cleanroom space size and specifications, radon-reduced space needs and availability, the assay need and other underground space needs as well timeline for future experiments. Results indicate that future, larger experiments will increasingly require underground assembly in larger, cleaner cleanrooms, often with better radon-reduction systems and increased monitoring capability for ambient contaminants. Most assay needs may be met by existing worldwide capabilities with organized cooperation between facilities and experiments. Improved assay sensitivity is needed for assays of bulk and surface radioactivity for some materials for some experiments, and would be highly beneficial for radon emanation.

Contents

1 Introduction	1
2 Facilities for Low-Radioactivity Fabrication and Assembly	2
3 Assay needs	4
4 Other Underground Support Needs	7
5 Conclusions	7

1 Introduction

Underground experiments require significant supporting capabilities, including above-ground and underground cleanrooms, radon-reduction systems, and low-background assay systems. These capabilities are required to create and maintain low-radioactive environments for the operation of radiation-sensitive experiments such as those described in other Underground Facility reports for neutrino physics and dark matter. To assess the needed supporting capabilities for future experiments, a survey was sent to all current and planned underground experiments with SNOWMASS white papers. Concurrently, a survey was sent to all current and planned underground facilities. Tables 1 and 2 list all survey respondents. Based in great part on the responses, Sections 2–4 below describe facilities’ supporting capabilities and the needs of future experiments.

*corresponding author: akamaha@physics.ucla.edu

Table 1: Survey respondents: List of Experiments

Current Experiments		
CANDLES [1]	DM-Ice [2]	NEXT-100 [3]
CDEX [4]	Hyper-Kamiokande [5]	PandaX [6, 7]
COSINE-100 [8]	KamLAND-Zen [9]	Super-Kamiokande [10]
CUPID [11, 12]	Majorana Demonstrator [13]	SNO+ [14]
Planned Experiments		
Argo [15]	DARWIN [16, 17]	NEXT w/Ba-Tagging [18, 19]
COSINE-200 [20]	Kton Xe TPC for $0\nu\beta\beta$ [21]	NuDot [22, 23]
CUPID-1T [24]	LEGEND [25]	PIRE-GEMADARC [26, 27]
CYGNUS [28, 29]	nEXO [30]	SBC [31, 32]
DarkSide-20k [15]	NEXT-CRAB [18, 19]	Snowball [33]
DarkSide-LowMass [15]	NEXT-HD [18]	50-ton bubble chamber [34]
A possible neutrinoless-double beta-decay extension to DUNE [35]		

Table 2: Survey respondents: List of Facilities

Berkeley Low Background Counting Facility, U.S. [36]	Boulby, UK [37, 38, 39]
Canfranc, Spain [40, 41, 42]	Gran Sasso, Italy [43, 44]
JinPing, China [45, 46]	Kamioka Observatory, Japan [47]
KURF, VA, U.S. (not available due to COVID) [48, 49, 50]	LAFARA, French Pyrénées [51]
LLNL Nuclear Counting Facility, U.S.	Modane, France [52, 53, 54]
Pacific Northwest National Laboratory, U.S. [55]	SNOLAB, Canada [56]
SURF, SD, U.S. [57]	Y2L / Yemilab, Korea [58, 59, 60]
U. Alberta, Canada [61]	SD Mines, SD, U.S. [62, 63]

2 Facilities for Low-Radioactivity Fabrication and Assembly

A general need for most underground experiments is space for low-radioactivity fabrication and assembly. Cleanrooms (as described in Sect. 2.1) and radon-reduced air environments (as described in Sect. 2.2) are important supporting facilities to mitigate exposure to ambient background sources.

2.1 Cleanroom Capabilities

Dust on or in sensitive detectors can compromise their operation (e.g. by causing electrical shorts or sparking [64]) and increase their radioactive backgrounds since dust particulates may contain ^{238}U , ^{232}Th and ^{40}K [65, 66, 67, 68, 69]. Dust may also emanate radon into detector active volumes after detector assembly [67]. It is therefore often critical to minimize exposure of detector materials to dust at all stages of storage, handling, and detector assembly. The higher level of mine dust in many underground spaces increases the level of contamination of the detector surfaces by these particulates compared to above ground if dedicated cleanroom spaces are not used.

Detectors for underground experiments have often been assembled in cleanroom laboratories above ground and then transported underground to finalize the assembly. As the need for bigger detectors arises for the future of these experiments, larger underground clean areas will be needed for detector assembly, as transport of very large assembled detectors from the surface will become too difficult. Furthermore, stricter background requirements will limit the amount of time materials can be at the surface, suffering cosmogenic activation. Underground clean areas will also be increasingly needed for material storage, screening facilities, and detector development such as crystal growth for solid state detectors [70, 71].

The standard cleanroom ISO-6–7 (class 1000–10000) currently available in different facilities across the

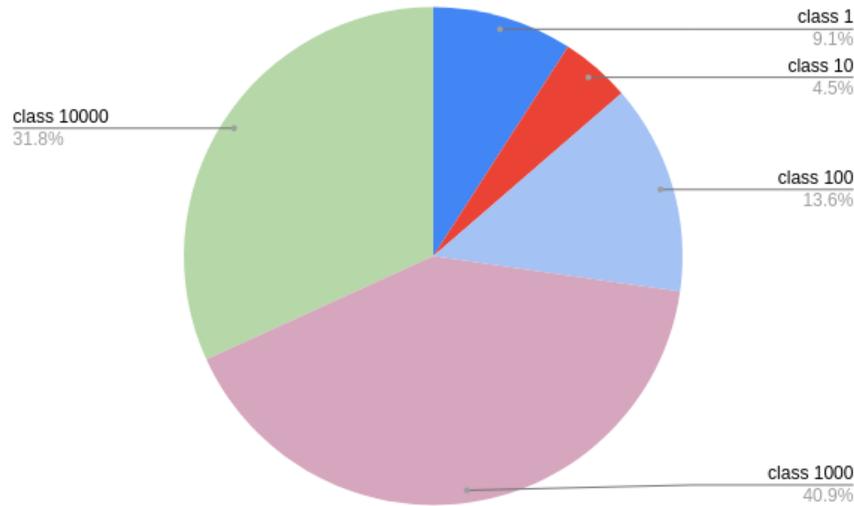


Figure 1: Cleanroom class requested by future UG experiments

world is sufficient for many experiments but not for all experiments. Some experiments require improving these cleanrooms to ISO-5 (class 100) for further suppression against dust fallout onto the detector material surfaces during the assembly stage, as shown in Figure 1. Table 3 lists the cleanroom sizes and ISO classes available in underground and surface laboratories worldwide.

For these future detectors' development and assembly, multiple-sites monitoring of the dust concentration within the cleanrooms as well as the dust fallout rate over time is also recommended. Particulate detectors should be distributed in strategic areas to sample the air within the room over time with prompt feedback. Collection vials or Witness plates should also be distributed in these areas to be measured with ICP-MS or optical and/or x-ray fluorescence microscopy to enable an accurate modelling and tracking of the dust content within the room and its deposition onto the detector materials (which can be confirmed later with tape-lift measurements). The lowest requirements on dust fallout rate is at the level of 100 ng/cm² over the duration of experiment assembly for inner detector surfaces with a requirement of $\sim 10^{-17}$ g (U,Th) /cm² on U and Th from dust. These requirements are modestly lower than the sensitivity of the current microscopy techniques for dust deposition but may be met for long-lived isotopes using ICP-MS [72].

2.2 Radon-reduced Cleanrooms and Other Spaces

Radon-daughter plate-out onto detector surfaces during storage, handling, or detector assembly provides additional long-lived radioactive contamination for underground experiments. Contamination with ²¹⁰Pb ($t_{1/2} = 22.3$ year) contributes to experimental backgrounds long after the initial plate-out via its beta decay [73, 74, 75, 76], alpha decay [77, 78, 69, 79] and recoiling daughters [73, 80, 81, 82, 83, 69, 84]. Due to nuclear recoil momentum, decay daughters are generally embedded tens of nm into the detector material surfaces after the initial parent depositions. The contaminants are therefore not easily removed with remedial cleaning after the assembly is complete. Techniques such as acid etching or electropolishing may be performed in some cases with relatively good efficiencies at removing some of the implanted radon daughters (²¹⁰Pb, ²¹⁰Bi, ²¹⁰Po) [85, 86, 87, 88, 79, 89]. The best approach remains mitigation against the deposition of radon daughters onto the detector material surfaces.

The air in underground laboratories typically has a high radon concentration (~ 100 Bq/m³) [90, 91], although some underground sites (such as Boulby and KURF) have low radon concentrations similar to outdoors (~ 5 Bq/m³) throughout their entire facilities. Many experiments require cleanroom areas for detector fabrication and assembly with radon concentrations below that of outside air. Larger future detectors requiring lower levels of radon-daughter plate-out will also necessitate larger cleanrooms underground with even lower radon concentrations. Table 4 lists the current low-radon cleanrooms worldwide along with additional spaces with radon concentrations reduced to lower than outside air. In general, these facilities have

Table 3: Cleanroom spaces for underground facilities

Laboratory	Depth (mwe)	CR Areas (m ²)	CR ISO Class
Boulby, UK.	2805	800	ISO 7
Canfranc, Spain [40, 41]	2400	70, 30	ISO 5-6
Gran Sasso, Italy	3100	13	ISO 7
Gran Sasso, Italy	3100	86, 32	ISO 6
Gran Sasso, Italy	0	325	ISO 6
Gran Sasso, Italy	0	62	(in progress)
SNOLAB, Canada	5890	4924	ISO 6-7
SNOLAB, Canada	5890	3159	ISO 6-7
SURF, SD, U.S.	0	37	ISO 6
SURF, SD, U.S.	0	55	ISO 5-6
SURF, SD, U.S.	4300	120, 56, 55, 41	ISO 5-6
SURF, SD, U.S.	4300	52, 18.3	ISO 6-7
SURF, SD, U.S.	4300	286, 125, 38, 34	ISO 7
SURF, SD, U.S.	4300	90	ISO 8
Y2L, Korea	1750	46, 46	ISO 7
Yemilab (under construction), Korea	2800	23	ISO 5
Yemilab (under construction), Korea	2800	80, 20	ISO 7
Kamioka Observatory, Japan	2700	66	Not relayed
PNNL, U.S.	38	5×19-60	ISO 6-7

been built to meet the needs of specific near-term experiments. Future experiments described above, such as liquid noble detectors, tend to need reduced-radon cleanrooms with areas 100–200 m², while several next-generation experiments (such as DarkSide-LowMass and future phases of NEXT) require lower radon concentrations (1–5 mBq/m³) than are currently available. These lowest radon concentrations desired are at, but not beyond, the capabilities of the most sensitive radon monitors so far produced.

Because the ultimate goal of reduced-radon cleanrooms is to ensure a low level of radon-daughter plate-out onto detector surfaces is not exceeded, monitoring of the radon daughter plate-out is also needed in many cases (especially since such plate-out rates depend not only on the radon concentration but also on the material charge and geometry). Such monitoring is typically achieved through a distribution of witness plates measured with low-background alpha detectors. Desired sensitivities for many experiments are lower than 0.1 mBq/m² activity of ²¹⁰Po during a full construction period, implying that monitoring that can provide direct short-term feedback of use must be modestly better than the best sensitivity currently available. [93, 89]

Some experiments require lower radon concentrations in the air surrounding their detectors (often in gaps within shielding layers). Modane supplies air with a concentration of 15 mBq/m³ to its experiments, while Canfranc supplies 220 m³/hr air with 1 mBq/m³ [40]. Y2L provides purge gas with a concentration of 1 Bq/m³ to its HPGe detectors. Several experiments use liquid nitrogen boil-off as described above.

3 Assay needs

Underground experiments including dark matter searches and neutrinoless double beta decay experiments continue to require extreme detector radiopurity. Of particular interest are the primordial radionuclides, ⁴⁰K, ²³²Th, and ²³⁸U which are present in most raw materials. For each of these experiments, materials are carefully screened and selected to comprise the detectors and their shielding. Once materials are selected, accurate and precise characterization is an important component in the modeling and analysis of their data. A complementary suite of assay capabilities, including High Purity Germanium (HPGe) Gamma-Ray Spectroscopy, Inductively Coupled Plasma Mass Spectrometry (ICP-MS), alpha screening, and radon emanation is required to determine which radionuclides are present in a material and at what levels, especially since

Table 4: Radon-reduced spaces for underground facilities

Laboratory	Depth (mwe)	CR Area (m ²)	CR ISO Class	Rn Concentration (mBq/m ³)	Other Areas
Canfranc, Spain [42]	2400	70	ISO 5-6	<5	1 mBq/m ³ to experiments
Gran Sasso, Italy	3100	13	ISO 7	10	
Gran Sasso, Italy	3100	86	ISO 6	50	
Gran Sasso, Italy	3100	32	ISO 6	50	
Gran Sasso, Italy	0	325	ISO 6	(in progress)	
Gran Sasso, Italy	0	62	ISO 6	(in progress)	
Kamioka Obs., Japan	2700				50 mBq/m ³ to SuperK tank
Modane, France [92]	4800	16		(planned)	15 mBq/m ³ to experiments
SNOLAB, Canada	5890		ISO 6	(in progress)	
SURF, SD, U.S.	4300	45	ISO 7	100	
SURF, SD, U.S.	0	55	ISO 5-6	500	
Y2L	1750	46	ISO 7	1000	HPGe array room
Yemilab (planned) [59]	2800	23	ISO 5	planned	planned
Yemilab (planned) [59]	2800	80	ISO 7	planned	planned
U. Alberta, Canada [61]	0	100	ISO 5	100	
SD Mines, U.S. [62, 63]	0	15	ISO 5-6	20	

decay chains are often not in secular equilibrium. [67, 94].

The surveyed current and planned experiments relayed a variety of needed sensitivities for sample assays, with most next-generation experiments aiming for ~ 100 nBq/kg assay capability for inner detector materials. However, KAMLAND-ZEN related their requirement of achieving on the order of 1 nBq/kg.

3.1 High-Purity Germanium Gamma-Ray Spectroscopy

Gamma-ray spectroscopy using HPGe detectors has historically been the workhorse of low-background efforts. These detectors are located in numerous underground lab around the world. Low-background counting of gamma rays to determine the radionuclides embedded within materials is sensitive down to $10 \mu\text{Bq kg}^{-1}$ levels. Counting times for these detectors are routinely on the order of 1–2 weeks, with some up to a month in duration. Samples must be of sufficient mass to collect emission statistics but also must fit within the shielding of the detectors, which vary in size. HPGe is a non-destructive assay technique, so it can be used to assay final components.

For samples of smaller mass and activity, Neutron Activation Analysis (NAA) sometimes may be used [95]. Samples are first activated in a reactor, and then analyzed over a few weeks using HPGe detectors. This technique is effectively destructive to a low background sample as the sample is unusable after it is activated.

As shown in Table 5, there are currently over 60 HPGe detectors serving underground experiments world-wide (and there are numerous HPGe detectors at additional underground laboratories not listed). If each detector counts a sample for two weeks and each detector requires four weeks of calibrations and background checks per year, the world-wide capability for ultra-low background counting is approximately 1,400 samples per year. Many experiments need on average 100 samples counted per year. However, limits of sensitivity for currently available HPGe may not reach the levels required by the most inner materials in the next generation of dark matter and neutrinoless double beta decay experiments. Current detector limits are on the order of $10 \mu\text{Bq kg}^{-1}$, about two orders of magnitude worse than needed for some materials. HPGe detectors with improved sensitivity (such as multiple-crystal detectors [112]), or other assay techniques with improved sensitivity, will be needed to provide assays for next-generation experiments. Furthermore, we cannot realize the full efficiency of having all world-wide detectors subscribed with the current model of each experiment “owning” detectors. World-wide collaboration among low background counting labs is needed to fully realize the potential.

Table 5: Current Low Background HPGe systems. Some sensitivities in our survey were not recorded.

Facility	Depth (mwe)	Number HPGe	Sensitivity [U], [Th] (mBq/kg)
Berkeley Low Background Counting Facility, U.S. [96]	15	1	6 – 24
Boulby Underground Laboratory, UK [97]	2805	6	< 0.1 – 1
Canfranc, Spain [98]	2400	7	0.1 – 1
China Jinping Underground Laboratory [45]	6720	3	1
Gran Sasso, Italy [99, 100]	3100	8	0.016 – 15
Kamioka Observatory, Japan [101, 102]	2700	5	< 1
LAFARA underground laboratory, French Pyrénées [51]	220	5	Not relayed
LLNL Nuclear Counting Facility, U.S.	10	3	Not relayed
Modane, France [103, 104]	4800	2	0.4 – 4
Pacific Northwest National Laboratory, U.S. [105, 55]	38	14	Not relayed
SNOLAB, Canada [106]	5890	5	0.04 – 0.35
SURF, SD, U.S. [107]	4300	6	0.05 – 0.7
Vue-des-Alpes Laboratory, Switzerland [108, 109, 110]	620	1	< 0.1
Y2L / Yemilab, Korea [111, 59, 112]	1750/2500	3	0.05 - 0.5
SD Mines, U.S.	0	2	200 – 2000

3.2 Mass Spectrometry

Complementary to HPGe screening are various forms of mass spectrometry. Inductively Coupled Plasma Mass Spectrometry (ICP-MS) provides some of the lowest detection limits (sub-ppt, or $0.01 \mu\text{Bq kg}^{-1}$) [113, 114, 115] available for ^{232}Th and ^{238}U as well as other isotopes of interest to the low-background community [116, 117]. While ICP-MS can also detect ^{40}K , interference effects with Ar species produced in the Ar plasma tend to reduce its sensitivity, with ppm levels achieved typically and state-of-the-art instrumentation able to achieve ppb to ppt levels [118].

One advantage of ICP-MS over HPGe detectors is in the measurement speed. Once the sample is prepared, ICP-MS takes minutes to analyze one sample, whereas the HPGe detector may take weeks. Additionally, smaller sample sizes are required with ICP-MS. If laser ablation is utilized, ICP-MS can be a location-specific technique, although this mode of operation requires more complicated calibration techniques typically including the development of certified matrix-matched standards [119, 120].

A disadvantage of ICP-MS is in the preparation of the sample (if laser ablation is not used). Optimizing a sample preparation technique for each new material can be time-consuming. Since digestion or ablation are required, the technique is destructive.

Most of the underground facilities surveyed either have 1–2 ICP-MS systems on site at their surface facilities, or have relationships with nearby labs for use of their ICP-MS systems. Most of these ICP-MS systems are located in cleanroom facilities with dedicated sample-preparation areas. The experiments surveyed either plan to use these systems or have located other systems within their collaborating institutions.

3.3 Alpha Screening

Many alpha detectors have negligible backgrounds reduced by operation underground, but backgrounds of the most sensitive detector for α screening, the XIA UltraLo-1800 [121], with a sensitivity to surface $^{210}\text{Po} < 0.1 \text{ mBq m}^{-2}$ [89] are reduced by operation underground by about a factor of 3 [93]. Despite this fact, relatively few underground sites (Boulby, Kamioka, PNNL, and Y2L [122]) have underground XIA detectors; one will be moved underground at SNOLAB soon. Most experiments require surface-alpha sensitivity that may be achieved with the XIA, but improved sensitivity is needed by Argo and is important for many experiments wishing to ensure that assembly occurs within the background requirements, rather than resulting in a need to etch or replace materials after assembly.

3.4 Radon Emanation Assays

As described in [123], emanation of radon provides an important radioactive background for most underground physics experiments, so screening candidate materials for Rn directly [124, 125, 126] is an important support for such experiments. Although radon emanation assays do not have improved sensitivity underground, many experimental systems requiring emanation assays are too large and/or fragile to move to an above-ground site for assay, and assaying as-built systems underground may be advantageous (see e.g. [67]). For these reasons, several underground laboratories, including Kamioka, SNOLAB, Boulby, and Canfranc, have radon emanation systems on-site, while SURF has the capability to harvest radon on-site for measurement nearby at South Dakota Mines [67].

The amount of radon emanation capacity worldwide appears sufficient for future experiments so long as this capacity may be efficiently exploited. However, for many experiments, improved radon emanation assay sensitivity would be useful, as many measurements of individual materials at the limit of sensitivity may easily add up to total radon emanation higher than the experiment requirements. Furthermore, ambiguities in interpretation from radon emanation measurements at room temperature when applied to experiments at low temperatures provide a need for future facilities for radon emanation at low temperatures.

4 Other Underground Support Needs

Experiments require additional specialized underground support to allow fabrication and assembly of detectors, or to allow experimental specifications to be met during operation. These support capabilities include underground storage of materials, on-site (including possibly underground) machining, and glove boxes for even cleaner detector assembly. These capabilities may require reduced radon environments, as may the detector shielding configurations.

On-site underground fabrication facilities are necessary to prevent cosmogenic activation of completed detector parts. Such facilities may provide benefit to multiple underground experiments at a site. Underground electroforming of copper parts can produce $>10\times$ lower radioactivity than the cleanest commercially available copper, and so is planned for experiments such as CDEX, NEWS-G, LEGEND, NEXT, and nEXO. [30, 127] Experiments such as SBD and SuperCDMS would also benefit from electroplating of clean copper onto pre-machined copper pieces [128, 129]. Underground electroforming capabilities exist at SURF, Canfranc, and PNNL, and facilities are planned for Boulby and SNOLAB. Additional underground crystal growth and fabrication of Ge detectors (to reduce the cosmogenic production of tritium) would also be beneficial for multiple experiments [26, 129, 130], but there are no such facilities currently due to their significant cost. Several labs (at least SURF, SNOLAB, and Gran Sasso) have underground machine shops. More extensive underground machine shops for general use would benefit future experiments.

Most underground sites have plenty of non-cleanroom space available for storage of materials that do not need to be kept in clean conditions. Such long-term storage is important for letting cosmogenic activation decay away in materials of detectors used for rare-event searches. Most experiments need only modest storage within cleanroom spaces, with needs captured in the discussion in Sect. 2.1. Some of this storage must be in low-radon volumes in order to reduce radon-daughter plateout onto parts. Such storage is most easily achieved by bagging materials in radon-impermeable bags or vacuum-tight canisters, and/or placing in gloveboxes or cabinets that are purged with low-radon gas, typically liquid nitrogen boil-off. Radon concentrations at or below 0.1 mBq/m^3 are achievable with such purges. [131, 132]

Several experiments require plants for water purification and radon removal (from the water), scintillator purification and degassing, or chemical spaces with fume hoods. SNOLAB in particular has excellent facilities for such liquid material purification. Finally, several experiments require isotopic purification, with some of these needed to be sited underground, such as Te for SNO+.

5 Conclusions

The larger, lower-background experiments planned for the future will require larger support facilities that also enable lower backgrounds than are currently available. Gaps between existing facilities and future needs include the following:

- Some experiments require larger and/or cleaner cleanrooms than currently exist.
- Some experiments require larger and/or lower-radon reduced-radon cleanrooms than currently exist.
- Existing surface-screening methods for radon-daughter plate-out are not sufficient to inform experiments during assembly as to whether their needs are met.
- Most assay needs may be met by existing worldwide capabilities with organized cooperation between facilities and experiments.
- Improved assay sensitivity is needed for assays of bulk and surface radioactivity for some materials for some experiments, and would be highly beneficial for radon emanation.
- More extensive underground machine shops for general use would benefit future experiments.

References

- [1] S. Umehara et al., *Status of ^{48}Ca double beta decay search with CANDLES*, *PoS PANIC2021* (2022) 291.
- [2] DM-ICE COLLABORATION collaboration, *First search for a dark matter annual modulation signal with NaI(Tl) in the southern hemisphere by dm-ice17* , *Phys. Rev. D* **95** (2017) 032006.
- [3] NEXT collaboration, *Sensitivity of NEXT-100 to Neutrinoless Double Beta Decay*, *JHEP* **05** (2016) 159 [[1511.09246](#)].
- [4] CDEX collaboration, *Constraints on Sub-GeV Dark Matter-Electron Scattering from the CDEX-10 Experiment*, [2206.04128](#).
- [5] HYPER-KAMIOKANDE collaboration, *Hyper-Kamiokande Experiment: A Snowmass White Paper*, in *2022 Snowmass Summer Study*, 3, 2022 [[2203.02029](#)].
- [6] PANDAX-4T collaboration, *Low radioactive material screening and background control for the PandaX-4T experiment*, *JHEP* **06** (2022) 147 [[2112.02892](#)].
- [7] PANDAX collaboration, *The first results of PandaX-4T*, *Int. J. Mod. Phys. D* **31** (2022) 2230007.
- [8] COSINE-100 collaboration, *Three-year annual modulation search with COSINE-100*, [2111.08863](#).
- [9] KAMLAND-ZEN collaboration, *First Search for the Majorana Nature of Neutrinos in the Inverted Mass Ordering Region with KamLAND-Zen*, [2203.02139](#).
- [10] SUPER-KAMIOKANDE collaboration, *First gadolinium loading to Super-Kamiokande*, *Nucl. Instrum. Meth. A* **1027** (2022) 166248 [[2109.00360](#)].
- [11] C. Augier et al., *Final results on the $0\nu\beta\beta$ decay half-life limit of ^{100}Mo from the CUPID-Mo experiment*, [2202.08716](#).
- [12] O. Azzolini et al., *Final Result on the Neutrinoless Double Beta Decay of ^{82}Se with CUPID-0*, [2206.05130](#).
- [13] MAJORANA COLLABORATION collaboration, *Final Result of the MAJORANA DEMONSTRATOR's Search for Neutrinoless Double- β Decay in ^{76}Ge* , [2207.07638](#).
- [14] V. Albanese, R. Alves, M. Anderson, S. Andringa, L. Anselmo, E. Arushanova et al., *The sno+ experiment*, *Journal of Instrumentation* **16** (2021) P08059.
- [15] DARKSIDE collaboration, *DarkSide-20k and the Future Liquid Argon Dark Matter Program*, *PoS EPS-HEP2021* (2022) 169.
- [16] DARWIN collaboration, *DARWIN – a next-generation liquid xenon observatory for dark matter and neutrino physics*, *PoS ICRC2021* (2021) 548.
- [17] J. Aalbers et al., *A Next-Generation Liquid Xenon Observatory for Dark Matter and Neutrino Physics*, [2203.02309](#).
- [18] NEXT collaboration, *Sensitivity of a tonne-scale NEXT detector for neutrinoless double beta decay searches*, *JHEP* **2021** (2021) 164 [[2005.06467](#)].
- [19] N.K. Byrnes, A.A. Denisenko, F.W. Foss, B.J.P. Jones, A.D. McDonald, D.R. Nygren et al., *Barium Tagging with Selective, Dry-Functional, Single Molecule Sensitive On-Off Fluorophores for the NEXT Experiment*, in *Meeting of the Division of Particles and Fields of the American Physical Society*, 9, 2019 [[1909.04677](#)].
- [20] COSINE collaboration, *Development of ultra-pure NaI(Tl) detectors for the COSINE-200 experiment*, *Eur. Phys. J. C* **80** (2020) 814 [[2004.06287](#)].

- [21] A. Avasthi, T.W. Bowyer, C. Bray, T. Brunner, N. Catarineu, E. Church et al., *Kiloton-scale xenon detectors for neutrinoless double beta decay and other new physics searches*, *Phys. Rev. D* **104** (2021) 112007.
- [22] NUDOT collaboration, J. Gruszko, C. Grant and L. Winslow, “R&d towards beyond-the-ton-scale double-beta decay searches in liquid scintillator.” https://www.snowmass21.org/docs/files/summaries/NF/SNOWMASS21-NF5_NF10-IF2_IF0_Julieta_Gruszko-159.pdf.
- [23] J. Gruszko, B. Naranjo, B. Daniel, A. Elagin, D. Gooding, C. Grant et al., *Detecting cherenkov light from 1–2 MeV electrons in linear alkylbenzene*, *Journal of Instrumentation* **14** (2019) P02005.
- [24] CUPID collaboration, *Toward CUPID-1T*, 2203.08386.
- [25] LEGEND collaboration, *The Large Enriched Germanium Experiment for Neutrinoless $\beta\beta$ Decay: LEGEND-1000 Preconceptual Design Report*, 2107.11462.
- [26] W.-Z. Wei, D.-M. Mei and C. Zhang, *Cosmogenic activation of germanium used for tonne-scale rare event search experiments*, *Astroparticle Physics* **96** (2017) 24.
- [27] D. Mei, J. Wilkerson and R. Harris, “Advanced germanium detectors and technologies for underground physics.” https://www.snowmass21.org/docs/files/summaries/UF/SNOWMASS21-UF4_UF3-NF5_NF6-CF1_CF0-IF3_IF0-CompF2_CompF3-CommF5_CommF0-006.pdf.
- [28] S.E. Vahsen, C.A.J. O’Hare, W.A. Lynch, N.J.C. Spooner, E. Baracchini, P. Barbeau et al., *Cygnus: Feasibility of a nuclear recoil observatory with directional sensitivity to dark matter and neutrinos*, 2020. 10.48550/ARXIV.2008.12587.
- [29] C.A.J. O’Hare, D. Loomba, K. Altenmüller, H. Álvarez Pol, F.D. Amaro, H.M. Araújo et al., *Recoil imaging for directional detection of dark matter, neutrinos, and physics beyond the standard model*, 2022. 10.48550/ARXIV.2203.05914.
- [30] G. Adhikari, S.A. Kharusi, E. Angelico, G. Anton, I.J. Arnquist, I. Badhrees et al., *nEXO: neutrinoless double beta decay search beyond 10^{28} year half-life sensitivity*, *Journal of Physics G: Nuclear and Particle Physics* **49** (2022) 015104.
- [31] SBC collaboration, *Operation update and Calibration plan for the Scintillating Bubble Chamber (SBC) Collaboration’s 10-kg LAr detector at Fermilab*, *J. Phys. Conf. Ser.* **2156** (2021) 012214.
- [32] SBC collaboration, *The Scintillation Bubble Chamber (SBC) experiment for dark matter and reactor $CE\nu NS$* , *PoS PANIC2021* (2022) 339.
- [33] M. Szydagis, C. Levy, Y. Huang, A.C. Kamaha, C.C. Knight, G.R.C. Rischbieter et al., *Demonstration of neutron radiation-induced nucleation of supercooled water*, *Phys. Chem. Chem. Phys.* **23** (2021) 13440.
- [34] PICO collaboration, A. Robinson, “Multi-ton scale bubble chambers.” https://www.snowmass21.org/docs/files/summaries/CF/SNOWMASS21-CF1_CF0-079.pdf.
- [35] A. Mastbaum, F. Psihas and J. Zennamo, *Xenon-Doped Liquid Argon TPCs as a Neutrinoless Double Beta Decay Platform*, 2203.14700.
- [36] K.J. Thomas, A.R. Smith, A.W.P. Poon, Y.D. Chan, E.B. Norman and K.T. Lesko, *Berkeley Low Background Facility*, *AIP Conf. Proc.* **1672** (2015) 020004.
- [37] A. Murphy and S. Paling, *The Boulby mine underground science facility: The search for dark matter, and beyond*, *Nucl. Phys. News* **22N1** (2012) 19.
- [38] D. Malczewski, J. Kisiel and J. Dorda, *Gamma background measurements in the Boulby Underground Laboratory*, *J. Radioanal. Nucl. Chem.* **298** (2013) 1483.

- [39] H.M. Araujo et al., *Measurements of neutrons produced by high-energy muons at the Boulby Underground Laboratory*, *Astropart. Phys.* **29** (2008) 471 [0805.3110].
- [40] J. Amaré et al., *Long term measurement of the ^{222}Rn concentration in the Canfranc Underground Laboratory*, [2203.13978](#).
- [41] S.E.A. Orrigo et al., *Long-term evolution of the neutron rate at the Canfranc Underground Laboratory*, [2204.14263](#).
- [42] J. Pérez-Pérez, J.C. Amare, I.C. Bandac, A. Bayo, S. Borjabad-Sánchez, J.M. Calvo-Mozota et al., *Radon mitigation applications at the laboratorio subterráneo de canfranc (lsc)*, *Universe* **8** (2022) 112.
- [43] A. Bettini, *Experimental Programme at the Gran Sasso National Laboratory*, *Phys. Part. Nucl.* **49** (2018) 489.
- [44] G. Bruno and W. Fulgione, *Flux measurement of fast neutrons in the Gran Sasso underground laboratory*, *Eur. Phys. J. C* **79** (2019) 747 [1905.05512].
- [45] H. Ma, W. Dai, Z. Zeng, T. Xue, L. Yang, Q. Yue et al., *Status and prospect of China Jinping Underground Laboratory*, *J. Phys. Conf. Ser.* **2156** (2021) 012170.
- [46] JNE collaboration, *Measurement of muon-induced neutron yield at the China Jinping Underground Laboratory **, *Chin. Phys. C* **46** (2022) 085001 [2108.04010].
- [47] Y. Suzuki and K. Inoue, *Kamioka Underground Observatories*, *Eur. Phys. J. Plus* **127** (2012) 111.
- [48] P. Huber, J.M. Link, C. Mariani, T. O'Donnell, M. Pitt and R.B. Vogelaar, "Kurf: The kimballton underground research facility."
https://www.snowmass21.org/docs/files/summaries/UF/SNOWMASS21-UF1_UF4-RF4_RF3_ODonnell-007.pdf.
- [49] P. Finnerty, S. MacMullin, H.O. Back, R. Henning, A. Long, K.T. Macon et al., *Low-Background gamma counting at the Kimballton Underground Research Facility*, *Nucl. Instrum. Meth. A* **642** (2011) 65 [1007.0015].
- [50] S. MacMullin, *Low background physics at the Kimballton mine*, *AIP Conf. Proc.* **1338** (2011) 78.
- [51] P.v. Beek, M. Souhaut, B. Lansard, M. Bourquin, J.-L. Reyss, P.v. Ballmoos et al., *LAFARA: a new underground laboratory in the French Pyrénées for ultra low-level gamma-ray spectrometry*, *Journal of Environmental Radioactivity* **116** (2013) 152.
- [52] F. Piquemal, *Modane underground laboratory: Status and project*, *Eur. Phys. J. Plus* **127** (2012) 110.
- [53] V. Palušová, R. Breier, E. Chauveau, F. Piquemal and P.P. Povinec, *Natural radionuclides as background sources in the Modane underground laboratory*, *J. Environ. Radioact.* **216** (2020) 106185.
- [54] D.V. Ponomarev, Z. Kalaninova, D.V. Medvedev, S.V. Rozov, I.E. Rozova, V.V. Timkin et al., *Measuring Low Neutron Fluxes at the Modane Underground Laboratory Using Iodine-Containing Scintillators*, *Instrum. Exp. Tech.* **62** (2019) 309.
- [55] M.E. Keillor et al., *CASCADES: An ultra-low-background germanium crystal array at Pacific Northwest National Laboratory*, *AIP Conf. Proc.* **1412** (2011) 208.
- [56] J. Hall, *The SNOLAB underground laboratory*, *J. Phys. Conf. Ser.* **1468** (2020) 012252.
- [57] J. Heise, *The sanford underground research facility*, 2022. 10.48550/ARXIV.2203.08293.
- [58] K. Park, *The new underground facility in Korea, Yemilab*, *J. Phys. Conf. Ser.* **2156** (2021) 012171.
- [59] M.H. Lee, *Radioassay and Purification for Experiments at Y2L and Yemilab in Korea*, *J. Phys. Conf. Ser.* **1468** (2020) 012249.

- [60] Y.S. Yoon, J. Kim and H. Park, *Neutron background measurement for rare event search experiments in the YangYang underground laboratory*, *Astropart. Phys.* **126** (2021) 102533 [[2102.07205](#)].
- [61] D. Grant, A. Hallin, S. Hanchurak, C. Krauss, S. Liu and R. Soluk, *Low Radon Cleanroom at the University of Alberta*, in *Topical Workshop on Low Radioactivity Techniques: LRT 2010*, R. Ford, ed., vol. 1338 of *AIP Conf. Ser.*, pp. 161–163, Apr., 2011, [DOI](#).
- [62] J. Street, R. Bunker, C. Dunagan, X. Loose, R.W. Schnee, M. Stark et al., *Construction and Measurements of an Improved Vacuum-Swing-Adsorption Radon-Mitigation System*, in *Topical Workshop on Low Radioactivity Techniques: LRT 2015*, J.L. Orrell, ed., American Institute of Physics Conference Series, June, 2015 [[1506.00929](#)].
- [63] J. Street, R. Bunker, E.H. Miller, R.W. Schnee, S. Snyder and J. So, *Radon Mitigation for the SuperCDMS SNOLAB Dark Matter Experiment*, in *Topical Workshop on Low Radioactivity Techniques: LRT 2017*, D.L. Leonard, ed., AIP Conf. Ser., Aug., 2017 [[1708.08535](#)].
- [64] K. Lindley and N. Rowson, *Feed preparation factors affecting the efficiency of electrostatic separation, Magnetic and Electrical Separation* **8** (1970) .
- [65] D. Akerib, C. Akerlof, D.Y. Akimov, A. Alquahtani, S. Alsum, T. Anderson et al., *The lux-zeplin (lz) radioactivity and cleanliness control programs*, *The European Physical Journal C* **80** (2020) **1**.
- [66] D. Akerib, C. Akerlof, S. Alsum, H. Araújo, M. Arthurs, X. Bai et al., *Projected wimp sensitivity of the lux-zeplin (lz) dark matter experiment*. *arxiv 2018*, arXiv preprint [arXiv:1802.06039](#) .
- [67] LUX-ZEPLIN COLLABORATION collaboration, *The LUX-ZEPLIN (LZ) radioactivity and cleanliness control programs*, *Eur. Phys. J. C* **80** (2020) 1044 [[2006.02506](#)].
- [68] M.L. di Vacri, I.J. Arnquist, S. Scorza, E.W. Hoppe and J. Hall, *Direct method for the quantitative analysis of surface contamination on ultra-low background materials from exposure to dust*, *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* **994** (2021) 165051.
- [69] LUX-ZEPLIN COLLABORATION collaboration, *LUX-ZEPLIN (LZ) Technical Design Report*, [arXiv:1703.09144](#) (2017) [[1703.09144](#)].
- [70] G. Wang, M. Amman, H. Mei, D. Mei, K. Irmscher, Y. Guan et al., *Crystal growth and detector performance of large size high-purity ge crystals*, 2015. 10.48550/ARXIV.1505.01827.
- [71] J. Ma, Q. Yue, S. Lin, H.T.-K. Wong, J. Hu, L. Jia et al., *Study on cosmogenic activation in germanium detectors for future tonne-scale CDEX experiment*, *Science China Physics, Mechanics & Astronomy* **62** (2018) .
- [72] M.L. di Vacri, I.J. Arnquist, S. Scorza, E.W. Hoppe and J. Hall, *Direct method for the quantitative analysis of surface contamination on ultra-low background materials from exposure to dust*, *Nucl. Instrum. Methods Phys. Res. A* **994** (2021) 165051.
- [73] SUPERCDMS COLLABORATION collaboration, *Projected sensitivity of the SuperCDMS SNOLAB experiment*, *Phys. Rev. D* **95** (2017) 082002 [[1610.00006](#)].
- [74] M. Leung, *Surface Contamination From Radon Progeny*, *AIP Conf. Proc.* **785** (2005) 184.
- [75] XENON COLLABORATION collaboration, *Study of the electromagnetic background in the XENON100 experiment*, *Phys. Rev. D* **83** (2011) 082001.
- [76] LUX COLLABORATION collaboration, *Radiogenic and muon-induced backgrounds in the LUX dark matter detector*, *Astropart. Phys.* **62** (2014) 33 [[1403.1299](#)].
- [77] D.S. Akerib et al., *The Large Underground Xenon (LUX) experiment*, *Nucl. Instrum. Methods Phys. Res. A* **704** (2013) 111 [[1211.3788](#)].

- [78] LUX COLLABORATION collaboration, *Radon-related backgrounds in the lux dark matter search*, *Physics Procedia* **61** (2015) 658.
- [79] S. Bruenner et al., *Radon daughter removal from ptfе surfaces and its application in liquid xenon detectors*, *The European Physical Journal C* **81** (2021) .
- [80] G. Angloher et al., *Results from 730 kg days of the CRESST-II Dark Matter search*, *European Physical Journal C* **72** (2012) 1971 [1109.0702].
- [81] B. Cai, M. Boulay, B. Cleveland and T. Pollmann, *Surface backgrounds in the DEAP-3600 dark matter experiment*, in *AIP Conf. Ser.*, R. Ford, ed., vol. 1338 of *AIP Conf. Ser.*, pp. 137–146, Apr., 2011, DOI.
- [82] P.-A. Amaudruz, M. Batygov, B. Beltran, K. Boudjemline, M. Boulay, B. Cai et al., *Radon backgrounds in the deap-1 liquid-argon-based dark matter detector*, *Astropart. Phys.* **62** (2015) 178.
- [83] E. Behnke, J. Behnke, S.J. Brice, D. Broemmelsiek, J.I. Collar, A. Conner et al., *First dark matter search results from a 4-kg CF3I bubble chamber operated in a deep underground site*, *Phys. Rev. D* **86** (2012) 052001 [1204.3094].
- [84] J. Xu, C. Stanford, S. Westerdale, F. Calaprice, A. Wright and Z. Shi, *First measurement of surface nuclear recoil background for argon dark matter searches*, *Phys. Rev. D* **96** (2017) .
- [85] R.W. Schnee, M.A. Bowles, R. Bunker, K. McCabe, J. White, P. Cushman et al., *Removal of long-lived ^{222}Rn daughters by electropolishing thin layers of stainless steel*, *AIP Conference Proceedings* (2013) .
- [86] G. Zuzel, M. Wojcik, B. Majorovits, M.O. Lampert and P. Wendling, *Removal of ^{222}Rn daughters from metal surfaces*, *AIP Conference Proceedings* **1672** (2015) 150002 [<https://aip.scitation.org/doi/pdf/10.1063/1.4928025>].
- [87] V.E. Guiseppe, C.D. Christofferson, K.R. Hair and F.M. Adams, *A review and outlook for the removal of radon-generated Po-210 surface contamination*, *AIP Conference Proceedings* (2018) .
- [88] J. Street, R. Mahapatra, E. Morrison, M. Platt and R. Schnee, *Removal of ^{210}Pb by etch of crystalline detector sidewalls*, *Nucl. Instrum. Methods Phys. Res. A* **976** (2020) 164280 [2005.00488].
- [89] R. Bunker, T. Aramaki, I. Arnquist, R. Calkins, J. Cooley, E. Hoppe et al., *Evaluation and mitigation of trace ^{210}pb contamination on copper surfaces*, *Nucl. Instrum. Methods Phys. Res. A* **967** (2020) 163870.
- [90] C. Liu, H. Ma, Z. Zeng, J. Cheng, J. Li and H. Zhang, *Measurements of Radon Concentrations Using CR-39 Detectors in China JinPing Underground Laboratory (2015-2016)*, **1806.06567**.
- [91] G. Pronost, M. Ikeda, T. Nakamura, H. Sekiya and S. Tasaka, *Development of new radon monitoring systems in the Kamioka mine*, *PTEP* **2018** (2018) 093H01 [1807.11142].
- [92] R. Hodák et al., *Characterization and long-term performance of the Radon Trapping Facility operating at the Modane Underground Laboratory*, *J. Phys. G* **46** (2019) 115105.
- [93] X. Liu, “Surface alpha counting with xia.”.
- [94] and Zhicheng Qian, L. Si, A. Abdukerim, Z. Bo, W. Chen, X. Chen et al., *Low radioactive material screening and background control for the PandaX-4t experiment*, *Journal of High Energy Physics* **2022** (2022) .
- [95] R. Tsang, O. Nusair and A. Piepke, *Sensitivity analysis towards trace-uranium detection with γ - γ coincidence NAA*, *Journal of Instrumentation* **16** (2021) P10007.
- [96] K. Thomas, E. Norman, A. Smith and Y. Chan, *Installation of a muon veto for low background gamma spectroscopy at the lbnl low-background facility*, *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* **724** (2013) 47.

- [97] P. Scovell, E. Meehan, H. Araújo, J. Dobson, C. Ghag, H. Kraus et al., *Low-background gamma spectroscopy at the Boulby underground laboratory*, *Astroparticle Physics* **97** (2018) 160.
- [98] I. Bandac, S. Borjabad, A. Ianni, R. Nuñez-Lagos, C. Pérez, S. Rodríguez et al., *Ultra-low background and environmental measurements at Laboratorio Subterráneo de Canfranc (LSc)*, *Applied Radiation and Isotopes* **126** (2017) 127.
- [99] M. Laubenstein, *Screening of materials with high purity germanium detectors at the Laboratori Nazionali del Gran Sasso*, *Int. J. Mod. Phys. A* **32** (2017) 1743002.
- [100] G.R. Araujo, L. Baudis, Y. Biondi, A. Bismark and M. Galloway, *The upgraded low-background germanium counting facility GATOR for high-sensitivity γ -ray spectrometry*, 2022. 10.48550/ARXIV.2204.12478.
- [101] S. Ito, K. Ichimura, Y. Takaku, K. Abe, M. Ikeda and Y. Kishimoto, *Development of the measurement of radium using a germanium detector with molecular recognition resin*, *Progress of Theoretical and Experimental Physics* **2018** (2018) [<https://academic.oup.com/ptep/article-pdf/2018/9/091H01/25845516/pty096.pdf>].
- [102] S. Ito, K. Ichimura, Y. Takaku, K. Abe, M. Harada, M. Ikeda et al., *Improved method for measuring low-concentration radium and its application to the Super-Kamiokande Gadolinium project*, *Progress of Theoretical and Experimental Physics* **2020** (2020) [<https://academic.oup.com/ptep/article-pdf/2020/9/093H02/33774486/ptaa105.pdf>].
- [103] P. Hubert and F. Hubert, *Low background gamma-ray spectrometry in the 'Laboratoire Souterrain de Modane'*, *AIP Conf. Proc.* **897** (2007) 3.
- [104] V.B. Brudanin et al., *Development of the ultra-low background HPGe spectrometer OBELIX at Modane underground laboratory*, *JINST* **12** (2017) P02004.
- [105] S. Stave, *Germanium Detectors in Homeland Security at PNNL*, *J. Phys. Conf. Ser.* **606** (2015) 012018.
- [106] I. Lawson, *Low Background Measurement Capabilities at SNOLAB*, *J. Phys. Conf. Ser.* **1342** (2020) 012086.
- [107] B.J. Mount, K.J. Thomas, K.C. Oliver-Mallory, K.T. Lesko, R.W. Schnee, R. Henning et al., *Black hills state university underground campus*, *Applied Radiation and Isotopes* **126** (2017) 130.
- [108] Y. Gonin, J. Busto and J.-L. Vuilleumier, *The "la vue-des-alpes" underground laboratory*, *Review of Scientific Instruments* **74** (2003) 4663 [<https://doi.org/10.1063/1.1614854>].
- [109] M. von Sivers, B. Hofmann, Å. Rosén and M. Schumann, *The GeMSE facility for low-background γ -ray spectrometry*, *Journal of Instrumentation* **11** (2016) P12017.
- [110] D.R. García, D. Baur, J. Grigat, B. Hofmann, S. Lindemann, D. Masson et al., *GeMSE: a low-background facility for gamma-spectrometry at moderate rock overburden*, *Journal of Instrumentation* **17** (2022) P04005.
- [111] E. Lee, K.I. Hahn, E. Jeon, W. Kang, V. Kazalov, G. Kim et al., *Measurements of detector material samples with two HPGe detectors at the YangYang Underground Lab.*, *PoS ICHEP2018* (2019) 809.
- [112] D. Leonard, K. Hahn, W. Kang, V. Kazalov, G. Kim, Y. Kim et al., *Development of an array of fourteen hpge detectors having 70% relative efficiency each*, *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* **989** (2021) 164954.
- [113] I. Arnquist, M. di Vacri and E. Hoppe, *An automated ultraclean ion exchange separation method for the determinations of ^{232}Th and ^{238}U in copper using inductively coupled plasma mass spectrometry*, *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* **965** (2020) 163761.

- [114] I.J. Arnquist, E.W. Hoppe, M. Bliss, K. Harouaka, M.L. di Vacri and J.W. Grate, *Mass spectrometric assay of high radiopurity solid polymer materials for parts in radiation and rare event physics detectors*, *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* **943** (2019) 162443.
- [115] C. Cao, N. Li, X. Yang, J. Zhao, Y. Li, Z. Cai et al., *A practical approach of high precision u and th concentration measurement in acrylic*, *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* **1004** (2021) 165377.
- [116] J. Dobson, C. Ghag and L. Manenti, *Ultra-low background mass spectrometry for rare-event searches*, *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* **879** (2018) 25.
- [117] L. Copia, S. Nisi, W. Plastino, M. Cialelli and P.P. Povinec, *Low-level ^{226}Ra determination in groundwater by sf-icp-ms: optimization of separation and pre-concentration methods*, *Journal of Analytical Science and Technology* **6** (2015) 22.
- [118] I.J. Arnquist and E.W. Hoppe, *The quick and ultrasensitive determination of k in nai using inductively coupled plasma mass spectrometry*, *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* **851** (2017) 15.
- [119] J.W. Grate, M. Bliss, O.T. Farmer, M.-L.P. Thomas and M. Liezers, *La-icp-ms analysis of plastics as a method to support polymer assay in the assessment of materials for low-background detectors*, *Journal of Radioanalytical and Nuclear Chemistry* **307** (2016) 2201.
- [120] I. Konz, B. Fernandez, M.L. Fernandez, R. Pereiro and A. Sanz-Medel, *Laser ablation icp-ms for quantitative biomedical applications*, *Analytical and bioanalytical chemistry* **403** (2012) 2113.
- [121] XIA LLC, “UltraLo-1800.” <http://www.xia.com/UltraLo/>.
- [122] C. Ha, G. Adhikari, P. Adhikari, E. Jeon, W. Kang, B. Kim et al., *Initial performance of the high sensitivity alpha particle detector at the yangyang underground laboratory*, *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* **913** (2019) 15.
- [123] D. Baxter, R. Bunker, S. Shaw, S. Westerdale, I. Arnquist, D.S. Akerib et al., *Snowmass2021 cosmic frontier white paper: Calibrations and backgrounds for dark matter direct detection*, 2022. 10.48550/ARXIV.2203.07623.
- [124] W. Rau and G. Heusser, *^{222}Rn emanation measurements at extremely low activities*, *Appl. Radiat. Isot.* **53** (2000) 371.
- [125] G. Zuzel and H. Simgen, *High sensitivity radon emanation measurements*, *Appl. Radiat. Isot.* **67** (2009) 889.
- [126] M. Liu, *Radon emanation into vacuum*, Master’s thesis, Queen’s University, 1991.
- [127] MAJORANA COLLABORATION collaboration, *The MAJORANA DEMONSTRATOR radioassay program*, *Nucl. Instrum. Meth. A* **828** (2016) 22 [1601.03779].
- [128] L. Balogh, C. Beaufort, R.A. Bunker, A. Brossard, J.-F. Caron, M. Chapellier et al., *Copper electroplating for background suppression in the news-g experiment*, *Nuclear Instruments and Methods in Physics Research. Section A, Accelerators, Spectrometers, Detectors and Associated Equipment* **988** (2021) .
- [129] SuperCDMS Collaboration, M.F. Albakry, I. Alkhatib, D.W.P. Amaral, T. Aralis, T. Aramaki et al., *A strategy for low-mass dark matter searches with cryogenic detectors in the supercdms snolab facility*, 2022. 10.48550/ARXIV.2203.08463.

- [130] W.-H. Zeng, H. Ma, M. Zeng, Z. Zeng, Q. Yue, J.-P. Cheng et al., *Evaluation of cosmogenic activation of copper and germanium during production in Jinping Underground Laboratory*, *Nucl. Sci. Tech.* **31** (2020) 50.
- [131] X. Liu and on behalf of the SuperNEMO collaboration, *Ultra-low level radon assays in gases*, in *Topical Workshop on Low Radioactivity Techniques: LRT 2015*, J.L. Orrell, ed., AIP Conf. Ser., June, 2015.
- [132] H. Simgen and G. Zuzel, *Analysis of the ^{222}Rn concentration in argon and a purification technique for gaseous and liquid argon*, *Appl. Radiat. Isot.* **67** (2009) 922.