

An introduction to programming Physics-Informed Neural Network-based computational solid mechanics

Jinshuai Bai^{a,b,d}, Hyogu Jeong^a, C. P. Batuwatta-Gamage^a, Shusheng Xiao^a, Qingxia Wang^{c,d},
C.M. Rathnayaka^e, Laith Alzubaidi^{a,b}, Gui-Rong Liu^f, Yuantong Gu^{a,b,*}

^a School of Mechanical, Medical and Process Engineering, Queensland University of Technology, Brisbane, QLD 4000, Australia

^b ARC Industrial Transformation Training Centre—Joint Biomechanics, Queensland University of Technology, Brisbane, QLD 4000, Australia

^c Centre for Applied Climate Sciences, University of Southern Queensland, Toowoomba, QLD 4305, Australia

^d School of Civil Engineering, The University of Queensland, Brisbane, QLD 4072, Australia

^e School of Science, Technology and Engineering, University of the Sunshine Coast, Petrie, QLD 4502, Australia

^f Department of Aerospace Engineering and Engineering Mechanics, University of Cincinnati, OH 45221, USA

* Corresponding authors.

E-mail addresses: yuantong.gu@qut.edu.au (Y. Gu),

Abstract

Physics-informed neural network (PINN) has recently gained increasing interest in computational mechanics. This work extends the PINN to computational solid mechanics problems. Our focus will be on investigation of various formulation, NN construction, and programming techniques, when governing equations of solid mechanics is implemented. Two prevalently used physics-informed loss functions for PINN-based computational solid mechanics are implemented and examined. Numerical examples ranging from 1D to 3D solid problems are presented to show the performance of PINN-based computational solid mechanics. The programs are built via Python with TensorFlow library with step-by-step explanations. The PINN-based computational mechanics is formulated and implemented successfully for all these benchmarking problems, and can be extended for more challenging applications. This work aims to help the researchers who are interested in the PINN-based solid mechanics solver to have a clear insight into this emerging area. The programs for all the numerical examples presented in this work are available on https://github.com/JinshuaiBai/PINN_Comp_Mech.

Keywords: Physics-informed neural network, computational mechanics, deep learning

1. Introduction

Computational mechanics is the discipline that applies numerical techniques to solve mechanics problems. The majority of problems in mechanics can be represented using partial differential equations (PDEs) [1]. Given that PDEs are usually difficult to solve analytically, numerically solving PDEs becomes the central focus of computational mechanics. Numerous numerical approaches, such as the finite element method (FEM) and the element free Galerkin (EFG) method, have been developed and widely employed [2].

In recent years, deep learning (DL), i.e., multiple layers artificial neural network (ANN), has attracted great attention and provided alternative ways for solving computational mechanics problems. The over parametrised ANN provides a powerful tool to unveil the relationships between field variables of mechanics problems [3]. Based on the training data, optimisers can iteratively improve the performance of ANNs. However, in most mechanics problems, only limited observation data are accessible. For example, quantities inside substance and structures are hard to obtain even with the state-of-the-art equipment [4]. Moreover, there are always infinite possibilities in the real applications. In this manner, it is impossible to obtain a complete and well-developed database for computational mechanics. Note that ANNs trained with insufficient data are susceptible to severe failures in terms of low prediction accuracy and poor generalisation. Therefore, data scarcity greatly hinders the applications of DL in computational mechanics.

Recently, the physics-informed neural network (PINN) has been proposed by Raissi et al. [5], in which physics laws and equations can be seamlessly integrated into training ANNs. In PINN, physics laws are transferred into training data. Compared to data-driven DL, PINN leverages physics laws as the remedy for insufficient data. In this manner, PINN can achieve better performance than data-driven DL when facing data scarcity. It has been proven that PINN is effective for solving PDEs. For the recent development of PINN, readers are referred to [6].

Physics-informed neural network-based computational mechanics has become one of the most popular topics in computational mechanics. Haghghat et al. [7] proposed a PINN-based framework for predicting field variables (such as displacement and stress) in elastostatic and elastoplasticity problems. In their study, ANN is applied to approximate the displacement field of mechanics problems. In addition, the collocation approach is used to incorporate governing equations and boundary conditions in the physics-informed loss function in order to assess the

performance of ANN. The residuals of the ANN approximated displacement are minimised using optimisers until convergence. Samaniego et al. [8] leveraged PINN for computational mechanics from the energy point of view. In their work, the principle of minimum potential energy is applied as the physics laws for static problems. Optimisers are used to seek the stationary state of the total potential energy for static mechanics problems. Up to now, various PINN-based computational mechanics have been proposed for numerous applications, including fluid mechanics, vibrations, and fracture, to name but a few [4, 9-19].

Compared to traditional computational mechanics methods, PINN-based computational mechanics has the following advantages [7, 8, 19]:

- Partial differential terms can be analytically obtained through automatic differentiation instead of spatial discretisation schemes and approximation methods in traditional computational mechanics;
- Physics-informed neural network-based computational mechanics has great potential for inverse problems;
- Physics-informed neural network-based computational mechanics is easy to implement. Open libraries for building up PINN are available and simple to use.

This study presents the details of the basic conceptions and implementations of PINN-based computational solid mechanics. The aim is to help researchers and engineers comprehend PINN-based computational mechanics and its programming. To this end, fundamental PINN-based computational solid mechanics programs are available with step-by-step explanations for 1D, 2D, and 3D problems. The programs are written in Python with the TensorFlow library [20], which is one of the most popular DL libraries. Besides, readers can easily extend the program to challenging solid mechanics problems, such as geometric nonlinearity [16], hyperelastic [21], and fracture problems [22].

This paper is organised as follows. Section 2 introduces the essential conceptions of PINN-based computational solid mechanics. In Section 3, a 1D problem is conducted to elucidate the implementations of the PINN-based computational mechanics. Besides, the program corresponding to the 1D problem is also provided in detail. In Sections 4 and 5, the extensions of PINN-based computational solid mechanics for 2D and 3D problems are provided with discussions. Section 6 summaries and provides further perspectives. The program for all the numerical examples presented in this paper is available at https://github.com/JinshuaiBai/PINN_Comp_Mech.

2. PINN-Based Computational Solid Mechanics

In this section, the essential conceptions of PINN-based computational solid mechanics are introduced. First, basic solid mechanics is recalled. Next, PINN for solid mechanics is elucidated by pieces. Finally, boundary condition imposition techniques for the PINN-based computational solid mechanics are presented.

2.1. Governing equations in solid mechanics

In solid mechanics, the governing equations for linear elastic problems is as follow

$$\sigma_{\alpha\beta,\beta} + f_\alpha = 0, \quad x \in \Omega, \quad (1)$$

where σ is the Cauchy stress tensor, f is the body force per unit mass. Under the small deformation assumption, the stress tensor is calculated by

$$\sigma_{\alpha\beta} = \lambda \delta_{\alpha\beta} \varepsilon_{\gamma\gamma} + 2\mu \varepsilon_{\alpha\beta}, \quad (2)$$

$$\varepsilon_{\alpha\beta} = \frac{1}{2}(u_{\alpha,\beta} + u_{\beta,\alpha}), \quad (3)$$

where λ and μ are the Lamé constants. $\delta_{\alpha\beta}$ is the Kronecker delta function. ε is the strain tensor and u is the displacement. The above governing equations are closed by boundary conditions, which can be written as

$$u_\alpha = \bar{u}_\alpha, \quad x \in \Gamma_u, \quad (4)$$

$$\sigma_{\alpha\beta} n_\beta = \bar{t}_\alpha, \quad x \in \Gamma_t, \quad (5)$$

where \bar{u} and \bar{t} denote the displacement and traction force on the corresponding boundaries, respectively, and n denotes the unit outward normal vector on the corresponding boundaries [23].

2.2. Physics-informed Neural Network for solid mechanics

PINN comprises two main components, i.e., ANN and physics-informed loss function. Herein, details of ANN and physics-informed loss function are introduced, respectively.

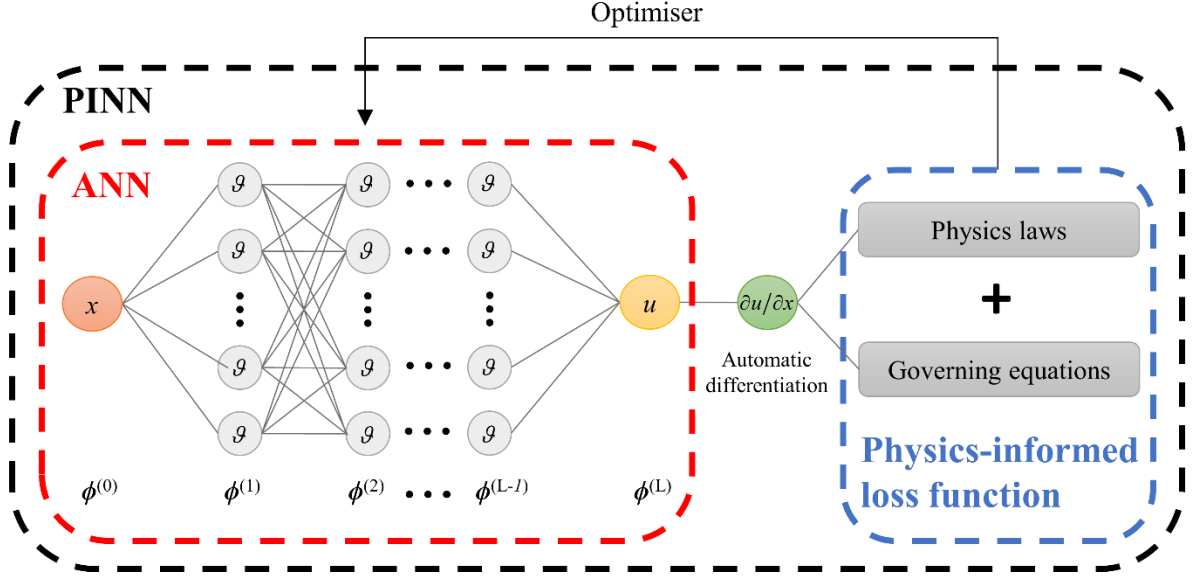


Fig. 1. A physics-informed neural network comprises two main components, i.e., artificial neural network (ANN) and physics-informed loss function. An example of a L layers ANN is shown in the red dash box. x and u denote the input and output of the ANN, respectively. \mathcal{G} denotes the activation function used in the ANN. The physics-informed loss function is shown in the blue dash box. The physics-informed loss function is formulated by the physics laws and governing equations of the investigating systems. Note that partial differential terms, which are widely seen in physics laws and governing equations, are able analytically obtained via automatic differentiation.

2.2.1. Artificial Neural Network

The artificial neural network is a powerful bionic computing system that is inspired by the biological brain [24]. Currently, there are many different types of ANNs, and each of them has differences in structure regards [25]. An example of a L layers ANN is shown in Fig. 1. Specifically, the 0-th layer is the input layer while the L -th layer is the output layer. Accordingly, an ANN can be mathematically expressed as [3]

$$\begin{aligned}
 \phi^{(0)} &= x; \\
 \tilde{\phi}^{(l)} &= w^{(l)}\phi^{(l)} + b^{(l)}; \\
 \phi^{(l+1)} &= \mathcal{G}(\tilde{\phi}^{(l)}); \\
 u = \phi^{(L)} &= w^{(L-1)}\phi^{(L-1)} + b^{(L-1)},
 \end{aligned} \tag{6}$$

where $w^{(l)}$ and $b^{(l)}$ are the l -th layer's weights and biases in the ANN, respectively. \mathcal{G} denotes the activation function, which provides nonlinear features to the neural network [25]. In general, ANNs are built to capture the mapping process between the inputs and outputs. Referred to the *universal approximation theorem* [26], an ANN is capable of approximating any Borel measurable functions by changing the values of weights and biases [27].

In the PINN-based computational solid mechanics, ANN is applied to approximate the displacement field by using the coordinate information. For different solid mechanics problems,

training algorithms are used to seek different sets of the optimal weights and biases inside the ANN.

2.2.2. Physics-informed loss function

The physics-informed loss function is the key component of PINN. In general, loss function quantifies the performance of ANNs and provides guidance to train ANNs. In PINN, physics laws are used to formulate the physics-informed loss function [28]. In this manner, the process of finding the optimal weights and biases is guided by the enforced physics laws. Note that partial differential terms in the physics and governing equations are analytically obtained through automatic differentiation [29]. With physics-informed loss function, the ANN is iteratively trained by optimisers [28].

Physics-informed loss functions can be formulated in different ways based on different physics laws. Currently, there are mainly two kinds of physics-informed loss functions for PINN-based computational solid mechanics, i.e., the collocation loss function and the energy-based loss function. Brief introductions for them are summarised here.

- **Collocation loss function**

The collocation loss function is the most straightforward loss function in PINN-based computational solid mechanics. It sums up the Mean Square Error (MSE) from the governing equation and traction boundary condition at every sample point, which reads

$$\mathcal{L} = \mathcal{L}_g + \mathcal{L}_t, \quad (7)$$

where \mathcal{L}_g and \mathcal{L}_t respectively denotes the loss terms from the governing equation and boundary condition. By applying the Eq. (1) and (5), the collocation loss function can be written as

$$\mathcal{L} = \frac{1}{n} \sum_{i=1}^n (\sigma_{\alpha\beta,\beta}^i + f_\alpha^i)^2 + \frac{1}{m_t} \sum_{i=1}^{m_t} (\sigma_{\alpha\beta}^i n_\beta - \bar{t}_\alpha^i)^2, \quad (8)$$

where n is the total number of sample points, and m is the number of the sample points on the traction boundary. The idea of the collocation loss function is to minimise the physics residuals at every sample point by modifying the weights and biases in the ANN. Despite the simplicity of implementing the collocation loss function, the usage of the collocation loss function may induce the bias training issue. Since the collocation loss function simply sums up residuals from different physics, the magnitude differences of

the residuals can be remarkable. During the training process, the optimiser may pay more attention to minimising the relatively larger loss terms while neglecting the others. To address this problem, techniques including adaptive learning and dimensionless formulation can be applied. For more details, readers can refer to [30, 31].

- **Energy-based loss function**

Based on the principle of minimum potential energy, the energy-based loss function is proposed based on the variational PINN [32]. In the energy-based loss function, the overall potential energy of the solid system is used as the loss function

$$\mathcal{L} = E_{\text{in}} - E_{\text{ex}}, \quad (9)$$

where E_{in} and E_{ex} are the internal potential energy and potential energy of the external force, respectively. The two potential energies can be obtained through

$$E_{\text{in}} = \int_{\Omega} \frac{1}{2} \sigma_{\alpha\beta} \varepsilon_{\alpha\beta} dV, \quad (10)$$

$$E_{\text{ex}} = \int_{\Gamma_t} u_{\alpha} \bar{t}_{\alpha} d\Gamma_t. \quad (11)$$

Therefore, the energy-based loss function can be written as

$$\mathcal{L} = \int_{\Omega} \frac{1}{2} \sigma_{\alpha\beta} \varepsilon_{\alpha\beta} dV - \int_{\Gamma_t} u_{\alpha} \bar{t}_{\alpha} d\Gamma_t. \quad (12)$$

The idea of the energy-based loss function is to find a neural network mapping that reaches the stationary point of the overall potential energy. Compared to the collocation loss function, the energy-based loss function naturally unifies the unit of all loss terms into the energy unit. Therefore, the energy-based loss function greatly alleviates the bias training issue [12]. Additionally, as observed from Eq. (12), the energy-based loss function only requires the first-order derivative of the displacement u , while the collocation loss function requires the second-order derivative of the displacement u . Thus, implementing the energy-based loss function can have a simpler way of coding and is computational more efficient than the collocation loss function [12]. Nevertheless, the energy-based loss function suffers inaccurate strain and stress fields [16], because it does not explicitly embed the equilibrium equation, which describes the stress balance condition.

2.3. Fixed boundary conditions imposition

Imposing the fixed boundary condition is important in PINN-based computational solid mechanics. It is worth noting that, with boundary condition imposition techniques, fixed boundary conditions can be naturally satisfied. In this manner, the physics-informed loss function can be simplified, resulting in significantly decreasing the complexity of the training process and training expense. Currently, various boundary condition imposition techniques (such as distance function [33] and tailored ANN structure [8]) have been proposed for PINN. In this study, we adopt the boundary imposition technique introduced by Samaniego et al. [8] to deal with fixed boundary conditions. Considering a fixed boundary condition as follow

$$u = 0, (x = a). \quad (13)$$

To exactly implement the fixed boundary condition, we tailored the output layer of the ANN as

$$u = (x - a) \cdot \hat{u}, \quad (14)$$

where \hat{u} is the direct output from the original ANN, and u is the actual output after the tailored output layer. Obviously, u can always satisfy the fixed boundary condition in Eq. (13).

3. PINN-based Computational Solid Mechanics in One Dimension

3.1. Stretching rod

Herein, a 1D stretching rod problem is considered to illustrate the implementation of the PINN-based computational solid mechanics. The configuration of the problem is given in Fig. 2. The length of the rod is 1 m and Young's modulus of the material is $E = 10$ Pa. A stretching force, $\bar{t} = 1$ N, is applied at the right end of the rod. In this manner, the equilibrium equation and the corresponding boundary conditions can be given by

$$\begin{aligned} \sigma_{x,x} &= 0, x \in [0,1] \\ u(x=0) &= 0, \\ \sigma_x(x=1) &= 1. \end{aligned} \quad (15)$$

From the energy point of view, the overall potential energy of the problem and can be written as

$$\Pi = \int_0^1 \frac{1}{2} \sigma_x \varepsilon_x dx - \bar{t} \cdot u(x=1). \quad (16)$$

Finally, the analytical solution of this problem is

$$u(x) = \frac{x}{E}. \quad (17)$$




Fig. 2. Configuration of the stretching rod problem. The arrow in red denotes the traction boundary condition.

3.2. Numerical Implementation

A PINN-based computational solid mechanics program for solving this 1D problem is available at https://github.com/JinshuaiBai/PINN_Comp_Mech. The overall structure of the program is given in Fig. 3. As shown in Fig. 3, the program is divided into three parts, i.e., `Pre_Process.py`, `Train.py`, and `Post_Porcess.py`. For the environment settings, PyCharm is selected as the IDE for Python 3.7. Besides, TensorFlow 2.8.0 with Keras 2.8.0 are used to build neural networks. The L-BFGS-B optimiser is provided by SciPy 1.8.0. All the examples are tested on a 64-bit Windows system with an Intel(R) Core(TM) i7-8700 CPU (3.2 GHz).

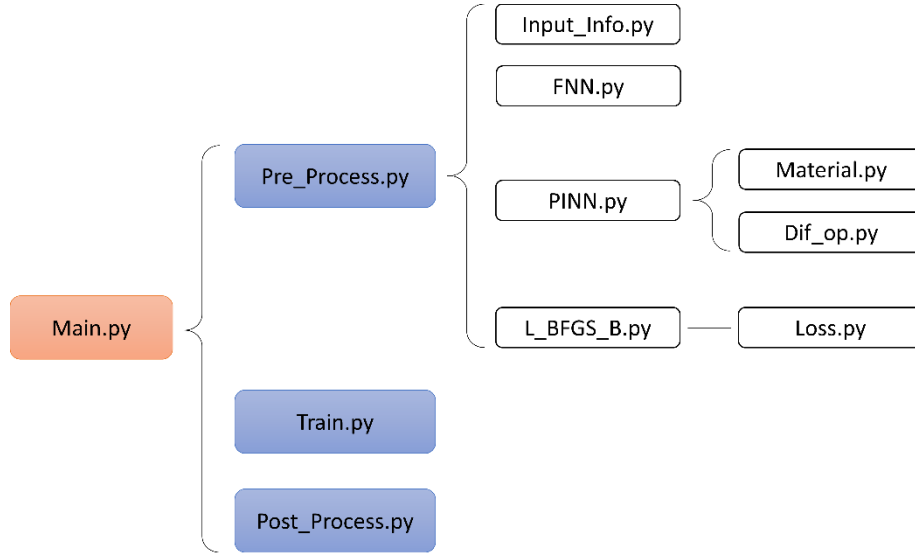


Fig. 3. Program structure for the 1D stretching rod problem.

3.2.1. Pre-process.py

The *Pre_process.py* file defines the problem parameters and initialises the frameworks. Four functions are called in this file, e.g., *Input_Info()*, *FNN()*, *PINN()*, and *L_BFGS_B()*. In the pre-processing, the problem parameters are firstly loaded through *Input_Info()* function. Then, the FNN is built through *FNN()* function. With the built FNNs and the loaded problem

parameters, the PINN is then constructed through *PINN()* function. Finally, the L-BFGS-B optimizer is initialised through the function *L_BFGS_B()*.

- ***Input_Info()***: This function is to define the problem parameters, including geometrical information, material properties, and neural network settings. In this problem, 51 sample points are generated on the rod with the same spacing. An FNN is used to map the displacement field, u , with respect to the coordinate, x . The FNN contains three hidden layers, where each layer possesses 5 neurons. The activation function used in the FNN is the tanh function and the initialisation scheme for weights and biases is the LeCun initialisation.
- ***FNN()***: This function is to build up an FNN to predict the displacement field via the coordinate. The default activation function used for the generated FNN is the tanh function and the default initialisation method for weights and biases is LeCun initialisation. For more options regarding the activation function and initialisation scheme, readers are referred to <https://keras.io/api/layers/activations/>.
- ***PINN()***: This function is to create a PINN with the previously loaded problem parameters and the created FNN. In this function, *Dif()* is firstly used to obtain the partial differential terms in governing equations. Then, the partial differential terms are fed in *Material()* to calculate strain, stress, and residual from the equilibrium equation. Finally, the stress and residual from the equilibrium equation are output and will be used to formulate the physics-informed loss function.
- ***L_BFGS_B()***: This function is to initialise the optimiser for training the created FNN. Here, we adopt the L-BFGS-B optimiser, which is a quasi-Newton optimisation algorithm [34]. The physics-informed loss function is employed as the target function for the initialised L-BFGS-B optimiser. Note that the collocation, and energy-based loss functions are all prepared in the Loss.py file. To use them, users can load and call the corresponding function in the L-BFGS-B optimiser, as shown in Fig. 5.

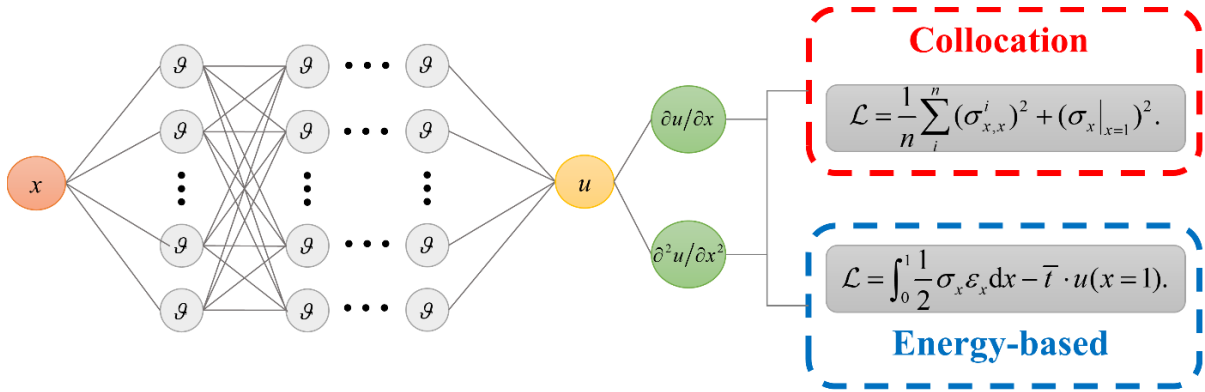


Fig. 4. Physics-informed neural network used for 1D stretching rod problem.

```

138
139
140
141
142
143

```

```

### Apply the collocation loss function
loss, l1, l2 = Collocation_Loss(y_p, y_train)

### Apply the energy-based loss function
# loss, l1, l2 = Energy_Loss(y_p, y_train, self.dx)

```

Fig. 5. Example of applying different loss functions. As shown in this figure, the program is currently applying the collocation loss function. To implement the energy-based loss function, readers can simply remove line 139 and apply line 142.

3.2.2. Train.py

The **Train.py** file is to execute the training process. The previously prepared optimiser will iteratively minimise the physics-informed loss function till convergence. During the training, the current physics-informed loss will be printed to the command window every 10 training steps (default). Finally, the history of the loss, final loss, and the number of iterations will be returned after convergence.

3.2.3. Post_process.py

The **Post_process.py** file is to visualise and output the results from the well-trained PINN. Currently, the program provides displacement, strain, and stress plots. Besides, the data in terms of displacement, strain, and stress is also saved in *out.mat* file.

Finally, the flowchart of the program for the 1D stretching rod problem is also given in Table 1.

Table 1. Flowchart of the PINN-based computational solid mechanics program for 1D stretching rod problem.

PINN-based computational solid mechanics program for 1D stretching rod

I. Pre-processing:

- i. Load problem information via **Input_Info()**, including:

Problem geometry;
Material properties;
Boundary conditions;
FNN information.

- ii. Build up FNNs via $FNN()$;
- iii. Build up PINN via $PINN()$;
- iv. Initialise the L-BFGS-B optimiser via $L_BFGS_B()$.

II. Training;
III. Post-processing.

3.3. Results and discussions

To quantify error predicted by PINN, we define the relative mean square (RMS) error as follow

$$e_{\text{RMS}} = \frac{1}{n} \sum_i^n \left(\frac{\omega_i^* - \omega_i^{\text{pred}}}{\omega_{\text{max}}^*} \right)^2. \quad (18)$$

where ω^* and ω^{pred} are ground truth and PINN predicted field variables, respectively. Fig. 6 shows the comparisons of the displacement, strain, and stress results obtained from PINNs with different loss functions and the analytical results. It is clear to find that the PINN predicted displacement by using the collocation and energy-based loss function agrees well with the analytical solution. However, the strain and stress predictions by using the energy-based loss function show a large departure from analytical solutions. This is because the energy-based loss function indirectly embeds the equilibrium equation [16]. Hence, the stress equilibrium equations are not strictly enforced during the training process. Table 2 shows the comparisons of the RMS errors and the number of iterations for convergence by using different loss functions. The PINN trained by the collocation loss function achieves higher accuracy, but its convergence is slower than that trained by the energy-based loss function.

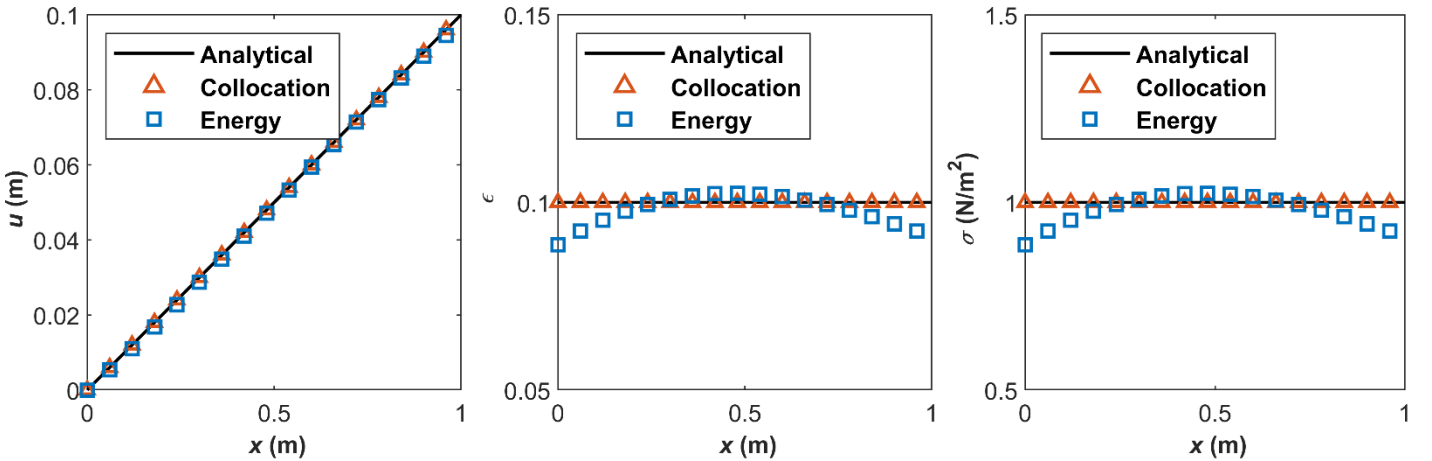


Fig. 6. Comparisons of the displacement, strain, and stress fields between the collocation loss function, energy-based loss function and the analytical solution.

Table 2. Comparisons of the RMS errors and number of iterations for convergence with respect to different kinds of loss functions for the 1D problem.

	RMS errors			Iterations
	U	ε	σ	
Collocation	5.20×10^{-10}	1.96×10^{-9}	1.96×10^{-9}	83
Energy-based	1.80×10^{-3}	1.70×10^{-3}	1.70×10^{-3}	39

4. PINN-based Computational Solid Mechanics in Two Dimension

4.1. In-plane stretching square plate

In this section, the program is extended to a 2D in-plane stretching square plate problem. The configuration of the problem is shown in Fig. 7(a). Due to the geometric symmetry, a quarter of the plate is used for the modelling, which is shown in Fig. 7(b). The length of the plate $L = 2$ m. A distributed force, $\bar{t}(y)$, is applied on the right side of the plate

$$\bar{t}(y) = \cos\left(\frac{\pi y}{2}\right). \quad (19)$$

The displacement boundary conditions are given as follows

$$U(0, y) = 0, V(x, 0) = 0. \quad (20)$$

For the plane stress problem, the Lamé constants are obtained through

$$\left\{ \begin{array}{l} \lambda = \frac{E\nu}{(1+\nu)(1-\nu)}, \\ \mu = \frac{E}{2(1+\nu)}, \end{array} \right. \quad (21)$$

where $E = 7$ Pa and $\nu = 0.3$ are used in the plate problems.

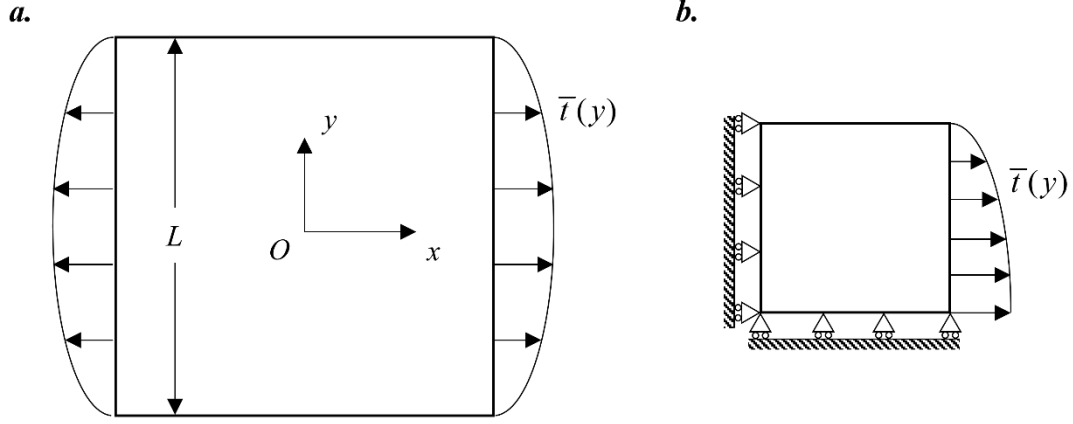


Fig. 7. (a) Configuration of the in-plane stretching square plate problem; (b) Actually geometry applied for modelling.

4.2. Numerical implementation

In the computational domain, 2601 uniformly distributed sample points are generated in the computational domain, where the spacing of sample points in all directions is 0.02m. Furthermore, two FNNs with the same structures are applied to respectively predict U and V , where each FNN contains three hidden layers and 20 neurons per hidden layer, as shown in Fig. 8. The FEM results from ABAQUS with fine mesh are used as the reference, where the quadratic element is applied and the size of all elements is 0.005 m.

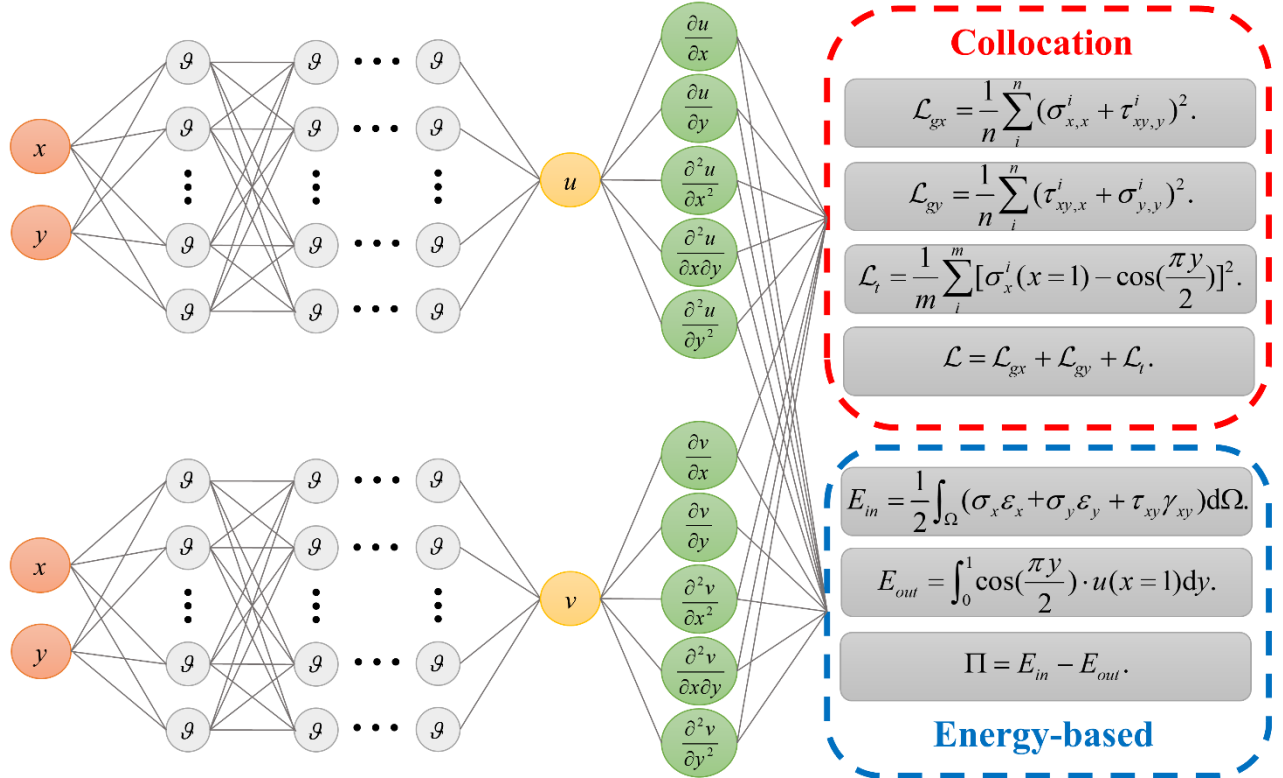


Fig. 8. Physics-informed neural networks used for 2D in-plane stretching plate. Two FNNs are applied to predict U and V , respectively.

4.3. Results and discussions

Table 3 shows the comparisons of the RMS errors and the number of iterations for convergence by using different loss functions. As observed from the table, the PINN with collocation loss function achieves higher accuracy than the PINN with energy-based loss function. However, the PINN with the energy-based loss function converges significantly earlier than that with the collocation loss function. Fig. 9 shows the comparison of the displacement and stress fields for the in-plane stretching problem. The FEM results are given in Fig. 9(c) for reference. As observed from Fig. 9(a), the PINN with the collocation loss function successfully predicts all the field variables well, while only a minor discrepancy is found. Besides, using the collocation loss function, PINN clearly captures the stress concentration of σ_y at the bottom right corner of the plate. As for the energy-based loss function results shown in Fig. 9(b), the displacement fields show good agreement with the FEM results. However, obvious oscillations can be observed in the three stress fields contour obtained by the energy-based loss function. This is mainly because the energy-based loss function lacks direct information of the equilibrium equation. Since the stress fields are calculated through the derivatives of the displacement fields, the stress fields can be sensitive even for slight displacement errors. Nevertheless, the stress fields from the energy-based loss function roughly capture the patterns of the stresses from the FEM. In this manner, post-processing methods can be applied to further smoothen the predictions from the energy-based loss function. Fig. 10 shows the comparisons of the displacement and stress fields along the diagonal of the plate from position (0,1) to (1,0). It is clear that the displacement predictions from both collocation and energy-based loss functions perform well, as illustrated in Fig. 10(a). For the stress fields shown in Fig. 10(b), the collocation results align with the reference results, while the σ_x and σ_y from the energy-based loss function show discrepancy near the boundary of the plate. More investigations and efforts are required to improve the accuracy of the energy-based loss function for stress fields, especially the enforcement of boundary conditions.

Table 3. Comparisons of the RMS errors and number of iterations for convergence with respect to different kinds of loss functions for the 2D problem.

	RMS errors					Iterations
	U	V	σ_x	σ_y	τ_{xy}	
Collocation	3.24×10^{-7}	3.06×10^{-6}	6.28×10^{-6}	2.84×10^{-5}	1.86×10^{-4}	2491
Energy	2.61×10^{-4}	2.68×10^{-3}	2.16×10^{-3}	4.03×10^{-3}	9.14×10^{-2}	721

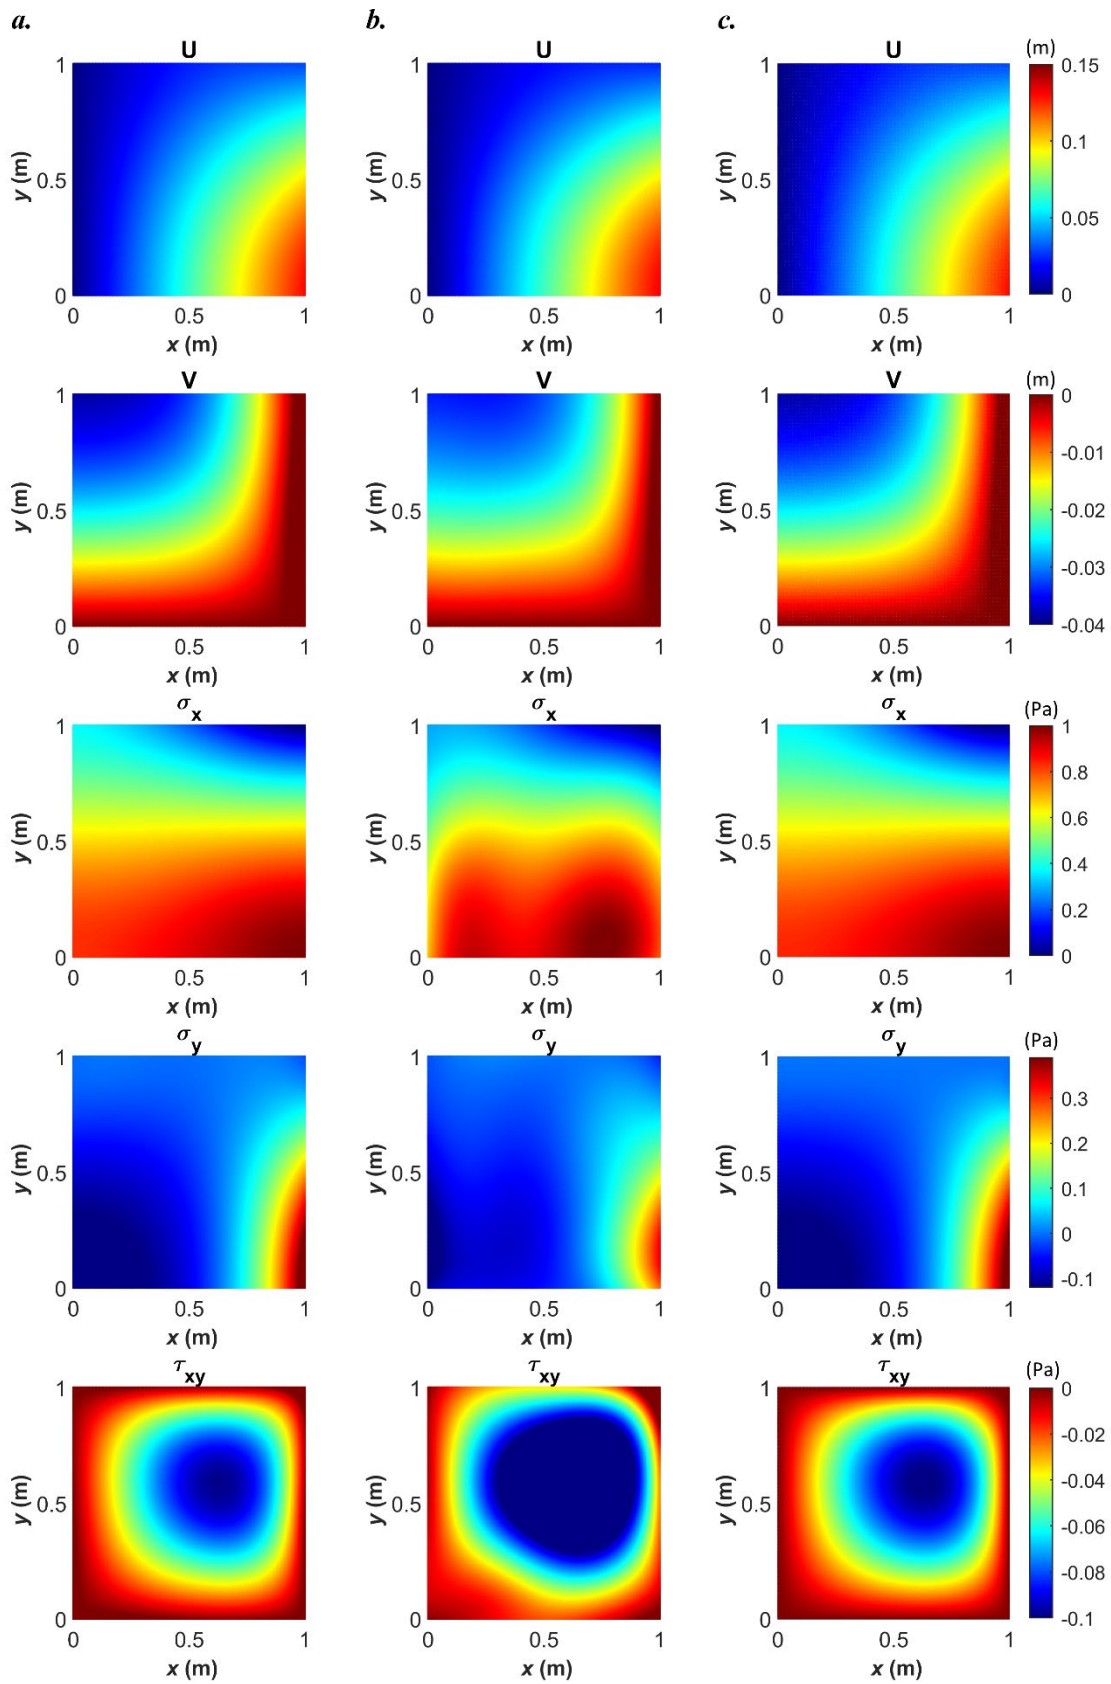


Fig. 9. Comparison of the displacement and stress fields of the in-plane stretching square plate problem from (a) collocation loss function; (b) Energy-based loss function; (c) FEM.

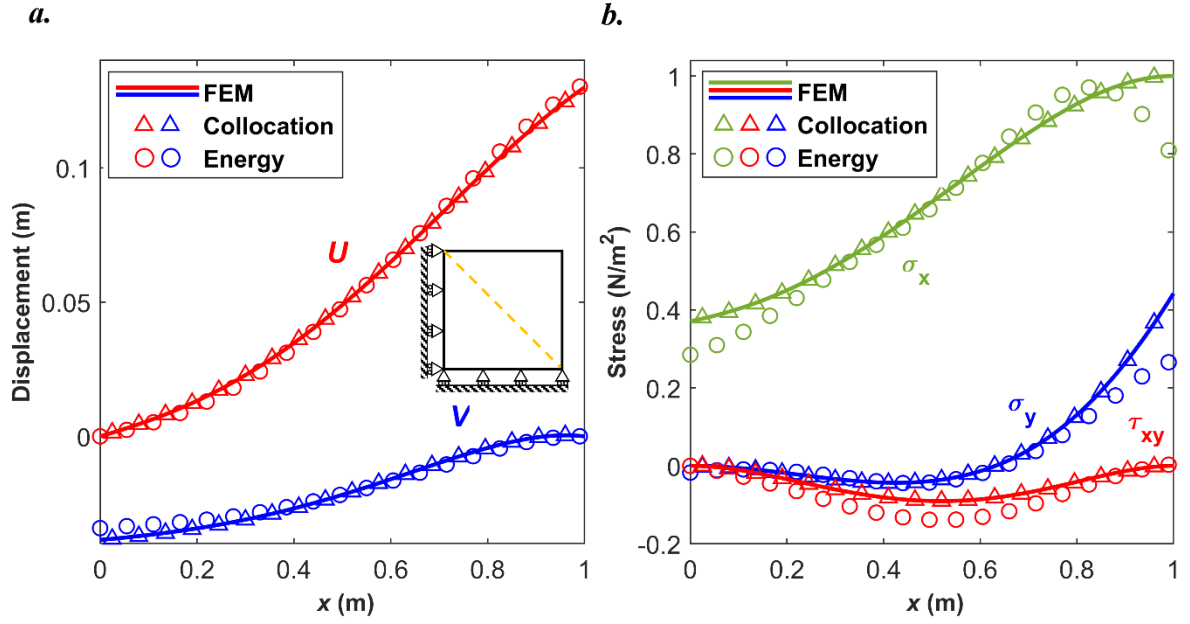


Fig. 10. (a) Comparison of the displacement along the diagonal of the plate, from (0,1) to (1,0); (b) Comparison of the stress fields along the diagonal of the plate, from (0,1) to (1,0). The solid lines in the two figures denote the results from the FEM. The triangles and circles in the two figures respectively denote the results from the collocation loss function and energy-based loss function.

5. PINN-based Computational Solid Mechanics in Three Dimension

5.1. Stretching cube

A three-dimensional stretching cube problem is conducted here. The configuration of the problem is shown in Fig. 11(a). The length of the cube $L = 2$ m. A distributed force, $\bar{t}(x, y)$, is applied on the top and bottom surfaces of the cube in the z direction

$$\bar{t}(x, y) = \cos\left(\frac{\pi x}{2}\right) \cos\left(\frac{\pi y}{2}\right). \quad (22)$$

The displacement boundary conditions are given as follows

$$U(0, y, z) = 0, V(x, 0, z) = 0, W(x, y, 0) = 0. \quad (23)$$

The Young's modulus and Poisson's ratio are $E = 10$ Pa and $\nu = 0.25$. Due to its symmetrical property, one-eighth of the geometry is modelled, which is shown in Fig. 11(b).

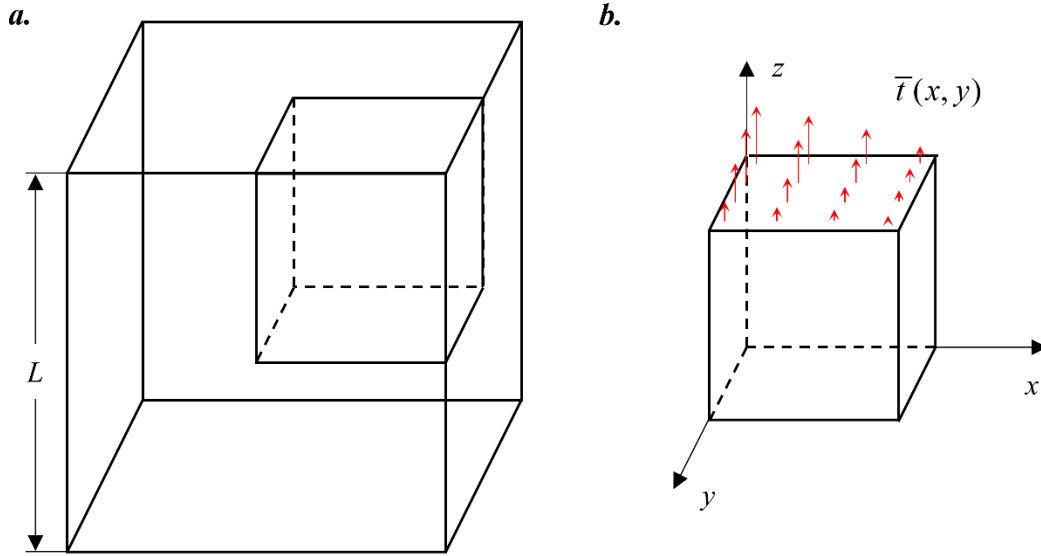


Fig. 11. (a) Configuration of the stretching rod cube problem; (b) Actual geometry used in modelling due to the geometric symmetry. The arrows in red denote the distributed force boundary condition.

5.2. Numerical implementation

Overall 9261 sample points are generated in the computational domain, where the spacing of sample points in all directions is 0.05m. Three FNNs are established for predicting U , V and W , respectively. Each FNN contains 4 layers and 20 neurons per hidden layer. Since the analytical solution is not available for this problem, the FEM results from ABAQUS with a fine mesh are used as the reference, where the quadratic element is applied and the size of all elements is 0.01 m. Here, only the collocation loss function is applied to deal with this problem. Readers can easily implement the energy-based loss function through the collocation program with small modifications.

5.3. Results and discussions

Fig. 12 and Fig. 13 show the comparisons of the displacement and stress fields of the problem between the proposed loss function and FEM results, respectively. It can be found that both the displacement and stress fields agree with the reference results. Besides, results from PINN-based computational solid mechanics show good symmetrical properties. However, small departures can be observed from comparisons.

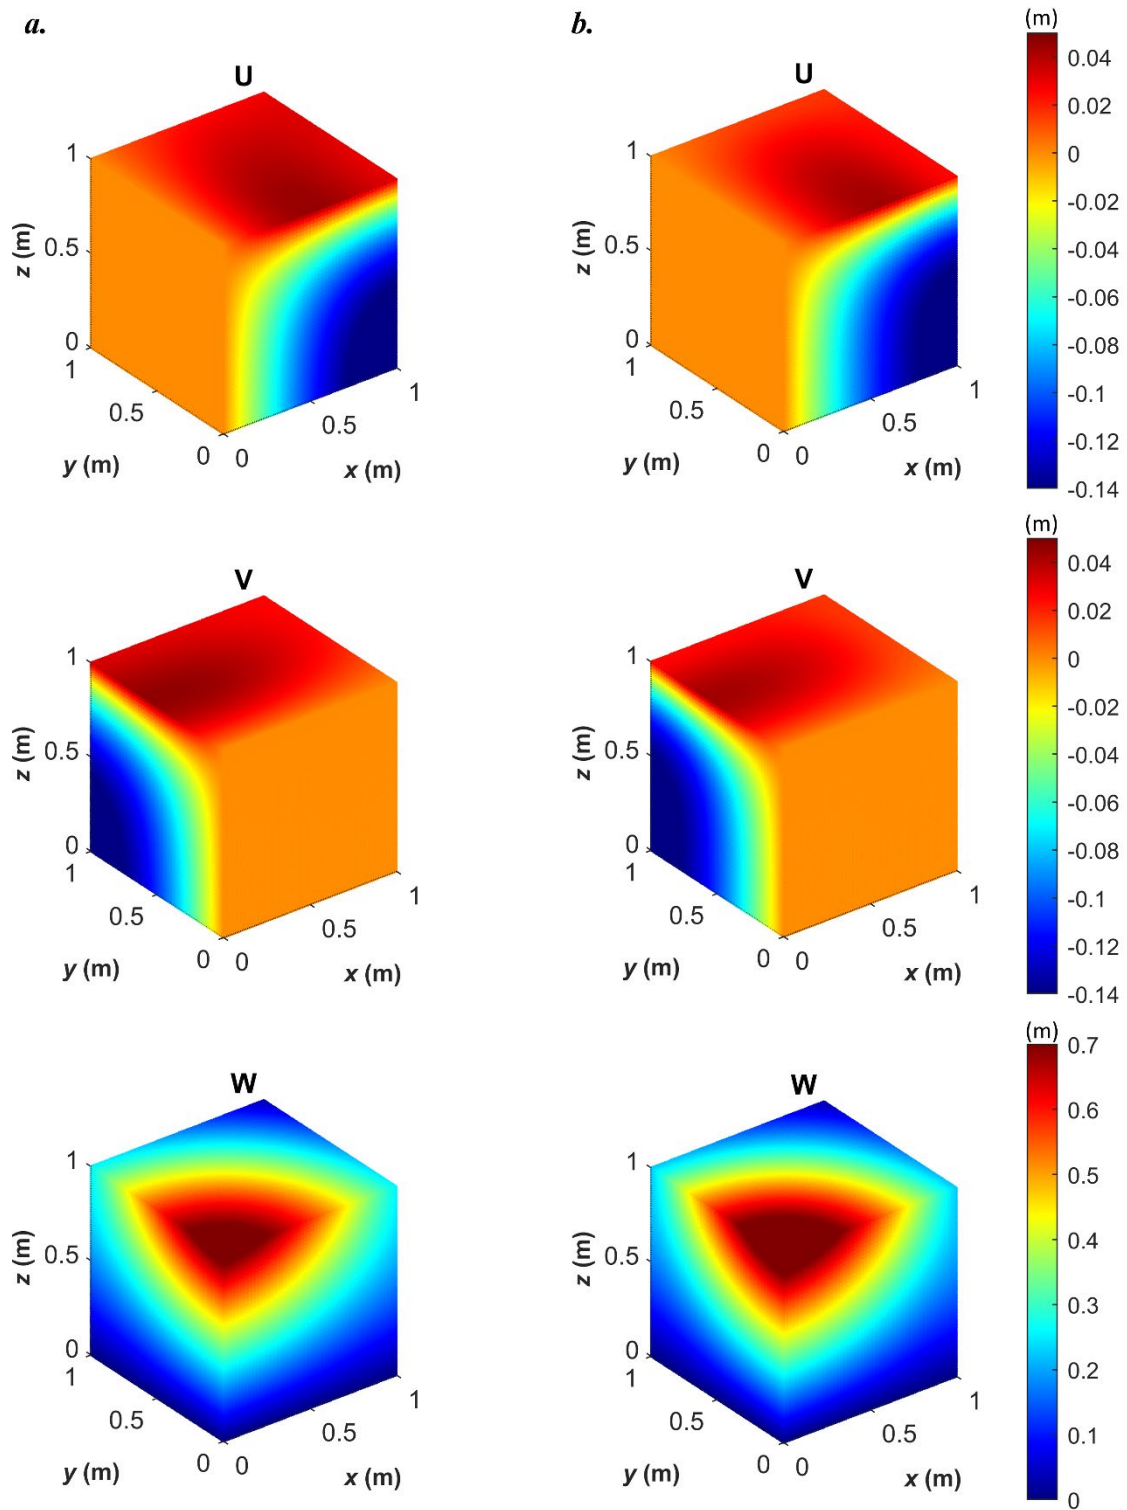


Fig. 12. Comparisons of the displacement fields of the 3D stretching cube problem from (a) PINN-based computational solid mechanics; (b) FEM.

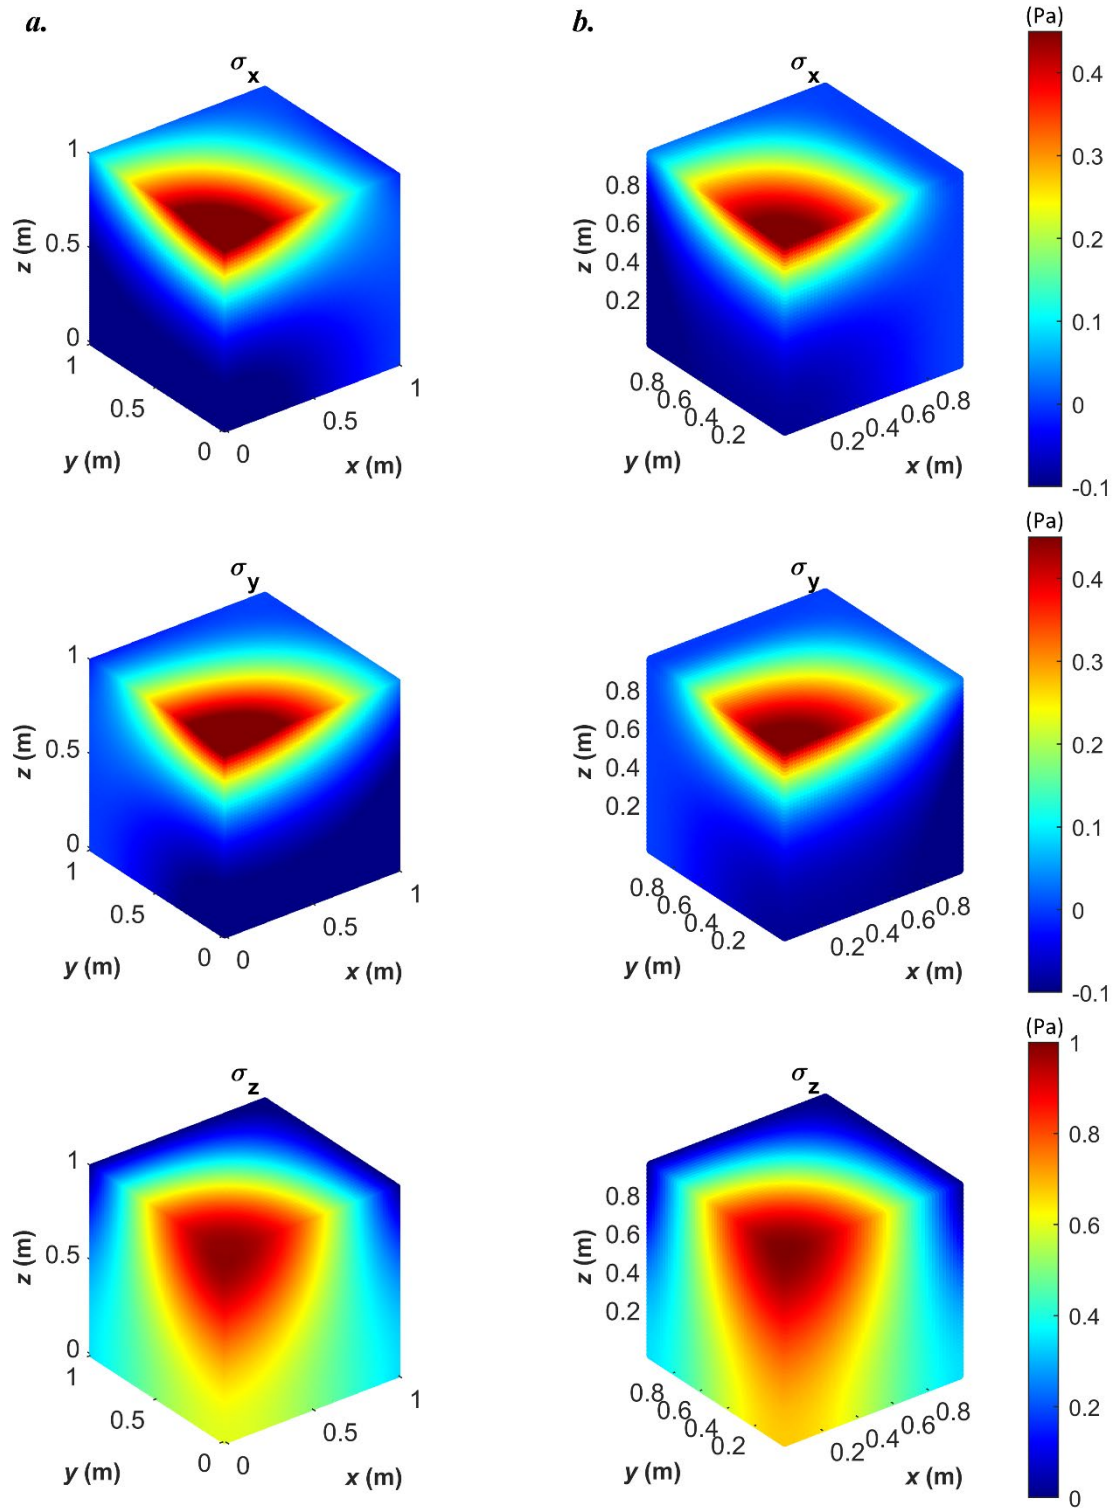


Fig. 13. Comparisons of the stress fields of the 3D stretching cube problem from (a) PINN-based computational solid mechanics; (b) FEM.

6. Summary

In this paper, details of the PINN-based computational solid mechanics and its numerical implementation have been introduced. The prevailingly used physics-informed loss functions

for PINN-based computational solid mechanics are summarised. Additionally, examples including 1D, 2D, and 3D problems are presented to show the performance and capability of PINN-based computational solid mechanics. It is demonstrated that both types of physics-informed loss functions are effective for displacement predictions. The PINN with the collocation loss function can achieve better accuracy for stress fields, while the PINN with the energy-based loss function is computationally more efficient. Furthermore, programs based on the Python coding language are provided with step-by-step explanations. It is worth noting that the programs for the PINN-based computational solid mechanics are manoeuvrable and can be easily extended to broaden applications, such as geometric nonlinearity and hyperelastic problems.

Despite its good performance, PINN-based computational mechanics is still in its infancy. Issues regarding robustness and computational efficiency are still severe during the use of PINN-based computational mechanics [6]. This work aims to provide readers with a fundamental insight into PINN-based computational mechanics. Meanwhile, we provide open questions regarding the effectiveness, robustness and efficiency of PINN-based computational solid mechanics. The great potential of PINN-based computational mechanics still remains to be tapped. We hope this work can spark further investigations and development of PINN-based computational mechanics to be an effective way for mechanics applications.

Author Contributions

J. Bai: Conceptualization, Methodology, Coding, Formal analysis, Writing-Original draft. **H. Jeong:** Coding, Writing-Reviewing and Editing. **C. P. Batuwatta-Gamage:** Coding, Writing-Reviewing and Editing. **S. Xiao:** Coding, Writing-Reviewing and Editing. **Q. Wang:** Writing-Reviewing and Editing. **C.M. Rathnayaka:** Writing-Reviewing and Editing. **L. Alzubaidi:** Writing-Reviewing and Editing. **G. Liu:** Writing-Reviewing and Editing. **Y. Gu:** Conceptualization, Methodology, Formal analysis, Writing-Reviewing and Editing, Supervision.

Declaration of Competing Interest

The authors declare no competing interests.

Acknowledgements

Support from the Australian Research Council research grants (IC190100020 and DP200102546) are gratefully acknowledged (J. Bai).

Reference

1. Liu G-R (2009) Meshfree methods: moving beyond the finite element method CRC press
2. Liu G-R and Quek SS (2013) The finite element method: a practical course Butterworth-Heinemann
3. Liu G-R (2022) Machine Learning with Python: Theory and Applications World Scientific
4. Raissi M, Yazdani A and Karniadakis GE (2020) Hidden fluid mechanics: Learning velocity and pressure fields from flow visualizations. *Science* 367: 1026-1030.
5. Raissi M, Perdikaris P and Karniadakis GE (2019) Physics-informed neural networks: A deep learning framework for solving forward and inverse problems involving nonlinear partial differential equations. *Journal of Computational Physics* 378: 686-707. <https://doi.org/10.1016/j.jcp.2018.10.045>
6. Karniadakis GE, Kevrekidis IG, Lu L, Perdikaris P, Wang S and Yang L (2021) Physics-informed machine learning. *Nature Reviews Physics* 3: 422-440. <https://doi.org/10.1038/s42254-021-00314-5>
7. Haghghat E, Raissi M, Moure A, Gomez H and Juanes R (2021) A physics-informed deep learning framework for inversion and surrogate modeling in solid mechanics. *Computer Methods in Applied Mechanics and Engineering* 379 <https://doi.org/10.1016/j.cma.2021.113741>
8. Samaniego E, Anitescu C, Goswami S, Nguyen-Thanh VM, Guo H, Hamdia K, Zhuang X and Rabczuk T (2020) An energy approach to the solution of partial differential equations in computational mechanics via machine learning: Concepts, implementation and applications. *Computer Methods in Applied Mechanics and Engineering* 362 <https://doi.org/10.1016/j.cma.2019.112790>
9. Goswami S, Yin M, Yu Y and Karniadakis GE (2022) A physics-informed variational DeepONet for predicting crack path in quasi-brittle materials. *Computer Methods in Applied Mechanics and Engineering* 391 <https://doi.org/10.1016/j.cma.2022.114587>
10. Zhuang X, Guo H, Alajlan N, Zhu H and Rabczuk T (2021) Deep autoencoder based energy method for the bending, vibration, and buckling analysis of Kirchhoff plates with transfer learning. *European Journal of Mechanics - A/Solids* 87 <https://doi.org/10.1016/j.euromechsol.2021.104225>
11. Nguyen-Thanh VM, Anitescu C, Alajlan N, Rabczuk T and Zhuang X (2021) Parametric deep energy approach for elasticity accounting for strain gradient effects. *Computer Methods in Applied Mechanics and Engineering* 386 <https://doi.org/10.1016/j.cma.2021.114096>
12. Li W, Bazant MZ and Zhu J (2021) A physics-guided neural network framework for elastic plates: Comparison of governing equations-based and energy-based approaches.

13. Rao C, Sun H and Liu Y (2021) Physics-Informed Deep Learning for Computational Elastodynamics without Labeled Data. *Journal of Engineering Mechanics* 147 [https://doi.org/10.1061/\(asce\)em.1943-7889.0001947](https://doi.org/10.1061/(asce)em.1943-7889.0001947)
14. Haghghat E, Bekar AC, Madenci E and Juanes R (2021) A nonlocal physics-informed deep learning framework using the peridynamic differential operator. *Computer Methods in Applied Mechanics and Engineering* 385 <https://doi.org/10.1016/j.cma.2021.114012>
15. Abueidda DW, Lu Q and Koric S (2021) Meshless physics-informed deep learning method for three-dimensional solid mechanics. *International Journal for Numerical Methods in Engineering* <https://doi.org/10.1002/nme.6828>
16. Fuhg JN and Bouklas N (2021) The mixed Deep Energy Method for resolving concentration features in finite strain hyperelasticity. *Journal of Computational Physics* <https://doi.org/10.1016/j.jcp.2021.110839>
17. Wessels H, Weißenfels C and Wriggers P (2020) The neural particle method – An updated Lagrangian physics informed neural network for computational fluid dynamics. *Computer Methods in Applied Mechanics and Engineering* 368 <https://doi.org/10.1016/j.cma.2020.113127>
18. Cai S, Wang Z, Fuest F, Jeon YJ, Gray C and Karniadakis GE (2021) Flow over an espresso cup: inferring 3-D velocity and pressure fields from tomographic background oriented Schlieren via physics-informed neural networks. *Journal of Fluid Mechanics* 915 <https://doi.org/10.1017/jfm.2021.135>
19. Bai J, Zhou Y, Ma Y, Jeong H, Zhan H, Rathnayaka C, Sauret E and Gu Y (2022) A general Neural Particle Method for hydrodynamics modeling. *Computer Methods in Applied Mechanics and Engineering* 393 <https://doi.org/10.1016/j.cma.2022.114740>
20. Abadi M, Agarwal A, Barham P, Brevdo E, Chen Z, Citro C, Corrado GS, Davis A, Dean J and Devin M (2016) Tensorflow: Large-scale machine learning on heterogeneous distributed systems. *arXiv preprint arXiv:160304467* <https://doi.org/10.48550/arXiv.1603.04467>
21. Nguyen-Thanh VM, Zhuang X and Rabczuk T (2020) A deep energy method for finite deformation hyperelasticity. *European Journal of Mechanics - A/Solids* 80 <https://doi.org/10.1016/j.euromechsol.2019.103874>
22. Goswami S, Anitescu C, Chakraborty S and Rabczuk T (2020) Transfer learning enhanced physics informed neural network for phase-field modeling of fracture. *Theoretical and Applied Fracture Mechanics* 106 <https://doi.org/10.1016/j.tafmec.2019.102447>
23. Liu G-R and Gu Y (2005) *An introduction to meshfree methods and their programming* Springer Science & Business Media
24. Bengio Y, Goodfellow I and Courville A (2017) *Deep learning* MIT press Massachusetts, USA:
25. LeCun Y, Bengio Y and Hinton G (2015) Deep learning. *Nature* 521: 436-444. <https://doi.org/10.1038/nature14539>
26. Hornik K, Stinchcombe M and White H (1989) Multilayer feedforward networks are universal approximators. *Neural Networks* 2: 359-366. [https://doi.org/10.1016/0893-6080\(89\)90020-8](https://doi.org/10.1016/0893-6080(89)90020-8)

27. Henkes A, Wessels H and Mahnken R (2022) Physics informed neural networks for continuum micromechanics. *Computer Methods in Applied Mechanics and Engineering* 393 <https://doi.org/10.1016/j.cma.2022.114790>
28. Nielsen MA (2015) *Neural networks and deep learning* Determination press San Francisco, CA
29. Baydin AG, Pearlmutter BA, Radul AA and Siskind JM (2018) Automatic differentiation in machine learning: a survey. *Journal of Machine Learning Research* 18
30. Wang S, Yu X and Perdikaris P (2021) When and why PINNs fail to train: A neural tangent kernel perspective. *Journal of Computational Physics* <https://doi.org/10.1016/j.jcp.2021.110768>
31. McClenny L and Braga-Neto U (2020) Self-adaptive physics-informed neural networks using a soft attention mechanism. arXiv preprint arXiv:200904544 <https://doi.org/10.48550/arXiv.2009.04544>
32. Lanczos C (2020) *The variational principles of mechanics* University of Toronto press
33. Sukumar N and Srivastava A (2021) Exact imposition of boundary conditions with distance functions in physics-informed deep neural networks. *Computer Methods in Applied Mechanics and Engineering* <https://doi.org/10.1016/j.cma.2021.114333>
34. Morales JL and Nocedal J (2011) Remark on “Algorithm 778: L-BFGS-B: Fortran subroutines for large-scale bound constrained optimization”. *ACM Transactions on Mathematical Software* 38: 1-4. <https://doi.org/10.1145/2049662.2049669>