

# Decentralized Federated Learning via Non-Coherent Over-the-Air Consensus

Nicolò Michelusi

**Abstract**—This paper presents NCOTA-DGD, a Decentralized Gradient Descent (DGD) algorithm that combines local gradient descent with Non-Coherent Over-The-Air (NCOTA) consensus at the receivers to solve distributed machine-learning problems over wirelessly-connected systems. NCOTA-DGD leverages the waveform superposition properties of the wireless channels: it enables simultaneous transmissions under half-duplex constraints, by mapping local signals to a mixture of preamble sequences, and consensus via non-coherent combining at the receivers. NCOTA-DGD operates without channel state information and leverages the average channel pathloss to mix signals, without explicit knowledge of the mixing weights (typically known in consensus-based optimization algorithms). It is shown both theoretically and numerically that, for smooth and strongly-convex problems with fixed consensus and learning stepsizes, the updates of NCOTA-DGD converge (in Euclidean distance) to the global optimum with rate  $\mathcal{O}(K^{-1/4})$  for a target number of iterations  $K$ . NCOTA-DGD is evaluated numerically over a logistic regression problem, showing faster convergence vis-à-vis running time than implementations of the classical DGD algorithm over digital and analog orthogonal channels.

## I. INTRODUCTION

*Federated learning* (FL) [2] has emerged as a new paradigm to alleviate the communication burden and privacy concerns associated with the transmission of raw data to a ML server, by leveraging decentralized computational and communication resources at the edge of the network. Typically, it aims to solve

$$\mathbf{w}^* = \arg \min_{\mathbf{w} \in \mathbb{R}^d} F(\mathbf{w}) \triangleq \frac{1}{N} \sum_{i=1}^N f_i(\mathbf{w}), \quad (\text{P})$$

where  $f_i(\mathbf{w})$  is the empirical loss based on the local dataset of node  $i$  (known to  $i$  alone), and  $\mathbf{w}$  is a  $d$ -dimensional parameter vector, so that  $F(\mathbf{w})$  represents the empirical loss over the network. Conventional FL solves (P) based on a client-server architecture, where the  $N$  edge devices (the clients) interact with a parameter server (PS, such as a base station) over multiple rounds [3]. In each round, edge devices compute local gradients based on a global model broadcast by the PS, and transmit them to the PS; the latter aggregates the local gradients and updates the global model via gradient descent.

Yet, in many important scenarios, a PS may be lacking [4], or direct communication with the PS may be challenging due to severe channel propagation conditions. In these cases, a decentralized learning architecture may be more attractive, in which the edge devices communicate with each other without the aid of a PS [4]. A renowned algorithm to solve (P) in this setting is *Decentralized Gradient Descent* (DGD) [5]: at

iteration  $k$ , each node ( $i$ ) updates its local optimization signal  $\mathbf{w}_{i,k}$  by combining a consensus signal (weighted sum of the neighbors' signals,  $\mathbf{c}_{i,k}$ ) with a local gradient step, as

$$\mathbf{w}_{i,k+1} = \mathbf{w}_{i,k} + \underbrace{\sum_{j=1}^N \omega_{i,j} (\mathbf{w}_{j,k} - \mathbf{w}_{i,k})}_{\triangleq \mathbf{c}_{i,k}} - \eta \nabla f_i(\mathbf{w}_{i,k}); \quad (1)$$

here,  $\omega$  are non-negative mixing weights with  $\omega_{i,j} = \omega_{j,i}$  and  $\sum_j \omega_{i,j} = 1$  ( $\omega_{i,j} = 0$  if  $i$  and  $j$  do not communicate directly).

Nevertheless, (1) relies on the ability to communicate over orthogonal, noise- and error-free links, and on prior knowledge of the mixing weights  $\omega$  used to aggregate the incoming signals. In many practical scenarios (e.g., swarms of UAVs), communications occur over wireless links, and are subject to various impairments: interference from simultaneous transmissions, fading and noise may preclude the ability to receive error-free signals. Mitigating these sources of errors typically requires: 1) a centralized coordinator responsible for careful network scheduling and interference management; 2) channel state information (CSI) to compensate signal fluctuations and link outages caused by fading. Yet, such coordination may be non-trivial in wireless decentralized systems, and CSI acquisition may be impaired by pilot contamination [6].

This calls for the design of decentralized optimization schemes that operate over (and leverage properties of) wireless channels. In this paper, we present NCOTA-DGD, an implementation of (1) over wireless channels subject to noise, fading and interference. Its main feature is a *Non-Coherent* (NC)-*Over-the-Air* (OTA) consensus step that leverages the waveform superposition properties of the wireless channels, without the need for CSI nor explicit knowledge of the mixing weights. We show, both theoretically and numerically, that, for smooth and strongly-convex problems with suitable constant *consensus* and *learning* stepsizes, the error (Euclidean distance) between the local models and the solution of (P) converges to zero with rate  $\mathcal{O}(K^{-1/4})$  for target  $K$  iterations.

Recent OTA-based schemes under client-server [7]–[11] and decentralized [12]–[14] FL rely on accurate CSI and careful power control to compensate signal fluctuations due to fading. Focusing on decentralized FL, the works [12]–[14] use graph coloring to break down the network into smaller non-interfering subgraphs, in which one device operates as the PS. This expedient enables the use of techniques developed for client-server FL (including channel inversion) coupled with a suitable consensus enforcing step. Yet, these schemes rely on CSI and power control to invert channels, scheduling operations (e.g., graph coloring), and knowledge of the network structure and mixing weights  $\omega$  for consensus. In

N. Michelusi is with the School of Electrical, Computer and Energy Engineering, Arizona State University.

An extended version of this work appears in [1].

This research has been funded in part by NSF under grant CNS-2129615.

contrast, NCOTA-DGD overcomes this need by using a set of orthogonal preamble sequences to encode signals, coupled with non-coherent combining at the receivers; it leverages the channel pathloss to mix signals, without explicit knowledge of the mixing weights. The paper [15] studies *consensus* over a shared multipath channel. While it assumes the channels to be *noiseless* and *static*, our work focuses on *decentralized optimization* over *noisy, time-varying* fading channels.

The preamble-based technique developed in this paper is inspired by the preamble-based random access scheme developed in [16] to encode local gradients in *client-server FL*. The scheme therein relies on noise-free downlink and inversion of the average pathloss at the transmitters. Differently from [16], NCOTA-DGD operates in decentralized settings, with all links subject to fading and noise; instead of random access-based preamble selection of [16], NCOTA-DGD maps local signals deterministically to a suitable linear combination of preamble sequences; NCOTA-DGD does not invert channels, but instead leverages the average pathloss to mix signals.

This paper is organized as follows. In Sec. II, we describe NCOTA-DGD, followed by its convergence analysis in Sec. III. In Sec. IV, we present numerical results, followed by concluding remarks in Sec. V. Complete proofs, a more general (and non-trivial) analysis with decreasing stepsizes, stochastic gradient descent updates and additional numerical evaluations, are provided in [1]. *Notation*: All vectors are in column form. For vector (boldface)  $\mathbf{a}$ ,  $[\mathbf{a}]_i$  is its  $i$ th component, and  $\|\mathbf{a}\| = \sqrt{\mathbf{a}^H \mathbf{a}}$  its Euclidean norm. For random vector  $\mathbf{a}$ , we define  $\|\mathbf{a}\|_{\mathbb{E}} \triangleq \sqrt{\mathbb{E}[\|\mathbf{a}\|^2]}$  and  $\|\mathbf{a}\|_{\mathbb{E}|A}$  when the expectation is conditional on event  $A$ .  $\mathbf{e}_Q^m$  is the  $Q$ -dimensional standard basis vector with  $[\mathbf{e}_Q^m]_m = 1$ ,  $[\mathbf{e}_Q^m]_j = 0, \forall j \neq m$ .  $\mathbf{1}_m$  and  $\mathbf{0}_m$  are the  $m$ -dimensional vectors of 1's and 0's, respectively.  $\mathbf{I}_m$  is the  $m \times m$  identity matrix.  $\mathbb{1}[A]$  is the indicator function of event  $A$ .  $\mathbf{A} \otimes \mathbf{B}$  is the Kronecker product of  $\mathbf{A}$  and  $\mathbf{B}$ .

## II. SYSTEM MODEL AND NCOTA-DGD

We consider  $N$  wirelessly-connected edge devices, solving (P) via a noisy version of DGD [5] (see (I)). We assume that the optimizer of (P),  $\mathbf{w}^*$ , lies in a  $d$ -dimensional sphere  $\mathcal{W}$  of radius  $R$ , within which the optimization is restricted (without loss of generality, centered at  $\mathbf{0}_d$ ). For instance, for a strongly-convex  $F(\cdot)$  with strong-convexity parameter  $\mu$  (see Assumption 1), it is known that  $\|\nabla F(\mathbf{0}_d)\| = \|\nabla F(\mathbf{0}_d) - \nabla F(\mathbf{w}^*)\| \geq \mu \|\mathbf{0}_d - \mathbf{w}^*\|$  (note:  $\nabla F(\mathbf{w}^*) = \mathbf{0}_d$ ), hence  $\mathcal{W} \triangleq \{\mathbf{w} \in \mathbb{R}^d : \|\mathbf{w}\| \leq R\}$ , where  $R \triangleq \frac{1}{\mu} \|\nabla F(\mathbf{0}_d)\|$  may be estimated via a consensus phase.

To solve (P) iteratively, we divide time into frames of fixed duration  $T$ . In frame  $k$ , node  $i$  generates the transmission signal  $\mathbf{x}_{i,k}$  using the *Preamble-based Encoding* procedure described in Sec. II-A, and transmits  $\mathbf{x}_{i,k}$  over the wireless channel. Upon receiving the signal from the other nodes in the network (Sec. II-B), it then computes a consensus signal using the *non-coherent combining procedure* of Sec. II-C; finally, it updates the local optimization variable by combining the consensus signal with local gradient descent (Sec. II-D).

Due to randomness of noise and fading, this procedure induces a stochastic process defined on a proper probability space; we denote by  $\mathcal{F}_k$  the  $\sigma$ -algebra generated by all signals generated up to frame  $k$  excluded, along with  $\mathbf{w}_{i,k}$ .

### A. Preamble-based Encoding

Let  $\mathcal{Z} \triangleq \{\mathbf{z}_m \in \mathbb{R}^d : m=1, \dots, M\}$  be a codebook of  $M=d+1$  codewords and  $\mathbf{Z} = [\mathbf{z}_1, \dots, \mathbf{z}_M]$  be the  $d \times M$  matrix with  $m$ th column equal to  $\mathbf{z}_m$ . These are defined as  $\mathbf{z}_m = 2Rd\mathbf{e}_d^m - R\mathbf{1}_d, m=1, \dots, d$  and  $\mathbf{z}_{d+1} = -R\mathbf{1}_d$ . With this choice, any  $\mathbf{w} \in \mathcal{W}$  may be represented as a convex combination of  $\mathcal{Z}$ . To see this, define the convex combination vector  $\mathbf{p} \in \mathbb{R}^M$  as

$$[\mathbf{p}]_m = \frac{[\mathbf{w}]_m + R}{2Rd}, \forall m=1, \dots, d, \quad [\mathbf{p}]_{d+1} = 1 - \sum_{m=1}^d [\mathbf{p}]_m. \quad (2)$$

Since  $\mathbf{w} \in \mathcal{W}$  (i.e.,  $\|\mathbf{w}\| \leq R$  and  $[\mathbf{w}]_m \in [-R, R]$ ), it is straightforward to see that  $\mathbf{p}$  takes value from the  $M$ -dimensional probability simplex, i.e.  $\mathbf{1}_M^T \mathbf{p} = 1$  and  $[\mathbf{p}]_m \geq 0, \forall m$ , and

$$\mathbf{w} = \sum_{m=1}^M [\mathbf{p}]_m \mathbf{z}_m = \mathbf{Z} \cdot \mathbf{p}, \quad (3)$$

Hence,  $\mathbf{p}$  in (2) defines the desired convex combination.

Let  $\mathcal{U} = \{\mathbf{u}_m \in \mathbb{C}^M : m=1, \dots, M\}$  be a set of  $M$  orthogonal preamble sequences, defined as  $\mathbf{u}_m = \sqrt{M} \mathbf{e}_M^m$ . Then, node  $i$  generates the transmission signal as

$$\mathbf{x}_{i,k} = \sqrt{E} \sum_{m=1}^M \sqrt{[\mathbf{p}_{i,k}]_m} \mathbf{u}_m,$$

with average energy per sample  $E = \|\mathbf{x}_{i,k}\|^2/M$ .

### B. Transmission over the wireless channel

Each node then transmits its signal  $\mathbf{x}_{i,k}$  over the wireless channel. We assume Rayleigh flat fading channels  $h_{i,j}^k \sim \mathcal{CN}(0, \Lambda_{i,j})$  between transmitting node  $j$  and receiving node  $i$  in frame  $k$ , where  $\Lambda_{i,j}$  is the large-scale pathloss. We assume  $\Lambda_{i,j} = \Lambda_{j,i}$  (channel reciprocity). Furthermore,  $h_{i,j}^k$  is i.i.d. over  $k$ , and independent across  $i-j$ .

We assume that the nodes operate under a half-duplex constraint. We thus divide each frame of duration  $T$  into 2 slots; each node is assigned to transmit in only one of the 2 slots. This assignment is kept fixed during the entire optimization session, and may be done randomly by each node. A node transmitting in slot 1 is in receive mode in slot 2, and vice versa. Let  $\mathcal{N}_i$  be the set of nodes that transmit when node  $i$  is in receive mode. Node  $i$  thus receives the signal

$$\mathbf{y}_i^k = \sum_{j \in \mathcal{N}_i} h_{i,j}^k \mathbf{x}_{j,k} + \mathbf{n}_i^k,$$

where  $\mathbf{n}_i^k \sim \mathcal{CN}(\mathbf{0}_M, \sigma^2 \mathbf{I}_M)$  is AWGN noise with variance  $\sigma^2$ .  $\mathbf{y}_i^k$  is then correlated with the preamble sequences as

$$r_{i,m}^k = \frac{\mathbf{u}_m^H \mathbf{y}_i^k}{\sqrt{E} \|\mathbf{u}_m\|^2} = \sum_{j \in \mathcal{N}_i} h_{i,j}^k \sqrt{[\mathbf{p}_{j,k}]_m} + n_{i,m}^k, \quad (4)$$

$n_{i,m}^k \triangleq \mathbf{u}_m^H \mathbf{n}_i^k / (\sqrt{E} \|\mathbf{u}_m\|^2) \sim \mathcal{CN}(0, \sigma^2 / (M \cdot E))$  is the equivalent noise, i.i.d. over  $i, k, m$ , due to the orthogonality of preamble sequences. Since  $h_{i,j}^k \sim \mathcal{CN}(0, \Lambda_{i,j})$ , one can see that  $|r_{i,m}^k|^2 |F_k$  has exponential distribution with mean

$$\mathbb{E}[|r_{i,m}^k|^2 |F_k] = \sum_{j \in \mathcal{N}_i} \Lambda_{i,j} [\mathbf{p}_{j,k}]_m + \frac{\sigma^2}{M \cdot E}. \quad (5)$$

### C. Non-Coherent Over-the-Air Consensus

At the end of frame  $k$ , node  $i$  computes the *consensus* signal

$$\mathbf{d}_{i,k} = \sum_{m=1}^M \left( |r_{i,m}^k|^2 - \frac{\sigma^2}{M \cdot E} \right) (\mathbf{z}_m - \mathbf{w}_{i,k}). \quad (6)$$

Using (5), it is straightforward to see that

$$\mathbb{E}[\mathbf{d}_{i,k} | \mathcal{F}_k] = \sum_{j \in \mathcal{N}_i} \Lambda_{i,j} \sum_{m=1}^M [\mathbf{p}_{j,k}]_m (\mathbf{z}_m - \mathbf{w}_{i,k}). \quad (7)$$

Furthermore, let  $\Lambda^* \triangleq \max_i \sum_{j \in \mathcal{N}_i} \Lambda_{i,j}$ , and define weights  $\omega_{i,j} = \frac{\Lambda_{i,j}}{\Lambda^*} \cdot \mathbb{1}[j \in \mathcal{N}_i]$  for  $i \neq j$  and  $\omega_{i,i} = 1 - \sum_{j \neq i} \omega_{i,j}$ . Using (3), we can then rewrite (7) as

$$\mathbb{E}[\mathbf{d}_{i,k} | \mathcal{F}_k] = \Lambda^* \sum_j \omega_{i,j} (\mathbf{w}_{j,k} - \mathbf{w}_{i,k}). \quad (8)$$

We can see that  $\mathbf{d}_{i,k}$  represents a noisy consensus signal reminiscent of (1), which aggregates and averages the local signals of all the other nodes in the network, with mixing weights proportional to the average pathloss  $\Lambda$ .

#### D. Local optimization state update

Finally, node  $i$  updates  $\mathbf{w}_{i,k}$  by combining the consensus signal with a local gradient descent (computed in parallel with transmission and reception), followed by a projection onto  $\mathcal{W}$ , yielding the NCOTA-DGD update

$$\mathbf{w}_{i,k+1} = \Pi[\mathbf{w}_{i,k} + \gamma \mathbf{d}_{i,k} - \eta \nabla f_i(\mathbf{w}_{i,k})], \quad (9)$$

where  $\gamma > 0$  and  $\eta > 0$  are *consensus* and *learning* stepsizes, respectively. As shown in Sec. III, these need to be chosen suitably, in order to mitigate the impact of fading and noise. The projection operator  $\Pi[\mathbf{a}]$  onto the sphere  $\mathcal{W}$  is defined as

$$\Pi[\mathbf{a}] = \arg \min_{\mathbf{w} \in \mathcal{W}} \|\mathbf{w} - \mathbf{a}\| = \begin{cases} \mathbf{a} & \text{if } \|\mathbf{a}\| \leq R, \\ \frac{R}{\|\mathbf{a}\|} \mathbf{a} & \text{otherwise,} \end{cases}$$

and guarantees that  $\mathbf{w}_{i,k} \in \mathcal{W}, \forall i, \forall k$ . The process described in Sec. II-A to Sec. II-D is then repeated in frame  $k+1$  with the new local optimization variable  $\mathbf{w}_{i,k+1}$ , and so on.

We now express NCOTA-DGD as a noisy DGD. Let  $\epsilon_{i,k} = \mathbf{d}_{i,k} - \mathbb{E}[\mathbf{d}_{i,k} | \mathcal{F}_k]$  be the error due to fading and noise. Using (7), we can then rewrite (9) as

$$\mathbf{w}_{i,k+1} = \Pi \left[ \mathbf{w}_{i,k} + \gamma \Lambda^* \sum_j \omega_{i,j} (\mathbf{w}_{j,k} - \mathbf{w}_{i,k}) - \eta \nabla f_i(\mathbf{w}_{i,k}) + \gamma \epsilon_{i,k} \right]. \quad (10)$$

A few observations are in order:

- 1) The weights  $\omega$  satisfy  $\omega_{i,j} \geq 0, \forall i, j$  and  $\omega_{i,j} = \omega_{j,i}$ , since  $\Lambda_{i,j} = \Lambda_{j,i}$  (channel reciprocity) and  $\{j \in \mathcal{N}_i\} \Leftrightarrow \{i \in \mathcal{N}_j\}$ . Hence,  $[\Omega]_{i,j} = \omega_{i,j}$  is a symmetric, doubly-stochastic mixing matrix (as commonly assumed in consensus-based optimization [5]) induced by the large-scale propagation conditions of the channel.
- 2) When  $\gamma = (\Lambda^*)^{-1}$ ,  $\epsilon_{i,k} = \mathbf{0}_d$ , and neglecting the projection operation, (10) reduces to the DGD updates (1). Hence, NCOTA-DGD can be interpreted as a projected DGD with noisy consensus. The consensus stepsize  $\gamma$

helps mitigate the detrimental effect of error propagation due to noise and fading. Remarkably, unlike (1), no explicit knowledge of  $\omega$  is required in NCOTA-DGD.

Since each frame includes 2 slots, and in each slot  $M=d+1$  samples are transmitted, the frame duration of NCOTA-DGD is  $T = \frac{2(d+1)}{W_{tot}}$ , where  $W_{tot}$  is the bandwidth of the system.

### III. CONVERGENCE ANALYSIS

Let  $\mathbf{W}_k = \sum_{i=1}^N \mathbf{e}_N^i \otimes \mathbf{w}_{i,k}$  be the  $\mathbf{w}_{i,k}$ -signals stacked over the network; similarly, let  $\epsilon_k = \sum_{i=1}^N \mathbf{e}_N^i \otimes \epsilon_{i,k}$  be the error signals due to fading and noise, stacked over the network. Let

$$f(\mathbf{W}) = \sum_{i=1}^N f_i(\mathbf{w}_i)$$

and  $\hat{\Omega} = \Omega \otimes \mathbf{I}_d$ . We then stack the updates (10) as

$$\mathbf{W}_{k+1} = \Pi^N \left[ \mathbf{W}_k + \gamma \Lambda^* (\hat{\Omega} - \mathbf{I}_{Nd}) \mathbf{W}_k - \eta \nabla f(\mathbf{W}_k) + \gamma \epsilon_k \right],$$

where  $\Pi^N[\mathbf{A}] = \arg \min_{\mathbf{W} \in \mathcal{W}^N} \|\mathbf{W} - \mathbf{A}\|$  is the projection operator, stacked over the network. Similarly to [5] for the analysis of DGD, we interpret this update as a noisy centralized projected gradient descent step with stepsize  $\eta$  (see (11)), based on the Lyapunov function

$$G(\mathbf{W}) \triangleq f(\mathbf{W}) + \frac{\gamma \Lambda^*}{2\eta} \mathbf{W}^\top (\mathbf{I}_{Nd} - \hat{\Omega}) \mathbf{W},$$

where the second term incentivizes consensus (in fact, it equals zero when  $\mathbf{w}_i = \mathbf{w}_j, \forall i, j$ ). We can then rewrite

$$\mathbf{W}_{k+1} = \Pi^N [\mathbf{W}_k - \eta \nabla G(\mathbf{W}_k) + \gamma \epsilon_k]. \quad (11)$$

We study the convergence of NCOTA-DGD under the following standard assumptions.

**Assumption 1.**  $f_i(\mathbf{w})$  are  $\mu$ -strongly convex and  $L$ -smooth.

**Assumption 2.**  $\|\mathbf{w}^*\| < R$  ( $\mathbf{w}^*$  is in the interior of  $\mathcal{W}$ ), and  $\zeta \triangleq R - \|\mathbf{w}^*\| > 0$ .

As discussed after (10),  $\Omega$  is symmetric and doubly-stochastic, hence its eigenvalues ( $\rho_i$  for the  $i$ th one) are real-valued and satisfy  $1 = \rho_1 \geq \rho_2 \geq \dots \geq \rho_N \geq -1$ . We make the following standard assumption on  $\rho_2$ .

**Assumption 3.**  $\rho_2 < 1$ .

We are now ready to present the convergence properties of NCOTA-DGD. The main idea is to decompose the error between the local optimization variables and the global optimum into: (1) the error between  $\mathbf{W}_k$  and the minimizer of the Lyapunov function  $G$ , defined as

$$\mathbf{W}^{(G)} = \arg \min_{\mathbf{W} \in \mathcal{W}^N} G(\mathbf{W}); \quad (12)$$

and (2) the error between the latter and the global optimum  $\mathbf{w}^*$ . Accordingly, we bound via the triangle inequality

$$\begin{aligned} \sqrt{\mathbb{E} \left[ \frac{1}{N} \sum_i \|\mathbf{w}_{i,k} - \mathbf{w}^*\|^2 \right]} &= \frac{1}{\sqrt{N}} \|\mathbf{W}_k - \mathbf{1}_N \otimes \mathbf{w}^*\|_{\mathbb{E}} \\ &\leq \frac{1}{\sqrt{N}} \|\mathbf{W}_k - \mathbf{W}^{(G)}\|_{\mathbb{E}} + \frac{1}{\sqrt{N}} \|\mathbf{W}^{(G)} - \mathbf{1}_N \otimes \mathbf{w}^*\|. \end{aligned} \quad (13)$$

These terms are individually bounded in Theorem 1. A sketch of its proof is provided in the Appendix.

**Theorem 1.** Assume that (C1)  $\eta(\mu + L) + \gamma\Lambda^*(1 - \rho_N) \leq 2$ ; (C2)  $\frac{\eta}{\gamma} \leq \frac{\zeta \cdot Z}{\sqrt{N} \nabla_{\max}}$ , where we define  $Z \triangleq \frac{(1 - \rho_2)\Lambda^*}{2\sqrt{1 + L/\mu}}$  and  $\nabla_{\max} \triangleq \max_i \|\nabla f_i(\mathbf{w}^*)\|$ . Then,

$$\frac{1}{\sqrt{N}} \|\mathbf{W}_k - \mathbf{W}^{(G)}\|_{\mathbb{E}} \leq 2R \left[ \frac{\sqrt{2}d}{\sqrt{\mu}} \left( \Lambda^* + \frac{\sigma^2}{E} \right) \frac{\gamma}{\sqrt{\eta}} + e^{-\mu\eta k} \right], \quad (14)$$

$$\frac{1}{\sqrt{N}} \|\mathbf{W}^{(G)} - \mathbf{1}_N \otimes \mathbf{w}^*\| \leq \frac{\nabla_{\max} \eta}{Z \gamma}. \quad (15)$$

To minimize these errors,  $\gamma/\sqrt{\eta}$  and  $\eta/\gamma$  need both be small, while  $\eta$  should be large to make  $e^{-\mu\eta k}$  small, yielding a tradeoff between the tuning of  $\eta$  and  $\gamma$ . To further investigate the convergence properties, let us consider a target timeframe  $K$  at which the algorithm stops. It appears then reasonable to choose  $\eta = a \cdot K^{-x}$  and  $\gamma = b \cdot K^{-y}$  for suitable  $a, b, x, y > 0$ . Under this choice, (14)-(15) specialize as

$$\frac{1}{\sqrt{N}} \|\mathbf{W}_K - \mathbf{W}^{(G)}\|_{\mathbb{E}} \leq 2R \left[ \frac{\Lambda^* + \frac{\sigma^2}{E}}{\sqrt{a\mu}} \sqrt{2db} K^{\frac{x}{2} - y} + e^{-\mu a \cdot K^{1-x}} \right],$$

$$\frac{1}{\sqrt{N}} \|\mathbf{W}^{(G)} - \mathbf{1}_N \otimes \mathbf{w}^*\| \leq \frac{\nabla_{\max} a}{Z b} K^{y-x}.$$

The exponential term requires  $x < 1$  to converge when  $K \rightarrow \infty$ , while the other two terms are of order  $\mathcal{O}(K^{-\max\{y-x, x/2-y\}})$ . Hence,  $\max\{y-x, x/2-y\}$  should be minimized subject to  $x < 1$ , yielding the following Corollary.

**Corollary 1.** Let  $0 < \epsilon < 1$ . With  $\eta \propto K^{-(1-\epsilon)}$  and  $\gamma \propto K^{-3/4(1-\epsilon)}$ , we have that<sup>1</sup>

$$\sqrt{\mathbb{E} \left[ \frac{1}{N} \sum_i \|\mathbf{w}_{i,K} - \mathbf{w}^*\|^2 \right]} = \mathcal{O}(K^{-1/4(1-\epsilon)}).$$

By choosing  $\epsilon \rightarrow 0$ , we can see that the error scales as  $\mathcal{O}(K^{-1/4})$ , as validated numerically in the next section.

#### IV. NUMERICAL RESULTS

We solve the '0 versus 1' task based on the MNIST dataset [17]: the goal is to distinguish images of digits '0' and '1'.

*Network deployment:* We consider  $N=200$  nodes, spread uniformly at random over a region of radius 3km. The nodes communicate over a bandwidth of  $W_{tot} = 1\text{MHz}$ , carrier frequency  $f_c = 3\text{GHz}$ . The pathloss  $\Lambda_{i,j}$  between node  $i$  and  $j$  follows Friis' free space equation. All nodes transmit with a fixed transmission power of  $P_{tx} = 5\text{dBm}$ . The noise power spectral density is  $N_0 = -169\text{dBmW/Hz}$ .

*Data deployment:* Each node has a local dataset with a single  $28 \times 28$  pixels image: 100 nodes have digit '0', the remainder have digit '1'. Node  $i$ 's image is converted into a 50-dimensional real feature vector  $\mathbf{d}_i$ , representing the components (out of a total of  $28 \times 28 = 784$ ) with largest mean energy across the dataset, and then normalized to  $\|\mathbf{d}_i\| = 1$ . We let  $\ell_i = 1$  if node  $i$ 's image is of digit 0, otherwise  $\ell_i = -1$ .

*Optimization problem formulation:* We solve the task via regularized logistic regression, with loss function

$$f_i(\mathbf{w}) = \frac{0.01}{2} \|\mathbf{w}\|^2 + \ln(1 + \exp\{-\ell_i \cdot \mathbf{d}_i^\top \mathbf{w}\}) \quad (16)$$

where  $\mathbf{w} \in \mathbb{R}^d$  is a  $d = 50$ -dimensional parameter vector. It can be shown that  $f_i$ , hence the global function  $F = 1/N \sum_i f_i$ , are all strongly-convex with parameter  $\mu = 0.01$ , and smooth with parameter  $L = \mu + 1/4$ .

*Wireless distributed optimization algorithms:* We implement the following algorithms, all initialized as  $\mathbf{w}_{i,0} = \mathbf{0}_d, \forall i$ .

- **NCOTA-DGD:** To enforce half-duplex constraints, the 200 nodes are partitioned into 2 sets, each with 100 randomly selected nodes. The frame duration is  $T = 102\mu\text{s}$ .

We also implement DGD over orthogonal digital (OD-DGD) and analog (OA-DGD) channels, following the updates

$$\mathbf{w}_{i,k+1} = \Pi[\mathbf{c}_{i,k} - \eta \nabla f_i(\mathbf{w}_{i,k})], \quad (17)$$

where  $\mathbf{c}_{i,k}$  is a reconstruction of  $\sum_j \omega_{i,j} \mathbf{w}_{j,k}$ . These implementations differ in the way signals are encoded and transmitted in the network, and  $\mathbf{c}_{i,k}$  is computed:

- **Orthogonal Digital DGD (OD-DGD):** each node scales  $\mathbf{w}_{i,k}$  by the largest magnitude of its components,  $\|\mathbf{w}_{i,k}\|_\infty$ ; each component of  $\mathbf{w}_{i,k}/\|\mathbf{w}_{i,k}\|_\infty$  (each  $\in [-1, 1]$ ) is then quantized using 9 quantization levels uniformly spaced in the interval  $[-1, 1]$ . We use dithered quantization: letting  $\hat{\mathbf{w}}_{i,k}$  be the quantized signal, it is such that  $\mathbb{E}[\hat{\mathbf{w}}_{i,k} | \mathbf{w}_{i,k}] = \mathbf{w}_{i,k}$ . With  $\|\mathbf{w}_{i,k}\|_\infty$  encoded using machine precision (64 bits), the data payload is thus  $L = 64 + d \log_2(9) \approx 223\text{bits}$  to encode the  $d$ -dimensional signal  $\mathbf{w}_{i,k}$ . Such payload is then transmitted by each node over orthogonal channels (via TDMA), using capacity achieving codes with rate  $R$ . With the fading channel  $h_{i,j}^k \sim \mathcal{CN}(0, \Lambda_{i,j})$  between transmitting node  $j$  and receiving node  $i$ , and assuming CSI at the receiver, the outage probability is  $P_{i,j}^{out} \triangleq 1 - \exp\{-\frac{\sigma^2}{E\Lambda_{i,j}}(2^R - 1)\}$ .  $R$  is chosen to guarantee a maximum 10% outage probability for nodes within a 500m radius from the transmitting node, yielding  $R \approx 2\text{bits/s/Hz}$ . The resulting frame duration is  $T \approx 22.67\text{ms}$ . At the end of the  $N$  transmissions, node  $i$  computes

$$\mathbf{c}_{i,k} = \mathbf{w}_{i,k} + \frac{1}{\max_n \sum_{j \neq n} (1 - P_{n,j}^{out})} \sum_{j \neq i} \omega_{i,j}^k (\hat{\mathbf{w}}_{j,k} - \mathbf{w}_{i,k}),$$

where  $\omega_{i,j}^k = \mathbb{1}[R < \log_2(1 + |h_{i,j}^k|^2 E/\sigma^2)]$  indicates a successful reception of  $\hat{\mathbf{w}}_{j,k}$  at node  $i$ . With this choice of  $\mathbf{c}_{i,k}$ , the updates (17) represent a noisy version of (1) with weights  $\omega_{i,j} = \frac{1 - P_{i,j}^{out}}{\max_n \sum_{j \neq n} (1 - P_{n,j}^{out})}, j \neq i$ ,  $\omega_{i,i} = 1 - \sum_{j \neq i} \omega_{i,j}$ , and the additional projection step (as seen by computing  $\mathbb{E}[\mathbf{c}_{i,k} | \mathcal{F}_k]$ ).

- **Orthogonal Analog DGD (OA-DGD):**  $\mathbf{w}_{i,k}$  is first normalized to unit norm; the first (respectively, second) half of the normalized vector,  $\frac{[\mathbf{w}_{i,k}]_{1:d/2}}{\|\mathbf{w}_{i,k}\|}$  ( $\frac{[\mathbf{w}_{i,k}]_{d/2+1:d}}{\|\mathbf{w}_{i,k}\|}$ ) is mapped to the real (imaginary) part of the baseband transmitted signal as

$$\mathbf{x}_{i,k} = \sqrt{E} \frac{d/2 + 2}{3} \left[ \frac{[\mathbf{w}_{i,k}]_{1:d/2} + j[\mathbf{w}_{i,k}]_{d/2+1:d}}{\|\mathbf{w}_{i,k}\|}; \frac{\|\mathbf{w}_{i,k}\|}{R}; 1 \right];$$

note that  $\mathbf{x}_{i,k}$  includes the norm  $\|\mathbf{w}_{i,k}\|$  (penultimate sample) and a pilot signal (last sample) to estimate the channel

<sup>1</sup>Note that  $e^{-\mu a \cdot K^\epsilon} = \mathcal{O}(K^{-1/4(1-\epsilon)})$  for  $0 < \epsilon < 1$

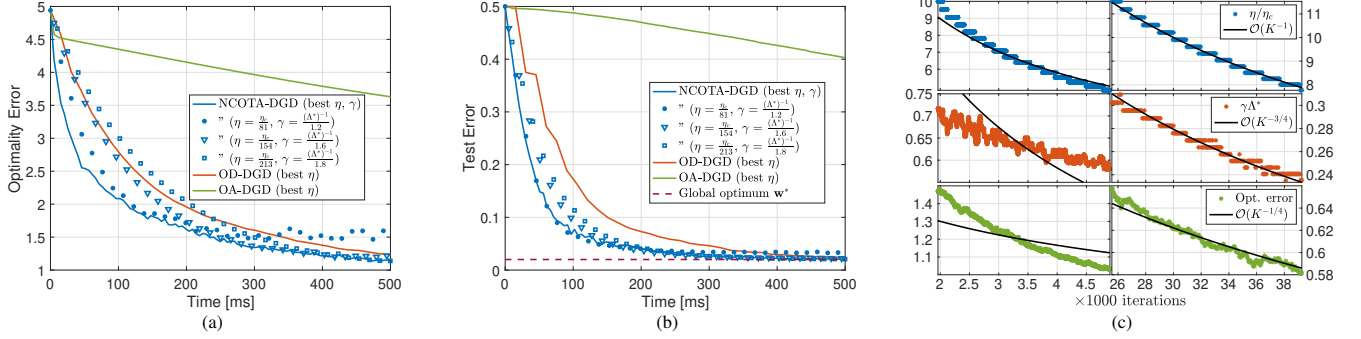


Fig. 1: Optimality error (a), test error (b), vs running time. Optimal stepsizes and optimality error for NCOTA-DGD, vs iterations (c).

at the receiver. This constitutes a  $(d/2 + 2)$ -dimensional complex-valued signal, whose energy per sample satisfies  $\frac{1}{d/2+2} \|\mathbf{x}_{i,k}\|^2 \leq E$ , consistent with the power constraint. The signal is then transmitted by each node over orthogonal channels (via TDMA), yielding the frame duration  $T = 5.4\text{ms}$ . With the received signal  $\mathbf{y}_{i,j}^k = h_{i,j}^k \mathbf{x}_{j,k} + \mathbf{n}_{i,j}^k$ , node  $i$  first estimates  $h_{i,j}^k$  via maximum likelihood from the last sample, followed by the estimation of  $\|\mathbf{w}_{j,k}\|$  from the penultimate sample; it then estimates  $\mathbf{w}_{j,k}/\|\mathbf{w}_{j,k}\|$  from the first  $d/2$  samples. After receiving the signals from all nodes, and using the reconstructions  $\hat{\mathbf{w}}_{j,k}$  of  $\mathbf{w}_{j,k}$ , node  $i$  then computes

$$\mathbf{c}_{i,k} = \mathbf{w}_{i,k} + \sum_{j \neq i} \frac{\Lambda_{i,j}}{\max_n \sum_{j \neq n} \Lambda_{n,j}} (\hat{\mathbf{w}}_{j,k} - \mathbf{w}_{i,k}),$$

so that signals are mixed proportionally to the average pathloss. With this choice of  $\mathbf{c}_{i,k}$ , the updates (17) represent a noisy version of (1) with weights  $\omega_{i,j} = \frac{\Lambda_{i,j}}{\max_n \sum_{j \neq n} \Lambda_{n,j}}$ ,  $j \neq i$  and  $\omega_{i,i} = 1 - \sum_{j \neq i} \omega_{i,j}$ , and the additional projection step.

Note that OD-DGD assumes CSI at the receiver and knowledge of  $P^{out}$ ; OA-DGD assumes knowledge of the average pathloss  $\Lambda$ . This information is not used by NCOTA-DGD.

**Evaluations and Discussion:** We evaluate: (1) the *optimality error*  $\sqrt{\hat{\mathbb{E}}[\frac{1}{N} \sum_i \|\mathbf{w}_{i,k} - \mathbf{w}^*\|^2]}$ , measuring the deviation of the local models from the solution of (P) (bounded in expectation in Theorem 1); (2) the *average test error*  $\text{TEST}_k = \hat{\mathbb{E}}[1/N \sum_i \text{TEST}_{i,k}]$ , where  $\text{TEST}_{i,k}$  is the test error for node  $i$  at frame  $k$ . This is computed on a test set of 100 '0's and 100 '1's; the label associated to feature vector  $\mathbf{d}$  is predicted as '0' if  $\mathbf{w}_{i,k}^\top \mathbf{d} > 0$ , and '1' otherwise. Here,  $\hat{\mathbb{E}}[\cdot]$  denotes a sample average of the trajectories generated by the algorithms, over 10 independent realizations of fading and noise.

In Fig. 1a, we plot the *best* optimality error vis-à-vis running time: all algorithms are evaluated using a set of fixed stepsizes; for each time instance in the  $x$ -axis, we plot only the optimality error evaluated on the best performing stepsize choice at that time (for NCOTA-DGD, we also show the curves for 3 representative stepsize choices). We note that NCOTA-DGD achieves the best performance, followed by OD-DGD and OA-DGD. This is thanks to the fast updates of NCOTA-DGD: over 500ms, it performs 4900 iterations, versus only 22 of OD-DGD and 93 of OA-DGD, which are limited by the use of orthogonal channels. Yet, OD-DGD bridges the gap to NCOTA-DGD over time: this is due to its better noise-suppression capabilities—especially beneficial when approach-

ing convergence to  $\mathbf{w}^*$ . This behavior suggests that a mixed analog-digital strategy may further improve performance; this study is left for future work. OA-DGD performs the worst: it does not enjoy the noise suppression capabilities of OD-DGD, and its updates are  $53\times$  slower than NCOTA-DGD.

In Fig. 1b, we plot the test error under the same best stepsize choice, vis-à-vis running time. We note that better optimality error corresponds to better test error. Both NCOTA-DGD and OD-DGD converge to the test error under  $\mathbf{w}^*$ .

In Fig. 1c, we plot the best stepsizes  $\eta$  (first row),  $\gamma$  (second row) and best optimality error (third row) of NCOTA-DGD, for two different phases: *initial phase*, corresponding to the first  $\sim 5k$  iterations (500ms, left side); *asymptotic phase*, after 26k iterations (right side). For each phase, we also fit the data points to the theoretical stepsize tuning and convergence behavior found in Corollary 1:<sup>2</sup> solid lines correspond to  $\eta \propto (K+\delta)^{-1}$ ,  $\gamma \propto (K+\delta)^{-3/4}$  and "Opt. error"  $\propto (K+\delta)^{-1/4}$ , where the scaling factors ( $\propto$ ) and  $\delta$  are fit to the data points. We note that, in the initial phase, the optimal  $\eta$  and  $\gamma$  do not match the theoretical behavior. In fact, in this regime, the optimality error is dominated by (15), while the error (14) is less dominant; indeed, the optimality error decreases quicker than  $\mathcal{O}(K^{-1/4})$  (bottom left). Conversely, in the asymptotic phase, the optimal  $\eta$  and  $\gamma$  more closely match the theoretical scaling, and the optimality error decays as  $\propto (K+\delta)^{-1/4}$ , as predicted (with  $\delta = 4227$ ). This is in line with the theoretical result of Corollary 1 when  $\epsilon \rightarrow 0$ , and corresponds to a regime when both error terms (14)-(15) are equally dominant.

## V. CONCLUSIONS

We present NCOTA-DGD, a noisy version of DGD that combines local gradient descent with Non-Coherent Over-The-Air consensus to solve distributed machine-learning problems over wirelessly-connected systems. NCOTA-DGD enables simultaneous transmissions by mapping local signals to a mixture of preamble sequences, and consensus by correlating the received signals with the preamble sequences via non-coherent combining, without explicit knowledge of the mixing weights, nor channel state information. We proved the convergence properties of NCOTA-DGD, both theoretically and numerically, and showed superior performance than implementations of DGD over digital and analog orthogonal channels.

<sup>2</sup>Note that  $(K + \delta)^{-exp} = \mathcal{O}(K^{-exp})$  for  $K \rightarrow \infty$ .

## REFERENCES

- [1] N. Michulusi, "Non-coherent over-the-air decentralized stochastic gradient descent," 2022, in preparation.
- [2] H. B. McMahan, E. Moore, D. Ramage, S. Hampson, and B. A. y Arcas, "Communication-efficient learning of deep networks from decentralized data," in *AISTATS*, 2017.
- [3] X. Lian, C. Zhang, H. Zhang, C.-J. Hsieh, W. Zhang, and J. Liu., "Can decentralized algorithms outperform centralized algorithms? A case study for decentralized parallel stochastic gradient descent," in *Proc. 31st NeurIPS*, Dec. 2017.
- [4] S. Savazzi, M. Nicoli, and V. Rampa, "Federated learning with cooperating devices: A consensus approach for massive iot networks," *IEEE Internet of Things Journal*, vol. 7, no. 5, pp. 4641–4654, 2020.
- [5] K. Yuan, Q. Ling, and W. Yin, "On the Convergence of Decentralized Gradient Descent," *SIAM Journal on Optimization*, vol. 26, no. 3, pp. 1835–1854, 2016.
- [6] O. Elijah, C. Y. Leow, T. A. Rahman, S. Nunoo, and S. Z. Iliya, "A comprehensive survey of pilot contamination in massive mimo-5g system," *IEEE Communications Surveys & Tutorials*, vol. 18, no. 2, pp. 905–923, 2016.
- [7] K. Yang, T. Jiang, Y. Shi, and Z. Ding, "Federated learning via over-the-air computation," *IEEE Transactions on Wireless Communications*, vol. 19, no. 3, pp. 2022–2035, 2020.
- [8] M. M. Amiri and D. Gündüz, "Federated learning over wireless fading channels," *IEEE Transactions on Wireless Communications*, vol. 19, no. 5, pp. 3546–3557, 2020.
- [9] G. Zhu, Y. Du, D. Gündüz, and K. Huang, "One-bit over-the-air aggregation for communication-efficient federated edge learning: Design and convergence analysis," *IEEE Transactions on Wireless Communications*, vol. 20, no. 3, pp. 2120–2135, 2021.
- [10] M. M. Amiri, T. M. Duman, D. Gündüz, S. R. Kulkarni, and H. V. Poor, "Blind federated edge learning," *IEEE Transactions on Wireless Communications*, vol. 20, no. 8, pp. 5129–5143, 2021.
- [11] M. Mohammadi Amiri and D. Gündüz, "Machine learning at the wireless edge: Distributed stochastic gradient descent over-the-air," *IEEE Transactions on Signal Processing*, vol. 68, pp. 2155–2169, 2020.
- [12] H. Xing, O. Simeone, and S. Bi, "Federated learning over wireless device-to-device networks: Algorithms and convergence analysis," *IEEE Journal on Selected Areas in Communications*, vol. 39, no. 12, pp. 3723–3741, 2021.
- [13] Y. Shi, Y. Zhou, and Y. Shi, "Over-the-air decentralized federated learning," in *2021 IEEE International Symposium on Information Theory (ISIT)*, 2021, pp. 455–460.
- [14] E. Ozfatura, S. Rini, and D. Gündüz, "Decentralized sgd with over-the-air computation," in *GLOBECOM 2020 - 2020 IEEE Global Communications Conference*, 2020, pp. 1–6.
- [15] G. Scutari and S. Barbarossa, "Distributed consensus over wireless sensor networks affected by multipath fading," *IEEE Transactions on Signal Processing*, vol. 56, no. 8, pp. 4100–4106, 2008.
- [16] J. Choi, "Communication-efficient distributed sgd using random access for over-the-air computation," *IEEE Journal on Selected Areas in Information Theory*, pp. 1–1, 2022.
- [17] L. Yan, C. Corinna, and C. J. Burges. The MNIST dataset of handwritten digits. [Online]. Available: <http://yann.lecun.com/exdb/mnist/>
- [18] D. Bertsekas, A. Nedić, and A. Ozdaglar, *Convex Analysis and Optimization*. Athena Scientific, 2003.
- [19] Y. Nesterov, *Introductory Lectures on Convex Optimization: A Basic Course*, 1st ed. Springer Publishing Company, Incorporated, 2004.

## APPENDIX

*Proof sketch of Theorem 1.* We first prove (14). Using the fixed point optimality condition  $\mathbf{W}^{(G)} = \Pi^N[\mathbf{W}^{(G)} - \eta \nabla G(\mathbf{W}^{(G)})]$ ,  $\forall \eta \geq 0$ , the non-expansive property of projections [18], and taking the expectation conditional on  $\mathcal{F}_k$ , we bound  $\|\mathbf{W}_{k+1} - \mathbf{W}^{(G)}\|_{\mathbb{E}|\mathcal{F}_k}^2$

$$\leq \|\mathbf{W}_k - \mathbf{W}^{(G)} - \eta(\nabla G(\mathbf{W}_k) - \nabla G(\mathbf{W}^{(G)}))\|^2 + \gamma^2 \Sigma,$$

where  $\|\epsilon_k\|_{\mathbb{E}|\mathcal{F}_k}^2 \leq \Sigma$  (Lemma 1 at the end of the Appendix). Assumption 1 implies that  $G$  is  $\mu$ -strongly convex and  $L_G \triangleq L + \Lambda^*(1 - \rho_N)\gamma/\eta$ -smooth. Then, using [19, Theorem 2.1.12],

the first term above is further bounded as  $\leq (1 - \mu\eta)^2 \|\mathbf{W}_k - \mathbf{W}^{(G)}\|_{\mathbb{E}}^2$  as long as  $\eta \leq 2/(\mu + L_G)$  i.e.  $\eta(\mu + L) + \gamma\Lambda^*(1 - \rho_N) \leq 2$  (C1), yielding, after the unconditional expectation,

$$\|\mathbf{W}_{k+1} - \mathbf{W}^{(G)}\|_{\mathbb{E}}^2 \leq (1 - \mu\eta)^2 \|\mathbf{W}_k - \mathbf{W}^{(G)}\|_{\mathbb{E}}^2 + \gamma^2 \Sigma.$$

The result (14) follows after solving the induction, noting that  $\|\mathbf{W}_0 - \mathbf{W}^{(G)}\| \leq \sqrt{N}2r$ , using the expression of  $\Sigma$  in Lemma 1,  $\mu\eta \leq 1$  (implied by C1),  $(1 - \mu\eta)^{2k} \leq e^{-2\mu\eta k}$ , and  $\sqrt{a+b} \leq \sqrt{a} + \sqrt{b}$  for  $a, b \geq 0$ .

Next, we prove (15). Consider the *unconstrained* minimizer  $\hat{\mathbf{W}} \triangleq \arg \min_{\mathbf{W} \in \mathbb{R}^{Nd}} G(\mathbf{W})$ . Therefore,  $\nabla G(\hat{\mathbf{W}}) = \nabla f(\hat{\mathbf{W}}) + \frac{\gamma}{\eta_{\max}} \Lambda^*(\mathbf{I}_{Nd} - \hat{\Omega})\hat{\mathbf{W}} = \mathbf{0}_{Nd}$ . From the multivariate mean value theorem, there exists  $\mathbf{A}$  with  $\mu\mathbf{I}_{Nd} \preceq \mathbf{A} \preceq L\mathbf{I}_{Nd}$  such that  $\nabla f(\hat{\mathbf{W}}) = \nabla f(\mathbf{1}_N \otimes \mathbf{w}^*) + \mathbf{A}(\hat{\mathbf{W}} - \mathbf{1}_N \otimes \mathbf{w}^*)$ . Combining it with  $\nabla G(\hat{\mathbf{W}}) = \mathbf{0}_{Nd}$ , it follows  $\|\hat{\mathbf{W}} - \mathbf{1}_N \otimes \mathbf{w}^*\| = \|\mathbf{B}^{-1} \nabla f(\mathbf{1}_N \otimes \mathbf{w}^*)\|$ , where we have defined  $\mathbf{B} \triangleq \mathbf{A} + \frac{\gamma}{\eta} \Lambda^*(\mathbf{I}_{Nd} - \hat{\Omega}) \succeq \mu\mathbf{I}_{Nd}$ . Noting that  $\nabla f(\mathbf{1}_N \otimes \mathbf{w}^*) \perp (\mathbf{1}_N \otimes \mathbf{I}_d)$  (in fact,  $\sum_i \nabla f_i(\mathbf{w}^*) = \mathbf{0}$  from the optimality condition on  $\mathbf{w}^*$ ), we can further bound it as

$$\|\hat{\mathbf{W}} - \mathbf{1}_N \otimes \mathbf{w}^*\| \leq \|\nabla f(\mathbf{1}_N \otimes \mathbf{w}^*)\| \max_{\mathbf{v} \perp (\mathbf{1}_N \otimes \mathbf{I}_d): \|\mathbf{v}\|=1} \|\mathbf{B}^{-1} \mathbf{v}\|.$$

Furthermore,  $\|\nabla f(\mathbf{1}_N \otimes \mathbf{w}^*)\| \leq \sqrt{N} \nabla_{\max}$ , and it can be proved (not shown due to space constraints, see [1]) that

$$\max_{\mathbf{v} \perp (\mathbf{1}_N \otimes \mathbf{I}_d): \|\mathbf{v}\|=1} \|\mathbf{B}^{-1} \mathbf{v}\| \leq \frac{2\sqrt{1+L/\mu} \eta}{\Lambda^*(1 - \rho_2) \gamma},$$

yielding  $\|\hat{\mathbf{W}} - \mathbf{1}_N \otimes \mathbf{w}^*\| \leq \frac{\sqrt{N} \nabla_{\max} \eta}{Z \gamma}$ . Next, we show that  $\hat{\mathbf{W}} \in \mathcal{W}^N$ , hence it coincides with the solution of the constrained problem and  $\hat{\mathbf{W}} = \mathbf{W}^{(G)}$ . Since  $\mathbf{w}^*$  is at distance  $\zeta$  from the boundary of  $\mathcal{W}$  (Assumption 2), it suffices to show that  $\mathbf{w}^*$  is closer to  $\hat{\mathbf{w}}_i$  than to the boundary of  $\mathcal{W}$ , i.e.  $\|\hat{\mathbf{w}}_i - \mathbf{w}^*\| \leq \zeta$ ,  $\forall i$ . This is a direct consequence of C2:  $\|\hat{\mathbf{w}}_i - \mathbf{w}^*\| \leq \|\hat{\mathbf{W}} - \mathbf{1}_N \otimes \mathbf{w}^*\| \leq \frac{\sqrt{N} \nabla_{\max} \eta}{Z \gamma}$ , hence  $\hat{\mathbf{W}} = \mathbf{W}^{(G)}$  and (15) follows.  $\square$

**Lemma 1.**  $\|\epsilon_k\|_{\mathbb{E}|\mathcal{F}_k}^2 \leq 2N[2Rd(\Lambda^* + \sigma^2/E)]^2 \triangleq \Sigma$ .

*Proof sketch.* Using (6), we rewrite  $\epsilon_{i,k}$  as

$$\epsilon_{i,k} = \sum_{m=1}^M (|r_{i,m}^k|^2 - \mathbb{E}[|r_{i,m}^k|^2 | \mathcal{F}_k]) (\mathbf{z}_m - \mathbf{w}_{i,k}).$$

Using the triangle inequality, we bound

$$\|\epsilon_{i,k}\|_{\mathbb{E}|\mathcal{F}_k} \leq \sum_{m=1}^M \text{sd}(|r_{i,m}^k|^2 | \mathcal{F}_k) \|\mathbf{z}_m - \mathbf{w}_{i,k}\|,$$

where  $\text{sd}(|r_{i,m}^k|^2 | \mathcal{F}_k)$  is the standard deviation of  $|r_{i,m}^k|^2$ , conditional on  $\mathcal{F}_k$ . Since  $|r_{i,m}^k|^2 | \mathcal{F}_k$  is exponentially distributed, it follows  $\text{sd}(|r_{i,m}^k|^2 | \mathcal{F}_k) = \mathbb{E}[|r_{i,m}^k|^2 | \mathcal{F}_k]$ . Moreover,  $\|\mathbf{z}_m - \mathbf{w}_{i,k}\| \leq \max_{m,m'} \|\mathbf{z}_m - \mathbf{z}_{m'}\| = 2\sqrt{2}Rd$ . Using (5), it then follows that  $\|\epsilon_{i,k}\|_{\mathbb{E}|\mathcal{F}_k} \leq 2\sqrt{2}Rd \left[ \sum_{j \in \mathcal{N}_i} \Lambda_{i,j} + \frac{\sigma^2}{E} \right]$ . The result directly follows after using  $\sum_{j \in \mathcal{N}_i} \Lambda_{i,j} \leq \Lambda^*$ , squaring both sides and adding over  $i$  ( $\|\epsilon_k\|_{\mathbb{E}|\mathcal{F}_k}^2 = \sum_i \|\epsilon_{i,k}\|_{\mathbb{E}|\mathcal{F}_k}^2$ ).  $\square$