

Quasi-convexity of the asymptotic channel MSE in regularized semi blind estimation

Abla Kammoun* (Contact Author), Karim Abed-Meraim*, and Sofène Affes[¶]

*Télécom-ParisTech 46, rue Barrault, 75634 Paris Cedex 13, France

[¶]INRS-EMT, 800, de la Gauchetière, Montreal, QC, H5A 1K6, Canada

Email: abed, kammoun@tsi.enst.fr, affes@emt.inrs.ca

Abstract—In this paper, the quasi-convexity of a sum of quadratic fractions in the form $\sum_{i=1}^n \frac{1+c_i x^2}{(1+d_i x)^2}$ is demonstrated where c_i and d_i are strictly positive scalars, when defined on the positive real axis \mathbb{R}^+ . It will be shown that this quasi-convexity guarantees it has a unique local (and hence global) minimum.

Indeed, this problem arises when considering the optimization of the weighting coefficient in regularized semi-blind channel identification problem, and more generally, is of interest in other contexts where we combine two different estimation criteria.

Note that V. Buchoux *et.al* have noticed by simulations that the considered function has no local minima except its unique global minimum but this is the first time this result, as well as the quasi-convexity of the function is proved theoretically.

Index Terms—Asymptotic analysis, Channel estimation, Exponential polynomial, Minimum MSE, Quasi-convexity, Regularization, Semi-blind estimation Asymptotic analysis, Channel estimation, Exponential polynomial, Minimum MSE, Quasi-convexity, Regularization, Semi-blind estimation A

I. INTRODUCTION

Many parameter estimation techniques use combined criteria to exploit different features or properties of the considered signals and hence improve the estimation performance. Examples of such combined techniques include the blind source separation (BSS) method in [1], and the blind equalization method in [2] where second and higher order statistics based criteria are combined to restore the source signals, and the channel equalization and offset estimation technique in [3], where again two criteria based on two different features of the transmit signals are jointly used to improve the receiver performance.

In [4], a similar approach is used for channel shortening in OFDM systems, and in [5], [6], semi-blind channel identification methods are considered where data-aided and blind techniques are combined together to shorten the training sequence while preserving a high channel estimation quality.

When combining two criteria, one uses a weighting parameter that needs to be optimized. In [7], the weighting coefficient is optimized in such a way the asymptotic mean square error (MSE) of the channel estimate is minimum.

The latter is shown to be a non-linear function and its optimization in [7] is done numerically using a line search algorithm.

In this paper, we demonstrate that the previous asymptotic MSE function is quasi-convex which provides a guarantee that numerical optimization always leads to the desired optimal weighting parameter value.

Moreover, one can observe that many asymptotic MSE functions have similar forms to that in [7] and thus, we believe the result given in this paper might be extended and adapted to other problems, where an optimal weighting coefficient is needed to combine two contrast functions. As an example, we can cite the case where a contrast function is linearly combined with an MSE criterion. Referring to the work in [8], we can easily show that in this case, the expression of the asymptotic MSE has the same form as the one described in [7].

From the mathematics point of view, our work can be viewed as a contribution to the study of the roots of real exponential polynomials. It should be noted that this issue has been studied for general cases in [9], where interesting results about the number of roots of real exponential polynomials with real frequencies have been presented. Unfortunately, these results yield a loose bound for the number of roots of the considered exponential polynomial and thus are of no interest for our particular case given by (12). We have provided in our work an original proof that takes into consideration the specifications of the considered exponential polynomial.

The paper is organized as follows. Section II summarizes the results in [7] and shows that the considered MSE optimization problem can be cast into the optimization problem of a sum of quadratic fractions of the form:

$$\sum_{i=1}^n \frac{1+c_i x^2}{(1+d_i x)^2}, \quad c_i > 0, d_i > 0.$$

Section III and IV are completely devoted to the derivation and the proof of the quasi-convexity of the asymptotic MSE function. In particular, section III contains some basic notions and results about quasi-convex functions. Conclusion and final remarks are given in section V.

Notation: Operators H , $^{-1}$ and Tr denote Hermitian, matrix inversion and trace operators. Moreover, the real and imaginary parts of a complex z are denoted respectively by $\text{Re}(z)$ and $\text{Im}(z)$.

II. REGULARIZED SEMI-BLIND CHANNEL ESTIMATION

In many signal processing applications, the major problem is to find out how to estimate some parameters at a low cost and with a good accuracy. The best estimate we can have is obtained by taking into account all the information that we can get about the desired parameter. This approach involves in general high computational complexity, thus restricting its interest to only theoretical issues.

Actually, in practice, suboptimal approaches retain only one kind of information on which they are based to derive a minimization problem with only a single criterion. An intermediate approach that is based on linearly combining competitive criteria has been recently proposed in many signal processing applications. For instance, in [4], the channel shortening is being improved by linearly combining the null tones criterion with that of the guard interval. Also in the context of estimating sparse parameter vectors, \mathcal{L}_p (where $p < 1$) quasi-norms are often linearly combined to standard statistical criteria, thus allowing to take into account the sparsity of the desired solution [10].

The optimal selection of the regularizing parameter that makes the best trade-off between two different criteria is important for the considered parameter estimation problem. To the best of our knowledge, the minimization of the mean square estimation error with respect to the regularizing coefficient has been only analysed rigorously in [7], in the context of semi-blind channel estimation.

Since we will heavily rely on the asymptotic expression derived in [7], it may be illuminating to provide a brief overview on the regularized semi-blind estimation technique.

Regularized semi-blind estimation technique combines blind and training based criteria. They have been introduced first in the context of Single Input Multiple Output (SIMO) systems. In this case, if s_k denotes the unit power transmitted signal, the vector received by the N receiving antennas \mathbf{y}_k is given by:

$$\mathbf{y}_k = \sum_{l=0}^L \mathbf{h}_l s_{k-l} + \mathbf{v}_k \quad (1)$$

where \mathbf{h}_l is the $N \times 1$ vector of the l -th tap of the channel impulse response and \mathbf{v}_k denotes the additive Gaussian noise. We assume that each frame is composed of training and data period, (see fig 1). The training period corresponds to the




Fig. 1. Time-Multiplexed Training Scheme

transmission of ℓ known symbols which are often referred to as pilots, whereas the data period corresponds to the transmission of p data symbols.

The blind criterion is based on the statistical properties of the received signal in the data period and can be put on the form:

$$\min_{\|\mathbf{h}\|=1} \mathbf{h}^H \mathbf{Q} \mathbf{h} \quad (2)$$

where \mathbf{h} is the channel parameter and \mathbf{Q} is a matrix that depends solely on the statistical properties of the received signal. On the other hand, the training based criterion can be expressed as;

$$\min_{\mathbf{h}} \|\mathbf{y} - \mathbf{S}\mathbf{h}\|^2 \quad (3)$$

where \mathbf{y} is the received signal and \mathbf{S} is a matrix that depends on the pilot symbols. In contrast to blind estimation methods,

training based techniques are more sensitive to noise and entail inefficient bandwidth utilization. However, blind methods are more complex, estimate the channel only up to a scalar ambiguity and are often non-robust to modelization errors (e.g. channel order overestimation errors) [11]. For these reasons, it might be interesting to combine linearly both criteria so as to resolve the drawbacks inherent to blind and training based techniques. Hence, the semi-blind estimate is the one that minimizes:

$$\min_{\mathbf{h}} \|\mathbf{y} - \mathbf{S}\mathbf{h}\|^2 + \lambda p \mathbf{h}^H \mathbf{Q} \mathbf{h} \quad (4)$$

where $\lambda > 0$ is the regularizing coefficient and p is the length of the information sequence. Note that the semi-blind approach in (4) outperforms the blind approach in (2) and the non-blind approach in (3) only if the regularizing scalar λ is chosen properly. In particular, this would be the case if λ is selected in such a way the asymptotic estimation error variance is minimized. Our result is also useful to derive a relation between the optimal MSE* and the percentage of training symbols which can be adjusted to achieve a target MSE performance.

It has been proved in [7] that the trace of the asymptotic¹ estimation mean-square error (MSE) is proportional to:

$$\text{MSE} \propto \text{Tr} \left\{ (\mathbf{I} + \lambda \gamma \mathbf{Q})^{-1} (\mathbf{I} + \lambda^2 \gamma \mathcal{M}(\mathbf{h})) (\mathbf{I} + \lambda \gamma \mathbf{Q})^{-1} \right\}$$

where $\gamma = \frac{p}{\ell}$, and $\mathcal{M}(\mathbf{h})$ is a Hermitian matrix that has the same row and column space as \mathbf{Q} (meaning that if $\mathbf{Q} = \mathbf{U}\mathbf{D}\mathbf{U}^H$ is the eigenvalue decomposition of \mathbf{Q} , $\mathcal{M}(\mathbf{h})$ writes as $\mathcal{M}(\mathbf{h}) = \mathbf{U}\mathbf{A}\mathbf{U}^H$, where \mathbf{A} is a given Hermitian matrix.).

Using the eigenvalue decomposition of \mathbf{Q} , it can be easily verified that the MSE is proportional to:

$$\text{MSE} \propto \sum_i \frac{1 + \lambda^2 \gamma a_{ii}}{(1 + \lambda \gamma d_{ii})^2} \quad (5)$$

where $a_{ii} > 0$ (resp. $d_{ii} > 0$) denote the diagonal elements of \mathbf{A} (resp. the non zero diagonal elements of \mathbf{D}).

Note that in [7] and [12], it was noticed by simulations that the MSE has a unique local (global) minimum with respect to λ , but to the best of our knowledge, until now, this result has not been proved in any previous work.

III. QUASI-CONVEXITY OF THE MEAN SQUARE ERROR

For the reader convenience, we recall hereafter the definition and also some results about quasi-convex functions. (we refer the reader to [13] for further information).

Definition 1: A real valued function f is said to be quasi-convex if its domain of definition and all its sublevel sets:

$$S_\alpha = \{x \in \text{dom}f | f(x) \leq \alpha\}$$

for $\alpha \in \mathbb{R}$, are convex, where $\text{dom}f$ denotes the set over which the function f is defined.

Examples of quasi-convex functions To illustrate this concept, we provide in fig 2 some examples of quasi-convex

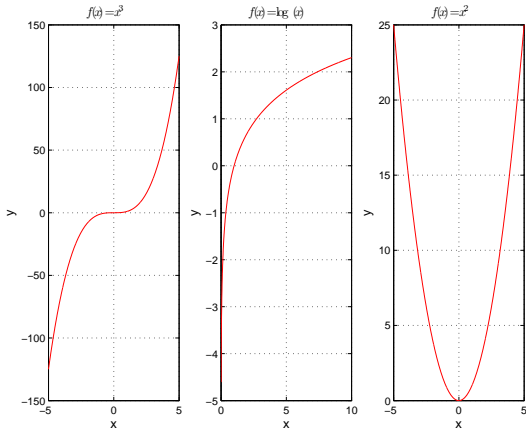


Fig. 2. Examples of quasi-convex functions

functions. As we can see, we note that a concave and also a non convex function can be also quasi-convex.

Like convex functions, quasi-convex functions satisfy a modified Jensen inequality which is given by:

Theorem 1: A function f is quasi-convex if and only if $\text{dom} f$ is convex and for all $x, y \in \text{dom}(f)$ and $0 \leq \theta \leq 1$

$$f(\theta x + (1 - \theta)y) \leq \max\{f(x), f(y)\}.$$

Clearly, the quasi-convexity generalizes the notion of convexity in the sense that the class of quasi-convex functions is larger than and includes the class of convex functions. Also, in most cases, quasi-convex functions inherit the nice properties of convex functions including the absence of local minimum as stated in the following theorem.

Theorem 2: Let f be a quasi-convex function. Then every local minimum is a global minimum or f is constant in a neighborhood of this local minimum.

Consequently, if a quasi-convex function f is non constant over any given interval (which is the case for the sum of quadratic functions we consider), then each local minimum is also a global minimum. Moreover, this global minimum (whenever it exists) is unique for real valued functions. To prove the non existence of local minima besides the global one, we use often the following second-order condition:

Theorem 3: Let f be a real function which is twice derivable. If f satisfies:

$$\forall c \text{ such that } f'(c) = 0, f''(c) > 0,$$

then, f is quasi-convex, and each local minimum is a global minimum.

Next we state our main result regarding the unimodality of the asymptotic MSE then we prove it in the section after.

Theorem 4: Let c_i, d_i be two sequences of $n \in \mathbb{N}^*$ strictly positive reals. Then the derivative of

$$F_n(x) = \sum_{i=1}^n \frac{1 + c_i x^2}{(1 + d_i x)^2} \quad (6)$$

¹Asymptotic refers to the case where $p \rightarrow \infty, \ell \rightarrow \infty$ and the ratio $\frac{p}{\ell} \rightarrow \gamma$.

has a unique positive zero x_0 with $F_n^{(2)}(x_0) > 0$. Consequently, $F_n(x)$ is a quasi-convex function when its domain of definition is restricted to \mathbb{R}^+ and hence has a unique local (global) minimum on the positive real axis. In the sequel, we will omit the index n for notational simplicity so that F_n will be referred to as F .

To prove this theorem, we proceed in the following steps.

- First, we show that the number of positive real values of $F^{(k+1)}$ is larger or equal than that of $F^{(k)}$, where $F^{(k)}$ denotes the k -th derivative of F .
- We introduce the function G_k which has the same number of zeros as $F^{(k)}$ and prove that it converges uniformly to G_∞ , over a compact set that contains all the zeros of $F^{(k)}$.
- Then we prove that G_∞ has a unique positive zero in that compact set.
- By applying Hurwitz theorem [14], we conclude that for large values of k , G_k is zero only once and that will be also the case of $F^{(k)}$.
- Finally, we prove that the second derivative of F is strictly positive when evaluated at the zero argument of F . Fig 3 illustrates the shape of function F and its first and second order derivatives, for $n = 3$.

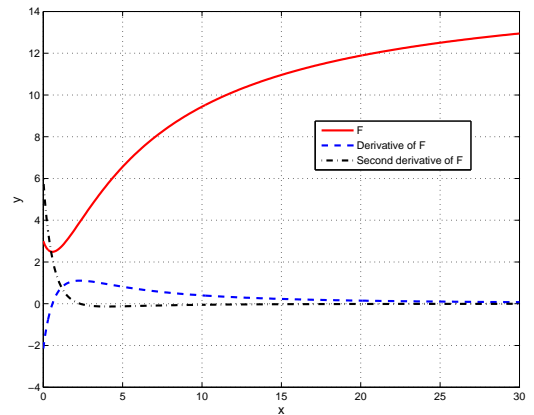


Fig. 3. Function F and its first and second order derivatives

Next section provides the details of all these steps and their proofs.

IV. ANALYSIS AND PROPERTIES OF F

A. Closed-form expressions for the derivatives of F

In this subsection, we provide a closed form expression for the k -th derivative of function F . We also show that the number of zeros of the k -th derivative is increasing with k .

Lemma 1: The k -th derivative of $F(x)$ ($k > 0$) can be put on the following expression:

$$F^{(k)}(x) = (-1)^{k+1} \sum_{i=1}^n \frac{b_{i,k}x - a_{i,k}}{(1 + d_i x)^{k+2}} \quad (7)$$

where $a_{i,k}$ and $b_{i,k}$ are sequences of positive reals given by:

$$\begin{cases} b_{i,k} &= 2k!c_i d_i^{k-1} \\ a_{i,k} &= 2k!c_i d_i^{k-1} \left(\frac{k+1}{2} \frac{d_i}{c_i} + \frac{k-1}{2d_i} \right) \end{cases}$$

Proof: See Appendix A. ■

Given the previous expressions of $F^{(k)}$, we are able to prove our first step result concerning the increasing number of zeros of $F^{(k)}$. We have the following lemma:

Lemma 2: Let Z_k denote the number of zeros of the k -th derivative of F given by (7). Then $Z_{k+1} \geq Z_k$.

Proof: Let x_1, \dots, x_{Z_k} denote the zeros of the k -th derivative $F^{(k)}$ in $[0, \infty[$. Therefore, using Rolle's Theorem [15], $F^{(k+1)}$ has at least $Z_k - 1$ zeros y_1, \dots, y_{Z_k-1} where $x_i \leq y_i \leq x_{i+1}, i \in \{1, \dots, Z_k - 1\}$. Since $\lim_{x \rightarrow +\infty} F^{(k)}(x) = 0$, there exist at least one zero of $F^{(k+1)}$ in $[x_{Z_k}, \infty[$. Consequently, the number of zeros of $F^{(k+1)}$ is at least equal to $Z^{(k)}$, i.e. $Z_{k+1} \geq Z_k$. ■

B. Uniform equivalence of G_k

In this subsection, we introduce an alternative function G_k that has the same number of positive valued zeros as $F^{(k)}$ and we provide its asymptotic equivalent expression. For that, let us start by providing a useful approximation of coefficient $a_{i,k}$ that will be used later to build the function G_k .

The Stirling formulae [16] provides us an equivalent² for $k!$:

$$k! \sim \sqrt{2\pi k} \left(\frac{k}{e}\right)^k$$

we can easily show that:

$$\begin{aligned} a_{i,k} &\sim \sqrt{2\pi k} k^{k+\frac{3}{2}} e^{-k} c_i d_i^{k-1} \left(\frac{d_i}{c_i} + \frac{1}{d_i}\right) \\ &\sim \sqrt{2\pi k} k^{k+\frac{3}{2}} e^{-k} c_i d_i^{k+2} \left(\frac{1}{c_i d_i^2} + \frac{1}{d_i^4}\right). \end{aligned} \quad (8)$$

We recall that the overall quasi-convexity proof is based on studying the zeros of the function $F^{(k)}$ as k goes to infinity. Actually, one can show³ that these zeros belong to the interval $[V_{\min}^k, V_{\max}^k]$, where $V_{\min}^k = \min_{i \in \{1, \dots, n\}} \frac{a_{i,k}}{b_{i,k}}$ and $V_{\max}^k = \max_{i \in \{1, \dots, n\}} \frac{a_{i,k}}{b_{i,k}}$. A lower bound for V_{\min}^k and an upper bound for V_{\max}^k can be easily computed and are given by:

$$V_{\min}^k \geq k\tau_{\min} \quad (9)$$

$$V_{\max}^k \leq k\tau_{\max} \quad (10)$$

where $\tau_{\min} = \min_{i \in \{1, \dots, n\}} \frac{d_i}{2c_i}$ and $\tau_{\max} = \max_{i \in \{1, \dots, n\}} \frac{d_i}{c_i} + \frac{1}{2d_i}$.

The difficulty that we face is that the zeros of $F^{(k)}$ are of order k , thus making the analysis of the asymptotic behavior of function $F^{(k)}$ somehow delicate. To deal with this difficulty, another function, which we denote by G_k , and which brings back those zeros to a given fixed interval is introduced. This function will be studied over the interval of interest $[\tau_{\min}, \tau_{\max}]$.

²Equivalence here means that $\frac{k!}{\sqrt{2\pi k} \left(\frac{k}{e}\right)^k} \xrightarrow[k \rightarrow \infty]{} 1$

³Outside this interval, all the terms in the sum given by (7) have the same sign and hence $F^{(k)}$ cannot be zero.

Function G_k is defined as:

$$G_k(x) = (-1)^{k+1} \sqrt{\frac{k}{2\pi}} e^k x^{k+2} F^{(k)}(kx) \quad (11)$$

One can easily note that over $[\tau_{\min}, \tau_{\max}]$, $G_k(x)$ has the same number of zeros as $F^{(k)}$.

Clearly, the scaling of the variable x by factor k is introduced to bring back the roots of $F^{(k)}$ from the interval $[k\tau_{\min}, k\tau_{\max}]$ to the finite length interval $[\tau_{\min}, \tau_{\max}]$. The multiplicative function in (11) (i.e. $\sqrt{\frac{k}{2\pi}} e^k x^{k+2}$) is introduced to normalize the coefficient $a_{i,k}$ and $b_{i,k}$ and to approximate the denominator terms in (7) by exponential functions.

Substituting $F^{(k)}$ by its expression in (7), G_k writes as:

$$\begin{aligned} G_k(x) &= \sqrt{\frac{k}{2\pi}} e^k x^{k+2} \sum_{i=1}^n \frac{k b_{i,k} x - a_{i,k}}{(1 + k d_i x)^{k+2}} \\ &= \sqrt{\frac{k}{2\pi}} e^k \sum_{i=1}^n \frac{a_{i,k} \left(\frac{k b_{i,k}}{a_{i,k}} x - 1\right)}{k^{k+2} d_i^{k+2} \left(\frac{1}{k d_i x} + 1\right)^{k+2}} \\ &\triangleq \sum_{i=1}^n \frac{g_{i,k}(x)}{h_{i,k}(x)} \end{aligned}$$

where $g_{i,k}(x) \triangleq \frac{\sqrt{k} e^k}{\sqrt{2\pi} d_i^{k+2} k^{k+2}} a_{i,k} \left(\frac{k b_{i,k}}{a_{i,k}} x - 1\right)$ and $h_{i,k}(x) = \left(\frac{1}{k d_i x} + 1\right)^{k+2}$.

In the following, we extend the domain of the function G_k to the rectangle R of \mathbb{C} given by:

$$\mathcal{R}_\epsilon = \{z = x + iy, x \in [\tau_{\min}, \tau_{\max}], -\epsilon \leq y \leq \epsilon\}$$

where ϵ is a constant real that will be specified later. Over this domain, the asymptotic equivalent of G_k is given by the following theorem: From the previously stated lemma, one can prove easily the following result:

Theorem 5: In the rectangle \mathcal{R}_ϵ , G_k converges uniformly to G_∞ given by:

$$G_\infty(z) = \sum_{i=1}^n c_i \left(\frac{1}{c_i d_i^2} + \frac{1}{d_i^4}\right) (V_{\infty,i} z - 1) e^{-\frac{1}{d_i z}}$$

where $V_{\infty,i} = \frac{2}{\frac{d_i}{c_i} + \frac{1}{d_i}}$.

Proof: See Appendix B. ■

C. Zeros of the uniform limit of G_k

In this section, we prove that G_∞ has a unique positive real zero. This is a byproduct of the following theorem:

Theorem 6: Let a_i , b_i and α_i three sequences of n strictly positive real scalars. Let f be the function given by:

$$f(x) = \sum_{i=1}^n (a_i x - b_i) e^{-\alpha_i x} \quad (12)$$

Then f admits a unique real positive zero.

Proof: See Appendix C. ■

By defining $f(z) = z G_\infty\left(\frac{1}{z}\right)$ and applying Theorem 6, we conclude that $G_\infty(z)$ has a unique real positive zero.

D. Application of Hurwitz theorem

To prove that from a certain range of k G_k is zero only once at the real positive axis, we will rely on the following known result in complex analysis, [14]:

Theorem 7: Let $f_k(z)$ be a sequence of analytic functions in a compact \mathbf{C} . Assume that f_k converges uniformly to f in \mathbf{C} . Assume also that f has no zeros on the frontier $\partial\mathbf{C}$ of \mathbf{C} . Then, there exists $k_0 \in \mathbb{N}$ such that $\forall k \geq k_0$, f and f_k have the same number of zeros in \mathbf{C} .

Applying this theorem, we can deduce that, G_k will have a unique zero value in \mathcal{R}_ϵ as G_∞ , where ϵ is chosen so that G_∞ has no zeros on the frontier of \mathcal{R}_ϵ and has no complex zeros besides its real positive zero. Since the number of zeros of G_k is increasing with respect to k , we conclude that all G_k and hence all $F^{(k)}$ have only a unique positive zero.

Let x_z be the unique positive zero argument of $F^{(1)}$. Since $F^{(1)}$ is negative in a neighborhood of zero, and $F^{(1)}$ has no zeros for $x \leq x_z$, $F^{(1)}$ is negative in the interval $[0, x_z]$. Therefore the function F is decreasing in $[0, x_z]$.

Since $F^{(1)}$ is positive for large value of x , $F^{(1)}$ must change its sign at x_z , and hence it is positive in the interval $[x_z, \infty[$. Consequently, F is increasing in $[x_z, \infty[$.

To sum up, we have established that in $[0, x_z]$, F is decreasing and in $[x_z, \infty[$ F is increasing. This guarantees that x_z is a minimum for F and hence $F^{(2)}(x_z) \geq 0$. In fact, $F^{(2)}(x_z)$ is strictly positive, since $F^{(1)}(x_z) = 0$ and $\lim_{x \rightarrow \infty} F^{(1)}(x) = 0$ means that there exists $y_z \in]x_z, \infty[$ such that $F^{(2)}(y_z) = 0$ and hence $F^{(2)}(x_z) \neq 0$ (because $F^{(2)}$ has a unique zero).

V. CONCLUSION

In this paper, we have provided a rigorous proof for the quasi-convexity of the asymptotic MSE of the regularized semi-blind channel estimate.

More generally, we have proved that any function given by a finite sum of quadratic fractions $\frac{1+cx^2}{(1+dx)^2}$, $c, d > 0$ is a unimodal function over \mathbb{R}^+ .

For our considered channel estimation problem, the previous result guarantees the absence of non-desired local minima of the MSE function when optimized with respect to the weighting coefficient.

APPENDIX A PROOF OF LEMMA 1

Proof: Lemma 1 can be proved easily by induction on k . For $k = 1$, we have:

$$\begin{aligned} F^{(1)}(x) &= \sum_{i=1}^n \frac{2c_i x(1+d_i x)^2 - 2d_i(1+c_i x^2)(1+d_i x)}{(1+d_i x)^4} \\ &= \sum_{i=1}^n \frac{(1+d_i x)(2c_i x(1+d_i x) - 2d_i(1+c_i x^2))}{(1+d_i x)^4} \\ &= \sum_{i=1}^n 2 \frac{c_i x - d_i}{(1+d_i x)^3} \end{aligned}$$

Let $k \in \mathbb{N}^*$. Assume that the result is true until order k . Hence, $F_n^{(k)}$ can be written as:

$$F^{(k)}(x) = (-1)^{k+1} \sum_{i=1}^n \frac{b_{i,k} x - a_{i,k}}{(1+d_i x)^{k+2}}$$

Therefore,

$$\begin{aligned} F^{(k+1)}(x) &= (-1)^{k+1} \left(\sum_{i=1}^n \frac{b_{i,k}(1+d_i x)^{k+2}}{(1+d_i x)^{2k+4}} \right. \\ &\quad \left. - \frac{(k+2)d_i(1+d_i x)^{k+1}(b_{i,k} x - a_{i,k})}{(1+d_i x)^{2k+4}} \right) \\ &= (-1)^{k+1} \sum_{i=1}^n \frac{b_{i,k} + (k+2)d_i a_{i,k} - (k+1)d_i b_{i,k} x}{(1+d_i x)^{k+3}} \\ &= (-1)^{k+2} \sum_{i=1}^n \frac{(k+1)b_{i,k} d_i x - (b_{i,k} + (k+2)d_i a_{i,k})}{(1+d_i x)^{k+3}} \\ &= (-1)^{k+2} \sum_{i=1}^n \frac{b_{i,k+1} x - a_{i,k+1}}{(1+d_i x)^{k+3}} \end{aligned}$$

where $b_{i,k+1} = (k+1)b_{i,k}d_i$ and $a_{i,k+1} = (b_{i,k} + (k+2)d_i a_{i,k})$. Since $b_{i,k} = 2k!d_i^{k-1}c_i$, we get $b_{i,k+1} = 2(k+1)!d_i^k c_i$.

Also,

$$\begin{aligned} a_{i,k+1} &= b_{i,k} + (k+2)d_i a_{i,k} \\ &= 2k!c_i d_i^{k-1} + 2k!(k+2)d_i^k c_i \left(\frac{k+1}{2} \frac{d_i}{c_i} + \frac{k-1}{2d_i} \right) \\ &= 2(k+1)!c_i d_i^k \left(\frac{1}{(k+1)d_i} + \frac{k+2}{k+1} \left(\frac{k+1}{2} \frac{d_i}{c_i} + \frac{k-1}{2d_i} \right) \right) \\ &= 2(k+1)!c_i d_i^k \left(\frac{k}{2d_i} + \frac{k+2}{2} \frac{d_i}{c_i} \right). \end{aligned}$$

■

APPENDIX B PROOF OF THEOREM 5

In this lemma, we propose to find the uniform-limit function for the function $G_k(z) = \sum_{i=1}^n \frac{h_{i,k}(z)}{g_{i,k}(z)}$ in the rectangle \mathcal{R}_ϵ . For that, we will first begin by finding the uniform limit functions of $h_{i,k}$ and $g_{i,k}$.

Lemma 3: In the rectangle \mathcal{R}_ϵ , the sequence of functions $(h_{i,k})_k$ converges uniformly to $h_{i,\infty}$ given by:

$$h_{i,\infty}(z) = e^{\frac{1}{d_i z}}$$

Also, the sequence of functions $(g_{i,k})_k$ converges uniformly to $g_{i,\infty}$ given by:

$$g_{i,\infty} = c_i \left(\frac{1}{c_i d_i^2} + \frac{1}{d_i^4} \right) (V_{\infty,i} z - 1)$$

where $V_{\infty,i} = \lim_{k \rightarrow \infty} \frac{k b_{i,k}}{a_{i,k}} = \frac{2}{\frac{d_i}{c_i} + \frac{1}{d_i}}$.

Proof:

The uniform convergence of $h_{i,k}$ to $h_{i,\infty}$ is a by-product of the following known result:

Lemma 4: Over a compact set the sequence function $(1 + \frac{z}{n})^n$ converges uniformly to e^z .

The uniform convergence of $g_{i,k}$ to $g_{i,\infty}$ is obtained by using the asymptotic equivalent of $a_{i,k}$ given in (8). ■

The uniform convergence of $h_{i,k}$ to $h_{i,\infty}$ and of $g_{i,k}$ to $g_{i,\infty}$ does not ensure the uniform convergence of $\frac{g_{i,k}}{h_{i,k}}$ to $\frac{g_{i,\infty}}{h_{i,\infty}}$.

Other extra conditions are needed as it will be noticed in the following lemma:

Lemma 5: Let f_k and g_k denote sequences of continuous functions over a compact C . Assume that g_k is bounded over C away from zero uniformly in k and in z , i.e there exists a constant M such that:

$$\forall k \in \mathbb{N}, \forall z \in C \quad |g_k(z)| > M.$$

Assume also that f_k and g_k converge uniformly to f_∞ and g_∞ . Then, $\frac{f_k}{g_k}$ converges uniformly to $\frac{f_\infty}{g_\infty}$ over the compact C .

Proof: Since f_k and g_k are continuous, their uniform limits f_∞ and g_∞ are also continuous. Therefore, there exists constant reals M_f, M_g such that:

$$\forall z \in C, |f_\infty(z)| \leq M_f \quad \text{and} \quad |g_\infty(z)| \leq M_g.$$

Since for all $k \in \mathbb{N}$, $|g_k(z)| > M$, we have $|g_\infty(z)| > M$. To prove the uniform convergence of $\frac{f_k}{g_k}$ towards $\frac{f_\infty}{g_\infty}$, it is sufficient to prove that $\sup_{z \in C} \left| \frac{f_k}{g_k} - \frac{f}{g} \right|$ converges to zero as k tends to infinity. We have:

$$\begin{aligned} \sup_{z \in C} \left| \frac{f_k}{g_k} - \frac{f}{g} \right| &= \sup_{z \in C} \left| \frac{f_k g - f g_k}{g_k g} \right| \\ &\leq \sup_{z \in C} \left| \frac{f_k g - f g_k}{M^2} \right| \\ &\leq \frac{1}{M^2} \left(\sup_{z \in C} |f_k g - f g| + \sup_{z \in C} |f g - f g_k| \right) \\ &\leq \frac{1}{M^2} \left(M_g \sup_{z \in C} |f_k - f| + M_f \sup_{z \in C} |g_k - g| \right) \\ &\xrightarrow[k \rightarrow \infty]{} 0 \end{aligned}$$

which proves that $\frac{f_k}{g_k}$ converges uniformly to $\frac{f_\infty}{g_\infty}$. ■

Since $|h_{i,k}(z)| > 1$ over \mathcal{R}_ϵ , $h_{i,k}$ satisfies the condition of lemma 5. Applying this lemma on the functions $g_{i,k}$ and $h_{i,k}$, we prove that $\frac{g_{i,k}}{h_{i,k}}$ converges uniformly to $\frac{g_{i,\infty}}{h_{i,\infty}}$.

Consequently, $G_k(z) = \sum_{i=1}^n \frac{g_{i,k}(z)}{h_{i,k}(z)}$ converges uniformly over

$$\mathcal{R}_\epsilon \text{ to } G_\infty(z) = \sum_{i=1}^n \frac{g_{i,\infty}(z)}{h_{i,\infty}(z)}.$$

APPENDIX C PROOF OF THEOREM 6

The proof is performed by induction on n . For $n = 1$, the result is straightforward. Let $n \in \mathbb{N}^*$ be a given integer, and assume that the result holds true for all $k \leq n$, and all functions f of the form given by (12). Assume that there exists

a_i, b_i and α_i three sequences of $n + 1$ strictly positive real scalars such that the function

$$f(x) = \sum_{i=1}^{n+1} (a_i x - b_i) e^{-\alpha_i x}$$

admits more than one positive zero. Let x_1 be the first smallest zero of f on \mathbb{R}^+ ,

Without loss of generality, we can assume that all the α_i are two by two different and that $\alpha_{n+1} = \min_{1 \leq i \leq n+1} \alpha_i$. Since f is strictly negative in zero and is positive for large values of x , f should change its sign at at least one zero. In the following we will consider only the case when f changes its sign at x_1 . The other case could be treated in the same way. Let x_2 be the second smallest zero of f on \mathbb{R}^+ . Under this condition, we distinguish the following cases:

- f changes its sign at x_1 and at x_2 .
- f changes its sign only at x_1 .

For the both cases, we can prove that the second derivative of

$$\begin{aligned} g_m(x) &= e^{(\alpha_{n+1} - \frac{1}{m})x} f(x) \\ &= \sum_{i=1}^n (a_i x - b_i) e^{-(\alpha_i - \alpha_{n+1} + \frac{1}{m})x} + (a_{n+1} x - b_{n+1}) e^{-\frac{x}{m}}, \\ &\quad \text{for } m \in \mathbb{N}^* \end{aligned}$$

has three zeros. More particularly, we have the following:

Case 1: f changes its sign at x_1 and at x_2

Since $f(0) < 0$, $f(x) < 0$ for $x \leq x_1$. Therefore, for $x \geq x_2$ and in the vicinity of x_2 , $f(x) < 0$ for $x \geq x_2$. Since $f(x) > 0$ for x large enough, f should have a third zero $x_3 > x_2$.

For all integers m , we note that f and g_m have the same number of zeros. Using Rolles theorem, it can be proved that the derivative of g_m which we denote $g_m^{(1)}$ and which is given by:

$$g_m^{(1)}(x) = \sum_{i=1}^n \left[-(\alpha_i - \alpha_{n+1} + \frac{1}{m}) a_i x + b_i (\alpha_i - \alpha_{n+1} + \frac{1}{m}) \right. \tag{13}$$

$$\left. + a_i \right] \times e^{-(\alpha_i - \alpha_{n+1} + \frac{1}{m})x} + a_{n+1} e^{-\frac{x}{m}} - \frac{1}{m} (a_{n+1} x \tag{14}$$

$$- b_{n+1}) e^{-\frac{x}{m}} \tag{15}$$

has at least three zeros, since $g_m^{(1)}(x)$ tends to zero as x tends to infinity.

Also again by using the Rolle's theorem, we conclude that the second derivative of g_m denoted by $g_m^{(2)}(x)$ has at least two zeros.

Case 2: f changes its sign at only one zero In this case, we can also prove that the first derivative of g_m has three zeros. Actually, at x_2 , the first derivative of g_m must be also zero, since x_2 is a local minimum for f and hence for g_m . As g_m tends to zero when x tends to infinity, $g_m^{(1)}$ has two zeros between $]x_1, x_2[$ and $]x_2, \infty[$. Consequently, in total, $g_m^{(1)}$ has at least three zeros, and therefore, the second derivative of g_m denoted has at least two zeros.

Taking the derivative of (15), $g_m^{(2)}(x)$ writes as:

$$g_m^{(2)}(x) = \sum_{i=1}^n (\alpha_i - \alpha_{n+1} + \frac{1}{m}) \left[a_i (\alpha_i - \alpha_{n+1} + \frac{1}{m}) x - 2a_i - b_i (\alpha_i - \alpha_{n+1} + \frac{1}{m}) \right] e^{-(\alpha_i - \alpha_{n+1} + \frac{1}{m})x} - \frac{2}{m} a_{n+1} e^{-\frac{1}{m}x} + \frac{1}{m^2} (a_{n+1}x - b_{n+1}) e^{-\frac{x}{m}}$$

Extending the definition domain of $g_m^{(2)}$ to $\mathbb{C}^+ = \{z = x + iy, x > 0\}$, we note that for every compact in \mathbb{C}^+ , $g_m^{(2)}$ converges uniformly to g_∞ given by:

$$g_\infty(z) = \sum_{i=1}^n (\alpha_i - \alpha_{n+1}) (a_i (\alpha_i - \alpha_{n+1}) z - 2a_i - b_i (\alpha_i - \alpha_{n+1})) e^{-(\alpha_i - \alpha_{n+1})z}$$

Let \mathcal{C} be the contour corresponding to the rectangle

$$R_\epsilon = \left\{ x + iy, x \in \left[\inf_{m,i} \frac{2a_i + b_i(\alpha_i - \alpha_{n+1}) + \frac{1}{m}}{a_i(\alpha_i - \alpha_{n+1} + \frac{1}{m})}, \sup_{m,i} \frac{2a_i + b_i(\alpha_i - \alpha_{n+1}) + \frac{1}{m}}{a_i(\alpha_i - \alpha_{n+1} + \frac{1}{m})} \right], y \in [-\epsilon, \epsilon] \right\},$$

ϵ is chosen such that $|g_\infty|$ is bounded above zero in \mathcal{C} and has no complex valued zeros. Then referring to Hurwitz theorem, g_∞ and $g_m^{(2)}$ will have the same number of zeros in R_ϵ for large enough values of m , which is in contradiction with the induction assumption.

REFERENCES

- [1] M. Klajman and A. G. Constantinides, "A weighted mixed statistics algorithm for blind source separation," *EUSIPCO*, vol. II, pp. 115–118, 2002.
- [2] M. Corlay, P. Duhamel, and M. Charbit, "A Combination of Statistical and Structural Approaches in Blind Equalization," *34th Asilomar Conference on Signals, Systems and Computers*, vol. 2, pp. 1207–1211, 2000.
- [3] A. Djebbar-Bouzi, K. Abed-Meraim, and A. Djebbari, "Blind Channel Equalization and Carrier Frequency Offset Estimation for MC-CDMA systems Using Guard Interval Redundancy and Excess Codes," *International Journal of Electronics and Communications*, vol. 63, pp. 220–225, 2009.
- [4] T. Ben Jabeur, K. Abed-Meraim, and H. Boujemaa, "Blind channel shortening in OFDM system using nulltones and cyclic prefix," *ICASSP*, pp. 3041–3044, March 2008.
- [5] G. Li and Z. Ding, "Semi-Blind Channel Identification for Individual Data Bursts in GSM Wireless Systems," *Signal Processing*, vol. 80, no. 10, pp. 2017–2031, October 2000.
- [6] A. A. Rontogiannis, K. Berberifis, A. Marava, and J. Palicot, "Efficient Semi-Blind Estimation of Multipath Channel Parameters Via a Delay Decoupling Optimization Approach," *Signal Processing*, vol. 85, no. 12, pp. 2394–2411, 2005.
- [7] V. Buchoux, O. Cappé, E. Moulines, and A. Gorokhov, "On the Performance of Semi-Blind Subspace-Based Channel Estimation," *IEEE Transactions on Signal Processing*, 2000.
- [8] Jean-Francois Cardoso and Eric Moulines, "Minimum contrast estimation with application to array processing," in *International Conference on Acoustics Speech and Signal Processing*, 1993, vol. 4, pp. 384–387.
- [9] F. Wielonsky, "A Rolle's Theorem for Real Exponential Polynomials in the Complex Domain," *Journal des Mathématiques Pures et Appliquées*, vol. 80, no. 4, pp. 389–408, May 2001.
- [10] A. Aissa-El-Bey and K. Abed-Meraim, "Blind Identification of Sparse SIMO Channels Using Maximum A Posteriori Approach," *Eusipco*, August 2008.
- [11] Y. Zeng and T. Sang Ng, "A Blind MIMO Channel Estimation Method Robust to Order Overestimation," *Signal Processing*, vol. 84, no. 2, 2003.
- [12] V. Buchoux, E. Moulines, and O. Cappé, "Estimation semi-autodidacte par méthode sous-espace pour systèmes de réception multicapteurs," *Actes du Colloque du GRETSI*, Septembre 1999.
- [13] S. Boyd and L. Vandenberghe, *Convex Optimization*, Cambridge University Press, 2004.
- [14] R. Remmert, *Theory of Complex Functions*, vol. 22 of *Graduate Texts in Math*, Springer-Verlag, 1991.
- [15] C. R. J. Clapham, *Introduction to Mathematical Analysis*, Routledge, 1973.
- [16] J. Havil, *Gamma: Exploring Euler's constant*, Princeton, NJ: Princeton University Press, 2003.

Abla Kammoun was born in Sfax, Tunisia. She received the Engineering degree in Signal and Systems from the Tunisia Polytechnic School, the master degree and the Phd degree in digital communications from Telecom Paris Tech (then Ecole Nationale Supérieure des Télécommunications, ENST).

Since June 2010, she is a post-doctoral researcher in TSI department in Telecom Paris Tech.

Her research interests include performance analysis, random matrix theory and semi-blind channel estimation.

Karim Abed-Meraim Karim ABED-MERAİM was born in 1967. He received the State Engineering Degree from Ecole Polytechnique, Paris, FRANCE, in 1990, the State Engineering Degree from Ecole Nationale Supérieure des Télécommunications (ENST), Paris, FRANCE, in 1992, the M.Sc. degree from Paris XI University, Orsay, FRANCE, in 1992 and the Ph.D degree from the Ecole Nationale Supérieure des Télécommunications (ENST), Paris, FRANCE, in 1995 (in the field of Signal Processing and communications).

From 1995 to 1998, he has been a research staff at the Electrical Engineering Department of the University of Melbourne where he worked on several research project related to "Blind System Identification for Wireless Communications", "Blind Source Separation", and "Array Processing for Communications", respectively.

He currently is Associate Professor at the Signal and Image Processing Department of Telecom ParisTech. His research interests are in signal processing for communications and include system identification, multiuser detection, space-time coding, adaptive filtering and tracking, array processing and performance analysis. He has about 300 scientific publications including 60 journal papers, 6 book chapters and 4 patents.

Dr Karim ABED-MERAİM was in charge of the "Equalization" research operation within the GT9/GDR-PRC ISIS (a research operation within the National Scientific Research Centre of France (CNRS)) and was leader of a research team within Telecom ParisTech working on "Signal Processing for Communications".

Within his research activity, he has organized and chaired several conference sessions (ICOTA'98, DSP'98 workshop, ISPCS'98, ISSPA'99, SSP2001, ISCCSP'04, ISSPA'05, ...). He is referee for several journals including IEEE-Tr-SP, IEEE-Tr-IT, Sig. Proc. Journal, IEEE-SP-Letters, JSAC, and IEEE-Tr-Comm. He was the technical Chairman of ISSPA'2001 and ISSPA'2003 (International Symposium on Signal Processing and its Applications) and the conference Chair of WOSPA 2008.

Dr. ABED-MERAİM is an IEEE senior member and was associate editor for the IEEE TRANSACTIONS ON SIGNAL PROCESSING (from 2001 to 2004).

Sofène Affes (S94, M95, SM04) received the Diplôme d'Ingénieur in telecommunications in 1992, and the Ph.D. degree with honors in signal processing in 1995, both from the Ecole Nationale Supérieure des Télécommunications (ENST), Paris, France.

He has been since with INRS-EMT, University of Quebec, Montreal, Canada, as a Research Associate from 1995 till 1997, as an Assistant Professor till 2000, then as an Associate Professor till 2009. Currently he is a Full Professor in the Wireless Communications Group. His research interests are in wireless communications, statistical signal and array processing, adaptive space-time processing and MIMO. From 1998 to 2002 he has been leading the radio design and signal processing activities of the Bell/Nortel/NSERC Industrial Research Chair in Personal Communications at INRS-EMT, Montreal, Canada. Since 2004, he has been actively involved in major projects in wireless of PROMPT (Partnerships for Research on Microelectronics, Photonics and Telecommunications).

Professor Affes was the co-recipient of the 2002 Prize for Research Excellence of INRS. He currently holds a Canada Research Chair in Wireless Communications and a Discovery Accelerator Supplement Award from NSERC (Natural Sciences & Engineering Research Council of Canada). In 2006, Professor Affes served as a General Co-Chair of the IEEE VTC2006-Fall conference, Montreal, Canada. In 2008, he received from the IEEE Vehicular Technology Society the IEEE VTC Chair Recognition Award for exemplary contributions to the success of IEEE VTC. He currently acts as a member of the Editorial Board of the IEEE Transactions on Wireless Communications, of the IEEE Transactions on Signal Processing, and of the Wiley Journal on Wireless Communications & Mobile Computing.