

# On Optimal Sensing and Capacity Trade-off in Cognitive Radio Systems with Directional Antennas

Hassan Yazdani, Azadeh Vosoughi, *Senior Member, IEEE*

University of Central Florida


E-mail: h.yazdani@knights.ucf.edu, azadeh@ucf.edu

**Abstract**—We consider a cognitive radio system, in which the secondary users (SUs) and primary users (PUs) coexist. The SUs are equipped with steerable directional antennas. In our system, the secondary transmitter ( $SU_{tx}$ ) first senses the spectrum (with errors) for a duration of  $\tau$ , and, then transmits data to the secondary receiver ( $SU_{rx}$ ) if spectrum is sensed idle. The sensing time as well as the orientation of  $SU_{tx}$ 's antenna affect the accuracy of spectrum sensing and yield a trade-off between spectrum sensing and capacity of the secondary network. We formulate the ergodic capacity of secondary network which uses energy detection for spectrum sensing. We obtain optimal  $SU_{tx}$  transmit power, the optimal sensing time  $\tau$  and the optimal directions of  $SU_{tx}$  transmit antenna and  $SU_{rx}$  receive antenna by maximizing the ergodic capacity, subject to peak transmit power and outage interference probability constraints. Our simulation results show the effectiveness of these optimizations to increase the ergodic capacity of the secondary network.


## I. INTRODUCTION

The explosive rise in demand for high data rate wireless applications has turned the spectrum into a scarce resource. Cognitive radio (CR) technology is a promising solution which alleviates spectrum scarcity problem by allowing an unlicensed (secondary) user to access licensed bands in a such way that its imposed interference on the primary users (PUs) is limited [1]. The focus of most literature is optimizing spectrum sensing and transmission strategies for opportunistic spectrum access of secondary users (SUs), when the SUs are equipped with omni-directional antennas [2]–[7]. In those works, spectrum sensing seeks spectrum holes in the time domain so that SUs exploit them for transmitting their data. Different from the bulk of the literature, in this paper we assume the SUs are equipped with steerable directional antennas which allow them to use spatial spectrum holes [8]–[11] to increase spectrum utilization, specially in cognitive satellite networks [12]. The directional antennas can identify and enable transmission and reception across spatial domain and further enhance spectrum utilization, compared with omni-directional antennas.

In this paper, the SU transmitter ( $SU_{tx}$ ) first senses the spectrum and transmits data only when the spectrum is sensed idle. Since all spectrum sensing methods, including the energy detection method we use, are prone to sensing errors their false alarm and detection probabilities should be incorporated in the design and performance analysis [13]. Suppose, the  $SU_{tx}$  employs a frame with duration  $T$  seconds, depicted in Fig. 1a, for spectrum sensing and data transmission. Each frame consists of a sensing time slot with duration  $\tau$  seconds and the  $SU_{tx}$  uses this time to decide whether spectrum is idle



(a) Frame structure of secondary users.

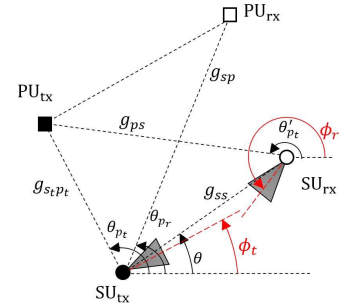

(b) Our CR system with steerable directional antennas.

Fig. 1: Our system model.

or busy. The remaining frame of duration  $T - \tau$  seconds is used for data transmission if the spectrum is sensed idle. As  $\tau$  increases, the false alarm probability decreases and detection probability increases. Thus, the result of spectrum sensing will be more accurate. On the other hand, the available time for data transmission decreases. Therefore, a trade-off exists between the sensing time and the capacity of our CR network.

We assume that the  $SU_{tx}$  knows only the channel state information (CSI) of link between the  $SU_{tx}$  and the secondary receiver ( $SU_{rx}$ ), and the statistics of the other links. Also, we assume that the  $SU_{tx}$  knows the geometry of CR network. The orientation of the  $SU_{tx}$ 's antenna with respect to the direction of primary transmitter ( $PU_{tx}$ ) affects the spectrum sensing accuracy. During spectrum sensing, to increase the detection probability and to receive the maximum power, the  $SU_{tx}$ 's antenna should be pointed to the  $PU_{tx}$ 's direction. On the other hand, the  $SU_{tx}$ 's antenna should be pointed to the  $SU_{rx}$ 's direction to maximize the transmission capacity. Thus, in addition to sensing-capacity trade-off in terms of sensing time  $\tau$ , there is another sensing-capacity trade-off in terms of the  $SU_{tx}$ 's antenna orientation. In this work, we establish the ergodic capacity of the channel between the  $SU_{tx}$  and the  $SU_{rx}$ , when spectrum sensing is *imperfect* and find the optimal directions of the  $SU_{tx}$  and the  $SU_{rx}$  antennas, the optimal  $SU_{tx}$  transmit power and the optimal sensing time  $\tau$  such that the ergodic capacity is maximized, subject to two constraints, namely, peak transmit power and outage interference probability constraints.

## II. SYSTEM MODEL

### A. Network Geometry

Our CR system model is shown in Fig. 1b. The SUs are equipped with steerable directional antennas. The orientation of primary receiver (PU<sub>rx</sub>) with respect to SU<sub>tx</sub> is denoted by  $\theta_{pr}$ . Also, the orientation of PU<sub>tx</sub> and SU<sub>rx</sub> with respect to SU<sub>tx</sub> are denoted by  $\theta_{pt}$  and  $\theta$ , respectively and the orientation of PU<sub>tx</sub> with respect to SU<sub>rx</sub> is denoted by  $\theta'_{pt}$ . The orientation of SU<sub>tx</sub> and SU<sub>rx</sub> antennas in their local coordination are denoted by  $\phi_t$  and  $\phi_r$ , respectively (to be optimized). We assume  $\theta_{pt}$ ,  $\theta_{pr}$ ,  $\theta$  and  $\theta'_{pt}$  are known or can be estimated [14]. The antenna gain is modeled as  $A(\phi) = A_1 + A_0 \exp(-B(\frac{\phi}{\phi_{3dB}})^2)$ , where  $B = \ln(2)$ ,  $\phi_{3dB}$  is the half-power beamwidth,  $A_1$  and  $A_0$  are two constant parameters [8]. Let  $d_{ss}$ ,  $d_{ps}$ ,  $d_{s_t p_t}$  and  $d_{sp}$  be the distances between SU<sub>tx</sub> and SU<sub>rx</sub>, PU<sub>tx</sub> and SU<sub>rx</sub>, PU<sub>tx</sub> and SU<sub>tx</sub>, and PU<sub>rx</sub> and SU<sub>tx</sub>, respectively.

The fading coefficients from SU<sub>tx</sub> to SU<sub>rx</sub>, PU<sub>tx</sub> to SU<sub>rx</sub>, PU<sub>tx</sub> to SU<sub>tx</sub>, and SU<sub>tx</sub> to PU<sub>rx</sub> are denoted by  $g_{ss}$ ,  $g_{ps}$ ,  $g_{s_t p_t}$  and  $g_{sp}$ , respectively. We assume  $g_{ss}$ ,  $g_{ps}$ ,  $g_{s_t p_t}$  and  $g_{sp}$  are independent exponential random variables with means  $\gamma_{ss}$ ,  $\gamma_{ps}$ ,  $\gamma_{s_t p_t}$  and  $\gamma_{sp}$ , respectively. The path-loss is  $L = (d_0/d)^\nu$ , where  $d_0$  is the reference distance,  $d$  is the distance between users, and  $\nu$  is the path loss exponent. We assume there is no cooperation between SUs and PUs and hence, SU<sub>tx</sub> and SU<sub>rx</sub> only do not know the realizations of  $g_{sp}$  and  $g_{ps}$  and only know their statistics. On the other hand, SU<sub>tx</sub> knows  $g_{ss}$ .

### B. Spectrum Sensing

The SU<sub>tx</sub> employs a frame with duration  $T$  seconds. Each frame consists of a sensing time slot with duration  $\tau$  seconds (to be optimized) and SU<sub>tx</sub> uses this time to decide whether spectrum is idle or busy. The remaining frame of duration  $T - \tau$  seconds is used for data transmission if the spectrum is sensed idle. It is clear that for a given  $T$ , if we increase the sensing time  $\tau$ , the spectrum sensing will be more accurate. On the other hand, the available time for data transmission decreases. Therefore, a trade-off exists between the sensing time and the transmission capacity of our CR network.

We formulate the spectrum sensing at the SU<sub>tx</sub> as a binary hypothesis testing problem where the received signal in SU<sub>tx</sub> can be written as

$$\begin{aligned} \mathcal{H}_0 &: r[k] = w[k], \\ \mathcal{H}_1 &: r[k] = \sqrt{g_{s_t p_t} A(\phi_t - \theta_{p_t}) L_{s_t p_t}} p[k] + w[k] \end{aligned} \quad (1)$$

for  $k = 1, \dots, N_s$ . The two hypotheses  $\mathcal{H}_0$  and  $\mathcal{H}_1$  with probabilities  $\pi_0$  and  $\pi_1 = 1 - \pi_0$  denote the spectrum is truly idle and truly busy, respectively. The term  $w[k] \sim \mathcal{N}(0, \sigma_n^2)$  is the additive white Gaussian noise (AWGN) at the SU<sub>tx</sub> and  $p[k]$  is the transmitted symbol from the PU<sub>tx</sub> with average power  $P_p$ . We assume the SU<sub>tx</sub> knows  $P_p$ . We note  $N_s = \tau f_s$  is the number of signal samples available for spectrum sensing and  $f_s$  is the sampling frequency. Let  $\hat{\mathcal{H}}_1$  and  $\hat{\mathcal{H}}_0$  with probabilities  $\hat{\pi}_0$  and  $\hat{\pi}_1$  denote that the result of spectrum sensing is busy and idle, respectively. Considering energy detection as our spectrum sensing method, the decision statistics at the SU<sub>tx</sub> can be written as  $Z = \frac{1}{N_s} \sum_{k=1}^{N_s} |r[k]|^2$ .

The accuracy of our spectrum sensing method is characterized by false alarm probability  $P_f = \Pr\{\hat{\mathcal{H}}_1 | \mathcal{H}_0\}$  and detection probability  $P_d = \Pr\{\hat{\mathcal{H}}_1 | \mathcal{H}_1\}$ . For large  $N_s$ , we can use the central limit theorem and approximate the probability distribution function (PDF) of decision statistics  $Z$  as Gaussian distribution and  $P_f$  and  $P_d$  can be written as [4]

$$P_f(\phi_t, \tau) = Q\left(\left(\frac{\xi}{\sigma_n^2} - 1\right) \sqrt{\tau f_s}\right) \quad (2)$$

$$P_d(\phi_t, \tau) = Q\left(\left(\frac{\xi}{\sigma_n^2} - \gamma - 1\right) \sqrt{\frac{\tau f_s}{2\gamma + 1}}\right) \quad (3)$$

where  $\gamma = P_p \gamma_{s_t p_t} A(\phi_t - \theta_{p_t}) L_{s_t p_t} / \sigma_n^2$  is the signal-to-noise ratio (SNR) at the SU<sub>tx</sub> and  $\xi$  is the decision threshold. The probabilities in (2) and (3) are functions of the optimization parameters  $\tau$  and  $\phi_t$ . For the simplicity of the presentation, we drop the parameters  $\tau$  and  $\phi_t$  in the remaining of the paper.

The orientation of SU<sub>tx</sub>'s antenna ( $\phi_t$ ) with respect to direction of PU<sub>tx</sub> affects the spectrum sensing accuracy. To increase  $P_d$  during spectrum sensing, the SU<sub>tx</sub>'s antenna should be pointed to PU<sub>tx</sub>'s direction to receive the maximum power. On the other hand, the SU<sub>tx</sub>'s antenna should be pointed to SU<sub>rx</sub>'s direction to maximize the transmission capacity. Thus, there is a sensing-capacity trade-off in terms of the SU<sub>tx</sub>'s antenna orientation.

### C. Data Communication Channel

When the spectrum is sensed idle, the SU<sub>tx</sub> uses power  $P$  (to be optimized) to transmit signal to SU<sub>rx</sub>. Let  $s[m]$  denote the transmitted signal by SU<sub>tx</sub> with power  $P$ , and  $y[m]$  denote the corresponding received signal by SU<sub>rx</sub> given by

$$y[m] = \sqrt{g_{ss} L_{ss} G(\theta, \phi_t, \phi_r)} s[m] + n[m],$$

where  $n[m]$  is the AWGN with power  $\sigma_n^2$  and  $G(\theta, \phi_t, \phi_r) = A(\phi_t - \theta) A(\phi_r - \pi - \theta)$  is the product of SU<sub>tx</sub> and SU<sub>rx</sub> antennas' gain. For the simplicity of presentation, we drop the parameters  $\theta$ ,  $\phi_t$  and  $\phi_r$  from  $G(\theta, \phi_t, \phi_r)$ .

Our goal is to find the ergodic capacity of the channel between SU<sub>tx</sub> and SU<sub>rx</sub> and explore the optimal SU<sub>tx</sub> transmit power  $P$ , optimal sensing time  $\tau$  and the optimal directions of SU<sub>tx</sub> and SU<sub>rx</sub> antennas,  $\phi_t$  and  $\phi_r$ , such that this capacity maximized, subject to peak transmit power and outage interference probability constraints.

## III. CONSTRAINED ERGODIC CAPACITY MAXIMIZATION

### A. Capacity Expression

When spectrum sensing is imperfect, the ergodic capacity would depend on the true status of the PU and the spectrum sensing result. In our problem, the ergodic capacity becomes  $C = D \mathbb{E}\{\alpha_0 c_{0,0} + \beta_0 c_{1,0}\}$ , where  $\mathbb{E}\{\cdot\}$  is the expectation operator, and  $c_{i,0}$  is instantaneous capacity corresponding to  $\mathcal{H}_i$  and  $\hat{\mathcal{H}}_0$  with probability  $\alpha_0 = \Pr\{\mathcal{H}_0, \hat{\mathcal{H}}_0\}$  and  $\beta_0 = \Pr\{\mathcal{H}_1, \hat{\mathcal{H}}_0\}$ , given as

$$c_{0,0} = \log_2 \left( 1 + \frac{g_{ss} L_{ss} G P}{\sigma_n^2} \right) \quad (4)$$

$$c_{1,0} = \log_2 \left( 1 + \frac{g_{ss} L_{ss} G P}{\sigma_n^2 + P_p g_{ps} L_{ps} A(\phi_r - \theta'_{p_t})} \right) \quad (5)$$

and  $D = (T - \tau)/T$  is the fraction of time in which SU<sub>tx</sub> transmits data to SU<sub>rx</sub>. It is easy to verify  $\alpha_0 = \pi_0(1 - P_f)$  and  $\beta_0 = \pi_1(1 - P_d)$ . It is worth noting that, if spectrum sensing errors are not considered (i.e., spectrum sensing is assumed to be perfect)  $\alpha_0 = \pi_0, \beta_0 = 0$ . Also, it is important to emphasize that the optimal transmit power  $P$ , the optimal antenna directions and the optimal sensing time  $\tau$  are functions of the fading coefficient  $g_{ss}$ . After taking expectation with respect to  $g_{sp}$  and  $g_{ps}$ ,  $C$  can be written as

$$C = D \mathbb{E}_{g_{ss}} \left\{ \hat{\pi}_0 \log_2 \left( 1 + \frac{1}{x} \right) + \frac{\beta_0}{\ln(2)} \left[ T(y) - T\left(y + \frac{y}{x}\right) \right] \right\} \quad (6)$$

where  $T(z) = e^z \text{Ei}(-z)$  and  $\text{Ei}(z)$  is the exponential integration [15]. In (6),  $x = \sigma_n^2/aP$ ,  $a = g_{ss}L_{ss}G$ ,  $y = \sigma_n^2/\sigma_p^2$ . The term  $\sigma_p^2 = P_p \gamma_{ps} L_{ps} A(\phi_r - \theta'_{p_t})$  captures the interference on SU<sub>rx</sub> due to PU activities.

### B. Constraints

Upon transmitting data, the SU<sub>tx</sub> generates an interference on the PU<sub>rx</sub>. Similar to the outage concept developed in wireless communication community, we define the interference outage probability as the probability that the interference exceeds a maximum threshold  $I_{pk}$ . As a mechanism to control the interference generated by the SU<sub>tx</sub>, we require that the interference outage probability to be smaller than a maximum value  $\varepsilon$ . In other words, we consider the following constraint

$$\Pr \left\{ D\beta_0 P g_{sp} L_{sp} A(\phi_t - \theta_{p_r}) > I_{pk} \mid g_{ss} \right\} \leq \varepsilon. \quad (7)$$

We can rewrite (7) as  $F_{g_{sp}} \left( \frac{I_{pk}}{D\beta_0 L_{sp} A(\phi_t - \theta_{p_r}) P} \right) \geq 1 - \varepsilon$ , where  $F_{g_{sp}}(\cdot)$  is the cumulative distribution function (CDF) of random variable  $g_{sp}$ , given as  $F_{g_{sp}}(x) = 1 - \exp\left(\frac{-x}{\gamma_{sp}}\right)$  for  $x \geq 0$ . Finally, we can write the constraint in (7) as

$$D\bar{b}_0 P \leq \frac{-I_{pk}}{\ln(\varepsilon)} \quad (8)$$

where  $\bar{b}_0 = \beta_0 \gamma_{sp} L_{sp} A(\phi_t - \theta_{p_r})$ . Let  $P_{pk}$  indicate the maximum allowed instantaneous transmit power of SU<sub>tx</sub>. To satisfy the peak transmit power constraint, we have

$$D\hat{\pi}_0 P \leq P_{pk}. \quad (9)$$

In order to ensure that the SU<sub>tx</sub>'s (SU<sub>rx</sub>'s) orientation lies within the half-power beam-width of the SU<sub>tx</sub> (SU<sub>rx</sub>) antenna, we constrain them as

$$|\phi_t - \theta| \leq \phi_{3dB}, \quad (10a)$$

$$|\phi_r - \pi - \theta| \leq \phi_{3dB}. \quad (10b)$$

### C. Behavior of Capacity with respect to sensing time $\tau$

In this section, we examine the behavior of  $C$  with respect to  $\tau$  and we show that, in a certain condition,  $C$  is a concave function of  $\tau$ . Consider  $P_f, P_d$  in (2), (3). By taking the second derivative of  $P_f$  with respect to  $\tau$ , one can easily verify that  $P_f$  is a convex function of  $\tau$  when  $\xi > \sigma_n^2$ . With the same argument we can show that  $D\alpha_0$  is a concave functions with respect to  $\tau$  for  $\xi > \sigma_n^2$ . Taking the first derivative of  $C$  with respect to  $\tau$ , we get

$$\frac{\partial C}{\partial \tau} = \frac{-C}{T-\tau} + \frac{D}{\sqrt{8\pi\tau}} \mathbb{E}_{g_{ss}} \left\{ X\pi_0 c_{0,0} e^{-\frac{\tau}{2} X^2} + Y\pi_1 c_{1,0} e^{-\frac{\tau}{2} Y^2} \right\}$$

---

### Algorithm 1: Optimization Algorithm

---

$\phi_t^{(0)} = \phi_{\text{init}}$  which satisfies (10a)  
 $\tau^{(0)} = \tau_{\text{init}} \in (0, T)$   
 calculate  $P$  using (11).  
 solve  $\partial C / \partial \phi_r = 0$  and obtain  $\phi_r$ .  
 $[\phi_t^{\text{opt}}, \tau^{\text{opt}}] = \text{argmax} \{C\}$  using bisection search  
 $P^{\text{opt}} = [P]_{\phi_t = \phi_t^{\text{opt}}, \tau = \tau^{\text{opt}}}$   
 $\phi_r^{\text{opt}} = [\phi_r]_{\phi_t = \phi_t^{\text{opt}}, \tau = \tau^{\text{opt}}}$

---

where  $X = \left(\frac{\xi}{\sigma_n^2} - 1\right) \sqrt{f_s}$  and  $Y = \left(\frac{\xi}{\sigma_n^2} - \gamma - 1\right) \sqrt{\frac{f_s}{2\gamma+1}}$ . One can easily verify that  $\lim_{\tau \rightarrow T} \partial C / \partial \tau < 0$ . If we choose  $\xi \geq \sigma_n^2(1 + m\gamma)$  where  $m = \frac{\pi_1}{\pi_1 + \pi_0 \sqrt{2\gamma+1}} < 1$ , we get  $\lim_{\tau \rightarrow 0} \partial C / \partial \tau \rightarrow +\infty$ . We conclude that  $C$  increases when  $\tau$  goes to zero and decreases when  $\tau$  goes to  $T$ . Hence,  $C$  has a maximum point with respect to  $\tau$  within the interval  $(0, T)$ . However,  $C$  may not be concave with respect to  $\tau$  and we may need to use a numerical search method to find the optimal  $\tau$ . On the other hand, it is easy to verify that  $P_d$  is a concave function of  $\tau$  when  $\xi < \sigma_n^2(1 + \gamma)$ . We conclude that if we choose the decision threshold  $\xi$  such that  $\sigma_n^2(1 + m\gamma) \leq \xi < \sigma_n^2(1 + \gamma)$ , the capacity  $C$  will be a concave function of  $\tau$ .

### D. Solution

Recall that our goal is to maximize the ergodic capacity  $C$  over  $P, \phi_t, \phi_r$  and  $\tau$  subject to constraints (8), (9) and (10). The capacity is concave with respect to  $P$  and  $\phi_r$ . However, in general, it is not concave with respect to  $\phi_t$  and  $\tau$ . In the following we present our approach for solving this optimization problem. The optimal power can be written as

$$P^{\text{opt}} = \min \left\{ \frac{P_{pk}}{D\hat{\pi}_0}, \frac{-I_{pk}}{D\bar{b}_0 \ln(\varepsilon)} \right\}. \quad (11)$$

The optimal  $\phi_t$  and  $\tau$  can be obtained by using searching methods like bisection method. We consider an initial value for  $\phi_t$  which satisfies (10a) and  $\tau \in (0, T)$ , and obtain  $P^{\text{opt}}$  using (11). Then, the optimal  $\phi_r$  can be found by solving  $\partial C / \partial \phi_r = 0$ , subject to the constraint (10b). For any realization of  $g_{ss}$ , the first derivative of  $C$  with respect to  $\phi_r$  is equal to

$$\frac{D}{\ln(2)} \left\{ \frac{A'(\phi_r - \pi - \theta)}{A(\phi_r - \pi - \theta)} g_0(x, y) - \frac{A'(\phi_r - \theta'_{p_t})}{A(\phi_r - \theta'_{p_t})} k_0(x, y) \right\}$$

where

$$g_0(x, y) = \frac{\hat{\pi}_0 + 2\beta_0}{2(1+x)} + \frac{y\beta_0}{x} T\left(y + \frac{y}{x}\right),$$

$$k_0(x, y) = \beta_0 \left[ 2 + yT(y) + y\left(1 + \frac{1}{x}\right) T\left(y + \frac{y}{x}\right) \right],$$

and  $A'(\cdot) = \partial A(\cdot) / \partial \phi_r$ . Then, we find the value of  $\phi_t$  and  $\tau$  which maximizes  $C$ . Algorithm 1 summarizes our proposed approach to find the optimal solutions  $\tau^{\text{opt}}, \phi_t^{\text{opt}}, \phi_r^{\text{opt}}$  and  $P^{\text{opt}}$ .

## IV. NUMERICAL RESULTS AND CONCLUSION

In this section, we illustrate how effectively the directional antennas can improve the capacity of our secondary network by Matlab simulations. Assume  $\sigma_n^2 = 1, A_0 = 9.8, A_1 = 0.2,$

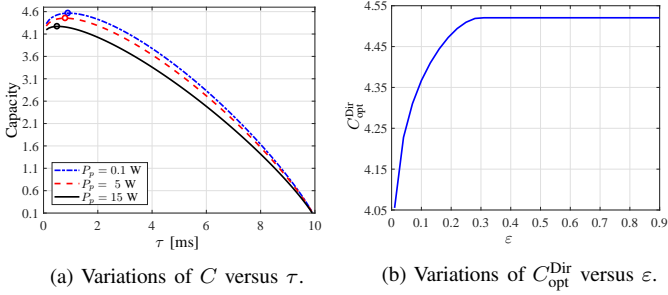


Fig. 2: Variations of capacity versus (a)  $\tau$ , (b)  $\varepsilon$  and (c)  $\theta$ .

$\gamma_{ss} = \gamma_{sp} = \gamma_{ps} = \gamma_{pst} = 1$ ,  $\pi_1 = 0.3$ ,  $T = 10$  ms,  $f_s = 20$  KHz,  $\phi_{3\text{dB}} = 30^\circ$ ,  $\varepsilon = 0.05$ ,  $\theta_{pr} = 90^\circ$ ,  $P_p = 0.4$  watts and  $\theta'_{pt} = 130^\circ$ . Fig. 2a depicts  $C$  versus  $\tau$  for different values of  $P_p$  when  $I_{\text{pk}} = 2$  dB,  $P_{\text{pk}} = 10$  dB and  $\theta = 50^\circ$ . We can see that  $C$  always has a maximum in the interval  $(0, T)$ . Also, we can see that as the power of  $\text{PU}_{\text{tx}}$  ( $P_p$ ) increases,  $\tau^{\text{opt}}$  decreases and  $\text{SU}_{\text{tx}}$  needs less time to sense the activity of the  $\text{PU}_{\text{tx}}$ . We denote the optimal capacity of CR network using directional antennas by  $C_{\text{opt}}^{\text{Dir}}$ . Fig. 2b plots  $C_{\text{opt}}^{\text{Dir}}$  versus  $\varepsilon$ , when  $P_{\text{pk}} = 10$  dB and  $I_{\text{pk}} = 2$  dB. By increasing  $\varepsilon$ , the  $\text{SU}_{\text{tx}}$  can use a higher power level to transmit data to the  $\text{SU}_{\text{rx}}$  without violating the interference outage probability constraint in (8). As a result,  $C_{\text{opt}}^{\text{Dir}}$  increases. We observe that when  $\varepsilon < 0.28$ , the interference outage probability constraint in (8) is dominant. However, for  $\varepsilon \geq 0.28$ , the instantaneous power constraint in (9) is dominant and  $C_{\text{opt}}^{\text{Dir}}$  will not increase by increasing  $\varepsilon$ .

Fig. 2c illustrates  $C_{\text{opt}}^{\text{Dir}}$  versus the orientation of the  $\text{SU}_{\text{rx}}$  ( $\theta$ ) for  $\varepsilon = 0.05, 0.1, 0.2$  is illustrated. In this figure, we fix the orientation of  $\text{PU}_{\text{tx}}$ ,  $\text{PU}_{\text{rx}}$  and  $\text{SU}_{\text{tx}}$  and inspect the variations of  $C_{\text{opt}}^{\text{Dir}}$  when the  $\text{SU}_{\text{rx}}$  changes its location. For a specific value of  $\varepsilon$ , when the  $\text{SU}_{\text{rx}}$  get closer to the  $\text{PU}_{\text{tx}}$ , the  $\text{SU}_{\text{tx}}$  decreases  $P$  and rotates the main lobe of its antenna to satisfy the interference outage probability constraint. As a result, the  $C_{\text{opt}}^{\text{Dir}}$  decreases. When the  $\text{SU}_{\text{rx}}$  gets farther away from  $\text{PU}_{\text{rx}}$  ( $\phi_t > 90^\circ$ ),  $C_{\text{opt}}^{\text{Dir}}$  slightly increases. However, when  $\phi_t \rightarrow \theta_{pt}$  ( $= 130^\circ$ ),  $C_{\text{opt}}^{\text{Dir}}$  decreases again since the interference from the  $\text{PU}_{\text{tx}}$  to the  $\text{SU}_{\text{rx}}$  ( $\bar{\sigma}_p^2$ ) increases.

Fig. 3a depicts  $C_{\text{opt}}^{\text{Dir}}$  versus  $\theta$  for two values of  $P_p$ . Increasing  $P_p$ , enhances the accuracy of spectrum sensing. On the other hand, it incurs stronger interference on the  $\text{SU}_{\text{rx}}$  and reduces  $C_{\text{opt}}^{\text{Dir}}$ . Fig. 3b shows the effect of the half-power beam-width ( $\phi_{3\text{dB}}$ ) of directional antennas on  $C_{\text{opt}}^{\text{Dir}}$ . We can see that an antenna with narrower beam-width always yields higher capacity because it can cancel more interference from (to)  $\text{PU}_{\text{tx}}$  ( $\text{PU}_{\text{rx}}$ ).

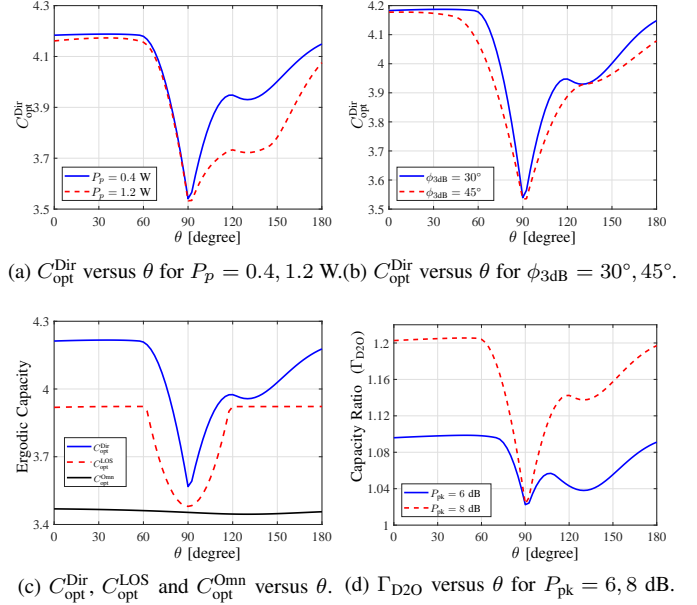


Fig. 3: (a)–(c) Capacity  $C_{\text{opt}}^{\text{Dir}}$  versus  $\theta$  for different system parameters. (d) Capacity ratio  $\Gamma_{\text{D2O}}$  versus  $\theta$  for different  $P_{\text{pk}}$ .

Let  $C_{\text{opt}}^{\text{Omn}}$  denote the optimal capacity when  $\text{SU}_{\text{tx}}$  and  $\text{SU}_{\text{rx}}$  have omni-directional antennas and only transmit power (8) and (9). Furthermore, let  $C_{\text{opt}}^{\text{LOS}}$  be the optimal capacity when directional antennas of  $\text{SU}_{\text{tx}}$  and  $\text{SU}_{\text{rx}}$  are exactly pointed at each other and only  $P$  and  $\tau$  are optimized subject to constraints (8) and (9). Fig. 3c illustrates  $C_{\text{opt}}^{\text{Dir}}$ ,  $C_{\text{opt}}^{\text{LOS}}$  and  $C_{\text{opt}}^{\text{Omn}}$  versus  $\theta$ . This figure shows the effectiveness of using the directional antennas and as well as optimizing their orientation on the capacity of the secondary network. It demonstrates that directional antennas can improve the secondary network capacity for all values of  $\theta$ .

We define the capacity ratio  $\Gamma_{\text{D2O}} = C_{\text{opt}}^{\text{Dir}}/C_{\text{opt}}^{\text{Omn}}$ . This ratio is shown in Fig. 3d for  $P_{\text{pk}} = 6, 8$  dB. We see that directional antennas yields as much as 22% capacity gain for  $P_{\text{pk}} = 8$  dB in comparison to omni-directional antennas. Also, we can see that the capacity gain decreases when maximum allowable transmit power ( $P_{\text{pk}}$ ) decreases.

In summary, we considered a CR system, where the SUs are equipped with directional antennas and sense the spectrum for duration of  $\tau$ . We formulated the ergodic capacity of the secondary network which uses energy detection method for spectrum sensing. The optimal  $\text{SU}_{\text{tx}}$  transmit power, the optimal sensing time  $\tau$  and the optimal directions of  $\text{SU}_{\text{tx}}$  transmit antenna and  $\text{SU}_{\text{rx}}$  receive antenna are obtained by maximizing the ergodic capacity, subject to peak transmit power and outage interference probability constraints. Our simulation results demonstrated the effectiveness of these optimizations on increasing the ergodic capacity of the secondary network.

#### ACKNOWLEDGMENT

This research is supported by NSF under grant ECCS-1443942.

## REFERENCES

- [1] T. Yucek and H. Arslan, "A survey of spectrum sensing algorithms for cognitive radio applications," *IEEE Communications Surveys Tutorials*, vol. 11, no. 1, pp. 116–130, First 2009.
- [2] H. Zhang, Y. Nie, J. Cheng, V. C. M. Leung, and A. Nallanathan, "Sensing time optimization and power control for energy efficient cognitive small cell with imperfect hybrid spectrum sensing," *IEEE Transactions on Wireless Communications*, vol. 16, no. 2, pp. 730–743, Feb 2017.
- [3] H. Hu, H. Zhang, and Y. C. Liang, "On the spectrum- and energy-efficiency tradeoff in cognitive radio networks," *IEEE Transactions on Communications*, vol. 64, no. 2, pp. 490–501, Feb 2016.
- [4] Y. C. Liang, Y. Zeng, E. C. Y. Peh, and A. T. Hoang, "Sensing-throughput tradeoff for cognitive radio networks," *IEEE Transactions on Wireless Communications*, vol. 7, no. 4, pp. 1326–1337, April 2008.
- [5] P. Paysarvi-Hoseini and N. C. Beaulieu, "Optimal wideband spectrum sensing framework for cognitive radio systems," *IEEE Transactions on Signal Processing*, vol. 59, no. 3, pp. 1170–1182, March 2011.
- [6] M. K. Kiskani and B. H. Khalaj, "Novel power control algorithms for underlay cognitive radio networks," in *2011 21st International Conference on Systems Engineering*, Aug 2011, pp. 206–211.
- [7] M. Yousefvand, N. Ansari, and S. Khorsandi, "Maximizing network capacity of cognitive radio networks by capacity-aware spectrum allocation," *IEEE Transactions on Wireless Communications*, vol. 14, no. 9, pp. 5058–5067, Sept 2015.
- [8] H. Yazdani and A. Vosoughi, "On cognitive radio systems with directional antennas and imperfect spectrum sensing," in *2017 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, March 2017, pp. 3589–3593.
- [9] G. Zhao, J. Ma, G. Y. Li, T. Wu, Y. Kwon, A. Soong, and C. Yang, "Spatial spectrum holes for cognitive radio with relay-assisted directional transmission," *IEEE Transactions on Wireless Communications*, vol. 8, no. 10, pp. 5270–5279, October 2009.
- [10] M.-H. Golbon-Haghighi, B. Mahboobi, and M. Ardebilipour, "Multiple antenna relay beamforming for wireless peer to peer communications," *Journal of Information Systems and Telecommunication*, vol. 1, no. 4, pp. 209–215, 2013.
- [11] H. Yazdani and A. Vosoughi, "On the combined effect of directional antennas and imperfect spectrum sensing upon ergodic capacity of cognitive radio systems," in *2017 51st Asilomar Conference on Signals, Systems, and Computers*, Oct 2017, pp. 1702–1706.
- [12] O. Y. Kolawole, S. Vuppala, M. Sellathurai, and T. Ratnarajah, "On the performance of cognitive satellite-terrestrial networks," *IEEE Transactions on Cognitive Communications and Networking*, vol. 3, no. 4, pp. 668–683, Dec 2017.
- [13] G. Ozcan, M. C. Gursoy, N. Tran, and J. Tang, "Energy-efficient power allocation in cognitive radio systems with imperfect spectrum sensing," *IEEE Journal on Selected Areas in Communications*, vol. 34, no. 12, pp. 3466–3481, Dec 2016.
- [14] H. Yazdani, A. Vosoughi, and N. Rahnavard, "Compressive sensing based direction-of-arrival estimation using reweighted greedy block coordinate descent algorithm for ESPAR antennas," in *MILCOM 2017 - 2017 IEEE Military Communications Conference (MILCOM)*, Oct 2017, pp. 169–173.
- [15] I. S. Gradshteyn and I. M. Ryzhik, *Table of integrals, series, and products*, 2014.