

# Gas selection for Xe-based LCP-GEM detectors onboard the CubeSat X-ray observatory NinjaSat

T. Takeda<sup>1,2</sup>, T. Tamagawa<sup>2,3,1</sup>, T. Enoto<sup>4,2</sup>, T. Kitaguchi<sup>2</sup>, Y. Kato<sup>2</sup>, T. Mihara<sup>2,3</sup>, W. Iwakiri<sup>5</sup>, M. Numazawa<sup>6</sup>, Y. Zhou<sup>1,3</sup>, K. Uchiyama<sup>1,3</sup>, Y. Yoshida<sup>1,3</sup>, N. Ota<sup>1,2</sup>, S. Hayashi<sup>1,3</sup>, S. Watanabe<sup>1,3</sup>, A. Jujo<sup>1,3</sup>, H. Sato<sup>7,3</sup>, C.P. Hu<sup>8,2</sup>, H. Takahashi<sup>9</sup>, H. Odaka<sup>10</sup>, T. Tamba<sup>11</sup>, K. Taniguchi<sup>2</sup>

<sup>1</sup>*Tokyo University of Science, Department of Physics, 1-3 Kagurazaka, Shinjuku, Tokyo 162-8601, Japan*

<sup>2</sup>*RIKEN Cluster for Pioneering Research, 2-1 Hirosawa, Wako, Saitama 351-0198, Japan*

<sup>3</sup>*RIKEN Nishina Center, 2-1 Hirosawa, Wako, Saitama 351-0198, Japan*

<sup>4</sup>*Kyoto University, Department of Physics, Kitashirakawa Oiwake-cho, Kyoto, Japan*

<sup>5</sup>*Chiba University, International Center for Hadron Astrophysics, Chiba 263-8522, Japan*

<sup>6</sup>*Tokyo Metropolitan University, Department of Physics, 1-1 Minamiosawa, Hachioji, Tokyo 192-0397, Japan*

<sup>7</sup>*Shibaura Institute of Technology, Department of System Engineering and Science, 307 Fukasaku, Minuma, Saitama, Saitama 337-8570, Japan*

<sup>8</sup>*National Changhua University of Education, Department of Physics, Changhua, 50007, Taiwan*

<sup>9</sup>*Hiroshima University, Department of Physics, 1-3-1 Kagamiyama Higashi-Hiroshima, Hiroshima 739-8526, Japan*

<sup>10</sup>*Osaka University, Department of Earth and Space Science, 1-1 Machikaneyama, Toyonaka, Osaka 560-0043, Japan*

<sup>11</sup>*The University of Tokyo, Department of Physics, 7-3-1 Hongo, Bunkyo, Tokyo 113-8654, Japan*

E-mail: [tomoshi.takeda@riken.jp](mailto:tomoshi.takeda@riken.jp)

**ABSTRACT:** We present a gas selection for Xe-based gas electron multiplier (GEM) detectors, Gas Multiplier Counters (GMCs) onboard the CubeSat X-ray observatory NinjaSat. To achieve an energy bandpass of 2–50 keV, we decided to use a Xe-based gas mixture at a pressure of 1.2 atm that is sensitive to high-energy X-rays. In addition, an effective gain of over 300 is required for a single GEM so that the 2 keV X-ray signal can be sufficiently larger than the electrical noise. At first, we measured the effective gains of GEM in nine Xe-based gas mixtures (combinations of Xe, Ar, CO<sub>2</sub>, CH<sub>4</sub>, and dimethyl ether; DME) at 1.0 atm. The highest gains were obtained with Xe/Ar/DME mixtures, while relatively lower gains were obtained with Xe/Ar/CO<sub>2</sub>, Xe/Ar/CH<sub>4</sub>, and Xe+quencher mixtures. Based on these results, we selected the Xe/Ar/DME (75%/24%/1%) mixture at 1.2 atm as the sealed gas for GMC. Then we investigated the dependence of an effective gain on the electric fields in the drift and induction gaps ranging from 100–650 V cm<sup>-1</sup> and 500–5000 V cm<sup>-1</sup>, respectively, in the selected gas mixture. The effective gain weakly depended on the drift field while it was almost linearly proportional to the induction field: 2.4 times higher at 5000 V cm<sup>-1</sup> than at 1000 V cm<sup>-1</sup>. With the optimal induction and drift fields, the flight model GMC achieves an effective gain of 460 with an applied GEM voltage of 590 V.

**KEYWORDS:** GEM, Charge transport and multiplication in gas, X-ray detectors

---

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Experimental setup</b>	<b>2</b>
<b>3</b>	<b>Results and Conclusion</b>	<b>2</b>


---

## 1 Introduction

Gas electron multipliers (GEMs) [1] are a type of micro-pattern gas detectors (MPGDs) that enable us to track charged particles with high spatial resolution. Recently, GEM with liquid crystal polymer insulator (LCP-GEM) [2] has been used in several cosmic X-ray polarimetry missions. The main advantage of the LCP-GEM is its low outgassing, making it suitable for applications in satellite missions, where the sealed gas cannot be replaced for several years. LCP-GEM can also be used for non-imaging detectors because of its good gain uniformity across the GEM. In addition, compared to semiconductor detectors, GEM-based detectors can expand their effective area at a low cost and do not require cooling for operation. Therefore, non-imaging GEM-based detectors have the potential as detectors onboard CubeSat, where power, space, and budget are limited.

NinjaSat is a 6U-size ( $10 \times 20 \times 30$  cm<sup>3</sup>) CubeSat X-ray observatory, which will be launched in October 2023 and observes the time variability of bright X-ray sources in the 2–50 keV band [3]. NinjaSat is equipped with two sets of Xe-based non-imaging gas X-ray detectors (Gas Multiplier Counters; GMCs). Figure 1 shows a photograph of the flight model GMC and its cross-sectional view. To mitigate the risk of mission termination due to GEM failure caused by discharge, we adopt a single GEM configuration instead of the double or triple GEM configuration widely used in ground-based experiments. When selecting the sealed gas for GMC, two essential things should be considered to realize the wide energy bandpass of 2–50 keV. One is the use of a Xe-based gas mixture to be sensitive to high energy X-rays up to 50 keV. The other is the use of a gas that achieves a high effective gain of GEM so that 2 keV X-ray signals are sufficiently larger than the circuit noise. In addition, because GMC does not have a pressure-supporting structure inside the gas cell, the sealed gas pressure must be higher than 1.2 atm so that the Be window would not be damaged due to differential pressure. We set the pressure at 1.2 atm to achieve a higher gain at a low applied voltage to the GEM based on the anti-correlation between the effective gain of GEM and the gas pressure. For the above reasons, we require an effective gain larger than 300 in a Xe-based gas mixture with a pressure of 1.2 atm at 0°C. However, in the case of a single GEM, it was known that the Xe-based gas mixture used in the past could not achieve sufficiently high gain to meet our requirement [4].

This paper describes the GEM gain measurements in Xe-based gas mixtures performed to select an appropriate sealed gas for GMCs. In addition, only for the selected gas mixture of 75% Xe, 24% Ar, and 1% dimethyl ether (DME) at 1.2 atm, the dependence of an effective gain on the electric fields in the drift gap,  $E_d$ , and induction gaps,  $E_i$ , are also described.

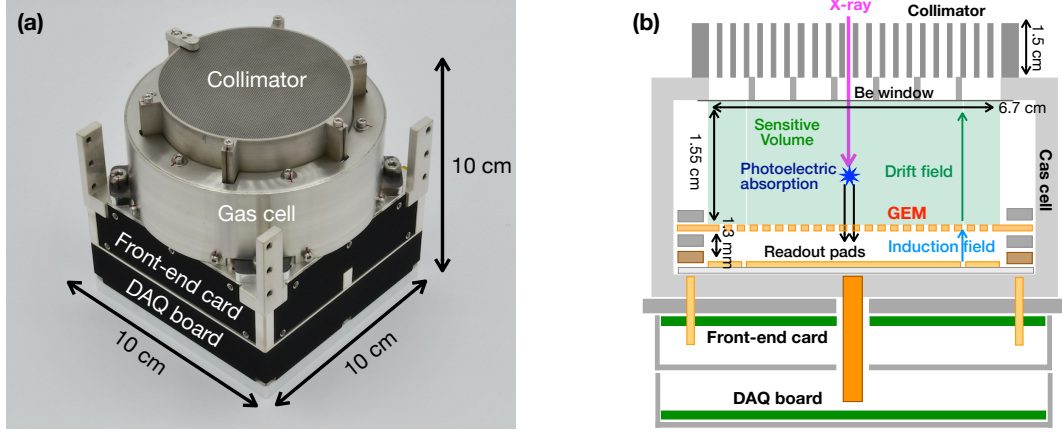

**Figure 1.** (a) Photograph of the flight model GMC. (b) Schematic cross-sectional view of GMC.


## 2 Experimental setup

We measured the effective gains of GEM in nine Xe-based gas mixtures (combinations of Xe, Ar, CO<sub>2</sub>, CH<sub>4</sub>, and dimethyl ether; DME) at 1.0 atm. For the GEM gain measurements, we used a gas cell with a maximum pressure resistance of 1.0 atm. Although this gas cell differs from the one used for the GMC, it has a GEM of the same design as GMC with a thickness of 100  $\mu\text{m}$ , a hole diameter of 70  $\mu\text{m}$ , and a pitch of 140  $\mu\text{m}$ . We utilized this gas cell to prevent excessive stress on the flight-equivalent GMC caused by repeated evacuations and refills with various candidate gases.  $E_d$  and  $E_i$  were set to be 403 and 1488 V cm<sup>-1</sup>, respectively. The detector was irradiated with the X-rays from an X-ray generator with an electron-accelerating voltage of 40 kV and a target material of Mo. The electron signal read out via the GEM cathode was fed into a charge-sensitive preamplifier (ORTEC 109) and a shaping amplifier (ORTEC 572). The signals were then digitized with a 12-bit ADC. The effective gain of GEM is defined as the number of electrons read with the GEM cathode divided by the number of secondary electrons created by X-rays of Mo K $\alpha$ . The former electron number was calculated from the peak channel of the spectrum, while the latter was calculated assuming a mean energy for ion-electron creation of 22 eV, which is the value of the most abundant Xe in the gas mixtures.

The gain dependence on  $E_d$  and  $E_i$  were measured using a gas cell equivalent to the flight model GMC as shown in Figure 1. The gas cell was filled with a XeArDME (75%/24%/1%) mixture at 1.2 atm, which was selected as the sealed gas for GMC based on the gain measurements. The gas cell was irradiated with the 5.9 keV X-rays from the radioactive <sup>55</sup>Fe source. We measured the charge collected with readout pads while scanning the drift and induction fields independently in the range of 100–650 and 500–5000 V cm<sup>-1</sup>, respectively.

## 3 Results and Conclusion

Figure 2 (a) shows the effective gain of single LCP-GEM as a function of the applied voltage to the GEM ( $\Delta V_{\text{GEM}}$ ) in nine Xe-based gas mixtures at 1.0 atm. Compared at the same voltage, the highest gain of  $2 \times 10^3$  was obtained with XeArDME (75%/24%/1%) mixture, while relatively lower gains

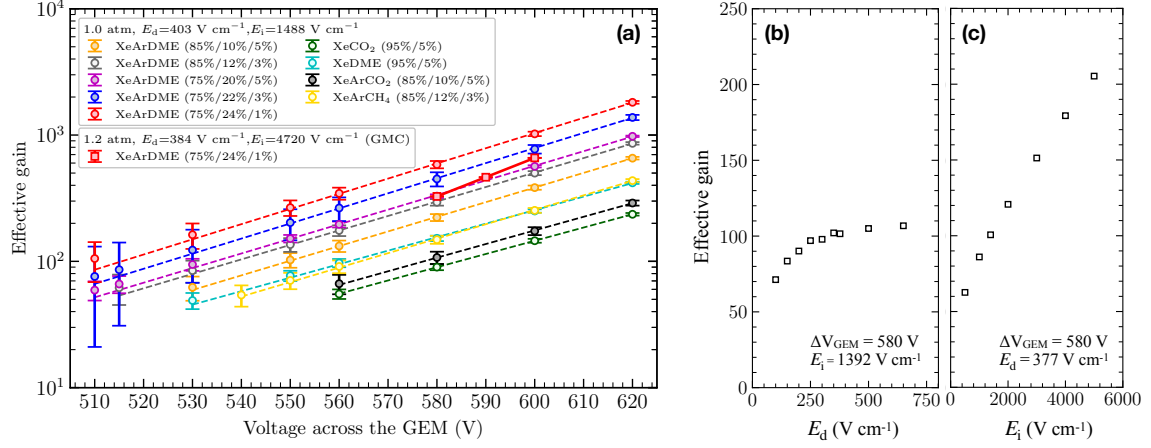

**Figure 2.** (a) Effective gain as a function of the applied GEM voltage in Xe-based gas mixtures. (b) Gain dependence on  $E_d$  and (c)  $E_i$  in the XeArDME (75%/24%/1%) mixture at 1.2 atm.

were obtained with Xe/Ar/CO<sub>2</sub>, Xe/Ar/CH<sub>4</sub>, and Xe+quencher mixtures. The highest gain of the XeArDME mixture is likely due to the penning effect between Ar, DME, and Xe. Based on these results, we selected a XeArDME (75%/24%/1%) mixture at 1.2 atm as a sealed gas for GMC.

The results of the  $E_d$  and  $E_i$  scan with the selected gas mixture are shown in Figure 2 (b) and (c), respectively. The effective gain was weakly dependent on  $E_d$  in the range of over 300 V cm<sup>-1</sup>, where the recombination of ion-electron pairs and electron attachment by electronegative atoms in the gas can be ignored. On the other hand, the effective gain was almost linearly proportional to  $E_i$  because a larger  $E_i$  increases the charge collection efficiency. The effective gain was 2.4 times higher at  $E_i = 5000$  V cm<sup>-1</sup> than at 1000 V cm<sup>-1</sup>.

Based on our study, the flight model GMC achieves an effective gain of 460 with a nominal operational settings of  $\Delta V_{\text{GEM}} = 590$  V,  $E_d = 384$  V cm<sup>-1</sup>, and  $E_i = 4720$  V cm<sup>-1</sup> as shown in Figure 2 (a). In addition, GMCs achieve the energy bandpass of 2–50 keV with a total effective area of 32 cm<sup>2</sup> at 6 keV for two GMCs: two orders of magnitude larger than the previous X-ray detectors onboard CubeSats.

## Acknowledgments

This work was supported by RIKEN Junior Research Associate Program.

## References

- [1] F. Sauli, *GEM: A new concept for electron amplification in gas detectors*, *Nucl. Instr. and Meth.* **A386** (1997) 531
- [2] T. Tamagawa, et al, *Development of thick-foil and fine-pitch GEMs with a laser etching technique*, *Nucl. Instr. and Meth.* **A608** (2009) 390
- [3] T. Enoto, et al, *NinjaSat: an agile CubeSat approach for monitoring of bright x-ray compact objects*, *Proc. of SPIE Vol. 11444 114441V* (2020)
- [4] A. Orthen, et al, *Gas gain and signal length measurements with a triple-GEM at different pressures of Ar-, Kr- and Xe-based gas mixtures*, *Nucl. Instr. and Meth.* **512** (2003) 476