





















The Simons Observatory: Cryogenic Half Wave Plate Rotation Mechanism for the Small Aperture Telescopes

K. Yamada ^{1, a)} B. Bixler,² Y. Sakurai ^{3, 4, b)} P. C. Ashton,^{5, 6, 4, c)} J. Sugiyama ¹ K. Arnold ²
 J. Begin ⁷ L. Corbett,^{5, 6} S. Day-Weiss ⁷ N. Galitzki ^{8, 9} C. A. Hill ^{5, 6} B. R. Johnson ¹⁰ B. Jost ⁴
 A. Kusaka,^{6, 1, 4, 11} B. J. Koopman ¹² J. Lashner ¹² A. T. Lee ^{5, 6} A. Mangu,⁵ H. Nishino ¹¹
 L. A. Page ⁷ M. J. Randall,² D. Sasaki ¹ X. Song,⁵ J. Spisak ² T. Tsan ² Y. Wang ⁷ and
 P. A. Williams ⁶

¹⁾Department of Physics, Graduate School of Science, The University of Tokyo, Tokyo 113-0033, Japan

²⁾Department of Physics, University of California, San Diego, La Jolla, CA 92093, USA

³⁾Graduate school of natural science and technology, Okayama University, Okayama 700-8530 Japan

⁴⁾Kavli Institute for the Physics and Mathematics of the Universe (WPI), UTIAS, The University of Tokyo, Chiba 277-8583, Japan

⁵⁾Department of Physics, University of California, Berkeley, CA 94720, USA

⁶⁾Physics Division, Lawrence Berkeley National Laboratory, Berkeley, CA 94720, USA

⁷⁾Joseph Henry Laboratories of Physics, Jadwin Hall, Princeton University, Princeton, NJ 08544, USA

⁸⁾Department of Physics, University of Texas at Austin, Austin, TX 78722, USA

⁹⁾Weinberg Institute for Theoretical Physics, Texas Center for Cosmology and Astroparticle Physics, Austin, TX 78712, USA

¹⁰⁾Department of Astronomy, University of Virginia, Charlottesville, VA 22904, USA

¹¹⁾Research Center for the Early Universe, School of Science, The University of Tokyo, Tokyo 113-0033, Japan

¹²⁾Wright Laboratory, Department of Physics, Yale University, New Haven, CT 06520, USA

(Dated: 27 September 2023)

We present the requirements, design and evaluation of the cryogenic continuously rotating half-wave plate (CHWP) for the Simons Observatory (SO). SO is a cosmic microwave background (CMB) polarization experiment at Parque Astronómico Atacama in northern Chile that covers a wide range of angular scales using both small ($\varnothing 0.42$ m) and large ($\varnothing 6$ m) aperture telescopes. In particular, the small aperture telescopes (SATs) focus on large angular scales for primordial B-mode polarization. To this end, the SATs employ a CHWP to modulate the polarization of the incident light at 8 Hz, suppressing atmospheric $1/f$ noise and mitigating systematic uncertainties that would otherwise arise due to the differential response of detectors sensitive to orthogonal polarizations. The CHWP consists of a 505 mm diameter achromatic sapphire HWP and a cryogenic rotation mechanism, both of which are cooled down to ~ 50 K to reduce detector thermal loading. Under normal operation the HWP is suspended by a superconducting magnetic bearing and rotates with a constant 2 Hz frequency, controlled by an electromagnetic synchronous motor. The rotation angle is detected through an angular encoder with a noise level of $0.07 \mu\text{rad}\sqrt{\text{s}}$. During a cooldown, the rotor is held in place by a grip-and-release mechanism that serves as both an alignment device and a thermal path. In this paper we provide an overview of the SO SAT CHWP: its requirements, hardware design, and laboratory performance.

CONTENTS		C. Grippers	6
		D. Motor cryogenic assembly	6
I. Introduction	2	E. Motor Driver	7
		F. Data Acquisition	7
II. Half-wave plate polarimetry	2		
III. Requirements	4	V. Performance	7
A. Operational	4	A. Thermal	7
B. Mechanical	4	B. Rotation control	8
C. Optical	4	C. Rotation efficiency	9
D. Thermal	5	D. Vibration	10
E. Data Acquisition	5	E. Rotor alignment and displacement	11
IV. Design	5	F. Angle encoding accuracy	13
A. Sapphire Stack Mounting	5	VI. Conclusion	14
B. Superconducting Magnetic Bearing	5		
		Acknowledgments	14
		A. Scan synchronous modulation of HWP rotation	15
		B. Measurement of the displacement of rotor	16
		C. Precautions	17

^{a)}Electronic mail: ykyohei@cmb.phys.s.u-tokyo.ac.jp

^{b)}Electronic mail: yuki.sakurai727@gmail.com, ysakurai@s.okayama-u.ac.jp

^{c)}Current address: Advanced Technology and Systems Division, SRI International, Menlo Park, CA 94025, USA

I. INTRODUCTION

The cosmic microwave background radiation (CMB) is the oldest detectable light in the universe, originating from the epoch of recombination. Its polarization is dominated by parity-even "E-mode" patterns, primarily sourced by density fluctuations in the early universe.^{1,2} Primordial tensor perturbations are predicted to produce parity-odd "B-mode" polarization with an angular spectrum peaking at degree scales.^{3,4} The rapid expansion of the early universe, called inflation, could produce tensor perturbations.⁵⁻⁷

A measurement of the primordial B-mode polarization signature would constrain models of the early universe and contribute to the understanding of physics at grand unified theory (GUT) energy scales.⁸ The primordial B-mode signal is subdominant to both E-modes and several foreground sources, including polarized galactic emission, mainly from synchrotron and thermal dust^{9,10}, and E to B-mode conversion through gravitational lensing.¹¹ Separating primordial B-mode polarization from galactic foregrounds requires wide frequency coverage, while efficient lensing B-mode separation requires high resolution and large sky coverage.¹²⁻¹⁴

The Simons Observatory (SO) is a CMB experiment located at Cerro Toco (5,200 m) in the Chilean Atacama Desert.^{15,16} The nominal observatory consists of three small aperture telescopes (SATs), each with an aperture of 42 cm targeting large angular scales,^{17,18} and one large aperture telescope (LAT), with an aperture of 6 m targeting arcminute angular scales.¹⁹⁻²¹ The combined arrays of the SATs and the LAT employ over 60,000 transition-edge sensor (TES) bolometers.²²⁻²⁴ The SAT are designed for the primary science goal of constraining primordial B-modes and therefore probe a sufficiently wide range of frequency bands and angular scales. In order to address these requirements, each SAT is sensitive to large angular scales of $30 < \ell < 300$ with 10% fractional sky coverage and has two primary frequency bands with bandwidths ranging from about 20% to 45% of the central frequencies.²⁵ Two SATs cover middle frequencies (MF), with band centers at of 93 and 145 GHz, while the third SAT covers ultra-high frequencies (UHF), centering at 225 and 280 GHz.

Various modulation techniques have been used in CMB polarization experiments.²⁶⁻³⁷ The rapid modulation of incident polarization by a half-wave plate (HWP) is one of the most promising techniques to separate the large scale CMB B-mode polarization signal from large unpolarized atmospheric $1/f$ noise, while using an instrument with large optical throughput and a large number of multi-choic pixels.³⁸⁻⁴⁴

The SO SATs employ a cryogenic continuously rotating half-wave plate (CHWP) polarization modulator to achieve sensitive observations at large angular scales. In this paper, we describe the requirements, design, and evaluation test results for the SO SAT CHWP rotation mechanism for the MF and UHF frequency bands. The development and study for low frequencies (LF), having center band frequencies of 27 and 39 GHz, is underway and will be reported elsewhere. Section II provides an overview of the basic functionality of the polarization modulator, Sec. III presents the requirements, Sec.

IV presents the design of subsystems, Sec. V presents the results of laboratory performance, and Sec. VI summarizes the development and describes future prospects.

II. HALF-WAVE PLATE POLARIMETRY

Observing primordial B-modes requires nK sensitivity, especially at degree angular scales. The challenge for ground-based polarimeters is to characterize faint signals in the presence of comparably large-amplitude unpolarized atmospheric fluctuations, in addition to polarized emission from the atmosphere,^{47,48} the ground, and the instrument itself. While atmospheric noise is mitigated by the high altitude and low water vapor of the SO site, it is nevertheless difficult to control this contamination due to spatial and temporal fluctuations caused by local weather conditions. The atmospheric noise enters the detector time ordered data (TOD) as $1/f$ noise, reducing sensitivity at large angular scales.⁴⁹⁻⁵²

Experiments without rapid polarization usually mitigate the atmospheric $1/f$ noise and reconstruct the linear polarization by differencing detectors with orthogonal antennas.⁵³⁻⁵⁵ However, any mismatched response between orthogonal detectors leads to intensity to polarization (I-to-P) leakage, which contaminates the cosmological polarization signal.⁵⁶

In order to mitigate both $1/f$ noise and I-to-P leakage, the SATs employ a CHWP-based polarization modulation system, a commonly used technique among millimeter and sub-millimeter polarimeters. The HWP consists of a birefringent material that introduces a phase difference of 180° between the ordinary and extraordinary axes. While passing through the HWP, the incident polarization rotates by twice the angle between its vector and the HWP extraordinary axis. If the HWP is continuously rotating, the measured linear polarization signal rotates synchronously, and is modulated above $1/f$ noise fluctuations by setting the appropriate rotation frequency. The HWP modulated signal incident on a polarimeter sensitive to a single linear polarization is expressed as

$$d_m(t) = I(t) + \varepsilon \text{Re}[(Q(t) + iU(t))m(\chi)], \quad (1)$$

where t is time, I , Q , and U are the Stokes vectors of the incident light, assuming $V = 0$. ε is the HWP polarization modulation efficiency, $\chi(t)$ is the rotation angle of the HWP, and

$$m(\chi) = \exp(-i4\chi) \quad (2)$$

is the modulation function. To extract the intensity signal, we low-pass filter the modulated data. To extract the linear polarization signals, Q and U , we band-pass filter the modulated data around the modulation frequency, multiply by the complex conjugate of the modulation function, $m(\chi)$, and apply a low-pass filter to it. We call this procedure demodulation.⁴¹ There is no need for differencing pairs of orthogonal detectors in demodulation, and thus all functional TESs in the array can operate independently.

The CHWP employs a Pancharatnam-style⁵⁷ achromatic HWP (AHWP) composed of three single-crystal sapphire

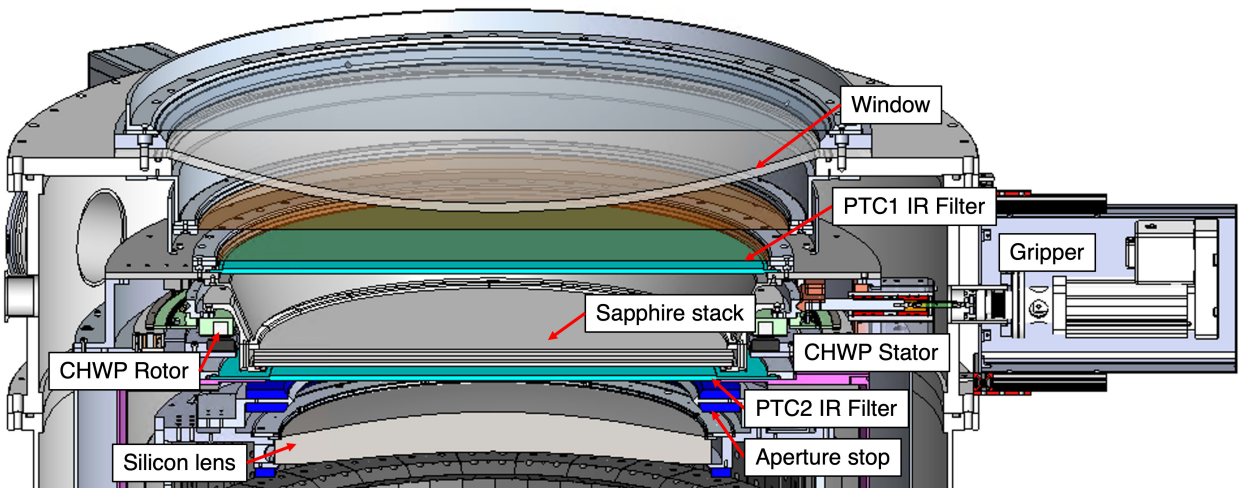
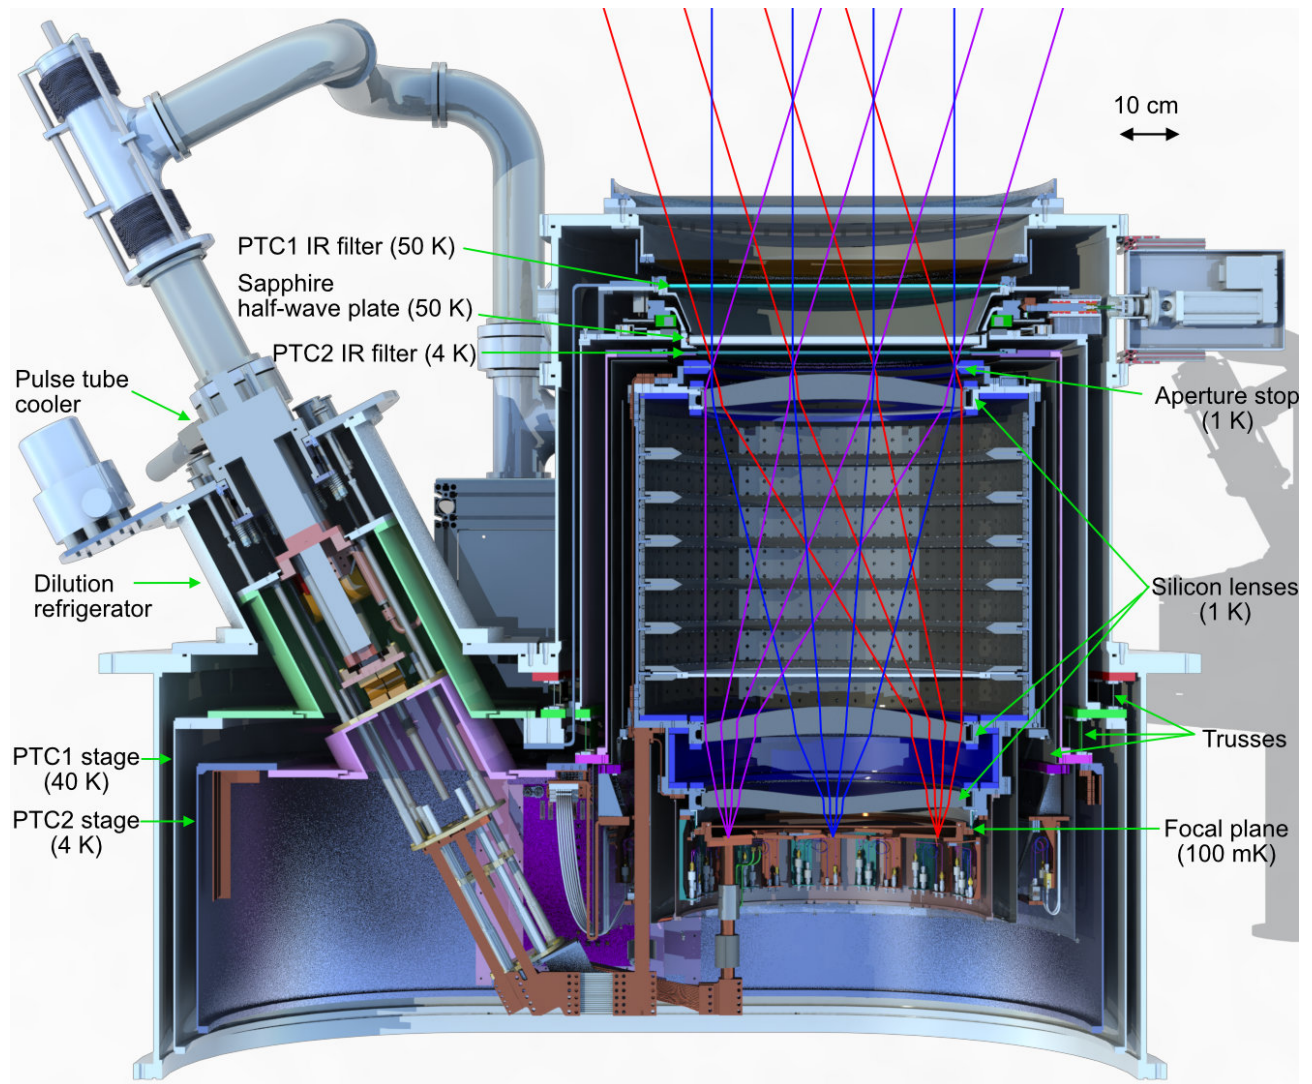


FIG. 1. The computer-aided design (CAD) cross-section of the small-aperture telescope's receiver.¹⁹ The superposed optical ray traces⁴⁵ are approximations and for illustrative purposes only. The SAT receiver employs an outer vacuum shell and the two thermal shells cooled by a pulse tube cooler (PTC).⁴⁶ We refer to the two thermal shells as the PTC1 stage and the PTC2 stage. The nominal temperature of each stage is 40 K and 4 K, respectively. The CHWP rotation mechanism and PTC1 infrared (IR) blocking alumina filter are located on the PTC1 stage, and the PTC2 IR blocking alumina filter is located on the PTC2 stage. The temperatures of each component are nominal values.

TABLE I. The CHWP’s numerical requirements and achieved values.

Parameter	Requirement	Achieved
Assembly outer diameter	≤ 950 mm	931 mm
Assembly height	≤ 246 mm	124.5 mm
Cryogenic stage mass	≤ 70 kg	66 kg
Clear aperture diameter	≥ 478 mm	478 mm
Rotor center alignment	≤ 5 mm	≤ 4.5 mm
Rotor temperature T_{rotor}	≤ 85 K	≤ 70 K
Stator temperature T_{stator}	≤ 70 K	≤ 60 K ^a
Rotor thermalization time ^b	≤ 36 hr	10 hr
Rotation frequency f_{HWP}	2 Hz	0.5 Hz - 3 Hz
Rotation stability Δf_{HWP} ^c	≤ 10 mHz	≤ 5 mHz
Encoded angle noise	$\ll 3 \mu\text{rad}/\sqrt{\text{s}}$	$0.07 \mu\text{rad}/\sqrt{\text{s}}$

^a Achieved at steady state when the rotor rotates at 2 Hz (Fig. 7).

^b Lag time of rotor vs stator on initial cooldown (Fig. 6)

^c The requirement is over the observation period of several years. The achieved stability is over 4 days (Fig. 11).

plates. Sapphire was chosen because it has high thermal conductivity and low millimeter-wave absorption. The AHWP allows coverage of a wide frequency band, and it has been employed in several previous CMB experiments^{34,38,44,58,59} as well as been included in the design of planned instruments.⁶⁰ The design of the AHWP is similar to that used in the Simons Array experiment, including the 3 slabs of sapphire with anti-reflection (AR) coating.⁴² The control of systematic effects from the AHWP is a crucial aspect of HWP polarimetry.^{59,61,62} The study of detailed performance and systematics of the SO AHWP will be reported elsewhere. The design of the rotation mechanism inherits many aspects of the analogous system in the Simons Array experiment.⁴⁴ However, the details of the implementation have been modified according to the unique requirements of the SO SAT receiver, as shown in Fig. 1.

The driving philosophy behind the CHWP system design is to ensure stability, both mechanically and thermally. Since the CHWP is located in the SAT’s main beam (Fig. 1), any unpredictable behavior carries a risk of contaminating the polarization signal from the sky.⁴⁵ Therefore, we require any variation in the CHWP system other than its fast modulation to be small, slowly varying, and measurable where possible. Furthermore, we look for robust design solutions that will withstand years of continuous operation at the Simons Observatory site while minimizing maintenance and telescope downtime. Finally, we develop the CHWP rotation mechanism as a modular system that can be tested with more frequent iterations before being integrated with the complete SAT cryostat.

III. REQUIREMENTS

Table I summarizes the CHWP requirements and achieved values. The system design relies on the heritage of the CHWP for the Simons Array telescopes,⁴⁴ and the requirements qualitatively remain the same. Notable differences to the requirements include: a) a larger optical throughput requiring optical diameter of 490 mm and the placement of the HWP optics

close to the telescope’s aperture stop; b) relaxed requirements on the physical volume available to the system; and c) a larger variation of the gravity vector due to the addition of bore sight rotation about the SAT’s optical axis to the scan strategy resulting in the rotor alignment requirement.

A. Operational

During normal operation we require a steady rotation frequency (f_{HWP}) of 2 Hz or greater in order for the polarization signal to be modulated faster than the $1/f$ knee of temperature fluctuations in the atmosphere.^{41,63} In order to make efficient use of observing time, we require spin-up (down) to (from) this rotation frequency to be achieved in less than 5 minutes. We also require the peak-to-peak stability of f_{HWP} to be better than 10 mHz during observations over a standard observation period of several years. Requirements are determined by operational conditions such as the need to avoid noisy frequency regions in the TES power spectra or resonance frequencies of the mechanical structures in the cryostat.

B. Mechanical

For modularity, the CHWP rotation mechanism is designed to easily accommodate the front end, window-side, of the cryostat. This constrains the total envelope of the CHWP cryogenic components to be < 950 mm in diameter and < 246 mm in height along the optical axis. The total mass requirement of the CHWP, ≤ 70 kg, is not tightly constrained, as it is subdominant to the total suspended mass of the cryogenic stages supported by the primary cryo-mechanical truss.⁶⁴

CHWP rotation can generate vibrations in the cryostat, and heat up the focal plane’s temperature, degrading detector gain stability and introducing $1/f$ noise. We require no measurable CHWP-induced resonant heating in the focal plane temperature. The vibrational performance is discussed in Sec. V D.

C. Optical

A clear aperture is one of the central requirements for the CHWP system. Special care is taken to prevent any optical interference from moving parts of the rotation mechanism, as any signal modulated at $4f_{\text{HWP}}$ mimics incident polarization. To this end, we require all rotating parts other than the sapphire stack to be outside of the -20 dB margin of the 90 GHz beam, and to be circularly symmetric. The 90 GHz band is chosen as it gives the most stringent optical requirements between the MF and UHF bands.

Given the SAT’s 35° field of view and the diffraction limited beam, these requirements impose a keepout zone with an opening angle of 45° extending skyward from the 420-mm diameter aperture stop. The sapphire stack must be at least 490 mm in diameter at a distance of 40 mm away from the aperture stop; as close to the stop as possible while maintaining sufficient mechanical margin for the PTC2 alumina filter

in between. Static (non-rotating) components are designed to be smaller than the smallest rotating dimension with the margin of -15 dB maximum. We also require that the innermost static components be circularly symmetric.

Finally, the misalignment of the rotor with the optical center must not exceed 5 mm during operation, as any larger misalignment would lead to physical interference or contamination of the beam.

D. Thermal

The rotor temperature is required to stay below 85 K to reduce thermal emission, requiring the thermal loading by the CHWP induced IR radiation incident on the PTC2 alumina filter to be subdominant to the total thermal loading on the PTC2 stage.⁶⁵ The sensitivity loss due to mm-wave emission from CHWP is expected to be small when the rotor temperature is below 100 K.⁴⁴ The stator temperature is required to be well below the critical temperature of the superconducting bearing (Secs. IV B and V E). The power dissipation on PTC1 stage is required to be subdominant to the total thermal loading on the PTC1 stage, and also care is taken to effectively heat sink the CHWP stator to the PTC1 stage to reduce temperature gradients generated by the loading from the CHWP system during operation, and to improve drive system efficiency by reducing the resistance of the motor drive coils. A lower temperature of the HWP optics reduces the fluctuation and non-uniformity of its emissivity and also helps to reduce the potential systematics in the observed polarization signal. The low power dissipation is an advantage not only for the cryogenic components, but also for the room-temperature components, especially for the experiments conducted at the altitude of 5,200 m, where convective air cooling is poor.

E. Data Acquisition

Precise measurement of the rotation angle of HWP is crucial for demodulation in the analysis pipeline. We require that the propagated noise equivalent temperature (NET) of the angular encoder be an order of magnitude smaller than the MF SAT NET goal: $1.4 \mu\text{K}\sqrt{\text{s}}$,¹⁵ where we combine the sensitivity at 93 and 145 GHz to be conservative. Assuming a ~ 100 mK constant polarization induced by the vacuum window and the PTC1 alumina filter,⁶⁶ and following a similar calculation to that described in Hill *et al.*,⁴⁴ this imposes a limit of $3 \mu\text{rad}\sqrt{\text{s}}$ for the encoder white noise level. In addition to the low encoding noise, robustness in encoding, such as a low rate of data packet loss and of glitches, is crucial.⁶⁷

Due to the remote nature of the SO site, we also require that the CHWP system be capable of autonomous operation, including the capability of its diagnostic monitoring system to detect a power interruption to the cryostat and trigger an automatic shutdown procedure, braking and re-gripping of the rotor.

IV. DESIGN

This section describes the mechanical design of the rotation mechanism and highlight its novel aspects. The overall mechanism can be divided into five major components: the HWP, the superconducting magnetic bearing (SMB), the grippers, the motor, and the angle encoder.

As shown in Figs. 1 and 2, the non-rotating cryogenic components of the CHWP mechanism are built onto an 884 mm diameter base plate that mounts to the sky-facing flange of the PTC1 stage. The main components mounted onto the base plate are the superconductor ring, the motor system, and the encoder readheads. Additionally, an aluminum shell on the outer diameter of the CHWP assembly provides a mounting flange for skyward optical components (the PTC1 stage IR blocking filters and related heat strapping) and creates a cold, well-regulated radiative cavity to help control the rotor temperature.

A. Sapphire Stack Mounting

The CHWP system employs an AHWP with a three-layer-sapphire stack sandwiched by AR layers. Hereafter we refer to this optical element as the sapphire stack. It has a ~ 505 mm diameter, and the total thickness of all five layers is ~ 20 mm for the MF band. As shown in Fig. 3, the sapphire stack is held in an aluminum cradle. In the vertical direction, the sapphire stack is held along its circumference between a Spira⁶⁸ gasket (LS-08) and a series of nylon pads. Nylon is chosen for its low wear and friction at cryogenic temperatures.⁶⁹ In the radial direction, the sapphire stack is pressed by a 20° arc-shaped Spira gasket (SS-16). On the opposite side, it is held by two nylon stops, each placed at 120° from the gasket. The radial position is designed to be centered after cooldown, taking into account the contractions and the gasket spring constant.

The cradle is mounted on the rotor baffle, which is shielded from the beam by the stator baffle (Fig. 4). As discussed in Sec. III C, any moving parts, e.g. the cradle aperture and rotor baffle, are designed to intercept the diffracted beam at the -20 dB level or below for 90 GHz when the rotor is at its nominal position. The stator baffle intercepts the diffracted beam at the -18.5 dB level at 90 GHz.

B. Superconducting Magnetic Bearing

The CHWP employs a 550 mm diameter superconducting magnetic bearing.⁷⁰ While SMBs have been demonstrated in other CHWP systems for CMB observations,^{39,40,43,44,71} the SO SMB is the largest of its kind developed to date. The SMB is composed of a permanent ring magnet on the rotor and a ring of 61 or 53 disks of yttrium barium copper oxide⁷² (YBCO) epoxied into an aluminum holder on the stator. YBCO is a type II superconductor with transition temperature of ~ 90 K, below which the magnetic flux of the rotor is pinned in flux vortices in the disks, resulting in the

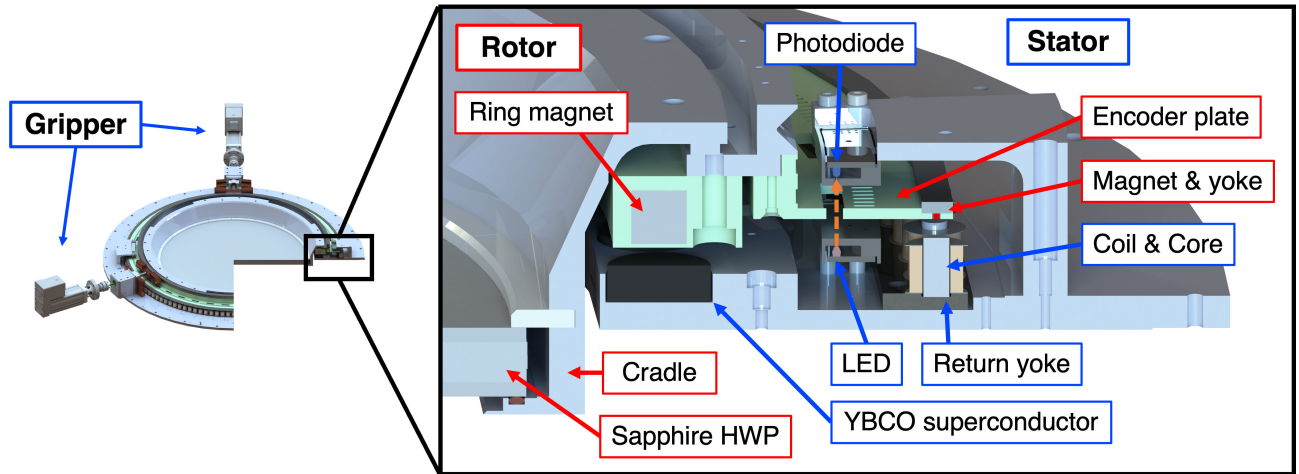


FIG. 2. Left panel: CAD views of the CHWP system. Right panel: magnified cross-sectional view of the rotation mechanism. Rotating components are labeled in red, and stationary components are labeled in blue.

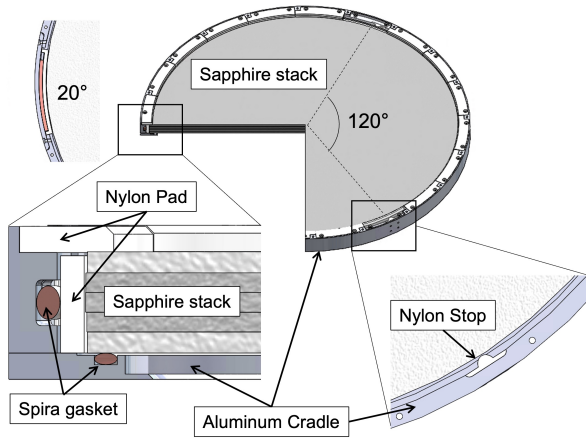


FIG. 3. The CAD image of the sapphire stack held in an aluminum cradle. The sapphire stack is held in place vertically by Spira gaskets and nylon pads, and radially by Spira gaskets and nylon stops.

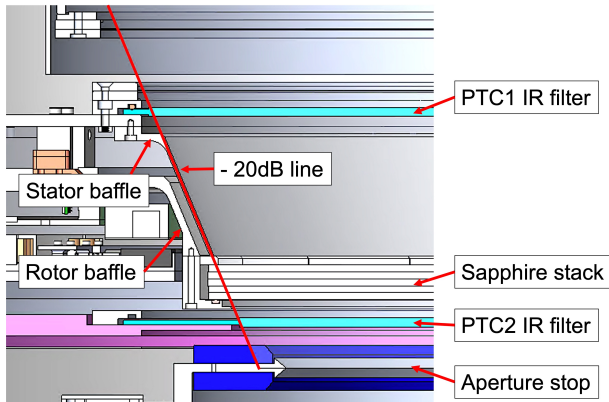


FIG. 4. A cross-sectional view of the sapphire stack design with the -20 dB line of the 90 GHz beam.

loss of all but the rotational degree of freedom. The ring magnet of 550 mm inner diameter was manufactured by Shin-Etsu Chemical⁷³ and consists of 32 segments of neodymium (Nd-FeB; N52) fixed in a G10 enclosure. Care was taken in assembly to minimize gaps between the segments in order to maintain an azimuthally symmetric field. The friction and stability of this bearing was previously characterized in Sakurai *et al.*⁷⁰ The optimization of the SMB design and its vibration performance are discussed in Sec. V D.

C. Grippers

While the YBCO disks are above their transition temperature (~ 90 K), the rotor is not suspended by the flux-pinning effect and it is necessary to firmly grip it. This is accomplished by a grip-and-release mechanism, referred to hereafter as grippers. The grippers are a set of three linear actuators⁷⁴ with vacuum adapters manufactured by Huntington.⁷⁵ The actuator shafts mate to wedged tips mounted on the stator which engage with a matching groove on the rotor when extended. This system allows for the precise and repeatable positioning of the rotor with respect to the rigid body of the SAT. The gripper design closely follows the design described in Hill *et al.*,⁴⁴ with minor modifications. A single gripper can provide a pushing force that is more than twice the weight of the rotor; this is necessary to enable re-gripping and centering at any telescope elevation, as required in Sec. III C.

D. Motor cryogenic assembly

The motor system that provides torque to the rotor is similar to that described in Hill *et al.*,⁴⁴ with an increased number of coils due to the larger diameter of the SAT. The magnetic field from the motor coils couples to the magnet sprockets on the edge of the encoder plate (Fig. 2), driving rotation. We em-

ploy optical encoders, a set of five IR light emitting diodes⁷⁶ (LEDs) mounted on an arm that hangs over a G10 encoder plate mounted to the rotor (Fig. 2). The LEDs are aligned with a matching set of photo-diodes⁷⁷ located below the plate. The encoder plate is slotted at two different radii in order to chop the light emitted by the LEDs. The photo current signal chopped by the wider slots drive the motor coils by providing feedback through the motor drive electronics (Sec. IV E), while the signal chopped by the finer slots is fed to the encoder electronics for calculation of the rotation angle of the CHWP (Sec. IV F). Two encoder heads are installed at 180° from one another for redundant angle encoding. Data from both encoder heads can be combined to estimate the rotor's off-center displacement, as described in Appendix. B.

E. Motor Driver

The design of the motor drive electronics closely follows that used in Hill *et al.*⁴⁴ Here we highlight the two design improvements. First, a Proportional-Integral-Differential (PID) feedback system is used further regulate the rotation frequency. For this system, a frequency-to-voltage circuit serves as an input to a PID controller⁷⁸ which adjusts the drive voltage and modulates the motor torque. With the PID enabled the frequency control system becomes closed loop and is able to account for unexpected changes to motor efficiency. PID parameters are chosen to minimize long-timescale variations.

Second, a phase compensation circuit is used to further improve rotation stability. While the CHWP rotates, the inductance of the motor coils distorts the motor drive feedback signal. This distortion increases with the rotation frequency and acts as an effective phase delay to the motor drive signal. The phase compensation circuit accounts for this effective phase delay and improves overall motor efficiency. We implement a discrete phase compensation in 60° increments through the sign reversal and the phase swapping of the three-phase motor using relay modules. The use of the relay modules eliminates single-point failures and minimizes noise added to the motor coil drive feedback. Phase compensation with 60° increments is not always optimal, but is easily achieved and provides sufficient control and efficiency. The performance of the rotation drive control electronics and the evaluation of rotation efficiency are summarized in Secs. V B and V C, respectively.

F. Data Acquisition

Data generated by the CHWP's cryogenic system is routed from the cryostat via four cables to a warm electronics box for processing. Acquisition of the rotor angular time stream requires cleaning and digitizing the raw encoder signals sent from the CHWP. This processing follows the method described in Hill *et al.*⁴⁴

The CHWP system also continuously records information from the motor driver, a Hall probe, and four silicon diode cryogenic thermometers. The diodes are placed on the YBCO

superconductor ring, sapphire stack mount on rotor, PTC1 filter plate and PTC2 filter plate, and are continuously monitored by a Lake Shore Model 240.⁷⁹ Rotor temperature measurement is achieved through electrical contacts attached to the end of each gripper. Therefore, measurement is only possible while the rotor is held by the grippers, but can be used to determine when it is safe to release the grippers and begin CHWP operation. A Hall probe⁸⁰ attached to the YBCO assembly continuously measures the magnetic field intensity around the superconductor (Fig. 20). The neodymium magnet in the rotor assembly is the primary magnetic source, and its field varies with changes in rotor temperature and displacement, enabling the Hall probe to monitor both of these properties.⁸¹ The monitoring and control of the CHWP system are managed by the Observatory Control System.⁸²

V. PERFORMANCE

We discuss the thermal and mechanical performance of three CHWPs evaluated at the University of Tokyo and in SAT cryostats at the University of California San Diego (UCSD), Princeton University, and the Lawrence Berkeley National Laboratory (LBNL) (Fig. 5.).

A. Thermal

Figure 6 shows the rotor and stator temperatures during a cooldown. Initially, the rotor is held by the grippers and is primarily cooled by conduction through the grippers' copper fingers. The rotor temperature lags behind the stator by 10 hours, well within the 36 hour requirement.

Once the YBCO disks become superconducting and the rotor temperature stabilizes, the rotor is ungripped and begins to levitate. Figure 7 shows the rotor temperature as a function of time, while it is floating (blue points) and when it spins at 2 Hz (red points) after temperature stabilization. In order to collect temperature data with the rotor spinning, its rotation is intermittently stopped and its temperature is measured using the gripper touch probes (Sec. IV F). This process is performed once every few hours with the duration of each touch not exceeding 60 seconds, leading to little disturbance in the rotor's temperature trend. The blue points inform us of optical loading where the IR loading is dominant, while the red points provide estimates of the excess loading generated by rotation. Each set of points are fit by

$$T(t) = T_e + \Delta T \exp(-t/\tau), \quad (3)$$

where T_e represents the estimated rotor temperature at steady state, τ is the time constant, and ΔT is the difference between the initial and steady state temperature. The steady state temperature of the CHWP rotating at 2 Hz is 70 K, which satisfies the requirement of ≤ 85 K. The time constants of the blue and red curves are 31 hours and 46 hours, respectively. As shown in the bottom panel of Fig. 7, there is no significant change in the temperature of the PTC2 IR filter indicating that the

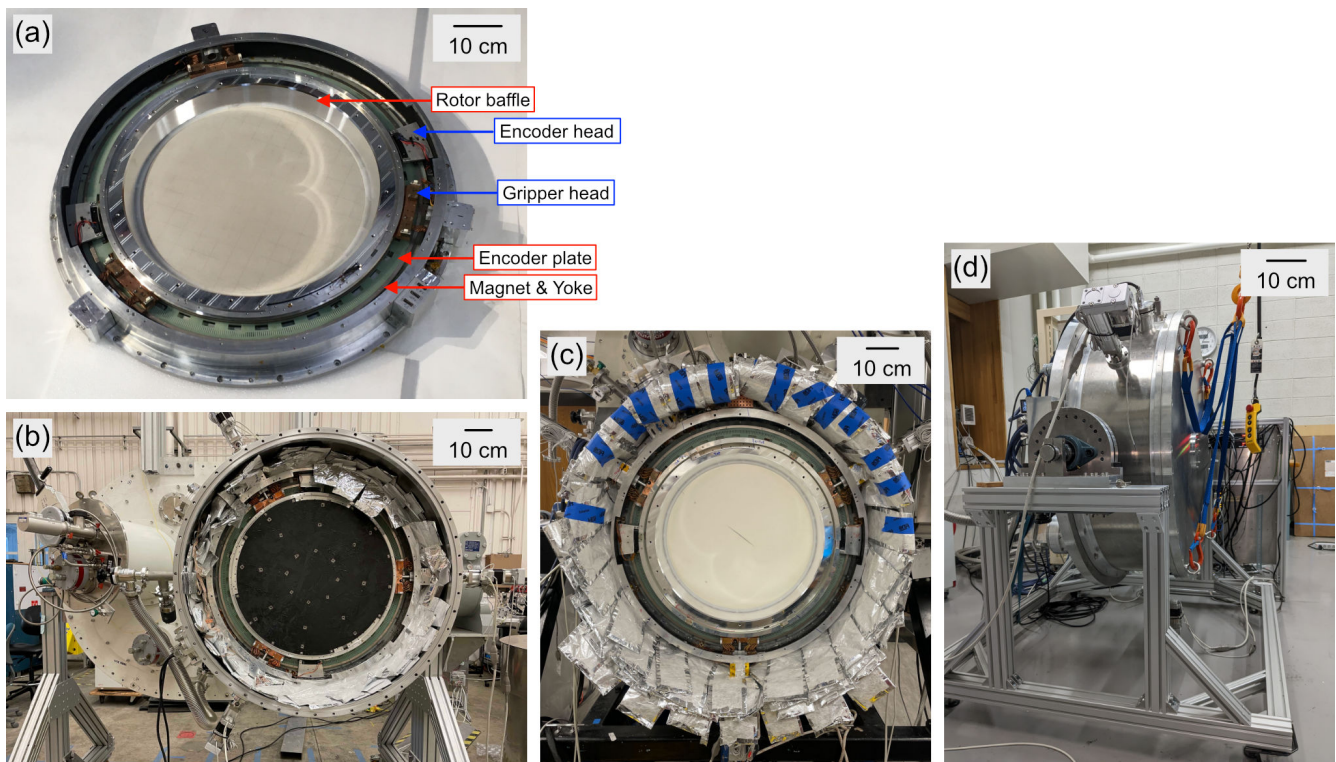


FIG. 5. The CHWP rotation mechanisms during testing. Panel (a) shows the rotation mechanism with the sapphire stack for the SAT cryostat at UCSD. Panels (b) and (c) show the rotation mechanisms installed in the SAT cryostat at LBNL and Princeton University respectively. In panel (b), the black object mounted in the rotor is a dummy mass, used to realistically validate the mechanical and thermal performance. Panel (d) shows the CWHP test cryostat at the University of Tokyo.

PTC2 stage has sufficient cooling capacity over the estimated thermal loading by the IR radiation from CHWP of 120 mW.

Figure 8 shows the model for an ANSYS thermal simulation, which is used to further characterize the CHWP thermal cavity as well as the heat input to the rotor. For the simulation we simply model the floating rotor surrounded by the PTC1 aluminum shell and the PTC1 and PTC2 alumina IR filters. Based on our measurements, we set the temperatures of aluminum shell and alumina filters in the simulation to 55 K, 60 K and 4 K, respectively. The infrared emissivity of the alumina IR filter is set to 0.8,⁸³ while that of the aluminum shell is set to 0.96. Here the inside of the aluminum shell is covered with an infrared black body.⁸⁴ Since there is no physical contact, the rotor exchanges heat with other components only by thermal radiation. Figure 7 shows the simulated time series of the rotor temperature with a constant heat input to the floating rotor. By comparing the data with the simulation result, the heat input to the rotor is estimated to be 220 mW when the rotor is floating, and 390 mW when the rotor is rotating at 2 Hz.

B. Rotation control

Figures 9 and 10 show the performance of the PID control and the phase compensation described in Sec. IV E. When the rotation PID feedback is on, the rotor accelerates to a steady

rotation at 2 Hz within 7 minutes, and decelerates down to 0 Hz within 3 minutes. When phase compensation is used in conjunction with the PID, the spin-up time to steady rotation at 2 Hz is reduced to less than 4 minutes.

Figure 11 demonstrates the stability of the CHWP's rotation at 2 Hz over 4 days using PID control. The achieved stability of ± 5 mHz is well within the required ± 10 mHz. Although not tested in-lab, the stability of the PID control loop over even longer timescales is expected to remain below the requirement. We additionally performed an in-lab azimuth scan to demonstrate stable operation of the CHWP in observation-like conditions. The receiver was held at a constant elevation angle of 50° and subject to an angular throw of 12° , constant scan velocity of $1^\circ/\text{sec}$, and turnaround acceleration of $1^\circ/\text{sec}^2$. While the nominal SAT angular throw will be wider, more frequent turnarounds during this test enabled an evaluation of scanning effects on PID performance under more strenuous operating conditions.

Figure 12 shows a time stream of the measured rotation frequency during scanning where we observe a scan-synchronous modulation of the measured frequency (± 2 mHz). This is due to the fact that the encoders and SAT detectors are fixed in the telescope reference frame, the magnetically levitated CHWP is not. Thus the measured modulation arises from conservation of angular momentum of the CHWP about its rotation axis. The angular velocity of the CHWP during scanning is given by the following, the detailed

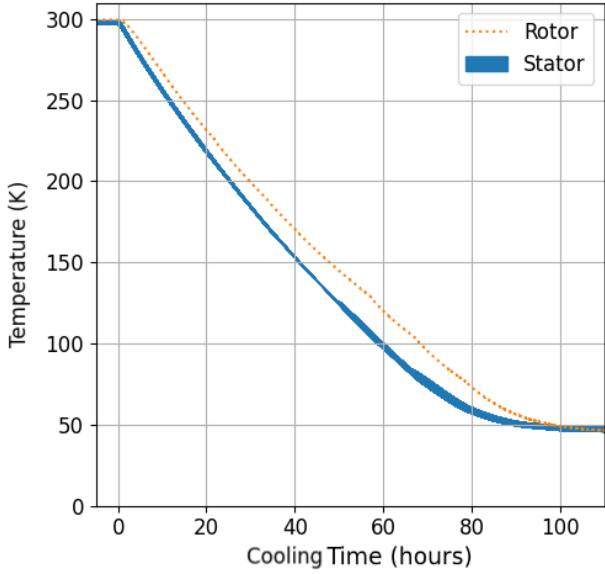


FIG. 6. Rotor and stator temperatures during cooldown. The rotor thermalizes within 10 hours of the stator.

derivation of which is described in Appendix A:

$$\dot{\chi}(t) = \bar{\chi} - \dot{\phi}(t) \sin(\theta_{e1}), \quad (4)$$

where ϕ is the azimuth angle of the telescope, θ_{e1} is the elevation angle of the telescope and $\bar{\chi}$ is the average angular velocity of the CHWP. The PID is tuned for longer-timescale stability and reacts little to the azimuthal scan modulation. This demonstrates that the accuracy of the encoding system and the stability of rotation frequency are well within the requirement including the effect of scan modulation.

C. Rotation efficiency

Table II summarizes the thermal dissipation of the rotation mechanism to the stator and PTC1 stage. There are four primary sources of thermal dissipation from the CHWP: a) Joule heating of the driving coils, where the phase compensation of the motor driver (Sec. IV E) plays an important role, b) hysteresis loss in the SMB, c) eddy current loss in the SMB, and d) dissipation from the optical encoders. a) is characterized by the impedance and the bias voltage of the motor coils, while b) and c) are characterized by fitting the spin-down curve, using the method described in Sakurai *et al.*⁷⁰ As noted in Table II, b) and c) are dependent on the elevation angle, or the gravity vector direction. Lower elevation angles lead to a larger distance between the YBCO and the magnet ring of the rotor along the optical axis, resulting in a weaker and smoother magnetic field coupled to the YBCO, thus diminishing the loss from hysteresis and eddy currents. The total dissipation from the motor and SMB (a+b+c) is measured by comparing the loading on the PTC1 stage when the CHWP is operating and when it is not. The power dissipation of the optical encoders is

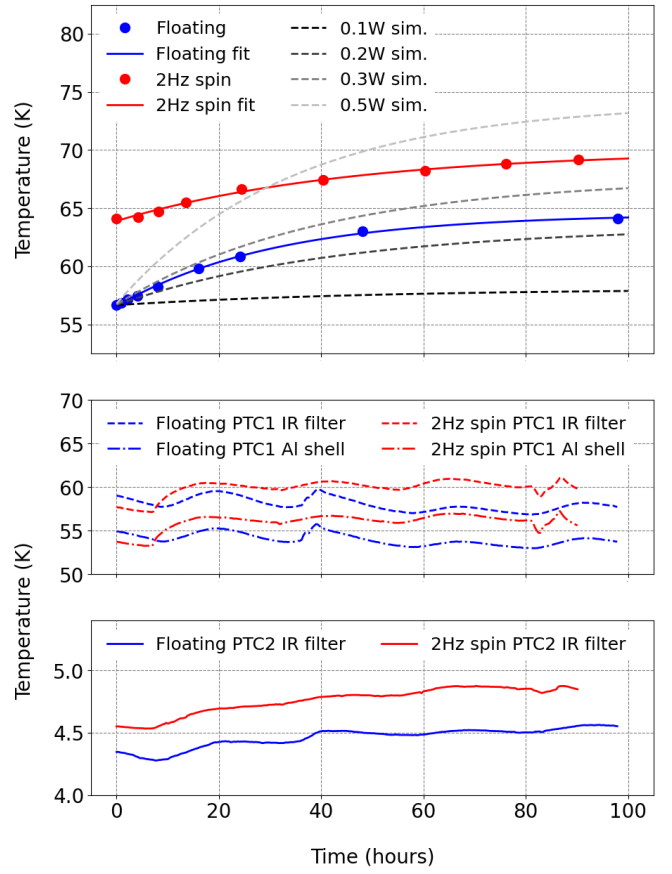


FIG. 7. Top panel: The rotor temperature profile while it is floating (blue points) and spinning at 2 Hz (red points), which are fit by Eq. 3 (solid lines). Black dashed lines show the ANSYS thermal simulation results with heat inputs of 0.1, 0.2, 0.3 and 0.5 W, respectively. The initial temperature of the simulation was set to the initial temperature of rotor when released from the grippers. The heat dissipation to the rotor is estimated by comparing the thermal equilibrium temperature between the fit result and the simulation. Middle panel: Colored dashed lines represent temperatures of the alumina IR filter and aluminum shell. Bottom panel: PTC2 IR filter temperature profile while the rotor is floating (blue) and spinning at 2 Hz (red).

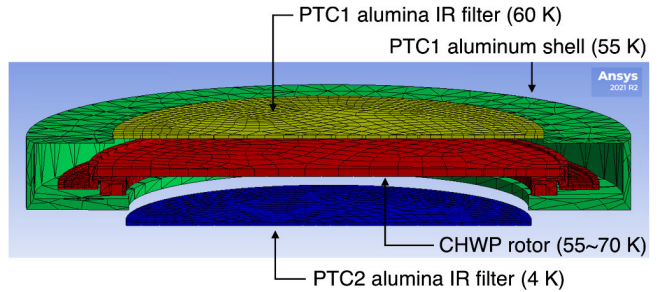


FIG. 8. The ANSYS thermal model used to simulate the amount of thermal loading from the CHWP rotor to the PTC2 stage. Temperatures of the PTC1 aluminum shell, the PTC1 and PTC2 alumina IR filters are set at 55 K, 60 K and 4 K respectively. The rotor temperature is varied from 55 K to 70 K to estimate the thermal loading on the PTC2 alumina IR filter.

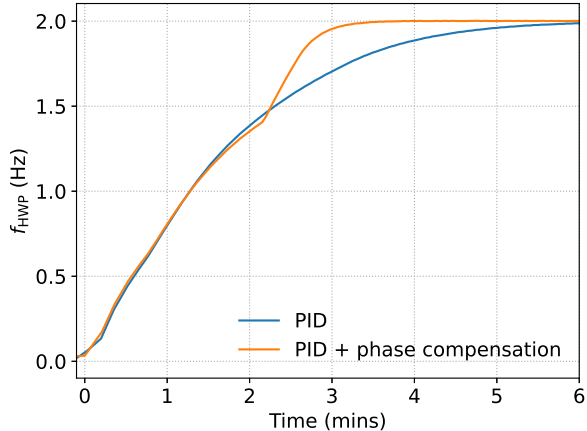


FIG. 9. The spin up curves. The blue curve shows the spin up curve with PID control. The rotation frequency stabilizes in ~ 7 minutes. The orange curve shows the spin up curve with phase compensation activated at 2.2 minutes. With phase compensation, the rotation frequency stabilizes in ~ 4 minutes.

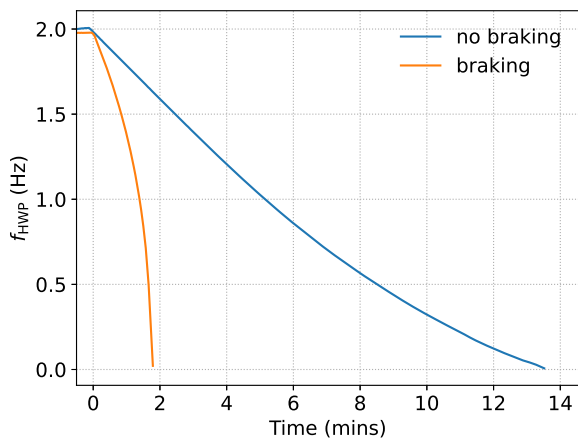


FIG. 10. The spin down curves. The blue curve shows the spin-down curve of HWP without braking. Braking can bring the HWP to a stop in less than 2 minutes (orange curve).

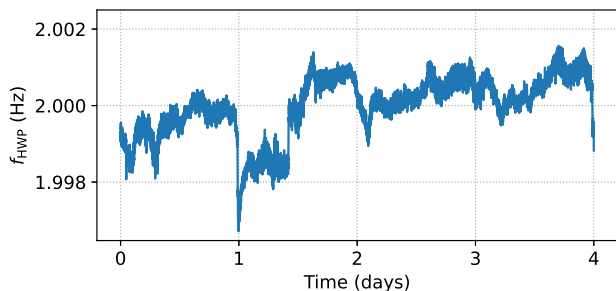


FIG. 11. Demonstration of the rotational stability of the CHWP at 2 Hz over 4 days using PID control.

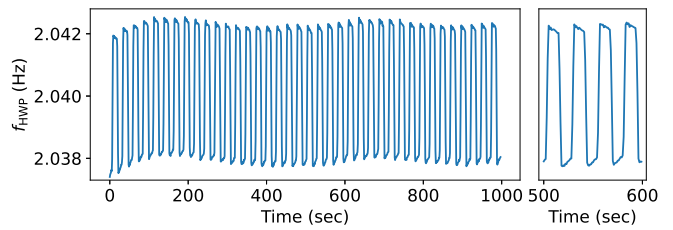


FIG. 12. Time stream of the measured HWP rotation frequency during the constant elevation scan of the SAT receiver at an elevation of 50° . The long timescale PID rotation control is enabled.

TABLE II. Dissipation of rotation mechanism on stator, PTC1 stage.

Motor	Joule heat of driving coils	0.4 ± 0.1 W (2.6 ± 1.0 W) ^a
SMB	Hysteresis loss of SMB	0.083 W/ 0.084 W ^b
	Eddy current loss of SMB	0.058 W/ 0.099 W ^b
	Total	0.5 ± 0.1 W (3.1 ± 1.0 W) ^a
Encoder	Power dissipated by LEDs	≤ 1 W ^c

^a Dissipation when phase compensation is activated (not activated).

^b Dissipation at an elevation of $50^\circ / 90^\circ$.

^c 10 LEDs are biased with 50 mA and 2 V.

mainly from the LEDs, which is estimated to be smaller than 1 W based on the bias current and voltage.

a) is reduced by optimizing the phase compensation angle of the drive motor (Sec. IV E). The phase compensation angle was optimized using the power consumption of the motor driving current source,⁸⁵ which includes dissipation both inside and outside of the receiver. Figure 13 shows the power consumed by the current source as a function of the phase compensation angle of the drive motor. The power consumption with a 2-Hz rotation achieves minimum at 60° . With a motor drive phase compensation of 60° , the power consumption is reduced from 3.6 ± 1.0 W to 0.8 ± 0.1 W, and the dissipation of the motor on the stator is reduced from 3.1 ± 1.0 W to 0.5 ± 0.1 W. This results in a total power dissipation of ≤ 1.6 W summing motor dissipation with that of the LEDs.

As we discuss in Sec. V E, the off-center displacement of the rotor induces a phase shift between the two encoders. Because the motor drive current source uses feedback from the encoder to its output (Sec. IV E), the rotation efficiency is also dependent on this phase shift and the rotation direction. As we see from Fig. 13, the rotation efficiency is sensitive to the phase shift of the motor when phase compensation is not activated, but is insensitive when 60° of phase compensation is activated. Therefore, the phase compensation enables to achieve robust rotational efficiency regardless of changes to the off-center displacement and rotation direction.

D. Vibration

The characteristic vibration frequencies of the SMB are key parameters for the vibrational performance of the CHWP. From the mass of the rotor and the displacement we evaluate in Sec. V E, the spring constants of the SMB paral-

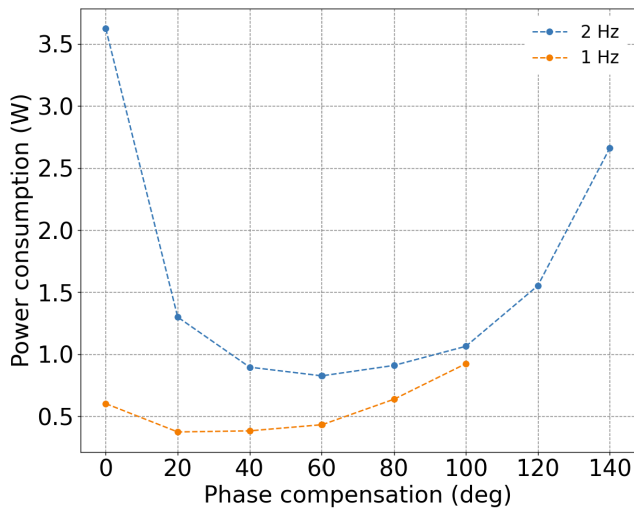


FIG. 13. The power consumption of the current source of the three-phase motor as a function of phase compensation angle. A digital phase compensation circuit implemented by a microcontroller is used to apply an arbitrary amount of compensation and to determine the optimal value.

lel and perpendicular to the optical axis are estimated to be $5.2(8.4) \times 10^5$ N/m and $9.1(17) \times 10^4$ N/m respectively for 48(61) YBCO tiles. From these values, we determine the corresponding characteristic vibrational frequencies to be 7(9) Hz and 9(13) Hz respectively, which are in agreement with the results of Sakurai *et al.*⁷⁰

The primary instrumental parameter that impacts the vibrational performance is the number of YBCO disks of the SMB. Throughout our evaluation of the SAT's susceptibility to CHWP induced vibrations, our design of the SMB evolved from 48 disks to 53 or 61. This section presents their comparison. We employ two methods to characterize vibration, one by using a three-axis accelerometer⁸⁶ mounted on the cryostat near the rotation mechanism, and the other by measuring the temperature increase of the 100-mK focal plane stage while sweeping through CHWP rotation frequencies.

Figure 14 shows the spectrogram of the vibration parallel to the optical axis. We do not observe significant vibration perpendicular to the optical axis. Vibrations were measured at frequencies equal to f_{HWP} multiplied by the number of coils ($= 120$), or the number of YBCO disks ($= 48, 53$) multiplied by an integer. In the 48-disk setup, the 96th harmonic of f_{HWP} was the largest vibrational mode. 96 is the least common multiple of the number of YBCO disks ($= 48$) and the number of NdFeB magnet segments ($= 32$), and this relationship yielded vibrational coupling that produced higher amplitude vibration. In the 53-disk setup, the number of YBCO disks and NdFeB magnets are relatively prime (do not have common divisors larger than 1) and we did not observe vibrational mode associated with their coupling.

The influence of vibration on the focal plane temperature in two representative SMBs with different numbers of YBCO disks is shown in Fig. 15. The rotation of CHWP was mono-

tonically swept in frequency from 0.5 to 2.3 Hz over a 12 hour duration while measuring the temperature of the cryogenic stages. Since these two SMBs are tested in SATs with different instrumentation, a direct comparison of the thermal sensor noise is not possible, however the resonant heating response observed in a 48-disk setup is not seen in a 53-disk setup.

E. Rotor alignment and displacement

There are two degrees of freedom that we consider important for the alignment of the CHWP rotation mechanism: alignment along the optical axis, involving displacement perpendicular to the plane of the SMB, and center alignment, involving displacement along the SMB plane. In this section we discuss alignment performance along these degrees of freedom, in addition to the effect of temperature on alignment. The quality of the rotor alignment is determined both by the initial centering established by the grippers and by the stiffness of the SMB.

Because the magnetic flux-pinning acts as a restoring force with a finite spring constant, when the rotor is released from the grippers it displaces due to gravity, finding a new equilibrium position that depends on the elevation angle. Due to its azimuthal symmetry, the SMB is most stiff along the optical axis.⁴⁰ The off-center displacement produces a phase shift between the two angle encoders, resulting in a difference between the calculated and actual rotational angle and the encoded angle. Therefore, the evaluation of off-center displacement is particularly important.

The stiffness of the SMB is the product of the critical density current of the YBCO, the magnetization of the NdFeB permanent magnet ring, and a constant determined by the geometry of the SMB. A temperature increase from 50 K to 85 K results in $\sim 90\%$ reduction in the critical density current⁸⁷ and $\sim 10\%$ reduction in the magnetization.⁸⁸ Thus, by measuring the temperature dependence of the rotor displacement we can determine the temperature dependence of the stiffness and obtain the maximum operating temperature of the SMB.

Each of the three primary CHWP alignment considerations can be evaluated independently. Alignment along the optical axis is characterized at 50 K with the methods described in Appendix B. The largest displacement occurs at an elevation angle of 90° , resulting in a displacement of 2.0 ± 0.3 mm, which is well within the designed clearance of 5 mm.

Center alignment is evaluated using the method described in Appendix B. Figure 16 shows the measured off-center displacement at different elevation angles and for SMBs with different numbers of YBCO disks. The off-center displacement was measured seven times at an elevation of 90° , and the initial alignment accuracy was found to be ≤ 1 mm. Inaccurate initial centering by the grippers while cooling through the YBCO transition produces a non-zero displacement at an elevation of 90° . As Fig. 16 shows, the off-center displacement decreases as the number of YBCO disks is increased, and is smaller than 3.5 mm with 61 YBCO disks at elevation angles larger than 20° .⁸⁹ This satisfies the requirement for optical and

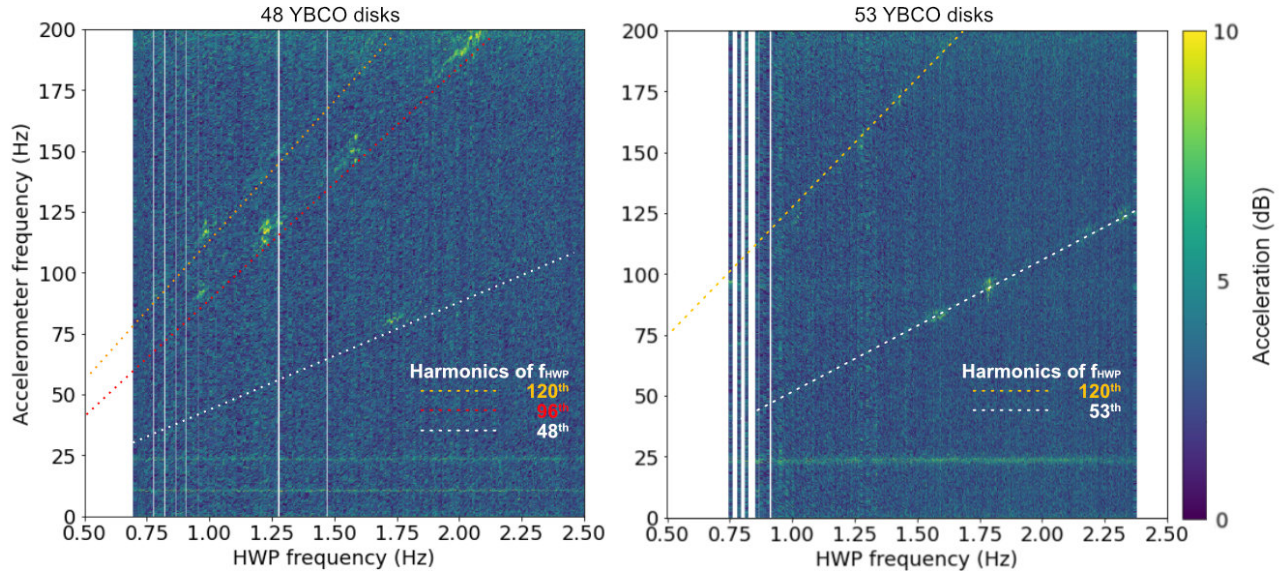


FIG. 14. Comparison of the vibration of the SMB with different numbers of YBCO disks. Vibration is observed at f_{HWP} multiplied by an integer times a common multiple of the characteristic numbers of the SMB: the number of ring magnet segments ($=32$), the number of YBCO disks ($=48, 53$), or the number of coils ($=120$). The vibration observed on the 48-disk SMB at f_{HWP} multiplied by the least common multiple of the number of YBCO disks and ring magnets segments ($=96$) is not observed on the 53-disk SMB.

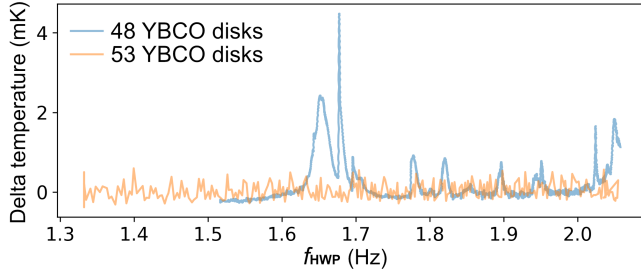


FIG. 15. Comparison of the effect of vibration on the focal plane temperature in two SMBs with different number of YBCO disks.

mechanical clearance of ≤ 5 mm even when combined with the initial alignment accuracy ≤ 1 mm.

Finally, the temperature dependence of the displacement (Fig. 17) is evaluated to determine the maximum operating temperature through the following three steps:

1. The temperature of the YBCO is gradually increased to 85 K. The off-center displacement is constant up to 70 K, but rapidly increases after reaching 70 K.
2. The YBCO temperature is gradually lowered from 85 K. The off-center displacement does not change throughout this process.
3. The YBCO temperature is gradually increased to observe where the off-center displacement starts to increase again. The off-center displacement remains the same up to ~ 85 K, but begins to rapidly increase when the temperature rises above 85 K.

With this test, we find that the maximum operating temperature of the SMB is not the transition temperature of the YBCO

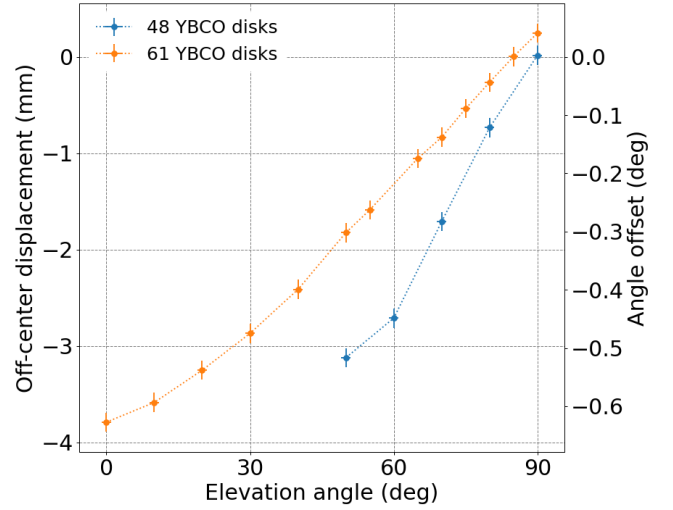


FIG. 16. The off-center displacement of the rotor at different elevation angles and different number of YBCO disks. The elevation angle of 90° refers to pointing at zenith (Fig. 19). The angle offset is an additional measured angle difference between the two encoders due to the off center displacement of the rotor (Eq. B1)

(~ 95 K) but 70 K. This temperature requirement is satisfied with sufficient margin under the normal operating conditions of our system. We additionally find that, if the off-center displacement occurs due to the temperature increase, it cannot be restored by simply lowering the temperature of the YBCO. Once the displacement has occurred, it is retained unless the SMB is brought to a higher temperature. In order to re-center the rotor, it is necessary to grip it at the center and warm up

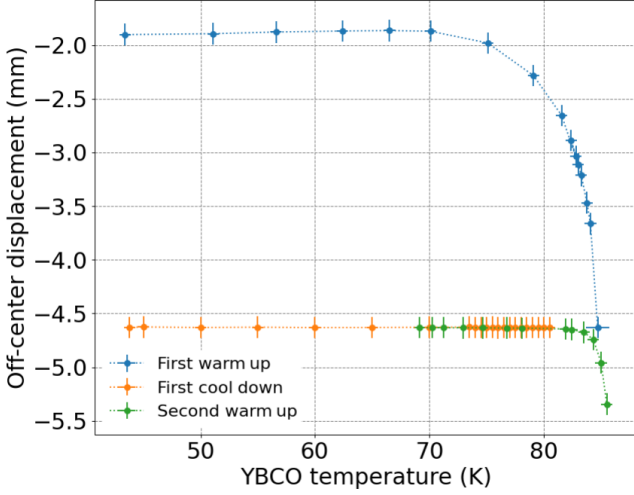


FIG. 17. The off-center displacement when the YBCO temperature is increased and decreased to evaluate the maximum operating temperature of the SMB. During the measurements, the rotor is continuously rotating at 2 Hz and the elevation angle is 50° .

the YBCO disks above their transition temperature, followed by a re-cooling to flux-pin the rotor in the correct position.

F. Angle encoding accuracy

There are two primary sources of angle encoding inaccuracy: the timing jitter of the data acquisition system and noise in the encoder readout. The total noise should correspond to less than the $3 \mu\text{rad}\sqrt{s}$ (Sec. III E).

We first discuss timing jitter, and more specifically the uncertainty of CHWP angle timestamp assignment. A Beagle-Bone Black microcontroller⁹⁰ acquires the encoder data, and assigns their timestamps based on its internal 200 MHz free-running clock (Sec. IV F). Since the internal clock has long-timescale frequency drifts, the timestamps must be corrected by referencing the microcontroller to the SAT's master clock, which also synchronizes with detector timestreams. The microcontroller receives the master clock signal as IRIG-B⁹¹ frame and position identifiers at a rate of 10 times per second. There are uncertainties, including jitter and data loss, in the measurement of the encoder and IRIG-B pulses, therefore we determine the CHWP angle after data acquisition by analyzing the full history of the internal timestamps for the two signals. The corrected timestamp is expressed as

$$\hat{t} = t_{\text{true}} + \Delta t_{\text{clk}}, \quad (5)$$

where Δt_{clk} is the uncertainty in the correction after synchronizing the encoded angle timestamps to IRIG-B time. The effect of timing jitter on angle encoding accuracy is evaluated by the power spectral density (PSD) of Δt_{clk} , which is determined by the relative time difference between the internal clock and IRIG-B time:

$$\Delta t_{\text{diff}} = t_{\text{bbb}}|_{t=t_{\text{true}} - \Delta t_{\text{IRIG}}} - t_{\text{true}} \simeq \Delta t_{\text{bbb}} - \Delta t_{\text{IRIG}}, \quad (6)$$

where t_{bbb} is the internal clock time, Δt_{bbb} is the drift of internal clock relative to IRIG-B, and Δt_{IRIG} is the timing jitter resulting from the detection of IRIG-B pulses. Since Δt_{bbb} and Δt_{IRIG} are independent, the PSD is

$$\begin{aligned} \text{PSD}(\Delta t_{\text{diff}}) &= \text{PSD}(\Delta t_{\text{bbb}}) + \text{PSD}(\Delta t_{\text{IRIG}}) \\ &= A f^{-\alpha} + \sigma_{\text{IRIG}}^2/10 \quad (\text{sec}^2 \cdot \text{sec}), \end{aligned} \quad (7)$$

where A and α are the $1/f$ noise parameters of Δt_{bbb} and σ_{IRIG}^2 is the noise variance in terms of the 10 Hz IRIG-pulse detection. The blue dashed curve in Fig. 18 shows the corresponding angle jitter due to the timing jitter constructed from Eq. 7 multiplied by the angular velocity. The $1/f$ noise is given by Δt_{bbb} and the white noise level is determined by Δt_{IRIG} . The corrected time, \hat{t} (Eq. 5), is constructed by synchronizing the internal clock to the IRIG-B signal at a frequency of f_{sync} by linear interpolation. Therefore, the PSD of the uncertainty in the corrected time Δt_{clk} is approximately expressed as

$$\text{PSD}(\Delta t_{\text{clk}}) \simeq \begin{cases} \sigma_{\text{IRIG}}^2/10 & f \leq f_{\text{sync}}/2 \\ A f^{-\alpha} & f \geq f_{\text{sync}}/2. \end{cases} \quad (8)$$

At frequencies below the synchronization Nyquist frequency ($f_{\text{sync}}/2$), timestamp correction eliminates $1/f$ noise and the white noise of the IRIG detection jitter limits the timing accuracy. At frequencies above $f_{\text{sync}}/2$ the timing accuracy still relies on the microcontroller's internal clock, resulting in the small amount of time drift. As can be seen from Fig. 18, the angle jitter due to the timing jitter of the corrected time satisfies the requirement at all frequencies.

Next, we evaluate the encoder readout noise. We place an upper limit on encoder readout noise using the encoder data and the CHWP's smooth rotation. The encoded CHWP angle is

$$\hat{\chi}(t_{\text{true}}) = \chi_{\text{true}}(\hat{t} + \Delta t_{\text{enc}}) + \eta(\chi_{\text{true}}), \quad (9)$$

where $\hat{\chi}$ is the encoded rotation angle of the CHWP, χ_{true} is the true rotation angle of the CHWP, and Δt_{enc} is the timing jitter that arises from the detection of photo-encoder pulses. $\eta(\chi_{\text{true}})$ is the non-uniformity of the encoder slot pattern. The CHWP angle jitter is defined by subtracting the smooth rotation:

$$\begin{aligned} \Delta \hat{\chi} &= \hat{\chi}(t_{\text{true}}) - \overline{d\hat{\chi}/dt_{\text{true}}} \cdot t_{\text{true}} \\ &\simeq \Delta \chi_{\text{true}} + \dot{\chi} \Delta t_{\text{clk}} + \dot{\chi} \Delta t_{\text{enc}} + \eta(\chi_{\text{true}}), \end{aligned} \quad (10)$$

where $\Delta \chi_{\text{true}}$ is the true drift of the CHWP angle that we would like to measure. Since $\Delta \chi_{\text{true}}$, Δt_{clk} , Δt_{enc} and $\eta(\chi_{\text{true}})$ are independent, the PSD of the CHWP angle jitter is

$$\begin{aligned} \text{PSD}(\Delta \hat{\chi}) &\simeq \text{PSD}(\Delta \chi_{\text{true}}) + \dot{\chi}^2 \text{PSD}(\Delta t_{\text{clk}}) \\ &\quad + \dot{\chi}^2 \text{PSD}(\Delta t_{\text{enc}}) + \text{PSD}(\eta(\chi_{\text{true}})), \end{aligned} \quad (11)$$

where

$$\dot{\chi}^2 \text{PSD}(\Delta t_{\text{enc}}) \simeq \frac{\dot{\chi}^2 \sigma_{\text{enc}}^2}{f_{\text{HWP}} \times 1140} \quad (\text{rad}^2 \cdot \text{sec}) \quad (12)$$

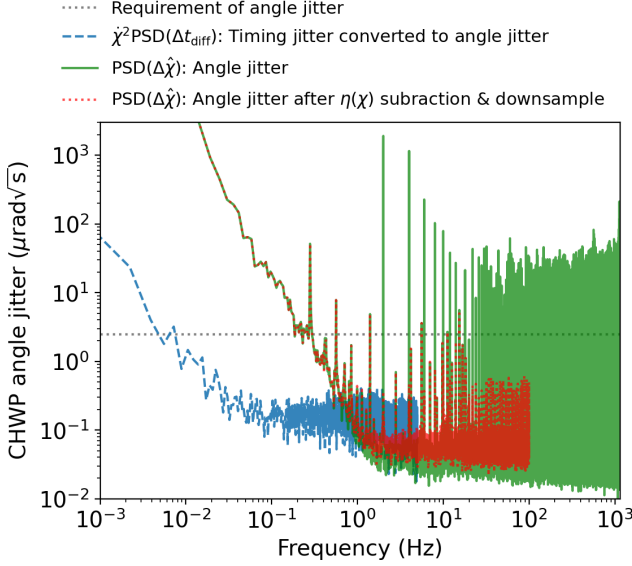


FIG. 18. A measurement of the angle encoder performance over 1 hour. The CHWP is constantly rotating at 2 Hz. The high frequency peaks in the raw PSD($\Delta\hat{\chi}$) are due to the non-uniformity of the encoder slot pattern, $\eta(\chi)$. The residual peaks after the $\eta(\chi)$ subtraction and down-sampling correspond to true fluctuation in the rotation angle, which are caused by vibrations of the PTC and the effects of the PID rotation control. The requirement applies only to the white noise level of the angle jitter.

and σ_{enc}^2 is the noise variance in terms of the encoder-pulse detection timing. There are 1140 pulses per revolution. The green solid curve in Fig. 18 shows Eq. 11 when the CHWP rotates at 2 Hz. The $1/f$ component is the true drift of the CHWP angle, $\Delta\chi_{\text{true}}$. The white noise level is determined by Δt_{enc} and is well below the requirement. The peaks at the harmonics of f_{HWP} arise from $\eta(\chi_{\text{true}})$. f_{sync} is chosen to be 1 Hz to ensure that the timing jitter becomes subdominant to the drift of the CHWP angle at all frequencies.

To demodulate the TES detector timestream sampled at 200 Hz, the raw CHWP angles sampled at $1140 \times f_{\text{HWP}}$ Hz need to be down sampled. In this procedure, the peaks at the higher harmonics of f_{HWP} must be subtracted so as not to contaminate the down-sampled angular timestream. The non-uniformity of the encoder slot pattern, $\eta(\chi_{\text{true}})$, is estimated by time averaging $\Delta\hat{\chi}$ for each angle step of the encoder signal as

$$\eta(\chi_{\text{true}}) \simeq \overline{\Delta\hat{\chi}} \text{ for each } (\hat{\chi} \bmod 2\pi). \quad (13)$$

The red dotted curve in Fig. 18 shows the angle jitter after the slot pattern subtraction and down-sampling. The residual peaks at the harmonics of f_{HWP} are due to the slow modulation of the rotation-synchronous fluctuations of $\hat{\chi}$. The achieved noise level is $0.07 \mu\text{rad}\sqrt{\text{s}}$, which is more than one order of magnitude lower than the requirement.

VI. CONCLUSION

We have presented the requirements, design and performance of the CHWP rotation mechanism for the Simons Observatory Small Aperture Telescopes. This work advances the field of cryogenic polarization modulators for mm-wave and sub-mm astronomical observations by introducing the largest diameter CHWP constructed to date. The aperture size of the CHWP system was previously constrained by the size of the rotor's magnet ring. By overcoming the manufacturing limitations of the SMB and optimizing the optical design, the size of the system is now limited by the largest available size of sapphire plate.⁹² This work has also advanced the CHWP rotation drive techniques to improve operational efficiency, and introduced new methodologies for characterizing CHWP systems, which enabled improvement of the SMB to reduce vibration and evaluate the rotor displacement.

The CHWP for LF frequency is currently under development and will have different design parameters. The center alignment of the rotor will be more challenging since the LF HWP sapphire stack is a factor of 3 ~ 4 thicker, and thus ~ 15 kg heavier than the MF HWP. On the other hand, the LF band enjoys significantly less atmospheric fluctuations than the higher frequency bands, and thus the requirements on the CHWP rotation frequency can be relaxed.

Three CHWPs have been built and evaluated for three SATs, and three additional CHWPs are planned to be built. CHWP performance satisfies all requirements, including a 478 mm clear aperture, a rotor temperature of < 70 K, a stator temperature of < 60 K, < 1.6 W of dissipation during continuous operation, rotation frequencies up to 3 Hz, rotation stability within 5 mHz, rotor alignment within 5 mm, and $0.07 \mu\text{rad}\sqrt{\text{s}}$ of the encoded angle noise. The presented CHWPs are expected to be deployed to the Chilean observation site and to see first light in 2023. This development contributes not only to the SO project but also to the design and trade study for future experiments such as CMB-S4.^{93,94}

ACKNOWLEDGMENTS

The presented CHWP development was supported by JSPS KAKENHI Grant Numbers JP18H01240, JP19H00674, JP19K14732, JP21J11179, JP22H04913, JP23H00105, JP23H01202, and JSPS Core-to-Core program Grant Number JPJSCCA20200003, and World Premier International Research Center Initiative (WPI), MEXT, Japan, and International Research Center Formation Program to Accelerate Okayama University Reform (RECTOR). Work at LBNL is supported in part by the U.S. Department of Energy, Office of Science, Office of High Energy Physics, under contract No. DE-AC02-05CH11231, and a grant from the Simons Foundation under Award #457687, B.K., and a grant from the Gordon and Betty Moore Foundation under Grant Number GBMF7939. K.Y. acknowledges the support from XPS, WINGS Programs, the University of Tokyo. J.S. acknowledges the support from the International Graduate Program for Excellence in Earth-Space Science (IGPEES)

and the JSR Fellowship, the University of Tokyo. D.S. acknowledges the support from FoPM, WINGS Program, the University of Tokyo. We thank Paul Barton at the Lawrence Berkeley National Laboratory for designing the motor drive electronics. We thank Sean Adkins for his advice and assistance in improving the CHWP control system. We thank the reviewers, whose suggestions clarify discussions throughout the paper.

AUTHOR DECLARATIONS

Conflict of Interest

The authors have no conflicts to disclose.

Author Contributions

K. Yamada: Methodology (equal); Resources (equal); Investigation (equal); Validation (equal); Software (equal); Writing – original draft (lead). **B. Bixler:** Methodology (equal); Resources (equal); Investigation (equal); Validation (equal); Software (lead); Writing – original draft (supporting). **Y. Sakurai:** Conceptualization (equal); Methodology (equal); Resources (equal); Investigation (equal); Validation (equal); Software (equal); Funding Acquisition (supporting); Writing – original draft (equal). **P. C. Ashton:** Conceptualization (equal); Methodology (equal); Resources (equal); Investigation (equal); Validation (equal); Writing – original draft (equal). **J. Sugiyama:** Methodology (equal); Resources (equal); Investigation (equal); Validation (equal); Software (supporting); Writing – original draft (supporting). **K. Arnold:** Project Administration (equal); Supervision (equal); Funding Acquisition (supporting). **J. Begin:** Investigation (supporting); Validation (supporting); Writing – review & editing (supporting). **L. Corbett:** Investigation (supporting); Validation (supporting). **S. Day-Weiss:** Investigation (supporting); Validation (supporting); Writing – original draft (supporting). **N. Galitzki:** Supervision (supporting); Investigation (supporting); Validation (supporting); Writing – review & editing (supporting). **C. A. Hill:** Conceptualization (equal); Methodology (supporting); Software (equal); Writing – review & editing (supporting). **B. R. Johnson:** Supervision (supporting); Funding Acquisition (supporting); Writing – review & editing (supporting). **B. Jost:** Writing – review & editing (supporting). **A. Kusaka:** Project Administration (equal); Supervision (lead); Conceptualization (equal); Investigation (supporting); Validation (supporting); Funding Acquisition (lead); Writing – original draft (sup-

porting). **B. J. Koopman:** Software (equal). **J. Lashner:** Software (equal). **A. T. Lee:** Project Administration (equal); Conceptualization (supporting); Supervision (supporting); Funding Acquisition (supporting). **A. Mangu:** Investigation (supporting); Validation (supporting). **H. Nishino:** Software (equal); Writing – review & editing (supporting). **L. A. Page:** Project Administration (equal); Conceptualization (supporting); Supervision (supporting); Investigation (supporting); Validation (supporting); Funding Acquisition (supporting); Writing – review & editing (supporting). **M. J. Randall:** Investigation (supporting); Validation (supporting). **D. Sasaki:** Investigation (supporting); Software (supporting); Writing – review & editing (supporting). **X. Song:** Investigation (supporting); Validation (supporting). **J. Spisak:** Investigation (supporting); Validation (supporting); Writing – original draft (supporting). **T. Tsan:** Investigation (supporting); Validation (supporting). **Y. Wang:** Investigation (supporting); Validation (supporting). **P. A. Williams:** Investigation (supporting); Validation (supporting).

DATA AVAILABILITY

The data that support the findings of this study are available from the corresponding author upon reasonable request.

Appendix A: Scan synchronous modulation of HWP rotation

Here we derive the scan modulation of the angular velocity of the CHWP, (Eq. 4). Figure 19 shows the schematic diagram of the rotating CHWP on the scanning telescope. The coordinate system can be taken as shown, without the loss of generality. We define r and θ as the cylindrical coordinates of the rotor and $\rho(r, \theta)$ as the rotor mass density, which is symmetric about θ . The angular momentum of the rotating CHWP is

$$L_{\text{HWP}} = \dot{\chi} \iint r \, dr d\theta \, \rho r^2 = \dot{\chi} I, \quad (\text{A1})$$

where I is the moment of inertia of the rotor.

Next, we calculate the angular momentum induced by the scanning telescope. Let r_0 be the radial distance from the axis of the scan to the center of the rotor. We assume that the CHWP bearing is infinitely rigid. This means that the net angular momentum contribution from the telescope scan is only along the direction of the rotor's rotation axis. As shown in Fig. 19, the angular momentum at each point of the rotor induced by the telescope scan is

$$\begin{aligned}
\delta L_{\text{scan}} &= \hat{n}_{\text{HWP}} \cdot (\vec{r} \times \rho \vec{v}) \\
&= \begin{pmatrix} \cos \theta_{\text{el}} \\ 0 \\ \sin \theta_{\text{el}} \end{pmatrix} \cdot \left\{ \begin{pmatrix} r \sin \theta_{\text{el}} \cos \theta \\ r \sin \theta \\ -r \cos \theta_{\text{el}} \end{pmatrix} \times \rho \dot{\phi} \begin{pmatrix} -r \sin \theta \\ r_0 + r \sin \theta_{\text{el}} \cos \theta \\ 0 \end{pmatrix} \right\} \\
&= \rho \dot{\phi} (r_0 r \cos \theta + r^2 \sin \theta_{\text{el}}), \tag{A2}
\end{aligned}$$

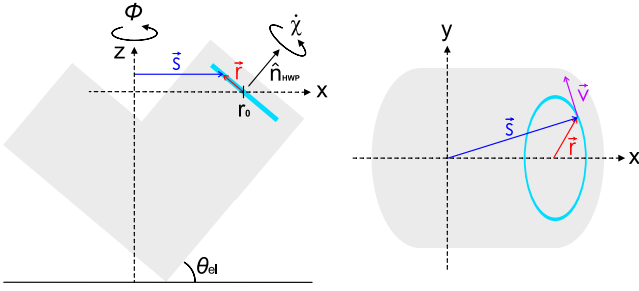


FIG. 19. Schematic diagram of the rotating CHWP on the scanning telescope. The gray area represents a telescope's receiver, while the light blue circle represents the rotor.

where ϕ and θ_{el} are the azimuth and elevation angles of the telescope, respectively. The total angular momentum is obtained by integrating over the rotor as

$$L_{\text{scan}} = \iint r dr d\theta \delta L_{\text{scan}} = \dot{\phi} \sin \theta_{\text{el}} I. \tag{A3}$$

From the conservation law of angular momentum, the following equation holds.

$$L_{\text{scan}} + L_{\text{HWP}} = \text{const.} \tag{A4}$$

Thus, Eq. 4 holds.

Appendix B: Measurement of the displacement of rotor

Here we elaborate on the methods used to make the displacement measurements summarized in Sec. V E. Displacement measurements along the optical axis are made using the gripping mechanisms (Sec. IV C) and a Hall probe (Sec. IV F) installed below the rotor's magnet ring. The measurement begins by pointing the receiver at an elevation of 90° and fully gripping the rotor. The actuators controlling the gripper positions are then retracted, allowing the rotor to sink along the optical axis. The gripper head geometry is designed such that retraction distance corresponds directly to the rotor displacement, and changes in the Hall probe's measured field are monitored. The total displacement of the rotor is estimated from the distance the grippers have moved while the Hall probe changes linearly. Figure 20 shows a schematic of the measurement setup and the measured magnetic field of the rotor magnet as the grippers are gradually retracted. The systematic error of the displacement is ± 0.3 mm, resulting from

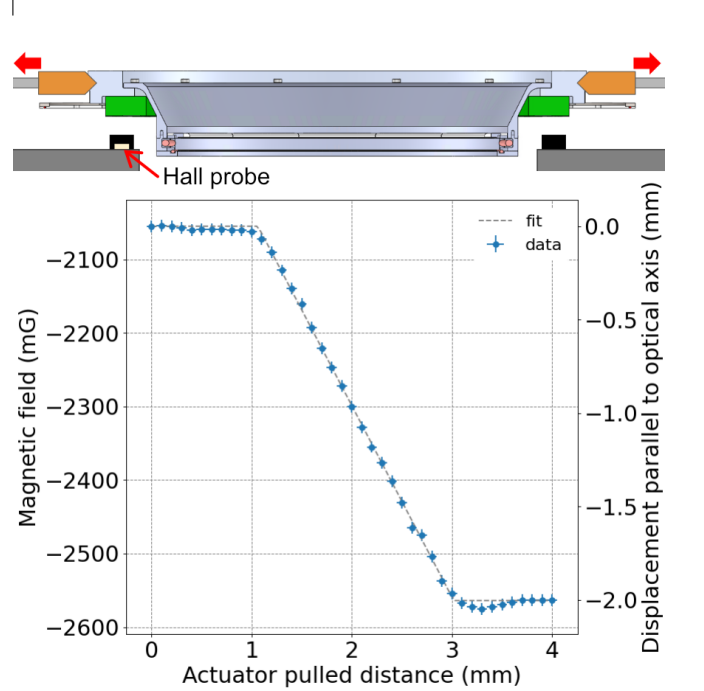


FIG. 20. Top panel: schematic diagram of the measurement setup for the rotor displacement along the optical axis. The Hall probe is located right below the magnet ring to measure the relative displacement of the rotor. Grippers are completely clear of the rotor when retracted 9 mm. Bottom panel: measurement of the displacement along the optical axis. From 0-1 mm, the rotor is not moving due to the play in the joints of the grippers. From 1-3 mm, the rotor is sliding down the wedge of the gripper heads. From 3 mm onwards, the rotor is floating.

changes in the Hall probe sensitivity and the rotor magnet's field caused by temperature drift during the measurement.

The off-center displacement is calculated by the measured additional angle offset between a pair of encoders placed 180° from one another as shown in Fig. 21. The additional angle offset is

$$d\chi_j = \pi f_{\text{HWP}j} (t_j^0 - t_{j+570}^1), \tag{B1}$$

where t_j^i is the timing when i -th encoder reads the j -th encoder slot and

$$f_{\text{HWP}j} = \frac{1}{1140(t_j^0 - t_{j+1}^0)} = \frac{1}{1140(t_j^1 - t_{j+1}^1)} \tag{B2}$$

is the rotation frequency. Since the total number of encoder slots is 1140, the slot 570 positions away is at the opposite side

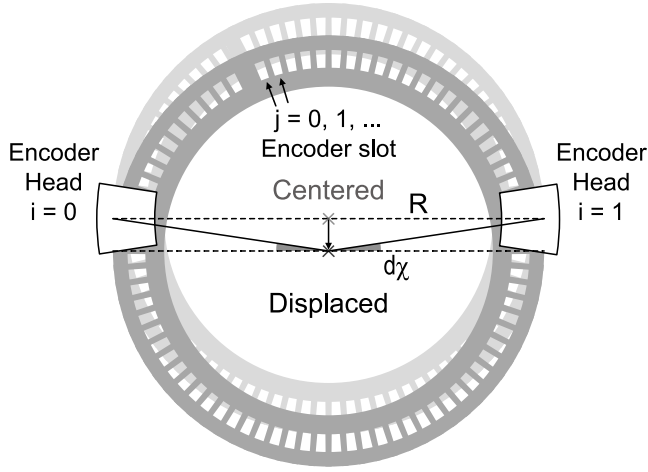


FIG. 21. The schematic diagram of the measurement setup of the off-center displacement. When the rotor is off-centered perpendicular to the line connecting the encoders, the pair incorrectly measures the rotation angle by $d\chi$. The off-center displacement can be calculated by Eq. B3.

of the encoder plate. If the CHWP is completely centered, $d\chi_j$ is always zero. If there is an off-center displacement of the rotor perpendicular to the line connecting the encoders, diametrically opposite slots will travel different distances between detection, resulting in a time delay that can be converted to the angle offset, $d\chi_j$. The pair of encoders are synchronized by the shared IRIG-B reference signal described in Sec. V F. The displacement perpendicular to the line connecting the pair of encoders is thus

$$\text{Displacement}_j = R \times \tan(d\chi_j), \quad (\text{B3})$$

where $R = 334$ mm is the radius of the encoder slots.

The measurement accuracy of the encoder angle shift due to off-center displacement is 0.02° , which is negligible compared to the required accuracy of the polarization angle calibration. The SAT platform will rotate the boresight $\pm 60^\circ$. Since the phase shift between the pair of encoders is at its maximum when the boresight angle is 0° , the requirement of the accuracy of the polarization angle is satisfied at any boresight angle.

Appendix C: Precautions

Successful operation of the CHWP requires paying careful attention to a number of system characteristics. This section presents a summary of the precautions we learned to take while building the CHWP and evaluating its performance.

Physical interference of the rotor is the most common inhibitor of CHWP rotation. This interference can be caused by misplaced or loose screws, nuts, tape, motor sprocket magnets, encoder or motor cables, or multi-layer insulation. To avoid the risk of physical interference, use of nuts and tape are minimized, screws are secured with thread-locker (LOCTITE 263) and the motor sprocket magnets are secured with

epoxy (Stycast 2850 FT). Moreover, the magnetic screws or mechanical parts, including 304 stainless steel, must not be used. This is because the rotor's magnet ring is strong enough to dislodge them and cause physical interference.

Care must also be taken in the operation of electrical devices, including the encoders, motors, and grippers. Protective measures for electrical devices are crucial, such as the protection circuit for the optical encoders, the current limit function for the motor drive power source, and the limit switch for the grippers. Finally, drastic temperature changes must be avoided while the encoder LEDs are biased, as exposure to rapidly changing environments can cause degradation.

- ¹M. Kamionkowski, A. Kosowsky, and A. Stebbins, "Statistics of cosmic microwave background polarization," *Phys. Rev. D* **55**, 7368–7388 (1997).
- ²M. Zaldarriaga and U. Seljak, "An All-Sky Analysis of Polarization in the Microwave Background," *Physical Review D* **55**, 1830–1840 (1997).
- ³M. Kamionkowski, A. Kosowsky, and A. Stebbins, "A Probe of Primordial Gravity Waves and Vorticity," *Physical Review Letters* **78**, 2058–2061 (1997).
- ⁴S. Uros and Z. Matias, "Signature of Gravity Waves in Polarization of the Microwave Background," *Physical Review Letters* **78**, 2054–2057 (1997).
- ⁵L. Abbott and S. Pi, *Inflationary Cosmology* (World Scientific Publishing Company, 1986).
- ⁶A. Linde, "Particle physics and inflationary cosmology," (2005), arXiv:hep-th/0503203 [hep-th].
- ⁷A. Linde, "Inflationary cosmology," in *Inflationary Cosmology* (Springer Berlin Heidelberg, Berlin, Heidelberg, 2007) pp. 1–54.
- ⁸U. Seljak and M. Zaldarriaga, "Direct Signature of Evolving Gravitational Potential from Cosmic Microwave Background," *Physical Review D* **60** (1999).
- ⁹L. Page, G. Hinshaw, E. Komatsu, *et al.*, "Three-Year Wilkinson Microwave Anisotropy Probe (WMAP) Observations: Polarization Analysis," *The Astrophysical Journal Supplement Series* **170**, 335 (2007).
- ¹⁰The Planck Collaboration, "Planck 2018 results. XI. Polarized dust foregrounds," *Astronomy & Astrophysics* (2018).
- ¹¹M. Zaldarriaga and U. Seljak, "Gravitational lensing effect on cosmic microwave background polarization," *Physical Review D* **58**, 23003 (1998).
- ¹²L. Knox and Y.-S. Song, "Limit on the Detectability of the Energy Scale of Inflation," *Physical Review Letters* **89**, 11303 (2002).
- ¹³M. Kesden, A. Cooray, and M. Kamionkowski, "Separation of Gravitational-Wave and Cosmic-Shear Contributions to Cosmic Microwave Background Polarization," *Physical Review Letters* **89**, 11304 (2002).
- ¹⁴U. Seljak and C. M. Hirata, "Gravitational lensing as a contaminant of the gravity wave signal in the CMB," *Physical Review D* **69**, 43005 (2004).
- ¹⁵P. Ade, J. Aguirre, Z. Ahmed, *et al.*, "The Simons Observatory: Science goals and forecasts," *Journal of Cosmology and Astroparticle Physics* **2019** (2019).
- ¹⁶The Simons Observatory Collaboration, "The Simons Observatory: Astro2020 Decadal Project Whitepaper," (2019), arXiv:1907.08284 [astro-ph.IM].
- ¹⁷A. Ali, S. Adachi, K. Arnold, *et al.*, "Small Aperture Telescopes for the Simons Observatory," *Journal of Low Temperature Physics* (2020).
- ¹⁸K. Kiuchi, S. Adachi, A. M. Ali, *et al.*, "Simons Observatory Small Aperture Telescope overview," in *Ground-based and Airborne Telescopes VIII*, Vol. 11445, International Society for Optics and Photonics (SPIE, 2020) p. 114457L.
- ¹⁹N. Galitzki, A. Ali, K. S. Arnold, *et al.*, "The Simons Observatory: instrument overview," in *Millimeter, Submillimeter, and Far-Infrared Detectors and Instrumentation for Astronomy IX*, Vol. 10708 (International Society for Optics and Photonics, 2018) p. 1070804.
- ²⁰N. Zhu, T. Bhandarkar, G. Coppi, *et al.*, "The simons observatory large aperture telescope receiver," *The Astrophysical Journal Supplement Series* **256**, 23 (2021).
- ²¹S. C. Parshley, M. Niemack, R. Hills, *et al.*, "The optical design of the six-meter CCAT-prime and Simons Observatory telescopes," in *Ground-based and Airborne Telescopes VII*, Vol. 10700, International Society for Optics and Photonics (SPIE, 2018) p. 1070041.

- ²²S. W. Henderson, Z. Ahmed, J. Austermann, *et al.*, “Highly-multiplexed microwave SQUID readout using the SLAC Microresonator Radio Frequency (SMuRF) electronics for future CMB and sub-millimeter surveys,” in *Millimeter, Submillimeter, and Far-Infrared Detectors and Instrumentation for Astronomy IX*, Vol. 10708, International Society for Optics and Photonics (SPIE, 2018) p. 1070819.
- ²³Y. Li, K. Arnold, Z. Atkins, *et al.*, “Assembly and integration process of the high-density detector array readout modules for the simons observatory,” *Journal of Low Temperature Physics* **199**, 985–993 (2020).
- ²⁴H. McCarrick, E. Healy, Z. Ahmed, *et al.*, “The simons observatory microwave squid multiplexing detector module design,” *The Astrophysical Journal* **922**, 38 (2021).
- ²⁵Simons Observatory Collaboration, “simonsobs/bolocalc-so-model version v3r7 baseline,” <https://github.com/simonsobs/bolocalc-so-model/>.
- ²⁶N. Jarosik, C. L. Bennett, M. Halpern, *et al.*, “Design, Implementation, and Testing of the Microwave Anisotropy Probe Radiometers,” *The Astrophysical Journal Supplement Series* **145**, 413 (2003).
- ²⁷C. W. O’Dell, B. G. Keating, A. de Oliveira-Costa, *et al.*, “CMB polarization at large angular scales: Data analysis of the POLAR experiment,” *Phys. Rev. D* **68**, 042002 (2003).
- ²⁸E. M. Leitch, J. M. Kovac, N. W. Halverson, *et al.*, “Degree Angular Scale Interferometer 3 Year Cosmic Microwave Background Polarization Results,” *The Astrophysical Journal* **624**, 10 (2005).
- ²⁹D. Barkats, C. Bischoff, P. Farese, *et al.*, “Cosmic Microwave Background Polarimetry Using Correlation Receivers with the PIQUE and CAPMAP Experiments,” *The Astrophysical Journal Supplement Series* **159**, 1 (2005).
- ³⁰M.-T. Chen, C.-T. Li, Y.-J. Hwang, *et al.*, “AMiBA: BROADBAND HETERODYNE COSMIC MICROWAVE BACKGROUND INTERFEROMETRY,” *The Astrophysical Journal* **694**, 1664 (2009).
- ³¹Bersanelli, M., Mandolesi, N., Butler, R. C., *et al.*, “Planck pre-launch status: Design and description of the Low Frequency Instrument,” *A&A* **520**, A4 (2010).
- ³²D. Araujo, C. Bischoff, A. Brizius, *et al.* (QUIET Collaboration), “SECOND SEASON QUIET OBSERVATIONS: MEASUREMENTS OF THE COSMIC MICROWAVE BACKGROUND POLARIZATION POWER SPECTRUM AT 95 GHz,” *The Astrophysical Journal* **760**, 145 (2012).
- ³³S. Moyerman, E. Bierman, P. A. R. Ade, *et al.*, “SCIENTIFIC VERIFICATION OF FARADAY ROTATION MODULATORS: DETECTION OF DIFFUSE POLARIZED GALACTIC EMISSION,” *The Astrophysical Journal* **765**, 64 (2013).
- ³⁴S. Bryan, P. Ade, M. Amiri, *et al.*, “A cryogenic rotation stage with a large clear aperture for the half-wave plates in the spider instrument,” *Review of Scientific Instruments* **87**, 014501 (2016).
- ³⁵N. J. Miller, D. T. Chuss, T. A. Marriage, *et al.*, “Recovery of large angular scale cmb polarization for instruments employing variable-delay polarization modulators,” *The Astrophysical Journal* **818**, 151 (2016).
- ³⁶K. Lee, J. Choi, R. T. Génova-Santos, *et al.*, “GroundBIRD: A CMB Polarization Experiment with MKID Arrays,” *Journal of Low Temperature Physics* **200**, 384–391 (2020).
- ³⁷K. Harrington, R. Datta, K. Osumi, *et al.* (CLASS collaboration), “Two Year Cosmology Large Angular Scale Surveyor (CLASS) Observations: Long Timescale Stability Achieved with a Front-end Variable-delay Polarization Modulator at 40 GHz,” *The Astrophysical Journal* **922**, 212 (2021).
- ³⁸B. R. Johnson, J. Collins, *et al.*, “MAXIPOL: Cosmic Microwave Background Polarimetry Using a Rotating Half-Wave Plate,” *The Astrophysical Journal* **665**, 42 (2007).
- ³⁹T. Matsumura, *A cosmic microwave background radiation polarimeter using superconducting magnetic bearings*, Ph.D. thesis, University of Minnesota (2006).
- ⁴⁰J. Klein and The EBEX Collaboration, “A cryogenic half-wave plate polarimeter using a superconducting magnetic bearing,” in *Cryogenic Optical Systems and Instruments XIII*, Vol. 8150 (International Society for Optics and Photonics, 2011) p. 815004.
- ⁴¹A. Kusaka, T. Essinger-Hileman, *et al.*, “Modulation of cosmic microwave background polarization with a warm rapidly rotating half-wave plate on the Atacama B-Mode Search instrument,” *Review of Scientific Instruments* **85**, 24501 (2014).
- ⁴²C. A. Hill, S. Beckman, Y. Chinone, *et al.*, “Design and development of an ambient-temperature continuously-rotating achromatic half-wave plate for CMB polarization modulation on the POLARBEAR-2 experiment,” in *Millimeter, Submillimeter, and Far-Infrared Detectors and Instrumentation for Astronomy VIII*, Vol. 9914, International Society for Optics and Photonics (SPIE, 2016) p. 99142U.
- ⁴³B. R. Johnson, F. Columbro, D. Araujo, *et al.*, “A large-diameter hollow-shaft cryogenic motor based on a superconducting magnetic bearing for millimeter-wave polarimetry,” *Review of Scientific Instruments* **88**, 105102 (2017).
- ⁴⁴C. A. Hill, A. Kusaka, P. Ashton, *et al.*, “A cryogenic continuously rotating half-wave plate mechanism for the polarbear-2b cosmic microwave background receiver,” *Review of Scientific Instruments* **91**, 124503 (2020).
- ⁴⁵F. T. Matsuda, “Optics design development of the Simons Observatory Small Aperture Telescopes,” in *Ground-based and Airborne Telescopes VIII*, Vol. 11445, International Society for Optics and Photonics (SPIE, 2020) p. 171.
- ⁴⁶Cryomech, PT-420s, <https://www.cryomech.com/products/pt420/>.
- ⁴⁷S. Takakura, M. A. O. Aguilar-Faúndez, Y. Akiba, *et al.*, “Measurements of tropospheric ice clouds with a ground-based cmb polarization experiment, polarbear,” *The Astrophysical Journal* **870**, 102 (2019).
- ⁴⁸M. A. Petroff, J. R. Eimer, K. Harrington, *et al.*, “Two-year cosmology large angular scale surveyor (class) observations: A first detection of atmospheric circular polarization at q band,” *The Astrophysical Journal* **889**, 120 (2020).
- ⁴⁹S. E. Church, “Predicting residual levels of atmospheric sky noise in ground-based observations of the cosmic background radiation,” *Monthly Notices of the Royal Astronomical Society* **272**, 551–569 (1995).
- ⁵⁰R. Dünner, M. Hasselfield, T. A. Marriage, *et al.*, “The atacama cosmology telescope: Data characterization and mapmaking,” *The Astrophysical Journal* **762**, 10 (2012).
- ⁵¹J. Errard, P. Ade, Y. Akiba, *et al.*, “Modeling Atmospheric Emission For CMB Ground-based Observations,” *Astrophysical Journal* **809** (2015).
- ⁵²T. W. Morris, R. Bustos, E. Calabrese, *et al.*, “The atacama cosmology telescope: Modeling bulk atmospheric motion,” *Phys. Rev. D* **105**, 042004 (2022).
- ⁵³Y. D. Takahashi, P. A. R. Ade, D. Barkats, *et al.*, “Characterization of the BICEP Telescope for High-precision Cosmic Microwave Background Polarimetry,” *ApJ* **711**, 1141–1156 (2010), arXiv:0906.4069 [astro-ph.CO].
- ⁵⁴D. S. Swetz, P. A. R. Ade, M. Amiri, *et al.*, “OVERVIEW OF THE ATACAMA COSMOLOGY TELESCOPE: RECEIVER, INSTRUMENTATION, AND TELESCOPE SYSTEMS,” *The Astrophysical Journal Supplement Series* **194**, 41 (2011).
- ⁵⁵J. E. Austermann, K. A. Aird, J. A. Beall, *et al.*, “SPTpol: an instrument for CMB polarization measurements with the South Pole Telescope,” in *Millimeter, Submillimeter, and Far-Infrared Detectors and Instrumentation for Astronomy VI*, Vol. 8452, International Society for Optics and Photonics (SPIE, 2012) p. 84521E.
- ⁵⁶M. Shimon, B. Keating, N. Ponthieu, and E. Hivon, “CMB polarization systematics due to beam asymmetry: Impact on inflationary science,” *Phys. Rev. D* **77**, 083003 (2008).
- ⁵⁷S. Pancharatnam, “Achromatic combinations of birefringent plates,” *Proceedings of the Indian Academy of Sciences - Section A* **41**, 137–144 (1955).
- ⁵⁸The EBEX Collaboration, “The EBEX Balloon-borne Experiment—Optics, Receiver, and Polarimetry,” *The Astrophysical Journal Supplement Series* **239**, 7 (2018).
- ⁵⁹L. Moncelsi, P. A. R. Ade, F. E. Angilè, *et al.*, “Empirical modelling of the BLASTPol achromatic half-wave plate for precision submillimetre polarimetry,” *Monthly Notices of the Royal Astronomical Society* **437**, 2772–2789 (2013).
- ⁶⁰Y. Sakurai, T. Matsumura, N. Katayama, *et al.*, “Breadboard model of the polarization modulator unit based on a continuously rotating half-wave plate for the low-frequency telescope of the LiteBIRD space mission,” in *Millimeter, Submillimeter, and Far-Infrared Detectors and Instrumentation for Astronomy X*, Vol. 11453, International Society for Optics and Photonics (SPIE, 2020) p. 114534E.
- ⁶¹T. Essinger-Hileman, A. Kusaka, *et al.*, “Systematic effects from an ambient-temperature, continuously rotating half-wave plate,” *Review of Scientific Instruments* **87**, 94503 (2016).
- ⁶²M. Monelli, E. Komatsu, A. E. Adler, M. Billi, P. Campeti, N. Dachlythra, A. J. Duivenvoorden, J. E. Gudmundsson, and M. Reinecke, “Impact of half-wave plate systematics on the measurement of cosmic birefringence

- from cmb polarization,” *Journal of Cosmology and Astroparticle Physics* **2023**, 034 (2023).
- ⁶³S. Takakura, M. Aguilar, Y. Akiba, *et al.*, “Performance of a continuously rotating half-wave plate on the POLARBEAR telescope,” *Journal of Cosmology and Astroparticle Physics* **2017**, 8 (2017).
- ⁶⁴K. D. Crowley, P. Dow, J. E. Shroyer, *et al.*, “The Simons Observatory: A large-diameter truss for a refracting telescope cooled to 1 K,” *Review of Scientific Instruments* **93**, 055106 (2022).
- ⁶⁵N. Galitzki *et al.*, “The Simons Observatory: Integration and testing of the first small aperture telescope, SAT-MF1,” (In preparation).
- ⁶⁶M. Salatino, J. Lashner, M. Gerbino, *et al.*, “Studies of systematic uncertainties for Simons Observatory: polarization modulator related effects,” in *Millimeter, Submillimeter, and Far Infrared Detectors and Instrumentation for Astronomy IX*, Vol. 10708 (International Society for Optics and Photonics, 2018) p. 1070848.
- ⁶⁷The POLARBEAR Collaboration, “Improved Upper Limit on Degree-scale CMB B-mode Polarization Power from the 670 Square-degree POLARBEAR Survey,” *The Astrophysical Journal* **931**, 101 (2022).
- ⁶⁸Spira Manufacturing Corp., <https://www.spira-emi.com/>.
- ⁶⁹D. W. Wisander, L. P. Ludwig, and R. L. Johnson, “Wear and friction of various polymer laminates in liquid nitrogen and in liquid hydrogen.” (1966).
- ⁷⁰Y. Sakurai, P. Ashton, A. Kusaka, *et al.*, “Half-meter Scale Superconducting Magnetic Bearing for Cosmic Microwave Background Polarization Experiments,” *Journal of Physics: Conference Series* **1590**, 012060 (2020).
- ⁷¹Y. Sakurai, T. Matsumura, N. Katayama, *et al.*, “Design and development of a polarization modulator unit based on a continuous rotating half-wave plate for LiteBIRD,” in *Proceedings of SPIE - The International Society for Optical Engineering*, Vol. 10708 (2018).
- ⁷²Can Superconductors, CSYL-28 <https://www.can-superconductors.com/>.
- ⁷³Shin-Etsu Chemical Co., Ltd., <https://www.shinetsu.co.jp/en/>.
- ⁷⁴SMC Corporation. LEY32C-30B-S11P1.
- ⁷⁵Huntington Vacuum Products. <https://huntvac.com/>.
- ⁷⁶Vishay, VSMB294008G, https://www.henkel-adhesives.com/us/en/product/potting-compounds/loctite-stycast_2850ft.html.
- ⁷⁷Vishay, TEMD1020, <https://www.vishay.com/docs/81564/temd1000.pdf>.
- ⁷⁸Omega, CNI16D54-EIT, https://www.jp.omega.com/pptst/CNI_SERIES.html.
- ⁷⁹Lake Shore, Model 240, <https://www.lakeshore.com/products/categories/overview/temperature-products/cryogenic-temperature-modules/240-series-input-modules>.
- ⁸⁰Lake Shore, HGT-3010 <https://shop.lakeshore.com/default/transverse-hall-sensor-3010hgt-3010.html>.
- ⁸¹Y. Sakurai, T. Matsumura, H. Kataya, *et al.*, “Estimation of the Heat Dissipation and the Rotor Temperature of Superconducting Magnetic Bearing Below 10 K,” *IEEE Transactions on Applied Superconductivity* **27**, 1–4 (2017).
- ⁸²B. J. Koopman, J. Lashner, L. J. Saunders, *et al.*, “The Simons Observatory: overview of data acquisition, control, monitoring, and computer infrastructure,” in *Software and Cyberinfrastructure for Astronomy VI*, Vol. 11452, International Society for Optics and Photonics (SPIE, 2020) p. 1145208.
- ⁸³Y. Inoue, T. Matsumura, M. Hazumi, *et al.*, “Cryogenic infrared filter made of alumina for use at millimeter wavelength,” *Applied Optics* **53**, 1727 (2014).
- ⁸⁴M. J. Persky, “Review of black surfaces for space-borne infrared systems,” *Review of Scientific Instruments* **70**, 2193–2217 (1999).
- ⁸⁵Kikusui electronics corp. PMX35-3A.
- ⁸⁶Analog Devices, adxl345 <https://www.analog.com/en/products/adxl345.html>.
- ⁸⁷P. Tiwari, X. D. Wu, S. R. Foltyn, *et al.*, “Study of high-quality epitaxial ybco thin films grown directly on y-cut linbo3,” *Journal of Electronic Materials* **25**, 131–135 (1996).
- ⁸⁸Y. Sakurai, T. Matsumura, N. Katayama, *et al.*, “Development of a Cryogenic Remote Sensing Thermometer for CMB Polarization Experiment,” in *29th IEEE International Symposium on Space THz Technology* (Pasadena, CA, 2018) pp. 169–174.
- ⁸⁹The minimum elevation angle of the SAT platform is 20°.
- ⁹⁰BeagleBone Black, Beagle Board: <https://beagleboard.org/black>.
- ⁹¹Range Commanders Council, “IRIG Standard 200-16: IRIG Serial Time Code Formats,” (2016).
- ⁹²Guizhou Haotian Optoelectronics Co., Ltd.
- ⁹³K. N. Abazajian, P. Adshead, Z. Ahmed, *et al.*, “CMB-S4 Science Book, First Edition,” (2016), [arXiv:1610.02743](https://arxiv.org/abs/1610.02743) [astro-ph.CO].
- ⁹⁴M. H. Abitbol, Z. Ahmed, D. Barron, *et al.*, “CMB-S4 Technology Book, First Edition,” (2017), [arXiv:1706.02464](https://arxiv.org/abs/1706.02464) [astro-ph.IM].