

Adaptive Smooth Control via Nonsingular Fast Terminal Sliding Modes for Distributed Space Telescope Demonstration Mission by CubeSat Formation Flying

Soobin Jeon

Ph.D Candidate, Department of Astronomy, Yonsei University, Seoul 03722, Republic of Korea

Hancheol Cho

Associate Professor, Department of Astronomy, Yonsei University, Seoul 03722, Republic of Korea
Visiting Assistant Professor, Department of Aerospace Engineering, Embry-Riddle Aeronautical University, Daytona Beach, FL 32114, USA

Sang-Young Park

Professor, Department of Astronomy, Yonsei University, Seoul 03722, Republic of Korea

Abstract— This paper presents a nonsingular fast terminal sliding mode-based adaptive smooth control methodology for a distributed space telescope demonstration mission. The distributed space telescope has a flexible focal length that corresponds to the relative position in the formation flying concept. The precise formation flying technology implemented by CubeSats enhances the utility of distributed space systems at low costs. The limited specification of a CubeSat generally restricts the performance of actuators – most critically the degrees of freedom of controlled motion. Conventional formation flying missions generally aim to verify relative orbit control technologies such as formation keeping and reconfiguration on orbit that are stable in natural dynamics. The state-of-the-art formation flying has evolved for more elaborate missions with scientific purposes. One example is the distributed space telescope that observes a celestial object by precisely keeping two satellites in alignment in the presence of system uncertainties or environmental disturbances. The reference trajectory of the

Manuscript received XXXXX 00, 0000; revised XXXXX 00, 0000; accepted XXXXX 00, 0000.

Corresponding author: H. Cho

Soobin Jeon is with the Department of Astronomy, Yonsei University, Seoul 03722, Republic of Korea (e-mail: forestine@yonsei.ac.kr). Hancheol Cho is with the Department of Astronomy, Yonsei University, Seoul 03722, Republic of Korea (e-mail: hanch37@yonsei.ac.kr) and the Department of Aerospace Engineering, Embry-Riddle Aeronautical University, Daytona Beach, FL 32114, USA (e-mail: choh15@erau.edu). Sang-Young Park is with the Department of Astronomy, Yonsei University, Seoul 03722, Republic of Korea (e-mail: spark624@yonsei.ac.kr).

distributed space telescope is designed to point toward an inertial celestial target and does not follow natural dynamics. The characteristics of the reference trajectory for the scientific mission and the restricted specifications of CubeSats induce the attitude and orbit control systems to be simultaneously designed with robustness as they mutually affect the control performance. This investigation leads to the development of an adaptive smooth control methodology via nonsingular fast terminal sliding modes. By avoiding the use of a discontinuous function, the proposed control approach generates completely smooth signals. Also, without a priori knowledge of the bounds on uncertainty, the control gain is automatically adapted to the unknown variations of system parameters and external disturbances. As a result, the sliding variables and the tracking errors are controlled to converge into user-specified small domains and the user can easily select control parameters to satisfy the mission requirements. The adaptive smooth controller in the previous research is extended from a single-input single-output system to a multi-input multi-output orbit/attitude control system. The simulation compares the efficiency of the adaptive smooth nonsingular fast terminal sliding mode controller with the linear quadratic regulator algorithm which is embedded onboard the CubeSat. The results verify that the adaptive smooth nonsingular fast terminal sliding mode control algorithm shows better control performance in the perspective of the alignment time and the fuel consumption for the distributed space telescope demonstration mission.

Index Terms— Robust control, Nonsingular fast terminal sliding mode control, Adaptive control, CubeSat, Formation flying

Nomenclature

$r = [x \ y \ z]^T$	Relative position vector in the LVLH frame
$\dot{r} = [\dot{x} \ \dot{y} \ \dot{z}]^T$	Relative velocity vector in the LVLH frame
$q = [q_v^T \ q_4]^T$	Quaternion
$q_v = [q_1 \ q_2 \ q_3]^T$	Quaternion vector component
$\omega = [\omega_1 \ \omega_2 \ \omega_3]^T$	Angular velocity
d	Disturbance
d	Lower bound of disturbance
D	Upper bound of disturbance
m	Mass of the deputy satellite
\mathbf{R}	Diagonal matrix comprising position errors
R_{ei}	Position error bound of NFTSM controller
Q_{ei}	Quaternion error bound of NFTSM controller
\mathbf{Q}_{LQR}	Q weight matrix of LQR controller
\mathbf{R}_{LQR}	R weight matrix of LQR controller
$(\cdot)^i$	A variable or parameter in an inertial frame
$(\cdot)^l$	A variable or parameter in the LVLH frame
$(\cdot)^b$	A variable or parameter in the body frame
$(\cdot)^c$	A variable or parameter of the chief satellite
$(\cdot)^d$	A variable or parameter of the deputy satellite

$(\cdot)_p$	A primary vector of TRIAD algorithm
$(\cdot)_s$	A secondary vector of TRIAD algorithm
$(\cdot)_w$	A variable or parameter of the reaction wheels
$(\cdot)_{orb}$	A variable or parameter of the relative orbit control system
$(\cdot)_{att}$	A variable or parameter of the attitude control system
$(\cdot)_{x,y,z}$	The first, second, and third components of the orbital variable or parameter
$(\cdot)_{1,2,3}$	The first, second, and third components of the attitude variable or parameter
$(\cdot)_r$	Reference, desired, or target variable or parameter
$(\cdot)_e$	Error variable or parameter

I. Introduction

The advancement of satellite technology has led to the concept of a distributed space system, which aims to replace medium or large single satellites with a number of small satellites [1]–[3]. The distributed space system integrates several satellites into a single architecture and encompasses satellite constellations, formation flying, and distributed space telescopes, etc. Distributed space systems offer the capability that strategically organizes the configuration of satellites in accordance with given mission objectives. Hence, it contributes to expanding the diversity and flexibility of scientific missions utilizing multiple satellites.

Conventional formation flight missions have reference relative trajectories that are designed based on the relative dynamics exhibited by two similar satellites. Namely, the reference trajectory is deliberately designed to retain its stability in the absence of a control input. The Gravity Recovery and Climate Experiment (GRACE) and the Gravity Recovery and Climate Experiment Follow-on (GRACE-FO) mission was a scientific mission that quantifies the gravitational field by analyzing alterations in relative motion [4], [5]. TerraSAR-X/TanDEM-X (TSX/TDX) satellites acquired ground observation data regularly by applying instantaneous thrust to maintain relative motion within the control window [6]. In [7]–[9] the formation flight control technology was verified by either modifying the relative orbit for a rendezvous (CanX-4/5) or executing inter-satellite docking with proximity operations (CPOD).

A distributed space telescope is a kind of distributed space system that observes inertial objects by formation flying of dual-spacecraft. The distributed space telescope that is also known as the binary-distributed telescope [10] or the virtual telescope [11] refers to a group of multiple satellites equipped with optics and detection payload functions as a single instrument [10]. Distributed telescopes have a variable and extensive local length com-

pared to monolithic telescopes and consist of a number of more compact structures, which possesses the advantage of relatively low launch and development costs [12]. This paper uses the term distributed space telescope.

The Inertial Alignment Hold (IAH) is the technology that maintains a specific configuration toward an inertial target in order to implement distributed space telescopes. The relative distance of the formation flying satellites corresponds to the telescope’s baseline or focal length and is designed to range from 1,000 to 72,000 kilometers (astrophysical targets) [13], [14] to 50 to 500 meters (heliophysical targets and X-ray images) [15], [16], depending on the observation target and wavelength band. In contrast to conventional formation flight missions, the reference trajectories of the inertial alignment hold missions should be designed as the orbits with the separation of focal lengths with respect to the inertial targets. Since the control law must retain the alignment precisely within the requirements in an unknown space environment, this paper suggests a robust control approach that compensates for any effects of disturbances using continuous thrust.

The main factors that contribute to disturbances in space are uncertainties in the structural properties and unmodeled perturbation forces [17]. The robust control system should be able to resist these effects that are neglected in the system modeling phase while successfully performing the tasks. Several robust control techniques have been proposed and have proven their effectiveness in a variety of practical control problems [18]–[21]. One common solution for achieving robustness is sliding mode control (SMC) [22]–[24]. The sliding mode control approach allows the system’s states to defy the natural motion and follow the designed trajectory, the so-called ‘sliding surface.’

The feasibility of sliding mode control in formation flying missions has been successfully shown in literature over several decades. The adaptive linear and nonsingular terminal sliding mode control approach achieved submillimeter formation keeping precision even when the operational faults were detected [25]. The continuous and high-order sliding mode controller with consecutive pulse-width modulation was applied to the satellite formation flying in [26]. The sliding mode approach in this application showed high tracking accuracy in the presence of bounded and matched disturbances and uncertainties. The fuzzy-SMC-based technique successfully conducted reconfigurations within a short time span with a minimum control effort for the multiple satellite formation flying problems [27].

The terminal sliding mode (TSM) technique was first proposed for finite-time control for rigid robotic manipulators [28], [29]. It successfully achieved finite-time stability, although the singularity problem existed [28]. The investigation in [29] suggested a modified type of terminal sliding variable by defining a nonsingular terminal sliding mode (NTSM) variable. In the aerospace field, the TSM approach addressed the attitude tracking problem of spacecraft [30]. However, it had the singularity

problem and the research in [31] dealt with it in the same manner as in [29].

The finite-time control (FTC) approach [32] combines the advantages of the linear and terminal sliding mode control approaches. This FTC algorithm as a TSM variant guarantees the convergence of tracking errors in finite time for the relative translational motion problems such as formation-keeping and reconfiguration of electromagnetic formation flying. The sliding variable proposed in [32] is similar to the one that this paper suggests for the relative orbit control system (ROCS). It is proven that the sliding variable in [32] shows faster convergence speed near and far from the equilibrium points than the linear and the conventional terminal sliding modes in [32]. However, the controller contains the term $|e|^{\gamma-1}$ where e is the relative position error and $\gamma \in (0, 1)$ is a constant, provoking the singularity problem that the previous research suffered. In addition, the constant gain hardly overcomes the unknown bounds of disturbances and uncertainties. This investigation leads to the proposition of a new nonsingular sliding variable for an adaptive smooth controller.

The study presented in [33] designed a nonsingular fast terminal sliding mode (NFTSM), another modified TSM technique. The NFTSM in [33] deals with a singular hyper-plane term by increasing the exponent range to $(1, 2)$. Besides, the combination of the equivalent control and reaching phase control with an adaptive gain alleviates chattering and achieves fast convergence. The sliding variable for the attitude control system (ACS) in this paper defines the hyper-plane term for quaternion errors in contrast to the one in [33] in which both the quaternion and angular velocity errors were applied. Despite this minor difference, the sliding variables in both papers include the hyper-plane and continuous error, and enhance the convergence rate from an arbitrary initial state. In addition, those two sliding variables utilize the increased exponent range that guarantees nonsingularity. However, the adaptive laws in [33] might suffer from unintended chattering and need to compromise between the chattering and speed. The adaptive rule in the current study successfully sustains smooth control without any chattering.

In this paper, we aim to achieve precise control of the relative orbit and attitude motion of multiple satellites without a priori knowledge of the bounds on system uncertainties or external disturbances. To this end, we propose a new sliding surface and a robust smooth control law with gain adaptation, and apply them to the distributed space telescope mission by CubeSat formation flying. A new nonsingular fast terminal sliding mode variable is first introduced while overcoming the singularity and achieving a fast convergence to the equilibrium point from any initial state. In addition, the NFTSM suggested in this paper has the advantage that we can easily select control parameters so that the control errors for ACS and ROCS converge to desired regions, which few previous studies have dealt with.

Next, the adaptive smooth control law is developed by extending the one in [34] that was designed for a single-input single-output (SISO) system. The adaptive controller is known to have better control performances than the one with a constant gain under disturbances and uncertainties with unknown bounds. In designing the adaptive smooth controller, only a few parameters are to be selected or tuned. However, it shows successful performances without aids from other controllers such as equivalent control or reaching phase control. Besides, its smooth nature removes the inveterate chattering phenomenon of conventional sliding mode control.

Lastly, the application to the CubeSat mission verifies the feasibility and effectiveness of the adaptive smooth NFTSM controller. The CANYVAL (CubeSat Astronomy by NASA and Yonsei using the Virtual ALignment)-C mission aimed to demonstrate the distributed space telescope by CubeSat formation flying and was launched in 2021. Therefore, the structures, configurations, specifications, and operational environments are all elaborately designed for the real-world mission. The sliding variable can describe the error bounds analytically as a function of the control parameters. Therefore, the user can select proper control parameters in order to satisfy the mission requirements, as mentioned in the previous paragraph. The simulation results are compared to the onboard algorithm in [36] and show improved control performances.

This paper is structured as follows. The first section describes the historical background of the distributed space telescope (DST) and NFTSM, and the aim and the contributions of the current study sequentially. Section II describes the concept and the characteristics of the Guidance, Navigation, and Control (GN&C) subsystem of the DST demonstration (CANYVAL-C) mission by CubeSats. The dynamic and kinematic equations of the nominal and error states are described in Section III for ACS and ROCS. Section IV introduces the new NFTSM and adaptive smooth control law, and proves their stability based on the Lyapunov theory. The control performances described in Section V verify the feasibility and effectiveness of the adaptive smooth nonsingular fast terminal sliding mode controller for the CubeSat formation flying mission developed in this paper. Finally, Section VI concludes the paper.

II. Mission Description

CANYVAL-C Mission

The CANYVAL project is a distributed space telescope demonstration mission by formation flying of 1U and 2U CubeSats and was developed by Yonsei University and National Aeronautics and Space Administration (NASA). The 1U satellite is a DSC (Detector Spacecraft) equipped with a visible wavelength camera, and an OSC (Optics Spacecraft), 2U satellite, is equipped with an occulter and it operates the propulsion system to perform orbit control. The nonlinear equation of the relative motion that regards the Earth as a point mass describes the

relative states between 1U as the chief and 2U as the deputy.

The configuration based on the mission concept is described in Fig. 1. The first phase of the CANYVAL project is CANYVAL-X (CANYVAL-eXperimental) launched in 2018, and the OSC controls only the alignment angle (θ_{align}) in Fig. 1 so that it has a flexible separation between DSC and OSC [37]. The second phase of the CANYVAL project is CANYVAL-C (CANYVAL-Coronagraph) launched in 2021, and the thruster has a greater number of degrees of freedom to implement the distributed space telescope with a fixed distance of 40 meters [38]. Therefore, the formation flying system controls the error between the relative position of OSC (\mathbf{r}) and the desired trajectory (\mathbf{r}_r) to complete the DSC – OSC – Sun configuration.

Fig. 2 describes the location and orientation of the payload and the propulsion system of the OSC. The CANYVAL-C mission’s propulsion system utilizes GomSpace’s Nanoprop, which fires cold gas through four nozzles in the $\pm\hat{\mathbf{b}}_x$ and $\pm\hat{\mathbf{b}}_y$ directions in the body fixed frame. The occulter should point to the $-\hat{\mathbf{b}}_z$ direction that is normal to the thrust nozzles and it constrains the controllable directions in the local-vertical, local-horizontal (LVLH) frame during alignment to the sun. The propulsion system controls only the satellite’s orbit, while the attitude is controlled by a reaction wheel assembly composed of three wheels. The attitude should be controlled to fire in the desired direction as the propulsion system has two degrees of freedom. Therefore, the orbit and attitude control accuracies are dependent on each other.

Mission Objectives

The operational orbit is a sun-synchronous orbit (SSO), and the local time of the ascending node (LTAN) is 11:00. Since the sun-synchronous orbit is circular, the eccentricity of the chief’s orbit is assumed to be zero for

the mathematical expressions and derivation in Section III. The inertial alignment hold consists of the staging and alignment modes for an efficient operation [36]. The satellite in the staging mode is reconfigured into the along-track orbit (ATO) of the along-track distance that corresponds to the focal length of DST. The ATO can be thought as a “leader-follower” configuration and is formulated as follows [8], [35]:

$$\begin{cases} x(t) = \frac{1}{2}\delta_1 \sin(nt + \nu) \\ y(t) = \delta_1 \cos(nt + \nu) + \delta_3 \\ z(t) = \delta_2 \sin(nt + \nu) \end{cases} \quad (1)$$

where n is the mean orbital angular speed of the chief and δ_1 , δ_2 , δ_3 , ν , and ν are the formation design parameters. Since the focal length of this mission is 40 meters, the reference state of the staging mode, which is the initial state of the alignment mode, is designed as $\delta_1 = \delta_2 = 0$ and δ_3 is 40 meters. Immediately after sunrise, the deputy commences the alignment mode for an extended observation of the sun. In the alignment mode, the deputy aligns toward the sun in the LVLH frame. Therefore the reference trajectory is derived as:

$$\mathbf{r}_r(t) = 40 \cdot \frac{\mathbf{r}_\odot(t)}{\|\mathbf{r}_\odot(t)\|_2} \quad (\text{m}) \quad (2)$$

where $\mathbf{r}_\odot(t)$ is the sun vector that orients from 1U to the sun and is described in the LVLH frame.

Fig. 3 describes the reference orbital trajectories in the LVLH frame. The reference trajectory of the staging mode is expressed as a cross mark in Fig. 3. On the other hand, the epoch time and the LTAN determine the reference trajectory of the alignment mode because it depends on the position of the sun by (2). Fig. 3 shows the reference trajectory of LTAN 11:00 at the vernal equinox when the sun is exactly at the equator in which the satellites were planned to operate for the CANYVAL-C mission.

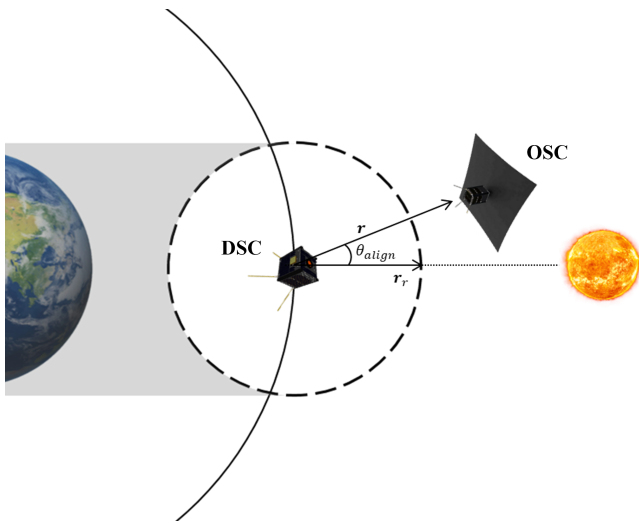


Fig. 1. Distributed space telescope configuration to demonstrate the solar coronagraph

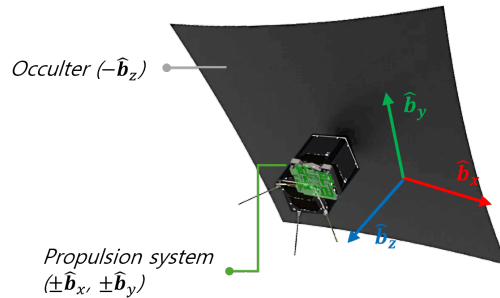


Fig. 2. Location and orientation of the occulter and propulsion system in body frame.

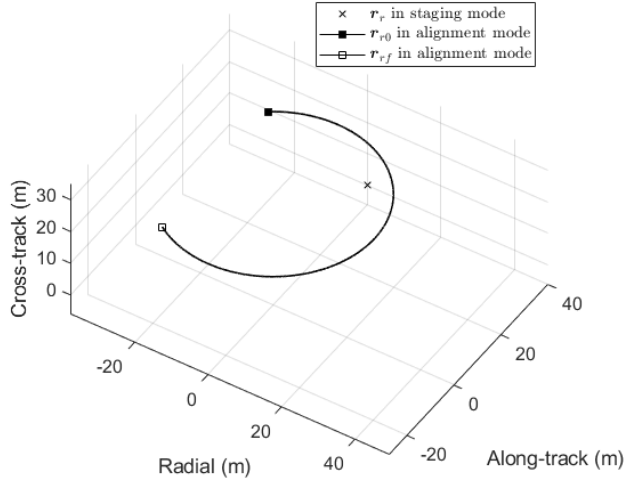


Fig. 3. Reference trajectories described in LVLH frame (cross mark: the reference state in staging mode, filled and empty squares: the initial and final reference states in alignment mode, solid line: the reference trajectory in alignment mode)

The reference attitude is derived from the TRIAD algorithm that defines a coordinate frame with two vectors described in the reference and body frames [39], [40]:

$$\mathbf{C}^b \cdot (\mathbf{C}^i)^T = \mathbf{C}_i^b \quad (3)$$

where the superscripts b and i of the direction cosine matrix \mathbf{C} refer to the body and reference frames, respectively. Also, the superscript T denotes the transpose of the corresponding matrix. Given the primary and secondary vectors of TRIAD method \mathbf{r}_p and \mathbf{r}_s , the direction cosine matrix is derived as

$$\mathbf{C} = [\hat{\mathbf{r}}_1 \quad \hat{\mathbf{r}}_2 \quad \hat{\mathbf{r}}_3] \quad (4)$$

where $\hat{\mathbf{r}}_1 = \mathbf{r}_p / \|\mathbf{r}_p\|$, $\hat{\mathbf{r}}_2 = \mathbf{r}_p \times \mathbf{r}_s / \|\mathbf{r}_p \times \mathbf{r}_s\|$, and $\hat{\mathbf{r}}_3 = \mathbf{r}_p \times (\mathbf{r}_p \times \mathbf{r}_s) / \|\mathbf{r}_p \times (\mathbf{r}_p \times \mathbf{r}_s)\|$.

The quaternion that is also known as the Euler parameters is defined as

$$\mathbf{q}_v = \mathbf{a} \sin(\theta/2), \quad q_4 = \cos(\theta/2) \quad (5)$$

where \mathbf{a} and θ are the Euler axis and the rotation angle about the Euler axis [41], [42].

If q_4 is not zero, the quaternion is able to be derived from the direction cosine matrix as follows [41], [42]:

$$\mathbf{q}_v = \frac{1}{4q_4} [C_{23} - C_{32} \quad C_{31} - C_{13} \quad C_{12} - C_{21}]^T \quad (6)$$

$$q_4 = \frac{1}{2} (1 + C_{11} + C_{22} + C_{33})^{\frac{1}{2}} \quad (7)$$

where $\mathbf{C} = [C_{ij}]$.

The primary vector of the attitude control in the alignment mode is to orient the occulter toward the sun. Since the propulsion system has nozzles only along the x and y directions in the body frame, if it needs z directional control, it rotates by 10 degrees with respect to the y

direction as an ad-hoc strategy. Therefore, the vectors that define the reference attitude frame during the alignment mode are:

$$\mathbf{r}_p^i = \mathbf{r}_\odot^i, \quad \mathbf{r}_s^i = \mathbf{C}_l^i \cdot [0 \quad 0 \quad 1]^T \quad (8)$$

$$\mathbf{r}_p^b = [0 \quad \pm \sin \theta \quad -1 - \cos \theta]^T \quad (9)$$

$$\mathbf{r}_s^b = [1 \quad 0 \quad 0]^T \quad (10)$$

where the subscripts p and s represent the primary and secondary vectors, respectively, \mathbf{C}_l^i is the rotation matrix from the LVLH frame to the inertial frame, θ is the rotation angle that is set as 10 degrees, and the positive sign in \mathbf{r}_p^b indicates that the y and z components of the thrust vector have the same sign. The secondary vectors in the inertial and body frames are derived from the angle β of the sun-synchronous orbit that is the angle between the orbital plane and the sun vector.

The deputy should be located within a sphere of a 3-meter radius with respect to the reference state to image the solar corona and determine the mission's success [36], [38]. The occulter should point to the sun with less than a 3-degree error to shade the sunlight in the image [38], [54]. As a result, the requirements of ROCS and ACS are summarized as follows:

$$\|\mathbf{r} - \mathbf{r}_r\|_2 \leq 3 \quad (\text{m}) \quad (11)$$

$$\theta_e \leq 3 \quad (\text{deg}) \quad (12)$$

where θ_e is the Euler angle of the error quaternion in (5).

III. Description of Formation Flying System

This paper assumes that the propulsion system has two degrees of freedom and controls only the orbital states, and the ACS (Attitude Control System) consists of reaction wheels. Therefore, the attitude actuator controls the body frame so that the resultant fired thrust vector is aligned with the reference thrust vector in advance of the orbital actuator's firing. The relative orbital dynamics are described in the LVLH coordinate system, defined based on point mass gravity. The quaternions and angular velocity represent the attitude and the dynamic equations include the rotational motion of the reaction wheels.

A. Relative Orbit Control System

The Keplerian two-body equations of motion of the chief satellite are given by [43]

$$\ddot{\mathbf{r}}_c(t) = -\frac{\mu \mathbf{r}_c(t)}{r_c^3} \quad (13)$$

where $\mathbf{r}_c(t) = [X_c(t) \quad Y_c(t) \quad Z_c(t)]^T$ is the chief's position in an inertial frame with the magnitude of r_c and μ is the standard gravitational parameter of the Earth.

The relative position and acceleration of the deputy satellite with respect to the chief are defined as

$$\mathbf{r}(t) = \mathbf{r}_d(t) - \mathbf{r}_c(t) \quad (14)$$

$$\begin{aligned}\ddot{\mathbf{r}}(t) &= \ddot{\mathbf{r}}_d(t) - \ddot{\mathbf{r}}_c(t) \\ &= -\frac{\mu(\mathbf{r}(t) + \mathbf{r}_c(t))}{\|\mathbf{r}(t) + \mathbf{r}_c(t)\|_2^3} + \frac{\mu\mathbf{r}_c(t)}{r_c^3}\end{aligned}\quad (15)$$

where $\mathbf{r}_d(t) = [X_d(t) \ Y_d(t) \ Z_d(t)]^T$ is the inertial position of the deputy satellite with the distance from the center of the Earth r_d .

The second time derivative of the position vector in the inertial frame (i) is related to the one in the LVLH frame (l) through the following [43], [44]

$$\begin{aligned}\ddot{\mathbf{r}}(t) &= {}^i \left(\frac{d^2 \mathbf{r}(t)}{dt^2} \right) = {}^l \left(\frac{d^2 \mathbf{r}(t)}{dt^2} \right) + 2 {}^i \boldsymbol{\omega}^l \times {}^l \left(\frac{d\mathbf{r}(t)}{dt} \right) \\ &+ \frac{d {}^i \boldsymbol{\omega}^l}{dt} \times \mathbf{r}(t) + {}^i \boldsymbol{\omega}^l \times ({}^i \boldsymbol{\omega}^l \times \mathbf{r}(t))\end{aligned}\quad (16)$$

where ${}^i \boldsymbol{\omega}^l$ is the angular velocity vector of the frame l with respect to the frame i . It is defined as ${}^i \boldsymbol{\omega}^l = [0 \ 0 \ \dot{\theta}_c]^T$ due to its normality to the orbital plane where $\dot{\theta}_c$ is chief's the orbital angular speed.

Hence, the relative equations of motion are derived as

$$\begin{aligned}\ddot{\mathbf{r}}(t) &= \mathbf{A}_1(\mathbf{r}_c, \dot{\mathbf{r}}_c, \mathbf{r}_d) \mathbf{r}(t) + \mathbf{A}_2(\mathbf{r}_c, \dot{\mathbf{r}}_c) \dot{\mathbf{r}}(t) \\ &+ \mathbf{f}(\mathbf{r}_c, \mathbf{r}_d) + \frac{1}{m} \mathbf{B}(\mathbf{u}_{orb}(t) + \mathbf{d}_{orb}(t, m, \mathbf{r}_d, \dot{\mathbf{r}}_d))\end{aligned}\quad (17)$$

where the nonlinearity of the Keplerian motion $\mathbf{f}(\mathbf{r}_c, \mathbf{r}_d)$, the matrices $\mathbf{A}_1(\mathbf{r}_c, \dot{\mathbf{r}}_c, \mathbf{r}_d)$, $\mathbf{A}_2(\mathbf{r}_c, \dot{\mathbf{r}}_c)$, and \mathbf{B} are defined as

$$\begin{aligned}\mathbf{A}_1(\mathbf{r}_c, \dot{\mathbf{r}}_c, \mathbf{r}_d) &= \begin{bmatrix} \dot{\theta}_c^2 - \frac{\mu}{r_d^3} & \ddot{\theta}_c & 0 \\ -\ddot{\theta}_c & \dot{\theta}_c^2 - \frac{\mu}{r_d^3} & 0 \\ 0 & 0 & -\frac{\mu}{r_d^3} \end{bmatrix}, \\ \mathbf{A}_2(\mathbf{r}_c, \dot{\mathbf{r}}_c) &= \begin{bmatrix} 0 & 2\dot{\theta}_c & 0 \\ -2\dot{\theta}_c & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}, \\ \mathbf{f}(\mathbf{r}_c, \mathbf{r}_d) &= \begin{bmatrix} \frac{\mu}{r_c^2} - \frac{\mu r_c}{r_d^3} \\ 0 \\ 0 \end{bmatrix}, \quad \mathbf{B} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}\end{aligned}\quad (18)$$

and m is the mass of the deputy, θ_c is the argument of latitude of the chief, $\mathbf{u}_{orb}(t) = [u_{orb,x}(t) \ u_{orb,y}(t) \ u_{orb,z}(t)]^T$ is the orbital control input, and $\mathbf{d}_{orb}(t, m, \mathbf{r}_d, \dot{\mathbf{r}}_d) = [d_{orb,x} \ d_{orb,y} \ d_{orb,z}]^T$ is the external disturbance force and its three elements have the same arguments but omitted here for brevity. The mass m is assumed to have uncertainty as described in Section IV.

Let the tracking error for the relative orbital states be defined by subtracting the reference state $\mathbf{r}_r(t)$ from the current state $\mathbf{r}(t)$:

$$\begin{aligned}\mathbf{r}_e(t) &= \mathbf{r}(t) - \mathbf{r}_r(t) \\ &= [x(t) - x_r(t) \ y(t) - y_r(t) \ z(t) - z_r(t)]^T\end{aligned}\quad (19)$$

where $\mathbf{r}_e(t) = [x_e(t) \ y_e(t) \ z_e(t)]^T$.

Hence, the equations of motion of the orbital errors are derived by substituting (19) into (17) as

$$\begin{aligned}\ddot{\mathbf{r}}_e(t) &= \mathbf{A}_1(\mathbf{r}_c, \dot{\mathbf{r}}_c, \mathbf{r}_d) (\mathbf{r}_e(t) + \mathbf{r}_r(t)) \\ &+ \mathbf{A}_2(\mathbf{r}_c, \dot{\mathbf{r}}_c) (\dot{\mathbf{r}}_e(t) + \dot{\mathbf{r}}_r(t)) \\ &+ \mathbf{f}(\mathbf{r}_c, \mathbf{r}_d) + \frac{1}{m} \mathbf{B}(\mathbf{u}_{orb}(t) + \mathbf{d}_{orb}(t, m, \mathbf{r}_d, \dot{\mathbf{r}}_d)) - \ddot{\mathbf{r}}_r(t)\end{aligned}\quad (20)$$

where $\dot{\mathbf{r}}_e(t)$ and $\ddot{\mathbf{r}}_e(t)$ are the first and second-time derivatives of the tracking error and $\ddot{\mathbf{r}}_r(t)$ is the second-time derivative of the reference trajectory.

B. Attitude Control System

The kinematic differential equations for the quaternions and the angular velocity that represent the attitude control system of a satellite are written as follows [33], [40]–[42], [45]

$$\begin{aligned}\dot{\mathbf{q}}(t) &= \begin{bmatrix} \dot{q}_v(t) \\ \dot{q}_4(t) \end{bmatrix} \\ &= \frac{1}{2} \begin{bmatrix} q_4(t) \mathbf{I}_{3 \times 3} + \mathbf{q}^\times(t) & \mathbf{q}_v(t) \\ -\mathbf{q}_v^T(t) & q_4(t) \end{bmatrix} \begin{bmatrix} \boldsymbol{\omega}(t) \\ 0 \end{bmatrix}\end{aligned}\quad (21)$$

where the quaternion $\mathbf{q}(t) = [q_v^T(t) \ q_4(t)]^T$ consists of the vector $\mathbf{q}_v(t) = [q_1(t) \ q_2(t) \ q_3(t)]^T$ and the scalar $q_4(t)$ components, $\boldsymbol{\omega}(t) = [\omega_1(t) \ \omega_2(t) \ \omega_3(t)]^T$ is the angular velocity vector, $\mathbf{I}_{3 \times 3}$ is the 3 by 3 identity matrix, and the skew-symmetric matrix $\mathbf{q}^\times(t)$ is defined as

$$\mathbf{q}^\times(t) = \begin{bmatrix} 0 & -q_3(t) & q_2(t) \\ q_3(t) & 0 & -q_1(t) \\ -q_2(t) & q_1(t) & 0 \end{bmatrix}\quad (22)$$

The attitude dynamic equations of motion with the control torque generated by the reaction wheels under external disturbances can be expressed as

$$\mathbf{J} \dot{\boldsymbol{\omega}}(t) = -\boldsymbol{\omega}(t) \times (\mathbf{J} \boldsymbol{\omega}(t) + \mathbf{J}_w \boldsymbol{\omega}_w(t)) + \mathbf{u}_{att}(t) + \mathbf{d}_{att}(t)\quad (23)$$

where \mathbf{J} is the deputy's moment of inertia matrix that contains uncertainty, \mathbf{J}_w is the moment of inertia matrix of the reaction wheels, $\boldsymbol{\omega}_w$ is the angular velocity of the reaction wheels, $\mathbf{u}_{att}(t)$ is the control torque, and $\mathbf{d}_{att}(t)$ is the external disturbance torque.

The rotation formula from the current body axes to the reference body axes constructs the attitude tracking error quaternion [33], [40]–[42], [45]

$$\begin{aligned}\mathbf{q}_e(t) &= \begin{bmatrix} q_{ev}(t) \\ q_{e4}(t) \end{bmatrix} \\ &= \begin{bmatrix} q_{r4}(t) \mathbf{q}_v(t) - q_4(t) \mathbf{q}_{rv}(t) - \mathbf{q}_{rv}^\times(t) \mathbf{q}_v(t) \\ q_4(t) q_{r4}(t) + \mathbf{q}_{rv}^T(t) \mathbf{q}_v(t) \end{bmatrix}\end{aligned}\quad (24)$$

where $\mathbf{q}_r(t) = [q_{rv}^T(t) \ q_{r4}(t)]^T$ is the reference attitude trajectory and $\mathbf{q}(t) = [q_v^T(t) \ q_4(t)]^T$ represents the current attitude.

The angular velocity error is derived as [33], [40]–[42], [45]

$$\boldsymbol{\omega}_e(t) = \boldsymbol{\omega}(t) - \mathbf{C}_r^b(t) \boldsymbol{\omega}_r(t)\quad (25)$$

where $\boldsymbol{\omega}(t) = [\omega_1(t) \ \omega_2(t) \ \omega_3(t)]^T$ is the current angular velocity and $\boldsymbol{\omega}_r(t) = [\omega_{r1}(t) \ \omega_{r2}(t) \ \omega_{r3}(t)]^T$ is the reference angular velocity. The matrix $\mathbf{C}_r^b(t)$ represents a rotation matrix from the reference to the current frames and can be expressed for the error quaternion as

$$\begin{aligned} \mathbf{C}_r^b(t) &= \left(q_{e4}^2(t) - \mathbf{q}_{ev}^T(t) \mathbf{q}_{ev}(t) \right) \mathbf{I}_{3 \times 3} + 2\mathbf{q}_{ev}(t) \mathbf{q}_{ev}^T(t) \\ &\quad - 2q_{e4}(t) \mathbf{q}_{ev}^\times(t) \end{aligned} \quad (26)$$

where $|\mathbf{C}_r^b(t)| = 1$ and the derivative of the rotation matrix can derive the angular rate of the body fixed frame as

$$\dot{\mathbf{C}}_r^b(t) = -\boldsymbol{\omega}_e^\times(t) \mathbf{C}_r^b(t) \quad (27)$$

Hence, the error kinematic and dynamic equations are written as [33], [40]–[42], [45]

$$\begin{aligned} \dot{\mathbf{q}}_e(t) &= \begin{bmatrix} \dot{q}_{ev}(t) \\ \dot{q}_{e4}(t) \end{bmatrix} \\ &= \frac{1}{2} \begin{bmatrix} q_{e4}(t) \mathbf{I}_{3 \times 3} + \mathbf{q}_{ev}^\times(t) & \mathbf{q}_{ev}(t) \\ -\mathbf{q}_{ev}^T(t) & q_{e4}(t) \end{bmatrix} \begin{bmatrix} \boldsymbol{\omega}_e(t) \\ 0 \end{bmatrix} \end{aligned} \quad (28)$$

$$\begin{aligned} \mathbf{J} \dot{\boldsymbol{\omega}}_e(t) &= -\left(\boldsymbol{\omega}_e(t) + \mathbf{C}_r^b(t) \boldsymbol{\omega}_r(t) \right) \\ &\quad \times \left(\mathbf{J} \left(\boldsymbol{\omega}_e(t) + \mathbf{C}_r^b(t) \boldsymbol{\omega}_r(t) \right) + \mathbf{J}_w \boldsymbol{\omega}_w(t) \right) \\ &\quad + \mathbf{u}_{att}(t) + \mathbf{d}_{att}(t) \\ &\quad + \mathbf{J} \left(\boldsymbol{\omega}_e^\times(t) \mathbf{C}_r^b(t) \boldsymbol{\omega}_r(t) - \mathbf{C}_r^b(t) \dot{\boldsymbol{\omega}}_r(t) \right) \end{aligned} \quad (29)$$

C. Problem Statement

To summarize Sections II and III, the relative orbit control problem of the CANYVAL-C mission is simplified into two applications: stabilization (staging mode) and tracking problem (alignment mode). The objective of this paper is to design a sliding surface and a control law for the formation flying system so that the errors of the relative orbit and attitude are ultimately bounded by small regions in finite time, that is:

$$\lim_{t \rightarrow t_{f,orb}} (\mathbf{r}(t) - \mathbf{r}_r(t)) = \mathbf{R}_e \quad (30)$$

$$\begin{aligned} \lim_{t \rightarrow t_{f,att}} \left(q_{r4}(t) \mathbf{q}_v(t) - q_4(t) \mathbf{q}_{rv}(t) \right. \\ \left. - \mathbf{q}_{rv}^\times(t) \mathbf{q}_v(t) \right) = \mathbf{Q}_e \end{aligned} \quad (31)$$

where the $t_{f,orb}$ and $t_{f,att}$ are the finite time instants of ROCS and ACS at which the errors converge to the desired regions. The error bounds \mathbf{R}_e and \mathbf{Q}_e are analytically derived in Lemma 5 and 6, respectively. The errors are defined in Section III.

IV. Control System Design

Assumption 1. The state vectors of the satellite $(\mathbf{r}, \dot{\mathbf{r}}, \mathbf{q}_v, \boldsymbol{\omega})$ are fully measurable and available throughout the spaceflight mission.

Assumption 2. The uncertain structural properties in the orbit and attitude control systems are the mass and moments of inertia that have unknown lower and upper

bounds. In the current paper, the mass and moments of inertia are supposed to be uncertain but bounded as

$$m(t) = m_0 + \delta m(t) \quad (32)$$

$$\mathbf{J}(t) = \mathbf{J}_0 + \delta \mathbf{J}(t) \quad (33)$$

where the subscripts ‘0’ and ‘ δ ’ denote the nominal (known) and uncertain values of the variable, respectively.

Assumption 3. The external disturbances are perturbations that include the asymmetric gravity of the Earth, atmospheric drag, and solar radiation pressure. They induce disturbance forces and torques that are bounded by unknown values:

$$0 < d_f < \|\mathbf{d}_{orb}(t, m, \mathbf{r}_d, \dot{\mathbf{r}}_d)\|_2 < D_f \quad (34)$$

$$0 < d_\tau < \|\mathbf{d}_{att}(t)\|_2 < D_\tau \quad (35)$$

where (d_f, D_f) and (d_τ, D_τ) are the lower and upper bounds of the orbital and attitude disturbances, respectively, and are all unknown.

Adaptive control law

The adaptive smooth control law is based on sliding modes and drives the sliding variable into a user-specified domain without any chattering phenomenon. The robust control law designed for a SISO system in [34] is elaborately extended to each of the orbit and attitude MIMO control systems:

$$\mathbf{u}(t) = -\frac{K(t)}{\varepsilon} \mathbf{s}(t) \quad (36)$$

where $K(t)$ is the smooth time-varying gain that obeys the adaptive law defined in (37), $\mathbf{s}(t)$ is the sliding variable, and ε is a user-specified positive constant.

The gain is updated by the adaptation law as follows [34]:

$$\dot{K}(t) = \eta (\|\mathbf{u}(t)\|_2 - K(t) + K_0), K(0) \geq K_0 \quad (37)$$

where $\mathbf{u}(t)$ is the adaptive smooth control law in (36), η is a user-specified positive constant, and K_0 is the constant lower bound of the control gain $K(t)$ (see Lemma 2) that is positive and user-specified, and $\|\cdot\|_2$ is a vector 2-norm.

LEMMA 1 Assume that the time derivative of the sliding variable can be expressed as

$$\dot{\mathbf{s}}(t) = \tilde{\lambda}_{max}^{-1} \tilde{\mathbf{d}}(t) + \tilde{\mathbf{b}}_0^{-1} \mathbf{u}(t) \quad (38)$$

where $\tilde{\mathbf{b}}_0$ is the nominal control matrix which is real-symmetric and positive definite, $\tilde{\lambda}_{max}$ is the maximum eigenvalue of $\tilde{\mathbf{b}}_0$, and $\tilde{\mathbf{d}}(t)$ is the disturbance that has unknown bounds such that $\tilde{d} < \|\tilde{\mathbf{d}}(t)\|_2 < \tilde{D}$. For example, $\tilde{\mathbf{b}}_0^{-1}$ is derived to be \mathbf{J}_0^{-1} for ACS in this Section. $\tilde{\mathbf{d}}(t)$ may include other terms than the dynamic forces and torques of Assumption 3 if it is bounded. Assume that the control gain $K(t)$ satisfies $K(t) > \tilde{D}$ for $\forall t$. Then, as soon as the condition $\|\mathbf{s}\|_2 > \varepsilon$ is met, the adaptive smooth control law proposed in (36) makes the sliding variable converge into the region $\|\mathbf{s}\|_2 \leq \varepsilon$ in finite time and retains it thereafter.

Proof:

The Lyapunov candidate $V(t) = \frac{1}{2} \mathbf{s}^T \tilde{\mathbf{b}}_0 \mathbf{s}$ obtains its time derivative as

$$\begin{aligned} \dot{V} &= \mathbf{s}^T \tilde{\mathbf{b}}_0 \dot{\mathbf{s}} \\ &= \mathbf{s}^T \left(\tilde{\lambda}_{max}^{-1} \tilde{\mathbf{b}}_0 \tilde{\mathbf{d}} + \mathbf{u} \right) \\ &= \mathbf{s}^T \left(\tilde{\lambda}_{max}^{-1} \tilde{\mathbf{b}}_0 \tilde{\mathbf{d}} - \frac{K(t)}{\varepsilon} \cdot \mathbf{s} \right) \end{aligned} \quad (39)$$

where (38) and (36) are substituted in order.

The spectral theorem decomposes any real symmetric matrix $\mathbf{A} \in \mathbb{R}^{n \times n}$ into

$$\begin{aligned} \mathbf{A} &= \mathbf{P} \mathbf{D} \mathbf{P}^T \\ &= \sum_{i=1}^n \lambda_i \mathbf{p}_i \mathbf{p}_i^T \end{aligned} \quad (40)$$

where λ_i and \mathbf{p}_i are the eigenvalue and eigenvector of \mathbf{A} for $i = 1, \dots, n$, $\mathbf{P} = [\mathbf{p}_1 \ \mathbf{p}_2 \ \dots \ \mathbf{p}_n]$ is a matrix composed of eigenvectors, and $\mathbf{D} = \text{diag}\{\lambda_1, \lambda_2, \dots, \lambda_n\}$ has the eigenvalues of \mathbf{A} as its diagonal elements. In the same manner, $\mathbf{s}^T \tilde{\mathbf{b}}_0 \tilde{\mathbf{d}}$ satisfies the inequality condition as

$$\mathbf{s}^T \tilde{\mathbf{b}}_0 \tilde{\mathbf{d}} \leq \tilde{\lambda}_{max} \mathbf{s}^T \tilde{\mathbf{d}} \quad (41)$$

Therefore, (39) is derived as

$$\begin{aligned} \dot{V} &\leq \mathbf{s}^T \left(\tilde{\mathbf{d}} - \frac{K(t)}{\varepsilon} \cdot \mathbf{s} \right) \\ &< \|\mathbf{s}\|_2 \tilde{D} - \frac{K(t)}{\varepsilon} \|\mathbf{s}\|_2^2 \\ &= \|\mathbf{s}\|_2 \left(\tilde{D} - \frac{K(t)}{\varepsilon} \|\mathbf{s}\|_2 \right) \end{aligned} \quad (42)$$

If the sliding variable is in the region $\|\mathbf{s}\|_2 > \varepsilon$, then

$$\begin{aligned} \dot{V} &< \|\mathbf{s}\|_2 (\tilde{D} - K(t)) \\ &\leq -\kappa(t) \cdot V^{1/2} \end{aligned} \quad (43)$$

where $\kappa(t) = \sqrt{2\lambda_{max}^{-1}} (K(t) - \tilde{D}) > 0$. Therefore, the control law proposed in (36) guarantees that the sliding variable moves into the region $\|\mathbf{s}\|_2 \leq \varepsilon$ in finite time. ■

LEMMA 2 *The gain adaptation law of (37) implies that the control gain always satisfies $K(t) \geq K_0$ for $\forall t$.*

Proof:

Let us define $\Delta K(t) \equiv K(t) - K_0$, then

$$\Delta \dot{K}(t) = \dot{K}(t) \quad (44)$$

Substitution of the adaptive rule into (44) leads to

$$\begin{aligned} \Delta \dot{K}(t) &= \dot{K}(t) \\ &= \eta (\|\mathbf{u}(t)\|_2 - K(t) + K_0) \\ &= \eta (\|\mathbf{u}(t)\|_2 - \Delta K(t)) \end{aligned} \quad (45)$$

Since $\|\mathbf{u}(t)\|_2 \geq 0$ is always satisfied, (45) becomes

$$\Delta \dot{K}(t) \geq -\eta \cdot \Delta K(t) \quad (46)$$

Let us introduce the function $\psi(t) = \psi(0) \exp(-\eta t) > 0$ where $\psi(0)$ is an arbitrary positive constant, then

$$\dot{\psi}(t) = -\eta \cdot \psi(t) \quad (47)$$

The time derivative of $\frac{\Delta K(t)}{\psi(t)}$ is calculated as

$$\begin{aligned} \frac{d}{dt} \left(\frac{\Delta K(t)}{\psi(t)} \right) &= \frac{\Delta \dot{K}(t) \psi(t) - \Delta K(t) \dot{\psi}(t)}{\psi^2(t)} \\ &= \frac{\Delta \dot{K}(t) \psi(t) + \eta \cdot \Delta K(t) \psi(t)}{\psi^2(t)} \\ &= \frac{\Delta \dot{K}(t) + \eta \cdot \Delta K(t)}{\psi(t)} \end{aligned} \quad (48)$$

Since $\Delta \dot{K}(t) + \eta \cdot \Delta K(t) \geq 0$ by (46), it proves that

$$\frac{d}{dt} \left(\frac{\Delta K(t)}{\psi(t)} \right) \geq 0. \quad (49)$$

The initial conditions of $\Delta K(t)$ and $\psi(t)$ yield

$$\frac{\Delta K(0)}{\psi(0)} \geq 0 \quad (50)$$

where $\Delta K(0) = K(0) - K_0 \geq 0$ and $\psi(0) > 0$.

Consequently, (49) and (50) proves that $\frac{\Delta K(t)}{\psi(t)}$ is equal to or greater than zero, leading to

$$\Delta K(t) = K(t) - K_0 \geq 0 \quad (51)$$

Therefore, the gain is updated with the lower bound as $K(t) \geq K_0$. ■

LEMMA 3 *The adaptive gain shown in (37) has a finite upper bound such that $K \leq K^*$ and does not grow infinitely. It is proven in [34].*

A. Relative Orbit Control System

Sliding variable design

The sliding variable for the relative orbit control system is designed based on the concept of the nonsingular fast terminal sliding mode. This novel NFTSM variable guarantees the asymptotic stability to the equilibrium point while maintaining the fast convergent characteristics of the traditional TSM. It is defined as follows:

$$\mathbf{s}_{orb}(t) = \dot{\mathbf{r}}_e(t) + \boldsymbol{\alpha}_{orb} \text{sig}^{\rho_{orb}} \mathbf{r}_e(t) + \boldsymbol{\beta}_{orb} \mathbf{r}_e(t) \quad (52)$$

where $\rho_{orb} \in (1, 2)$ is a constant, $\boldsymbol{\alpha}_{orb} = \text{diag}\{\alpha_{orb,1}, \alpha_{orb,2}, \alpha_{orb,3}\}$, $\boldsymbol{\beta}_{orb} = \text{diag}\{\beta_{orb,1}, \beta_{orb,2}, \beta_{orb,3}\}$ are user-specified diagonal matrices, where $\alpha_{orb,i=1,2,3} > 0$ and $\beta_{orb,i=1,2,3} > 0$ are constants. Besides, $\text{sig}^\rho \boldsymbol{\xi} = [|\xi_1|^\rho \text{sgn}(\xi_1) \quad |\xi_2|^\rho \text{sgn}(\xi_2) \quad |\xi_3|^\rho \text{sgn}(\xi_3)]^T$ is defined for a vector $\boldsymbol{\xi} = [\xi_1 \ \xi_2 \ \xi_3]^T$. The subscripts and arguments of the variables and parameters will be suppressed for brevity unless required.

PROPOSITION 1 *The relative position and velocity errors $(\mathbf{r}_e, \dot{\mathbf{r}}_e)$ are asymptotically stable if the sliding variable \mathbf{s} defined in (52) is zero.*

Proof:

Let the Lyapunov candidate be defined as

$$V = \frac{1}{2} \mathbf{r}_e^T \mathbf{r}_e \quad (53)$$

The time derivative is derived as

$$\begin{aligned}\dot{V} &= \mathbf{r}_e^T \dot{\mathbf{r}}_e \\ &= \mathbf{r}_e^T (-\boldsymbol{\alpha} \text{sig}^\rho \mathbf{r}_e - \boldsymbol{\beta} \mathbf{r}_e) \\ &\leq -\alpha_{\min} \|\mathbf{r}_e\|_{\rho+1}^{\rho+1} - \beta_{\min} \|\mathbf{r}_e\|_2^2\end{aligned}\quad (54)$$

where $s = \mathbf{0}$ is used, $\alpha_{\min} = \min_{i=1,2,3} \alpha_i$ and $\beta_{\min} = \min_{i=1,2,3} \beta_i$. Hence, when the sliding variable is maintained to be zero, the orbital error states converge to zero asymptotically. ■

LEMMA 4 Assume that V is a C^1 smooth positive definite function that is defined on $U \subset \mathbb{R}^n$. If $\dot{V} + cV^r$ is a negative semi-definite function where $c \in \mathbb{R}^+$ and $r \in (0, 1)$, then there exists a region $U_0 \subset \mathbb{R}^n$ such that V can approach zero in finite time from the initial value V_0 on the region U_0 . The convergence time is known as $t \leq \frac{V_0^{1-r}}{c(1-r)}$ [47]–[51].

THEOREM 1 Consider the relative orbit control system that is nonlinear and uncertain (17) with the adaptive smooth feedback controller (36)–(37) where the sliding manifold is designed as in (52). Then, as soon as the condition $\|\mathbf{s}\|_2 > \varepsilon$ is met, the orbital states converge to the region $\|\mathbf{s}\|_2 \leq \varepsilon$ in finite time.

Proof:

Let us define the Lyapunov function $V(t)$ as

$$V = \frac{1}{2} \mathbf{s}^T \mathbf{s} + \frac{1}{2\gamma_{orb}} (K - K^*)^2 \quad (55)$$

where γ_{orb} and K^* are positive constants and K^* is sufficiently large. The variable γ refers to the orbital variable from here on. The time derivative is derived as

$$\dot{V} = s^T \dot{s} + \frac{1}{\gamma} (K - K^*) \dot{K} \quad (56)$$

The time derivative of the orbital sliding variable yields

$$\dot{s} = \ddot{\mathbf{r}}_e + \boldsymbol{\alpha} \rho \mathbf{R} \dot{\mathbf{r}}_e + \boldsymbol{\beta} \dot{\mathbf{r}}_e \quad (57)$$

where $\mathbf{R} = \text{diag} \{ |x_e|^{\rho-1}, |y_e|^{\rho-1}, |z_e|^{\rho-1} \}$. Substituting (20) into (57) yields

$$\begin{aligned}\dot{s} &= \mathbf{A}_1 (\mathbf{r}_e + \mathbf{r}_r) + \mathbf{A}_2 (\dot{\mathbf{r}}_e + \dot{\mathbf{r}}_r) + \mathbf{f} + \frac{1}{m} \mathbf{B} (\mathbf{u} + \mathbf{d}) \\ &\quad - \ddot{\mathbf{r}}_r + \boldsymbol{\alpha} \rho \mathbf{R} \dot{\mathbf{r}}_e + \boldsymbol{\beta} \dot{\mathbf{r}}_e\end{aligned}\quad (58)$$

The terms in (58) are rearranged according to their uncertainties

$$\begin{aligned}\dot{s} &= [\mathbf{A}_1 (\mathbf{r}_e + \mathbf{r}_r) + \mathbf{A}_2 (\dot{\mathbf{r}}_e + \dot{\mathbf{r}}_r) + \mathbf{f} - \ddot{\mathbf{r}}_r + \boldsymbol{\alpha} \rho \mathbf{R} \dot{\mathbf{r}}_e + \boldsymbol{\beta} \dot{\mathbf{r}}_e] \\ &\quad + \frac{1}{m} \mathbf{B} \mathbf{d} + \frac{1}{m} \mathbf{B} \mathbf{u}\end{aligned}\quad (59)$$

With (18), the time derivative of the sliding variable simply leads to

$$\dot{s} = \frac{1}{m} \mathbf{u} + \bar{\mathbf{d}} \quad (60)$$

where $\bar{\mathbf{d}} = [\mathbf{A}_1 (\mathbf{r}_e + \mathbf{r}_r) + \mathbf{A}_2 (\dot{\mathbf{r}}_e + \dot{\mathbf{r}}_r) + \mathbf{f} - \ddot{\mathbf{r}}_r + \boldsymbol{\alpha} \rho \mathbf{R} \dot{\mathbf{r}}_e + \boldsymbol{\beta} \dot{\mathbf{r}}_e] + \frac{1}{m} \mathbf{B} \mathbf{d}$ includes the nonlinearities of the dynamics and uncertainties with an unknown upper bound $\|\bar{\mathbf{d}}\|_2 < \bar{D}$. Assume that K^* is selected such that $K^* > m_{\max} \bar{D}$ where m_{\max} is the maximum value of the uncertain mass

and $K^* \geq K(t)$ for all time $t \geq 0$ as $K(t)$ updated by (37) is bounded (see Lemma 3), then

$$\begin{aligned}\dot{V} &= s^T \dot{s} + \frac{1}{\gamma} (K - K^*) \dot{K} \\ &= s^T \left(\bar{\mathbf{d}} + \frac{1}{m} \mathbf{u} \right) + \frac{1}{\gamma} (K - K^*) \dot{K} \\ &= s^T \left(\bar{\mathbf{d}} - \frac{K}{m\varepsilon} \mathbf{s} \right) + \frac{1}{\gamma} (K - K^*) \dot{K} \\ &< \|s\|_2 \bar{D} - \frac{K}{m\varepsilon} s^T \mathbf{s} + \frac{1}{\gamma} (K - K^*) \dot{K} \\ &= \frac{\|s\|_2}{m} \left(m\bar{D} - \frac{K}{\varepsilon} \|s\|_2 \right) + \frac{1}{\gamma} (K - K^*) \dot{K}\end{aligned}\quad (61)$$

Let us assume the case where the sliding variable stays in the region $\|\mathbf{s}\|_2 > \varepsilon$. Then (61) is derived as

$$\begin{aligned}\dot{V} &< \frac{\|s\|_2}{m} (m\bar{D} - K) + \frac{1}{\gamma} (K - K^*) \dot{K} \\ &= \frac{\|s\|_2}{m} (m\bar{D} - K^*) + \frac{1}{\gamma} (K - K^*) \dot{K} - \frac{\|s\|_2}{m} (K - K^*) \\ &= \|s\|_2 \left(\bar{D} - \frac{K^*}{m} \right) + \frac{1}{\gamma} (K - K^*) \dot{K} - \frac{\|s\|_2}{m} (K - K^*) \\ &< \|s\|_2 \left(\bar{D} - \frac{K^*}{m_{\max}} \right) + \frac{1}{\gamma} (K - K^*) \dot{K} - \frac{\|s\|_2}{m} (K - K^*) \\ &= -\lambda_s \|s\|_2 - |K - K^*| \left(-\frac{\|s\|_2}{m} + \frac{1}{\gamma} \dot{K} \right)\end{aligned}\quad (62)$$

where $\lambda_s \triangleq \frac{K^* - m_{\max} \bar{D}}{m_{\max}} > 0$ is defined and the equality condition $K - K^* = -|K - K^*|$ is utilized. Now, a new parameter $\lambda_K > 0$ is introduced such that

$$\begin{aligned}\dot{V} &< -\lambda_s \|s\|_2 - |K - K^*| \left(-\frac{\|s\|_2}{m} + \frac{1}{\gamma} \dot{K} \right) + \lambda_K |K - K^*| \\ &\quad - \lambda_K |K - K^*| \\ &= -\lambda_s \|s\|_2 - |K - K^*| \left(-\frac{\|s\|_2}{m} + \frac{1}{\gamma} \dot{K} - \lambda_K \right) \\ &\quad - \lambda_K |K - K^*| \\ &< -\lambda_s \|s\|_2 - |K - K^*| \left(-\frac{\|s\|_2}{m_{\min}} + \frac{1}{\gamma} \dot{K} - \lambda_K \right) \\ &\quad - \lambda_K |K - K^*| \\ &= -\lambda_s \|s\|_2 - \lambda_K |K - K^*| - L\end{aligned}\quad (63)$$

where $L \triangleq |K - K^*| \left(-\frac{\|s\|_2}{m_{\min}} + \frac{1}{\gamma} \dot{K} - \lambda_K \right)$. We write (63) as

$$\begin{aligned}\dot{V} &< -\lambda_s \|s\|_2 - \lambda_K |K - K^*| - L \\ &= -\lambda_s \sqrt{2} \cdot \frac{\|s\|_2}{\sqrt{2}} - \lambda_K \sqrt{2\gamma} \cdot \frac{|K - K^*|}{\sqrt{2\gamma}} - L \\ &\leq -\min \left(\lambda_s \sqrt{2}, \lambda_K \sqrt{2\gamma} \right) \cdot \left(\frac{\|s\|_2}{\sqrt{2}} + \frac{|K - K^*|}{\sqrt{2\gamma}} \right) - L \\ &\leq -\lambda \cdot V^{1/2} - L\end{aligned}\quad (64)$$

where $\lambda \triangleq \sqrt{2} \min (\lambda_s, \lambda_K \sqrt{\gamma}) > 0$.

The parameter L could be positive by selecting a proper γ . Since $\dot{K} > 0$ when $\|\mathbf{s}\|_2 > \varepsilon$, the positiveness

condition $L > 0$ is equivalent to

$$\gamma_{orb} < \frac{m_{min}\dot{K}}{\lambda_K m_{min} + \|s\|_2} \quad (65)$$

Let us define $\Gamma_{orb}(t) \triangleq \frac{m_{min}\dot{K}}{\lambda_K m_{min} + \|s\|_2}$, then substitution of (37) leads to

$$\begin{aligned} \Gamma_{orb}(t) &\triangleq \eta \frac{m_{min} \left(K(t) \left(\frac{\|s\|_2}{\varepsilon} - 1 \right) + K_0 \right)}{\lambda_K m_{min} + \|s\|_2} \\ &\geq \eta \frac{m_{min} K_0 \frac{\|s\|_2}{\varepsilon}}{\lambda_K m_{min} + \|s\|_2} \\ &= \eta \cdot \frac{m_{min} \frac{K_0}{\varepsilon}}{\frac{\lambda_K m_{min}}{\|s\|_2} + 1} \end{aligned} \quad (66)$$

As the condition $\|s\|_2 > \varepsilon$ is satisfied,

$$\Gamma_{orb}(t) > \eta \frac{m_{min} \frac{K_0}{\varepsilon}}{\frac{\lambda_K m_{min}}{\varepsilon} + 1} = \eta \frac{m_{min} K_0}{\lambda_K m_{min} + \varepsilon} \quad (67)$$

As a result, one should select γ_{orb} such that

$$\gamma_{orb} < \frac{\eta m_{min} K_0}{\lambda_K m_{min} + \varepsilon} \quad (68)$$

If the parameter L is always positive, we can conclude that $\dot{V} < -\lambda V^{1/2} - L < -\lambda V^{1/2}$. Hence, the sliding surface converges into the region $\|s\|_2 \leq \varepsilon$ in finite time by Lemma 4. ■

LEMMA 5 *When the i th element of the orbital sliding variable is bounded by $|s_i(t)| \leq \varepsilon_i$, the relative position error is bounded by $|r_{ei}(t)| \leq R_{ei}$, where x_e , y_e , and z_e are written as r_{ei} for $i = 1, 2, 3$, respectively, to possess the expression of uniformity. The error bound R_{ei} can be analytically obtained, being the unique solution of the algebraic equation $F(R_{ei}) = 0$, where $F(x) = \varepsilon_i - \alpha_i \text{sig}^\rho x - \beta_i x$. Because R_{ei} is a positive constant, $\text{sig}^\rho x$ is equivalent to x^ρ and it leads to $F(x) = \varepsilon_i - \alpha_i x^\rho - \beta_i x$.*

Proof:

Let us define the Lyapunov function $V = \frac{1}{2} r_{ei}^2$, then its time derivative is derived as

$$\dot{V} = r_{ei} \dot{r}_{ei} \quad (69)$$

The bound on the sliding surface $|s_i| \leq \varepsilon_i$ constrains \dot{r}_{ei} as

$$G(r_{ei}) \leq \dot{r}_{ei} \leq F(r_{ei}) \quad (70)$$

where $F(x)$ and $G(x)$ are defined as in (71) and (72)

$$F(x) = \varepsilon_i - \alpha_i \text{sig}^\rho x - \beta_i x \quad (71)$$

$$G(x) = -\varepsilon_i - \alpha_i \text{sig}^\rho x - \beta_i x \quad (72)$$

The description of $F(x)$ depends on the sign of x and achieves its derivative $\frac{dF(x)}{dx}$ as

$$F(x) = \begin{cases} \varepsilon_i + \alpha_i (-x)^\rho + \beta_i (-x) > 0 & \text{if } x < 0, \\ \varepsilon_i > 0 & \text{if } x = 0, \\ \varepsilon_i - \alpha_i x^\rho - \beta_i x & \text{if } x > 0. \end{cases} \quad (73)$$

$$\frac{dF(x)}{dx} = -\rho \alpha_i |x|^{\rho-1} - \beta_i < 0 \quad \text{for } \forall x \in \mathbb{R}. \quad (74)$$

Since $F(0) > 0$, $F(x)$ is positive for $\forall x \in \mathbb{R}^-$ and monotonically decreasing for $\forall x \in \mathbb{R}$, it is obvious that there exists a unique positive solution $R_{ei,p} \in \mathbb{R}^+$ such that $F(R_{ei,p}) = 0$. The sign of $F(x)$ is calculated as

$$\begin{cases} F(x) > 0 & \text{for } x < R_{ei,p}, \\ F(x) = 0 & \text{for } x = R_{ei,p} > 0, \\ F(x) < 0 & \text{for } x > R_{ei,p} > 0. \end{cases} \quad (75)$$

On the other hand, $G(x) = F(x) - 2\varepsilon_i$, which means $G(x)$ is translated $F(x)$ along the y direction by $-2\varepsilon_i$.

$$G(x) = \begin{cases} -\varepsilon_i + \alpha_i (-x)^\rho + \beta_i (-x) & \text{if } x < 0, \\ -\varepsilon_i < 0 & \text{if } x = 0, \\ -\varepsilon_i - \alpha_i x^\rho - \beta_i x < 0 & \text{if } x > 0. \end{cases} \quad (76)$$

$$\frac{dG(x)}{dx} = \frac{dF(x)}{dx} < 0. \quad (77)$$

Likewise, the sign of $G(x)$ is determined according to $R_{ei,n} \in \mathbb{R}^-$ which is the unique solution of $G(R_{ei,n}) = 0$.

$$\begin{cases} G(x) > 0 & \text{for } x < R_{ei,n} < 0, \\ G(x) = 0 & \text{for } x = R_{ei,n} < 0, \\ G(x) < 0 & \text{for } x > R_{ei,n}. \end{cases} \quad (78)$$

As a result, substitution of (75), (78) to (70) derives

$$\begin{cases} G(r_{ei}) \leq \dot{r}_{ei} \leq F(r_{ei}) < 0 & \text{if } 0 < R_{ei,p} < r_{ei} \\ 0 < G(r_{ei}) \leq \dot{r}_{ei} \leq F(r_{ei}) & \text{if } r_{ei} < R_{ei,n} < 0 \end{cases} \quad (79)$$

The parallel translation between $F(x)$ and $G(x)$ derives the relationship between $R_{ei,p}$ and $R_{ei,n}$ as

$$\begin{aligned} G(R_{ei,n}) &= -\varepsilon_i - \alpha_i \text{sig}^\rho R_{ei,n} - \beta_i R_{ei,n} \\ &= -\varepsilon_i + \alpha_i (-R_{ei,n})^\rho + \beta_i (-R_{ei,n}) \\ &= -F(-R_{ei,n}) \\ &= 0 \end{aligned} \quad (80)$$

Because $F(R_{ei,p}) = F(-R_{ei,n}) = 0$ and $F(x) = 0$ has the unique solution, it implies that $R_{ei,p} = -R_{ei,n} = R_{ei}$. The time derivative of the Lyapunov function in (69) become negative when $|r_{ei}| > R_{ei}$ as

$$\dot{V} = r_{ei} \dot{r}_{ei} < 0 \quad (81)$$

which proves that the region $\mathbb{L}_1 = \{r_{ei} \in \mathbb{R} \mid |r_{ei}| \leq R_{ei}\}$ is the domain of attraction. Fig.4 explains this region of attraction as the shaded region satisfies (81). ■

B. Attitude Control System

Sliding variable design

The sliding variable for the attitude control system is designed based on nonsingular fast terminal sliding mode as follows:

$$s_{att} = \omega_e + \alpha_{att} \text{sig}^{\rho_{att}} q_{ev} + \beta_{att} q_{ev} \quad (82)$$

where the definition of $\text{sig}^\rho \xi$, α , and β are the same with the one in (52), but related to the ACS.

PROPOSITION 2 *The quaternion and angular velocity errors (q_{ev}, ω_e) are asymptotically stable if the sliding variable s in (82) is zero.*

Proof:

Let us define the Lyapunov candidate as [52]

$$V = \mathbf{q}_{ev}^T \mathbf{q}_{ev} + (1 - q_{e4})^2, \quad (83)$$

then its time derivative is derived by substituting (28) as

$$\dot{V} = -2\dot{q}_{e4} = \mathbf{q}_{ev}^T \boldsymbol{\omega}_e \quad (84)$$

Since the attitude sliding variable is assumed to be zero, then it is derived by substituting (82)

$$\begin{aligned} \dot{V} &\leq \mathbf{q}_{ev}^T (-\alpha \text{sig}^\rho \mathbf{q}_{ev} - \boldsymbol{\beta} \mathbf{q}_{ev}) \\ &\leq -\alpha_{\min} \mathbf{q}_{ev}^T \text{sig}^\rho \mathbf{q}_{ev} - \beta_{\min} \mathbf{q}_{ev}^T \mathbf{q}_{ev} \\ &= -\alpha_{\min} \|\mathbf{q}_{ev}\|_{\rho+1}^{\rho+1} - \beta_{\min} \|\mathbf{q}_{ev}\|_2^2 \end{aligned} \quad (85)$$

where $\alpha_{\min} = \min_{i=1,2,3} \alpha_i$ and $\beta_{\min} = \min_{i=1,2,3} \beta_i$.

Therefore, when the attitude sliding variable is retained at zero, the quaternion error converges to zero. If the sliding variable and the quaternion error are zero, the angular velocity error is also zero according to the definition of the sliding variable in (82). As a result, it proves the asymptotic stability of the quaternion and angular velocity errors when the sliding variable is zero. ■

THEOREM 2 Consider the attitude control system that is nonlinear and uncertain (23) with the adaptive smooth feedback control (36) and (37). The sliding manifold is designed as (82). Then, when the condition $\|s\|_2 > \varepsilon$ is met, the attitude states converge to the region $\|s\|_2 \leq \varepsilon$ in finite time.

Proof:

The Lyapunov candidate is defined as

$$V = \frac{1}{2} \dot{s}^T \mathbf{J}_0 \dot{s} + \frac{1}{2\gamma_{att}} (K - K^*)^2 \quad (86)$$

where γ_{att} is a positive constant and K^* is also a positive constant satisfying $K(t) \leq K^*$. The variable γ implies that it is the attitude variable from here on. By the definition of the sliding variable (82), its time derivative is described as

$$\dot{s} = \dot{\boldsymbol{\omega}}_e + (\rho \boldsymbol{\alpha} \boldsymbol{\Theta} + \boldsymbol{\beta}) \dot{\mathbf{q}}_{ev} \quad (87)$$

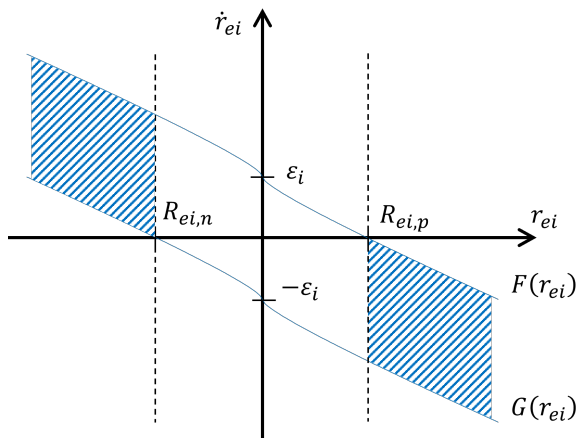


Fig. 4. Bound on r_{ei} in the region $|s_i| \leq \varepsilon_i$

where $\boldsymbol{\Theta} = \text{diag} \{|q_{e1}|^{\rho-1}, |q_{e2}|^{\rho-1}, |q_{e3}|^{\rho-1}\}$ is positive semi-definite.

The moments of inertia matrix is decomposed as in (33), and the inverse is derived as

$$\mathbf{J}^{-1} = (\mathbf{J}_0 + \delta \mathbf{J})^{-1} = \mathbf{J}_0^{-1} + \delta \hat{\mathbf{J}} \quad (88)$$

where $\delta \hat{\mathbf{J}} = -\mathbf{J}_0^{-1} \delta \mathbf{J} (\mathbf{I}_{3 \times 3} + \mathbf{J}_0^{-1} \delta \mathbf{J})^{-1} \mathbf{J}_0^{-1}$ [45], [53].

Hence, the substitution of (88) into (29) leads to the decomposition of $\dot{\boldsymbol{\omega}}_e$ in (87) as

$$\begin{aligned} &\mathbf{J}^{-1} \left[-(\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times (\mathbf{J} (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) + \mathbf{J}_w \boldsymbol{\omega}_w) \right. \\ &\quad \left. + \mathbf{u} + \mathbf{d} + \mathbf{J} (\boldsymbol{\omega}_e^\times \mathbf{C}_r^b \boldsymbol{\omega}_r - \mathbf{C}_r^b \dot{\boldsymbol{\omega}}_r) \right] \\ &= (\mathbf{J}_0^{-1} + \delta \hat{\mathbf{J}}) \left[-(\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times ((\mathbf{J}_0 + \delta \mathbf{J}) (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \right. \\ &\quad \left. + \mathbf{J}_w \boldsymbol{\omega}_w) + \mathbf{u} + \mathbf{d} + (\mathbf{J}_0 + \delta \mathbf{J}) (\boldsymbol{\omega}_e^\times \mathbf{C}_r^b \boldsymbol{\omega}_r - \mathbf{C}_r^b \dot{\boldsymbol{\omega}}_r) \right] \\ &= \mathbf{J}_0^{-1} \left[-(\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times \mathbf{J}_0 (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \right. \\ &\quad \left. - (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times \mathbf{J}_w \boldsymbol{\omega}_w + \mathbf{u} + \mathbf{J}_0 (\boldsymbol{\omega}_e^\times \mathbf{C}_r^b \boldsymbol{\omega}_r - \mathbf{C}_r^b \dot{\boldsymbol{\omega}}_r) \right] \\ &+ \mathbf{J}_0^{-1} \left[-(\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times \delta \mathbf{J} (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \right. \\ &\quad \left. + \mathbf{d} + \delta \mathbf{J} (\boldsymbol{\omega}_e^\times \mathbf{C}_r^b \boldsymbol{\omega}_r - \mathbf{C}_r^b \dot{\boldsymbol{\omega}}_r) \right] \\ &+ \delta \hat{\mathbf{J}} \left[-(\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times \mathbf{J}_0 (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \right. \\ &\quad \left. - (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times \delta \mathbf{J} (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \right. \\ &\quad \left. - (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times \mathbf{J}_w \boldsymbol{\omega}_w + \mathbf{u} + \mathbf{d} \right. \\ &\quad \left. + \mathbf{J}_0 (\boldsymbol{\omega}_e^\times \mathbf{C}_r^b \boldsymbol{\omega}_r - \mathbf{C}_r^b \dot{\boldsymbol{\omega}}_r) \right. \\ &\quad \left. + \delta \mathbf{J} (\boldsymbol{\omega}_e^\times \mathbf{C}_r^b \boldsymbol{\omega}_r - \mathbf{C}_r^b \dot{\boldsymbol{\omega}}_r) \right] \\ &= \mathbf{J}_0^{-1} \mathbf{u} + \mathbf{J}_0^{-1} \left[-(\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times \mathbf{J}_0 (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \right. \\ &\quad \left. - (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times \mathbf{J}_w \boldsymbol{\omega}_w + \mathbf{J}_0 (\boldsymbol{\omega}_e^\times \mathbf{C}_r^b \boldsymbol{\omega}_r - \mathbf{C}_r^b \dot{\boldsymbol{\omega}}_r) \right] \\ &+ \mathbf{J}_0^{-1} \left[-(\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times \delta \mathbf{J} (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \right. \\ &\quad \left. + \mathbf{d} + \delta \mathbf{J} (\boldsymbol{\omega}_e^\times \mathbf{C}_r^b \boldsymbol{\omega}_r - \mathbf{C}_r^b \dot{\boldsymbol{\omega}}_r) \right] \\ &+ \delta \hat{\mathbf{J}} \left[-(\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times \mathbf{J}_0 (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \right. \\ &\quad \left. - (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times \delta \mathbf{J} (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \right. \\ &\quad \left. - (\boldsymbol{\omega}_e + \mathbf{C}_r^b \boldsymbol{\omega}_r) \times \mathbf{J}_w \boldsymbol{\omega}_w \right. \\ &\quad \left. + \mathbf{u} + \mathbf{d} + \mathbf{J}_0 (\boldsymbol{\omega}_e^\times \mathbf{C}_r^b \boldsymbol{\omega}_r - \mathbf{C}_r^b \dot{\boldsymbol{\omega}}_r) \right] \\ &= \mathbf{J}_0^{-1} \mathbf{u} + \bar{\mathbf{d}}_1 + \bar{\mathbf{d}}_2 + \bar{\mathbf{d}}_3 \end{aligned} \quad (89)$$

where $\bar{\mathbf{d}}_1$, $\bar{\mathbf{d}}_2$, and $\bar{\mathbf{d}}_3$ are the second, third, and fourth terms in (89) that are assumed to be unknown but bounded.

Therefore, (87) substituted by (28) and (89) is derived as

$$\begin{aligned}\dot{\mathbf{s}} &= \mathbf{J}_0^{-1} \mathbf{u} + \bar{\mathbf{d}}_1 + \bar{\mathbf{d}}_2 + \bar{\mathbf{d}}_3 \\ &+ \frac{1}{2} (\rho \boldsymbol{\alpha} \boldsymbol{\Theta} + \boldsymbol{\beta} \mathbf{I}_{3 \times 3}) (q_{e4} \mathbf{I}_{3 \times 3} + \mathbf{q}_{ev}^\times) \boldsymbol{\omega}_e \\ &= \mathbf{J}_0^{-1} \mathbf{u} + \bar{\mathbf{d}}_1 + \bar{\mathbf{d}}_2 + \bar{\mathbf{d}}_3 + \bar{\mathbf{d}}_4 \\ &= \mathbf{J}_0^{-1} \mathbf{u} + \lambda_{\max}^{-1} \bar{\mathbf{d}}\end{aligned}\quad (90)$$

where λ_{\max} is the maximum eigenvalue of \mathbf{J}_0 and $\lambda_{\max}^{-1} \bar{\mathbf{d}} = \bar{\mathbf{d}}_1 + \bar{\mathbf{d}}_2 + \bar{\mathbf{d}}_3 + \bar{\mathbf{d}}_4$.

As a result, the time derivative of the Lyapunov function in (86) leads to

$$\begin{aligned}\dot{V} &= \mathbf{s}^T \mathbf{J}_0 \dot{\mathbf{s}} + \frac{1}{\gamma} (K - K^*) \dot{K} \\ &= \mathbf{s}^T \left(\mathbf{u} + \lambda_{\max}^{-1} \mathbf{J}_0 \bar{\mathbf{d}} \right) + \frac{1}{\gamma} (K - K^*) \dot{K} \\ &= \mathbf{s}^T \left(-\frac{K}{\varepsilon} \mathbf{s} + \lambda_{\max}^{-1} \mathbf{J}_0 \bar{\mathbf{d}} \right) + \frac{1}{\gamma} (K - K^*) \dot{K} \\ &= \lambda_{\max}^{-1} \mathbf{s}^T \mathbf{J}_0 \bar{\mathbf{d}} - \frac{K}{\varepsilon} \mathbf{s}^T \mathbf{s} + \frac{1}{\gamma} (K - K^*) \dot{K}\end{aligned}\quad (91)$$

Since \mathbf{J}_0 is a symmetric matrix, the inequality equation is derived by the spectral theorem

$$\mathbf{s}^T \mathbf{J}_0 \bar{\mathbf{d}} \leq \lambda_{\max} \|\mathbf{s}\|_2 \|\bar{\mathbf{d}}\|_2 \quad (92)$$

The disturbance is assumed to have an unknown bound as

$$\|\lambda_{\max}^{-1} \bar{\mathbf{d}}\|_2 = \|\bar{\mathbf{d}}_1 + \bar{\mathbf{d}}_2 + \bar{\mathbf{d}}_3 + \bar{\mathbf{d}}_4\|_2 < \lambda_{\max}^{-1} \bar{D} \quad (93)$$

Therefore, it follows that

$$\begin{aligned}\dot{V} &\leq \|\mathbf{s}\|_2 \|\bar{\mathbf{d}}\|_2 - \frac{K}{\varepsilon} \|\mathbf{s}\|_2^2 + \frac{1}{\gamma} (K - K^*) \dot{K} \\ &< \|\mathbf{s}\|_2 \left(\bar{D} - \frac{K}{\varepsilon} \|\mathbf{s}\|_2 \right) + \frac{1}{\gamma} (K - K^*) \dot{K}\end{aligned}\quad (94)$$

where $\|\bar{\mathbf{d}}\|_2 < \bar{D}$. In the region $\|\mathbf{s}\|_2 > \varepsilon$, it leads to

$$\begin{aligned}\dot{V} &< \|\mathbf{s}\|_2 (\bar{D} - K) + \frac{1}{\gamma} (K - K^*) \dot{K} \\ &= \|\mathbf{s}\|_2 (\bar{D} - K^*) + \frac{1}{\gamma} (K - K^*) \dot{K} - \|\mathbf{s}\|_2 (K - K^*) \\ &= -\beta_s \|\mathbf{s}\|_2 - |K - K^*| \left(-\|\mathbf{s}\|_2 + \frac{1}{\gamma} \dot{K} \right)\end{aligned}\quad (95)$$

where $\beta_s \triangleq K^* - \bar{D} > 0$ is defined and the equality condition $K - K^* = -|K - K^*|$ is utilized. Next, a parameter $\beta_K > 0$ is introduced such that

$$\begin{aligned}\dot{V} &< -\beta_s \|\mathbf{s}\|_2 - |K - K^*| \left(-\|\mathbf{s}\|_2 + \frac{1}{\gamma} \dot{K} \right) \\ &\quad + \beta_K |K - K^*| - \beta_K |K - K^*| \\ &= -\beta_s \|\mathbf{s}\|_2 - |K - K^*| \left(-\|\mathbf{s}\|_2 + \frac{1}{\gamma} \dot{K} - \beta_K \right) \\ &\quad - \beta_K |K - K^*| \\ &= -\beta_s \|\mathbf{s}\|_2 - \beta_K |K - K^*| - \kappa\end{aligned}\quad (96)$$

where $K - K^* = -|K - K^*|$ because $K \leq K^*$ and $\kappa \triangleq |K - K^*| \left(-\|\mathbf{s}\|_2 + \frac{1}{\gamma} \dot{K} - \beta_K \right)$.

As a consequence, it is derived as

$$\begin{aligned}\dot{V} &< -\beta_s \sqrt{2} \cdot \frac{\|\mathbf{s}\|_2}{\sqrt{2}} - \beta_K \sqrt{2\gamma} \cdot \frac{|K - K^*|}{\sqrt{2\gamma}} - \kappa \\ &\leq -\min \left(\beta_s \sqrt{2}, \beta_K \sqrt{2\gamma} \right) \cdot \left(\frac{\|\mathbf{s}\|_2}{\sqrt{2}} + \frac{|K - K^*|}{\sqrt{2\gamma}} \right) - \kappa \\ &\leq -\beta \cdot V^{1/2} - \kappa\end{aligned}\quad (97)$$

where $\beta \triangleq \sqrt{2} \min (\beta_s, \beta_K \sqrt{\gamma}) > 0$.

The positiveness of parameter κ suggests that the γ must be selected properly. If $\kappa > 0$, it yields

$$\gamma_{att} < \frac{\dot{K}}{\beta_K + \|\mathbf{s}\|_2} \quad (98)$$

Let us define $\Gamma_{att}(t) = \frac{\dot{K}}{\beta_K + \|\mathbf{s}\|_2}$ and the substitution of the adaptive law (37) derives

$$\begin{aligned}\Gamma_{att}(t) &= \eta \cdot \frac{K(t) \left(\frac{\|\mathbf{s}\|_2}{\varepsilon} - 1 \right) + K_0}{\beta_K + \|\mathbf{s}\|_2} \\ &\geq \eta \cdot \frac{K_0 \cdot \frac{\|\mathbf{s}\|_2}{\varepsilon}}{\beta_K + \|\mathbf{s}\|_2} \\ &= \eta \cdot \frac{\frac{K_0}{\varepsilon}}{\frac{\beta_K}{\|\mathbf{s}\|_2} + 1}\end{aligned}\quad (99)$$

where $K(t) \geq K_0$ is utilized.

In the region $\|\mathbf{s}\|_2 > \varepsilon$, $\Gamma_{att}(t)$ is derived as

$$\Gamma_{att}(t) > \eta \frac{\frac{K_0}{\varepsilon}}{\frac{\beta_K}{\varepsilon} + 1} = \eta \frac{K_0}{\beta_K + \varepsilon} \quad (100)$$

Therefore, parameter γ_{att} must be chosen to satisfy

$$\gamma_{att} < \frac{\eta K_0}{\beta_K + \varepsilon}. \quad (101)$$

Equation (97) shows that the Lyapunov function satisfies $\dot{V} \leq -\beta \cdot V^{1/2} - \kappa < -\beta \cdot V^{1/2}$. Hence, the finite-time convergence of the sliding variable into the region $\|\mathbf{s}\|_2 \leq \varepsilon$ is guaranteed by Lemma 4. ■

LEMMA 6 *If the i th component of the attitude sliding variable is bounded by the region $|s_i(t)| \leq \varepsilon_i$, then the quaternion error is bounded as $|q_{ei}(t)| \leq Q_{ei}$ for $i = 1, 2, 3$. Q_{ei} is the unique solution of the equation $F(Q_{ei}) = 0$, where the function $F(x)$ is defined in (71).*

Proof:

Let the Lyapunov function be

$$V = \mathbf{q}_{ev}^T \mathbf{q}_{ev} + (1 - q_{e4})^2, \quad (102)$$

then its time derivative is obtained as

$$\begin{aligned}\dot{V} &= \mathbf{q}_{ev}^T \boldsymbol{\omega}_e \\ &= \sum_{i=1}^3 \dot{V}_i\end{aligned}\quad (103)$$

where $\dot{V}_i = q_{ei} \omega_{ei}$. The bound on the sliding variable $|s_i| \leq \varepsilon_i$ leads to the inequality equation as

$$G(q_{ei}) \leq \omega_{ei} \leq F(q_{ei}) \quad (104)$$

where $F(x)$ and $G(x)$ are the functions given in (71) and (72). Since $F(x)$ and $G(x)$ are the same with (71) and (72) of Lemma 5, the uniqueness of the solution for the equations $F(Q_{ei,p}) = 0$ and $G(Q_{ei,n}) = 0$ and their relationship $Q_{ei,p} = -Q_{ei,n} = Q_{ei}$ are proven in the same way. Therefore, the region of attraction $\mathbb{L}_2 = \{q_{ei} \in \mathbb{R} \mid |q_{ei}| \leq Q_{ei}\}$ derives that \dot{V}_i and \dot{V} are negative when $|q_{ei}| > Q_{ei}$. ■

V. Numerical Simulation

The orbital perturbations induce the external disturbance force in space. The Earth's geopotential model JGM3 determines the aspherical gravity by degrees and orders of 70. The third-body gravity from the Sun and Moon that treated as point masses is applied. The gravity gradient torque from the point-mass Earth's gravity exerts a disturbance on the attitude control system. The residual dipole moments of 10^{-3} Am² in a random direction and the Earth's magnetic field of international geomagnetic reference field model generates magnetic disturbance torque. The atmospheric drag and solar radiation pressure are the common disturbances for the relative orbit control and attitude systems. The atmospheric density is calculated from the exponential model, and the solar radiation pressure adopts a constant solar flux. The internal uncertainties on the deputy satellite originate from its mass and moments of inertia. The uncertainties usually arise from measurement errors. The non-Gaussian random errors demonstrate these uncertainties for the software simulation.

The ROCS and ACS operate in closed loops inter-dependently. Fig.5 depicts the block diagram of both systems. The software algorithm of the ROCS, the orbit controller box, provides the relative orbit error states as inputs and generates the reference control input $\mathbf{u}_{orb,r}$. Let the reference control input from the control algorithm be denoted by $\mathbf{u}_{orb,0}^l$ that corresponds to \mathbf{u}_{orb} in the equation. The superscript indicates the variable's frame as in Section 2, and the subscript 0 is a temporary number of the process. The zero-order hold function holds the reference control input constant for the sampling interval $T_{s,orb}$. The sampling interval for the ROCS system should be properly selected for both attitude control and immediate update of control input. $T_{s,orb}$ of 5 seconds is used in this simulation. The discretized signal $\mathbf{u}_{orb,1}^l$ is then converted into the body frame as $\mathbf{u}_{orb,1}^b$ to give an input to the orbital actuator and the propulsion system.

The resolution and the saturation limit of thrust firing and the restricted degrees of freedom contribute to the thrust error and produce $\mathbf{u}_{orb,2}^b$. In the numerical simulation, the fired thrust $\mathbf{u}_{orb,2}^b$ is converted into the $\mathbf{u}_{orb,2}^l$ and $\mathbf{u}_{orb,2}^i$, sequentially. Since the control algorithm is formulated in the LVLH frame, \mathbf{u}_{orb} in the simulation result graphs is the same with $\mathbf{u}_{orb,2}^l$. $\mathbf{u}_{orb,2}^i$ is the control input in the inertial frame and integrated with the orbital

perturbations and mass uncertainties. The numerical integrator, ode45 of MATLAB provides the orbital states with every time step of 0.01 second.

The ACS generates the reference attitude from the zero-ordered thrust vector in the body frame $\mathbf{u}_{orb,1}^b$ that is transmitted to ACS every orbital sampling time. Since the reference attitude possibly alters every orbital sampling time, the ACS should be able to confine the sliding variable within $T_{s,orb}$. Therefore, the orbital sampling time is critical for the attitude control performance. The attitude control problem of the time limit $T_{s,orb}$ repeats for the whole simulation duration. The reference torque is integrated with the disturbance torques and the moment of inertia uncertainties using the attitude dynamics with reaction wheels. The numerical integrator and the time step for the ACS system are the same as the ones for the ROCS.

The procedure to search for the proper control parameters is as follows. The parameters that constitute the sliding variable are ρ , α , and β . The parameter ρ determines the convergence rate of the nonsingular fast terminal sliding variable when it retains zero. It can be readily shown that if $|x| < 1$ for an arbitrary variable x , x achieves zero much faster as ρ is smaller. On the contrary, when $1 < |x|$, larger ρ shows faster convergence. Since the initial relative position error is likely to be larger than one meter and the definition of the quaternion restricts the initial quaternion error below one, it is recommended that ρ_{orb} and ρ_{att} are selected as 1.90 and 1.10, respectively.

Lemma 5 analytically determines α_{orb} , β_{orb} , and ϵ_{orb} for ROCS and Lemma 6 achieves the parameters for the ACS in the same manner. Lemma 5 suggests that R_{ei} is the unique solution of the function $F(x) = 0$ and can be reorganized as

$$\frac{F(R_{ei})}{\epsilon_i} = 1 - \frac{\alpha_i}{\epsilon_i} \text{sig}^\rho R_{ei} - \frac{\beta_i}{\epsilon_i} R_{ei} = 0 \quad (105)$$

Assuming that all three components of α_i and β_i are chosen to be the same, the requirement in (11) derives the inequality condition of R_{ei} as

$$R_{ei} \leq \sqrt{3} \quad (106)$$

Assuming the largest R_{ei} , it leads (105) to be

$$1 - \frac{\alpha_i}{\epsilon_i} \text{sig}^\rho \sqrt{3} - \frac{\beta_i}{\epsilon_i} \sqrt{3} = 0 \quad (107)$$

As a consequence, $\frac{\alpha_i}{\epsilon_i}$ and $\frac{\beta_i}{\epsilon_i}$ for ROCS should satisfy the inequality conditions as follows:

$$\frac{\alpha_{orb,i}}{\epsilon_{orb,i}}, \frac{\beta_{orb,i}}{\epsilon_{orb,i}} \geq 0.29 \quad (108)$$

In a similar manner, the requirement (12) derives Q_{ei} in Lemma 6 as

$$Q_{ei} \leq \sin\left(\frac{3}{2} \cdot \frac{\pi}{180}\right) = 1.51 \times 10^{-2} \quad (109)$$

Following the same procedure as in (105), (107), and (108), the inequality conditions of $\frac{\alpha_i}{\epsilon_i}$ and $\frac{\beta_i}{\epsilon_i}$ for ACS are written as follows:

$$\frac{\alpha_{att,i}}{\epsilon_{att,i}}, \frac{\beta_{att,i}}{\epsilon_{att,i}} \geq 24.0 \quad (110)$$

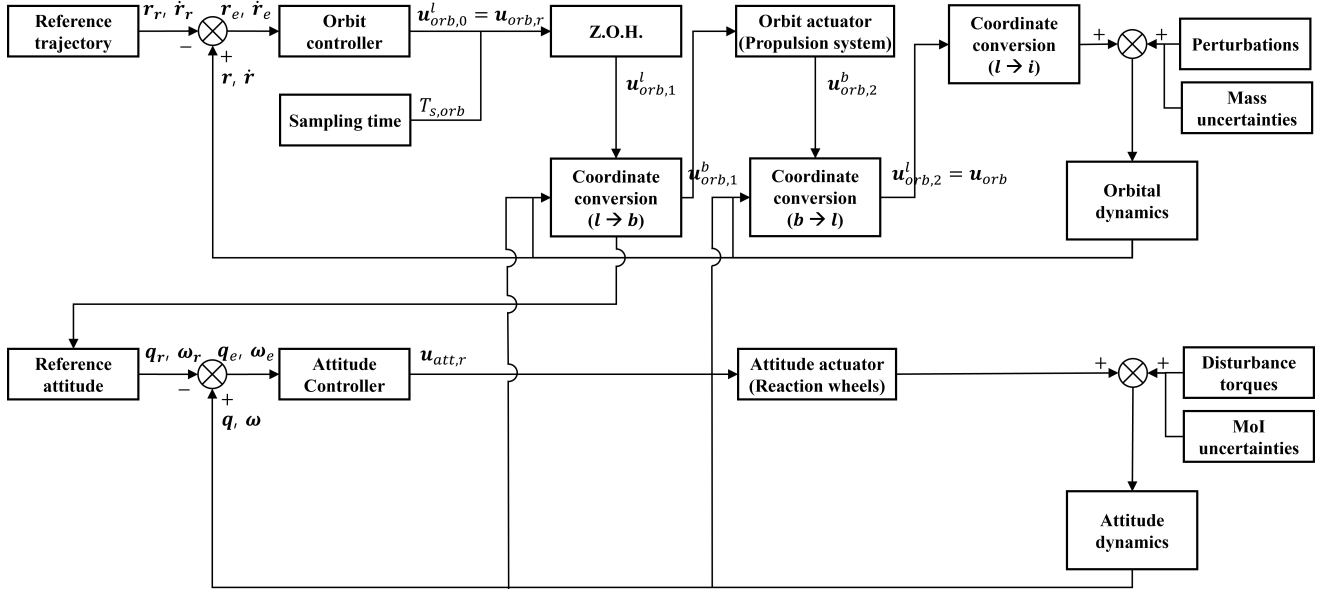


Fig. 5. Block diagram of control loops in formation flying system

Equations (108) and (110) suggest that the ratios of $\frac{\alpha_i}{\varepsilon_i}$ and $\frac{\beta_i}{\varepsilon_i}$ give the critical importance in the error bounds and ε_i is not solely determined. In addition, the parameters α and β attach weights to the error state relative to its time derivatives. As α and β become sufficiently large, it mitigates the direct influence from the control input on the relative velocity or the angular velocity, and the controlled states suffer less from sudden rises. Several simulations and intuition help with the empirical tuning of those values.

The adaptive control law has the advantage that only a few parameters are to be selected. Suppose that the sliding variable approaches the vicinity of ε to have the same order of ε . Then the control gain $K(t)$ has the same order as the control input $u(t)$. Since the error is disposed to decrease, the initial control gain $K(0)$ could be chosen considering the actuator limit in Table I. The reorganized formula of the adaptive law in (111) suggests that the relative magnitude of $\|s\|_2 / \varepsilon$ and $\left(1 - \frac{K_0}{K(t)}\right)$ determines the sign of \dot{K} .

$$\dot{K}(t) = \eta K(t) \left(\left\| \frac{s}{\varepsilon} \right\|_2 - \left(1 - \frac{K_0}{K(t)} \right) \right) \quad (111)$$

Therefore, the parameters K_0 and η affect how sensitively the sign and magnitude of \dot{K} change. In the same manner as other parameters, it needs a number of simulations and intuition.

Since each of $\alpha_{att,i}$ for $i = 1, 2, 3$ is set to the same value, let $\alpha_{att} = \alpha_{att,i=1,2,3}$ be defined. In a similar manner β_{att} , α_{orb} , and β_{orb} are defined. If α_{att} , β_{att} , ρ_{att} , α_{orb} , β_{orb} , and ρ_{orb} are set as 1.44, 1.44, 1.10, 7.00×10^{-3} , 7.00×10^{-3} , and 1.90 for $i = 1, 2, 3$, respectively, then the error and its time derivative have the same order. ε_{att} and ε_{orb} are respectively set as 6.00×10^{-2} and 1.20×10^{-2} , considering the requirements for the

error tolerance and the control input saturation. The control parameters η_{att} , $K_{att}(0)$, $K_{att,0}$, η_{orb} , $K_{orb}(0)$, and $K_{orb,0}$ are selected as 5.00×10^{-2} , 2.00×10^{-4} , 2.00×10^{-7} , 3.00×10^{-4} , 3.00×10^{-5} , and 1.00×10^{-8} . These parameters are summarized in Table II.

According to the top panel of Fig. 6, the two-norm of the orbital sliding variable rapidly decreases within 50 seconds, and initially converges below ε_{orb} during the interval 330-365 seconds. It again stays in the region ε_{orb} after 430 seconds. Even though the sliding variable temporarily exceeds ε_{orb} during 415-430 seconds, the appropriate choice of α_{orb} and β_{orb} holds the two norm of the position error below 3 meters. The two-norm of the position error plotted in the middle panel of Fig. 6 initially reduces below the requirement at 41.36 seconds, and then remains in the region thereafter.

The position error in each direction of the LVLH frame is described at the bottom panel. The radial position error stays around $-\sqrt{3}$ meters once it is stabilized. The along-track and cross-track position errors reach zero at about 400 seconds when the sliding variable converges. The along-track position error slowly increases to $\sqrt{3}$ at the end of the simulation. On the other hand, the cross-track position error remains near zero thereafter.

TABLE I
Actuator specification of attitude and orbit control systems

Actuator	Specification	
Thruster	Maximum thrust ($u_{orb,i}^*$ for $i = x, y, z$)	1.00 (mN)
	Thrust resolution	0.01 (mN)
Reaction wheels	Maximum torque ($u_{att,i}^*$ for $i = 1, 2, 3$)	0.23 (mNm)

The difference between the reference thrust from the control algorithm $\mathbf{u}_{orb,r}$ and the fired thrust \mathbf{u}_{orb} defines the thrust error $\mathbf{u}_{orb,e}$ as illustrated in Fig.7, where $\mathbf{u}_{orb,e} = \mathbf{u}_{orb} - \mathbf{u}_{orb,r}$. The fired thrust and the thrust error are depicted in the top three panels of Fig. 7. The radial thrust error in the first panel initially has a positive value and rapidly decreases during the first 50 seconds. The positive thrust error suggests that the reference thrust is negative and controls the positive orbital error. It also explains the positive along-track and cross-track thrust errors in the second and third panels. After 50 seconds, the magnitude of thrust is almost zero and induces the offset of the radial position error. After the convergence of the sliding variable, only a small magnitude of thrust is fired discontinuously. Because the propulsion system has a thrust resolution of 0.01 mN, the thrust could be fired once the reference thrust is large enough. Compared to the radial and along-track cases, the cross-track thrust

TABLE II
Simulation parameters for attitude and orbit control systems

ρ_{att}	α_{att}	β_{att}	ε_{att}
1.10	1.44	1.44	6.00×10^{-2}
$K_{att}(0)$	$K_{att,0}$	η_{att}	
2.00×10^{-4}	2.00×10^{-7}	5.00×10^{-2}	
ρ_{orb}	α_{orb}	β_{orb}	ε_{orb}
1.90	7.00×10^{-3}	7.00×10^{-3}	1.20×10^{-2}
$K_{orb}(0)$	$K_{orb,0}$	η_{orb}	
3.00×10^{-5}	1.00×10^{-8}	3.00×10^{-4}	

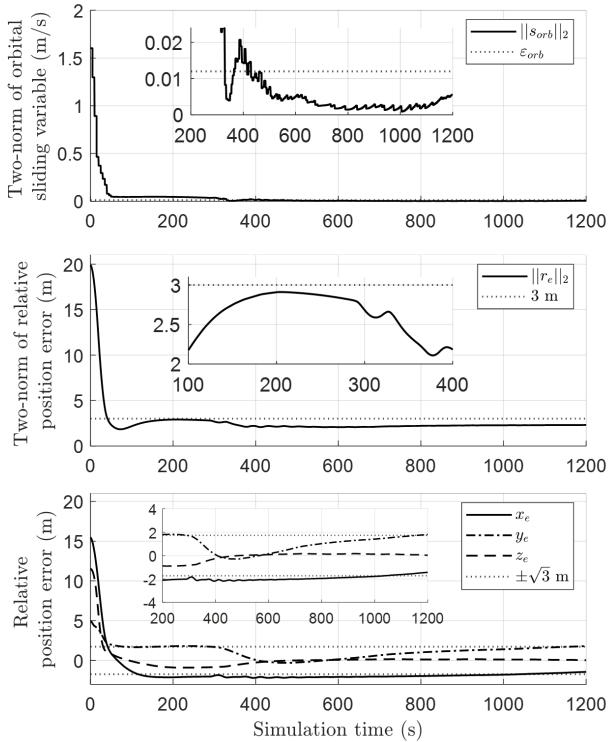


Fig. 6. Two-norm of the orbital sliding variable and position error

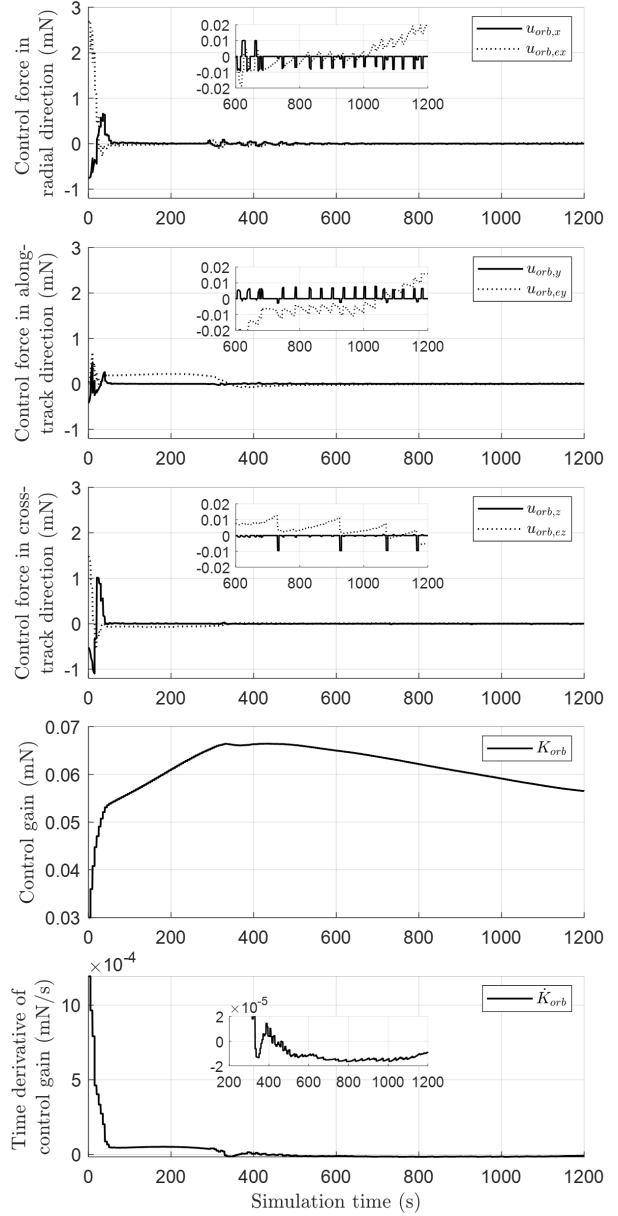


Fig. 7. Fired thrust, thrust error, orbital control gain and its time derivative

easily controls the position error and consumes less fuel after the convergence. The fourth and fifth panels in Fig. 7 depict K and \dot{K} . According to the adaptation law in (111), the negative sign of \dot{K} and the converged K indicate that the sliding variable is bounded. These simulation results confirm that the sliding variable is bounded after 430 seconds.

The abrupt rises in the sliding variable and quaternion errors occur when the reference quaternion changes. According to the simulation result shown in Fig. 8, the two reference quaternions switch 32 times for 1200 seconds. The expectable reference quaternions make it possible to predict the convergence speed of the attitude sliding variable. The initial attitude is usually oriented far from the reference attitude in the beginning. The top two panels

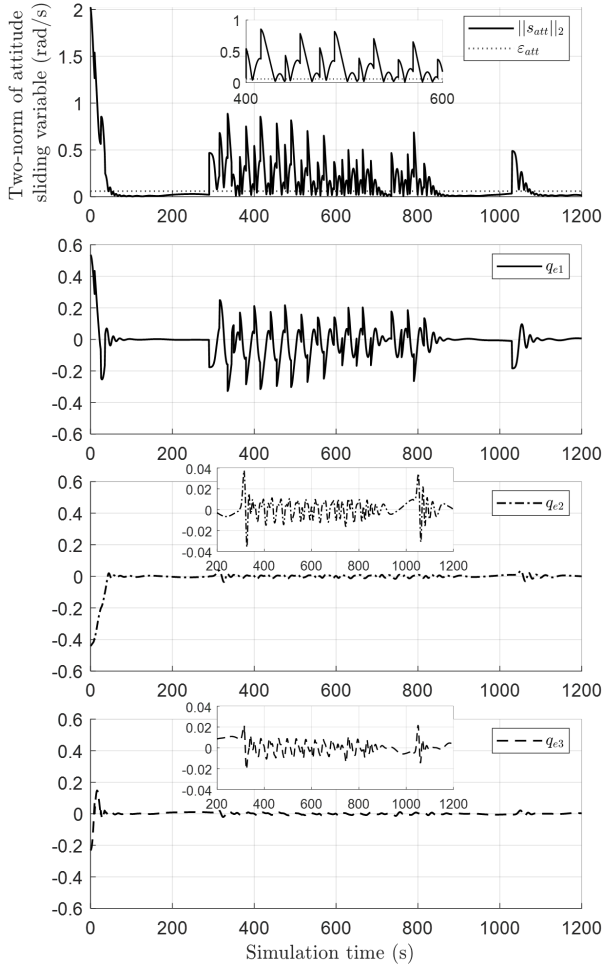


Fig. 8. Two-norm of the attitude sliding variable and quaternion error

in Fig. 8 show that the change in the reference attitude could instantly reduce the control error during the first 50 seconds. The ROCS generates the reference thrust more frequently before the orbital sliding mode converges at 430 seconds. The attitude maneuver is very regular and the convergence speed of the attitude sliding variable should be analyzed after 430 seconds. The attitude sliding variable is bounded by $\|s\|_2 \leq \varepsilon_{att}$ within 7.98 seconds on average after 430 seconds including 38.20 seconds at the last control.

As it is described in Section II, the reference attitude rotates ± 10 deg along the $+\hat{b}_x$ axis to achieve the controllability in $+\hat{b}_z$ axis. Therefore, only the q_{e1} in the second panel momentarily increases except for the initial 50 seconds. Since the three components of the quaternion vector are coupled by the cross term in (24), the increase in q_{e1} causes q_{e2} and q_{e3} to fluctuate (the third and fourth panels).

The control torque profile in the top three panels in Fig. 9 corresponds to the trend of the quaternion errors. $u_{att,1}$ is temporarily saturated for about 10 seconds when the q_{e1} is at the peak. $u_{att,2}$ and $u_{att,3}$ are relatively small but never zero unless the three components in quaternion error vectors become zero simultaneously. The fourth and

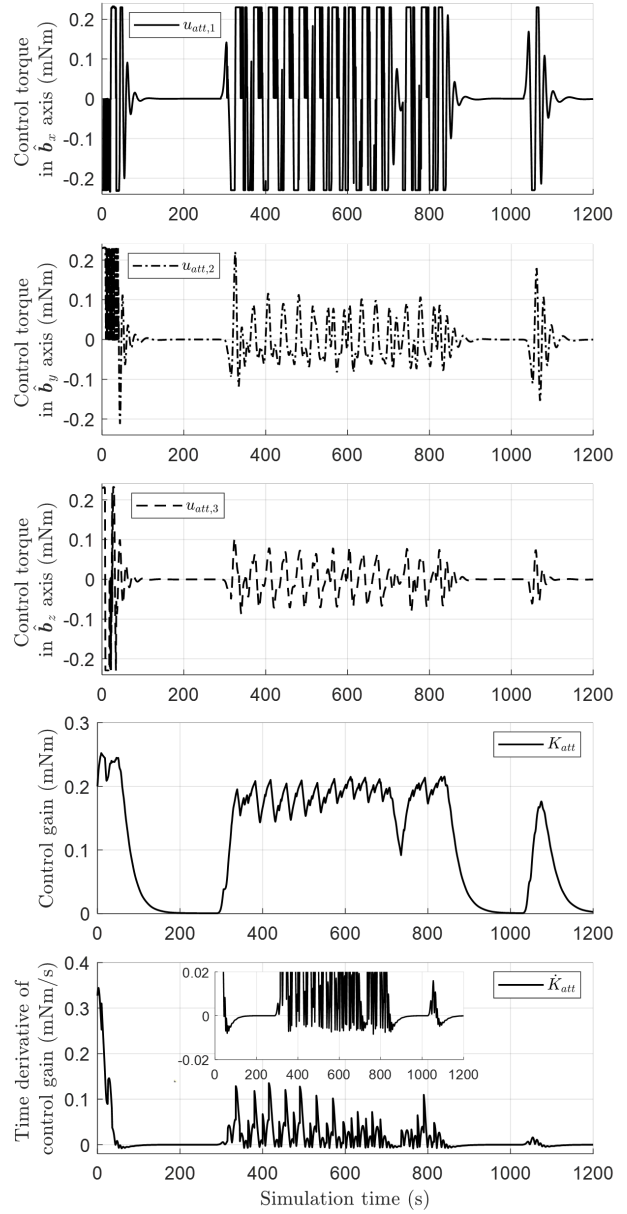


Fig. 9. Control torque, attitude control gain and its time derivative

fifth panels explain the rationale that the last convergence speed of the attitude sliding variable is latent. The attitude sliding variable stays in the region within ε_{att} for about 200 seconds before the last control (top panel of Fig. 8). Theoretically, \dot{K} is negative when $\|s\|_2 \leq \left(1 - \frac{K_0}{K}\right) \cdot \varepsilon_{att}$. The simulation verifies that the time that \dot{K} is negative and the time that $\|s\|_2 \leq \left(1 - \frac{K_0}{K}\right) \cdot \varepsilon_{att}$ are different by only 0.12 second. Hence, \dot{K} is negative for a considerable time duration and it provokes the significant reduction of K in the fourth panel.

The time allocation for the alignment in this mission is 20 minutes. According to Table III, this NFTSM control algorithm satisfies the mission requirement for 19.31 minutes and consumes 5.70×10^{-2} Ns of fuel. On the other hand, the linear quadratic regulator and PD control

algorithms are embedded on board the CANYVAL-C mission for ROCS and ACS, respectively. The weight matrices for the LQR controller are $\mathbf{Q}_{LQR} = \text{diag}\{2.52 \times 10^{-3}, 2.52 \times 10^{-3}, 2.52 \times 10^{-3}, 1.04, 1.04, 1.04\}$ and $\mathbf{R}_{LQR} = \text{diag}\{1.16 \times 10^4, 1.16 \times 10^4, 1.16 \times 10^4\}$. These algorithms retain the satellite within the requirement only for 3.18 minutes while it consumes 1.50 Ns. Therefore, the NFTSM control algorithm extends the aligned time by 6.07 times and improves the fuel efficiency by 26.31 times.

VI. Conclusion

The virtual telescope demonstration mission requires precise control performances in both attitude and relative orbit control systems. Since the propulsion system has only two degrees of freedom, the attitude control performance could degrade the mission success possibility. In this paper, the nonsingular fast terminal sliding surface and the adaptive smooth controller are introduced to the attitude and relative orbit control systems. The nonsingular fast terminal sliding mode naturally has a fast convergence rate and improves the alignment time. The control law is designed to generate continuous signals and prevents the system from chattering—the radical problem of the classical sliding mode control. The adaptive rule designed based on the vector norm of the sliding variable is able to consider the changes in the uncertainties and disturbances. The simulation results show that the adaptive smooth controller based on the nonsingular fast terminal sliding mode greatly improves the control performance with reasonable thrust consumption.

ACKNOWLEDGMENT

This research was supported by the Challengeable Future Defense Technology Research and Development Program through the Agency For Defense Development(ADD) funded by the Defense Acquisition Program Administration(DAPA) in 2023(No.915027201)

REFERENCES

[1] M. D’Errico Distributed Space Missions for Earth System Monitoring *Springer Science+Business Media New York, 2013*
 [2] F. Kamalabadi, E. Lightsey, D. Rabin, A. Daw, S. D’Amico, A. Koenig, P. Chamberlin, T. Woods, S. Gupta, E. Ekici, J. Sample, H. Park, A. Alexeenko, J. Hwang, K. Denis, J. Klimchuk Distributed Space Telescopes Enabled by Constellation of Small Satellites *AGU Fall Meeting 2021, held in New Orleans, LA, 13-17 December 2021*
 [3] B. A. Corbin The Values Proposition of Distributed Satellite Systems for Space Science Missions *Ph.D Thesis, Department of*

Aeronautics and Astronautics, Massachusetts Institute of Technology, 2015
 [4] B. D. Tapley, S. Bettadpur, M. M. Watkins, and C. Reigber The gravity recovery and climate experiment: Mission overview and early results *Geophysical Research Letters*, vol.31, no.9, May 2004, doi: [10.1029/2004GL019920](https://doi.org/10.1029/2004GL019920)
 [5] R. P. Kornfeld, B. W. Arnold, M. A. Gross, N. T. Dahya, W. M. Klipstein, P. F. Gath, and S. Bettadpur GRACE-FO: The Gravity Recovery and Climate Experiment Follow-On Mission *Journal of Spacecraft and Rockets*, vol.56, no.3, May 2019, doi: [10.2514/1.A34326](https://doi.org/10.2514/1.A34326)
 [6] A. Moreira, G. Kireger, I. Hajnsek, D. Hounam, M. Werner, S. Riegger, and E. Settemeyer TanDEM-X: A TerraSAR-X Add-On Satellite for Single-Pass SAR interferometry *Geosci. and remote Sens. Symp. 2*, 2004, doi: [10.1109/IGARSS.2004.1368578](https://doi.org/10.1109/IGARSS.2004.1368578)
 [7] N. H. Roth Navigation and Control Design for the CanX-4/-5 Satellite Formation Flying Mission *M.S. Thesis*, University of Toronto, Toronto, Canada, 2011
 [8] G. Bonin, N. Roth, S. Armitage, J. Newman, B. Risi, and R. E. Zee CanX-4 and CanX-5 Precision Formation Flight: Mission Accomplished! *29th Annual AIAA/USU Conference on Small Satellites*, pp.1–15, 2015
 [9] C.W.T. Roscoe, J.J. Westphal, and E. Mosleh Overview and GNC design of the CubeSat Proximity Operations Demonstration (CPOD) mission *Acta Astronaut.*, vol.153, pp.410–421, 2018 doi: [10.1016/j.actaastro.2018.03.033](https://doi.org/10.1016/j.actaastro.2018.03.033)
 [10] A. W. Koenig, B. Macintosh and S. D’Amico Formation Design of Distributed Telescopes in Earth Orbit for Astrophysics Applications *Journal of Spacecraft and Rockets*, vol.56, no.5, Sep-Oct. 2019, doi: [10.2514/1.A34420](https://doi.org/10.2514/1.A34420)
 [11] P. C. Calhoun, A.-M. Novo-Gradac, and N. Shah Spacecraft alignment determination and control for dual spacecraft precision formation flying *Acta Astronaut.*, vol.153, pp.349–356, 2018 doi: [10.1016/j.actaastro.2018.02.021](https://doi.org/10.1016/j.actaastro.2018.02.021)
 [12] Air Force Research Inst. Technology Horizons: A Vision for Air Force Science and Technology 2010-30 AF/ST-TR-10-01-PR, Maxwell AFB, AL, Air Univ. Press, 2010.
 [13] G.K. Skinner, Z. Arzoumanian, W.C. Cash, N. Gehrels, K.C. Gendreau, P. Gorenstein, J.F. Krizmanic, M.C. Miller, J.D. Phillips, R.D. Reasenberg, C.S. Reynolds, R.M. Sambruna, R.E. Streitmatter and D.L. Windt The Milli-Arc-Second Structure Imager, MASSIM: A new concept for a high angular resolution x-ray telescope *Proc. SPIE 7011*, 70110T-1-11, 2008, doi: [10.1117/12.789568](https://doi.org/10.1117/12.789568)
 [14] W. Cash, P. Oakley, M. Turnbull, T. Glassman, A. Lo, R. Polidan, S. Kilston and C. Noecker The New Worlds Observer: scientific and technical advantages of external occulters *Proc. of SPIE 7010*, 70101Q-1-9, 2008 doi: [10.1117/12.789717](https://doi.org/10.1117/12.789717)
 [15] L. Philippe, D. Luc, V. Sebastien and Z. Andrei ASPIICS: a giant coronagraph for the ESA/ PROBA-3 formation flying mission *Proc. of SPIE 7731*, 773118-1-12, 2010, doi: [10.1117/12.858247](https://doi.org/10.1117/12.858247)
 [16] B. R. Dennis, G. K. Skinner, M. J. Li, A. Y. Shih Very High-Resolution Solar X-Ray Imaging Using Diffractive Optics *Sol. Phys.*, vol. 279, pp.573–588, 2012, doi: [10.1007/s11207-012-0016-7](https://doi.org/10.1007/s11207-012-0016-7)
 [17] J.-J. E. Slotine, and W. Li Applied Nonlinear Control *Pearson, 1991*
 [18] Z. Chen and J. Huang Attitude Tracking and Disturbance Rejection of Rigid Spacecraft by Adaptive Control *IEEE Transactions on Automatic Control*, vol. 54, no. 3, pp. 600-605, 2009, doi: [10.1109/TAC.2008.2008350](https://doi.org/10.1109/TAC.2008.2008350)
 [19] S. M.Joshi, A. G. Kelkar, and J. T. Y. Wen Robust attitude stabilization of spacecraft using nonlinear quaternion feedback *IEEE Transaction on Automatic Control*, 40(10), 1800–1803, 1995
 [20] R. Kristiansen, and J. T. Gravdahl Satellite attitude control by quaternion-based backstepping *IEEE Transaction on Control Systems Technology*, 17(1), 227–232, 2009
 [21] L. L. Show, J. C. Juang, and Y.W. Jan An LMI-based nonlinear attitude control approach *IEEE Transaction on Control Systems Technology*, 11(1), 73–83, 2003

TABLE III


Comparison of control algorithms

ROCS	ACS	Aligned time	Fuel consumption
LQR	PD	3.18 min	1.50 Ns
NFTSM	NFTSM	19.31 min	5.70×10^{-2} Ns

- [22] V.I. Utkin Sliding Modes in Control and Optimization *Springer-Verlag Berlin, Heidelberg, 1992*
- [23] Y. Shtessel, C. Edwards, L. Fridman, and A. Levant Sliding Mode Control and Observation *Springer New York Heidelberg Dordrecht London, 2010*
- [24] C. Edwards and S. Spurgeon Sliding Mode Control: Theory and Applications *CRC Press, 1998*
- [25] Godard and K. D. Kumar Fault Tolerant Reconfigurable Satellite Formations Using Adaptive Variable Structure Techniques *Journal of Guidance, Control, and Dynamics*, vol. 33, no. 3, pp. 969–984, May–June 2010
- [26] T. Massey and Y. Shtessel Continuous Traditional and High-Order Sliding Modes for Satellite Formation Control *Journal of Guidance, Control, and Dynamics*, vol.28, no.4, pp.826–831, 2005
- [27] R. R. Nair, L. Behera, V. Kumar and M. Jamshidi Multisatellite Formation Control for Remote Sensing Applications Using Artificial Potential Field and Adaptive Fuzzy Sliding Mode Control *IEEE Systems Journal*, vol. 9, no. 2, pp. 508–518, June 2015
- [28] Man Zhihong, A. P. Paplinski and H. R. Wu A robust MIMO terminal sliding mode control scheme for rigid robotic manipulators *IEEE Transactions on Automatic Control*, vol. 39, no. 12, pp. 2464–2469, Dec. 1994. doi: 10.1109/9.362847.
- [29] Yong Feng, Xinghuo Yu and Zhihong Man Non-singular terminal sliding mode control of rigid manipulators *Automatica*, Volume 38, Issue 12, 2002, Pages 2159–2167. doi: 10.1016/S0005-1098(02)00147-4.
- [30] Erdong Jin, Zhaowei Sun Robust controllers design with finite time convergence for rigid spacecraft attitude tracking control *Aerospace Science and Technology*, Volume 12, Issue 4, 2008, Pages 324–330. doi: 10.1016/j.ast.2007.08.001.
- [31] Shihua Li, Zhao Wang, Shumin Fei Comments on the paper: Robust controllers design with finite time convergence for rigid spacecraft attitude tracking control *Aerospace Science and Technology*, Volume 15, Issue 3, 2011, Pages 193–195. doi: 10.1016/j.ast.2010.11.005.
- [32] Guoqiang Zeng and Min Hu Finite-time control for electromagnetic satellite formations *Acta Astronautica*, Volume 74, 2012, Pages 120–130, ISSN 0094-5765, doi: 10.1016/j.actaastro.2012.01.003.
- [33] P. M. Tiwari, S. Janardhanan and M. Nabi Rigid Spacecraft Attitude Control Using Adaptive Non-singular Fast Terminal Sliding Mode *J. Control Autom. Electr. Syst.*, vol. 26, pp. 115–124, 2015, doi: 10.1007/s40313-014-0164-0.
- [34] H. Cho, G. Kerschen and T. R. Oliveira Adaptive smooth control for nonlinear uncertain systems *Nonlinear Dyn.*, vol. 99, pp. 2819–2833, Jan. 2020, doi: 10.1007/s11071-019-05446-z.
- [35] H. Schaub and J. L. Junkins Analytical Mechanics of Space Systems American Institute of Aeronautics and Astronautics, 2009
- [36] S. Jeon, S.-Y. Park and G.-N. Kim Relative Orbit Control Algorithms and Scenarios for the Inertial Alignment Hold Demonstration Mission by CubeSat Formation Flying *Aerospace*, vol. 11, no.2, Feb. 2024, doi: 10.3390/aerospace11020135
- [37] J.-P. Park, S.-Y. Park, Y. Song, G.N. Kim, K. Lee, H.J. Oh, J.-C. Yim, E.J. Lee, S.-H. Hwang, S.W. Kim, K.Y. Choi, D.S. Lee, S.H. Kwon, M.-S. Kim, S.-W. Yeo, T.-H. Kim, S.-H. Lee, K.B. Lee, J.-W. Seo, W.-H. Cho, J. Lee, J.-H. Park, Y.W. Kim, S.J. Kang, J. Hwang, S.H. Lee, J.-H. Yang, S. Jin CubeSat Development for CANYVAL-X Mission *14th International Conferences on Space Operations*, 2016, pp.681–691. doi: 10.5140/JASS.2019.36.4.235.
- [38] G.-N. Kim, S.-Y. Park, T. Lee, D.-E. Kang, S. Jeon, J. Son, N. Kim, Y.-K. Park, Y. Song, Development of CubeSat systems in formation flying for the solar science demonstration: The CANYVAL-C mission *Advances in Space Research*, vol.68, no.11, pp. 4434–4455, 2021 doi: 10.1016/j.asr.2021.09.021.
- [39] H. D. Black A passive system for determining the attitude of a satellite *AIAA Journal*, vol.2, no.7, pp.1350–1351, 1964
- [40] J. R. Wertz *Spacecraft Attitude Determination and Control*
- [41] B. Wie *Space Vehicle Dynamics and Control, 2nd Ed.* Reston, VA, USA: American Institute of Aeronautics and Astronautics, Inc., 2008.
- [42] P. C. Hughes Space Attitude Dynamics John Wiley & Sons, 1986
- [43] K. T. Alfriend, S. R. Vadali, P. Gurfill, J. P. How and L. S. Breger *Spacecraft Formation Flying: Dynamics, control and navigation.* Burlington, MA, USA: Elsevier, 2010.
- [44] W. E. Wiesel *Spacecraft Dynamics, 2nd Ed.* McGraw-Hill, 1997
- [45] P. M. Tiwari, S. Janardhanan and M. Nabi Rigid spacecraft attitude control using adaptive integral second order sliding mode *Aerospace Science and Technology*, vol. 42, pp. 50–57, Jan. 2015, doi: 10.1016/j.ast.2014.11.017.
- [46] S. Yu, X. Yu, B. Shirinzadeh and Z. Man Continuous finite-time control for robotic manipulators with terminal sliding mode *Automatica*, vol. 41, no. 11, pp. 1957–1964, 2005, doi: 10.1016/j.automatica.2005.07.001.
- [47] J. Wang and Z. Sun 6-DOF robust adaptive terminal sliding mode control for spacecraft formation flying *Acta Astronautica*, vol. 74, pp. 76–87, Dec. 2011, doi: 10.1016/j.actaastro.2011.12.005.
- [48] Z. Meng, W. Ren and Z. You Distributed finite-time attitude containment control for multiple rigid bodies *Automatica*, vol. 46, no. 12, pp. 2092–2099, Dec. 2010, doi: 10.1016/j.automatica.2010.09.005.
- [49] S. P. Bhat and D. S. Bernstein Continuous Finite-Time Stabilization of the Translational and Rotational Double Integrators *IEEE Transactions on Automatic Control*, vol. 43 no. 5, pp. 678–682, May 1998, doi: 10.1109/9.668834.
- [50] Y. Hong, J. Wang and D. Cheng Adaptive Finite-Time Control of Nonlinear Systems With Parametric Uncertainty *IEEE Transactions on Automatic Control*, vol. 51, no. 5, pp. 858–862, May 2006, doi: 10.1109/TAC.2006.875006.
- [51] Y. Tang Terminal sliding mode control for rigid robots *Automatica*, vol. 34, no. 1, pp. 51–56, Jan. 1998, doi: 10.1016/S0005-1098(97)00174-X.
- [52] Y.-J. Cheon Sliding Mode Control of Spacecraft with Actuator Dynamics *Transactions on Control, Automation, and Systems Engineering*, vol. 4, no. 2, Jun. 2022
- [53] K. Ma Comments on: Quasi-continuous higher order sliding-mode controllers for spacecraft-attitude-tracking maneuvers *IEEE Trans. Ind. Electron*, vol. 60, no. 7, pp. 2771–2773, 2013
- [54] H. Kang Design and analysis of attitude system for CANYVAL-C cubesat mission *M.S. Thesis*, Yonsei university, South Korea, 2019



Soobin Jeon Soobin Jeon is a PhD candidate who will graduate in Aug 2024 at Yonsei University in South Korea. She received a B.S. degree in astronomy from the same university (2017). Her research field includes Guidance, Navigation, and Control (GN&C), robust control, and satellite constellation. She was involved in CubeSat missions such as CANYVAL-C and MIMAN. This paper addresses another research interest, the robust control system development. She recently participated in the satellite constellation project that dealt with the analytical orbit design of communication constellations with continuous coverage.



Hancheol Cho Dr. Hancheol Cho received the B.S. and M.S. degrees in astronomy from Yonsei University, South Korea, in 2006 and 2008, and the Ph.D. degree in aerospace engineering from the University of Southern California, Los Angeles, USA, in 2012. From 2013 to 2015, he was a senior research engineer with Samsung Techwin Co., Ltd. in South Korea. He was a Marie-Curie COFUND postdoctoral fellow with the University of Liege, Belgium and a postdoctoral appointee with Sandia National Laboratories, Albuquerque, USA. From 2021 to 2023, he was an assistant professor with the Department of Aerospace Engineering, Embry-Riddle Aeronautical University, Daytona Beach, USA. Since September 2023, he has been an associate

professor with the Department of Astronomy and the Department of Satellite Systems, Yonsei University, South Korea. He also holds a visiting assistant professorship at Embry-Riddle Aeronautical University in Daytona Beach, USA. His research interests include spacecraft dynamics and control, robust adaptive controls, optimization, and robotics. He is an associate editor of the Journal of Control, Automation and Electrical Systems (Springer) and a member of the Astrodynamics Technical Committee of AIAA (American Institute of Aeronautics and Astronautics).



Sang-Young Park Dr. Sang-Young Park is a professor of the Astronomy Department as well as the Department of Satellite Systems at Yonsei University. He earned a Ph.D. degree in aerospace engineering from Texas A&M University in 1996. Since joining Yonsei in 2003, he has contributed to a variety of research fields in spacecraft dynamics and control, optimal control, orbit determination, spacecraft formation flying, and CubeSat systems.