

DiffCom: Channel Received Signal is a Natural Condition to Guide Diffusion Posterior Sampling

Sixian Wang, *Member, IEEE*, Jincheng Dai, *Member, IEEE*, Kailin Tan, *Graduate Student Member, IEEE*, Xiaoqi Qin, *Senior Member, IEEE*, Kai Niu, *Member, IEEE*, and Ping Zhang, *Fellow, IEEE*

Abstract—End-to-end visual communication systems typically optimize a trade-off between channel bandwidth costs and signal-level distortion metrics. However, under challenging physical conditions, this traditional *discriminative communication* paradigm often results in unrealistic reconstructions with perceptible blurring and aliasing artifacts, despite the inclusion of perceptual or adversarial losses for optimizing. This issue primarily stems from the receiver’s limited knowledge about the underlying data manifold and the use of deterministic decoding mechanisms. To address these limitations, this paper introduces *DiffCom*, a novel end-to-end *generative communication* paradigm that utilizes off-the-shelf generative priors and probabilistic diffusion models for decoding, thereby improving perceptual quality without heavily relying on bandwidth costs and received signal quality. Unlike traditional systems that rely on deterministic decoders optimized solely for distortion metrics, our *DiffCom* leverages raw channel-received signal as a fine-grained condition to guide stochastic posterior sampling. Our approach ensures that reconstructions remain on the manifold of real data with a novel confirming constraint, enhancing the robustness and reliability of the generated outcomes. Furthermore, *DiffCom* incorporates a blind posterior sampling technique to address scenarios with unknown forward transmission characteristics. Extensive experimental validations demonstrate that *DiffCom* not only produces realistic reconstructions with details faithful to the original data but also achieves superior robustness against diverse wireless transmission degradations. Collectively, these advancements establish *DiffCom* as a new benchmark in designing generative communication systems that offer enhanced robustness and generalization superiorities.

Index Terms—Generative communications, source and channel coding, diffusion models, perceptual quality.

I. INTRODUCTION

A. Background

TRADITIONAL end-to-end communication systems are typically optimized under the source-channel separation framework, which separates the processes of representation, compression, and transmission of information. This approach utilizes rate-distortion theory for source coding and channel coding theory for transmission, aiming to minimize the size of the source data under a distortion constraint, such as mean-squared error (MSE), while ensuring reliable data transmission over noisy channels subject to the constraints of channel ca-

capacity [1]. This framework has been foundational in advancing multiple generations of digital communication systems.

Recent advancements in deep learning have encouraged the exploration of data-driven solutions for end-to-end communications, specifically through the concept of joint source-channel coding (JSCC). Early works in deep learning-based JSCC (DeepJSCC) typically implement an autoencoder architecture that directly maps source information to channel-input symbols, taking into account the impairments of wireless channels to maximize end-to-end application performance (e.g., minimizing distortion (such as MSE) of reconstructed images). These models have demonstrated performance comparable to, or sometimes superior to, traditional methods like BPG (compatible with HEVC intra coding) + LDPC for small-sized CIFAR-10 images [2]–[5].

Inspired by the success of nonlinear transform coding (NTC) in neural data compression [6], the nonlinear transform source-channel coding (NTSCC) approach integrates a learned entropy model of the intermediate encoder features to determine necessary communication rates for achieving specified distortion levels, adapting the transmission rate accordingly [7], [8]. This end-to-end rate-distortion (RD) optimized JSCC framework, particularly in scenarios involving high-resolution images and videos, has shown significant system coding gains over basic DeepJSCC approaches. Its latest version [9] has exhibited on-par or superior end-to-end rate-distortion performance compared to the state-of-the-art engineered source and channel codecs, such as VTM (VVC intra coding) + 5G-LDPC.

Optimizing traditional rate-distortion metrics, i.e., minimizing the expected data transmission rate under a distortion constraint such as MSE, does not yet ideally cater to human perceptual qualities, often at the expense of realism. Here, realism is mathematically connected to the statistical fidelity or f -divergence between the distributions of the reconstructed and original images. This fidelity is typically optimized using an adversarial discriminator loss [10] and assessed using metrics like the Fréchet Inception Distance (FID) [11]. Intuitively, rate-distortion (RD) optimization tends to yield pixel-wise averages of plausible solutions that are overly smooth and misaligned with human perceptual interpretation [12]. Theoretical and empirical studies have further revealed that achieving perfect realism may result in at most a two-fold increase in optimal MSE, which yet significantly impacts the perceived quality of reconstructed images [13], [14].

These findings have catalyzed the development of codecs that prioritize human perceptual quality, referred to as “generative compression” or “generative transmission” codecs. Such codecs aim for reconstructions that, while potentially differing

This work was supported in part by the National Natural Science Foundation of China under Grant 62293481, Grant 62371063, and Grant 92067202, in part by the Beijing Natural Science Foundation under Grant L232047, Grant 4222012, in part by Program for Youth Innovative Research Team of BUPT No. 2023QNTD02. (*Corresponding author: Jincheng Dai, Ping Zhang*)

The authors are with Beijing University of Posts and Telecommunications, Beijing 100876, China. (email: daijincheng@bupt.edu.cn)

Our project and open source code are available at: <https://semcomm.github.io/DiffCom>

from the original, are indistinguishable to observers, thereby focusing on end-to-end rate-distortion-perception (RDP) optimization. This approach has gained traction in both neural compression [10], [15] and end-to-end neural transmission strategies [7], [16], [17].

B. Motivation

Despite the effectiveness of existing end-to-end transmission approaches, two significant limitations persist:

- *Inferior fidelity*: Common artifacts such as blurring and aliasing are particularly noticeable under challenging conditions including low transmission rates and poor wireless channel quality. These artifacts lead to unrealistic and inconsistent reconstructions, despite the incorporation of perceptual or adversarial losses during training.
- *Inferior generalization and robustness*: The channel characteristics are learned implicitly during the end-to-end codec training process. Consequently, these systems often underperform or fail when exposed to types of wireless-related degradation not encountered during training, highlighting a lack of generalization to new or varying conditions. Moreover, the decoders often exhibit sensitivity to unexpected perturbations in their input, which may cause significant and unreasonable changes in their output, thus leading to weak robustness.

The essential factors contributing to the aforementioned limitations are twofold:

- *Lack of prior knowledge of the underlying natural data manifold at the receiver*: Most RDP optimized end-to-end transmission systems, despite incorporating generative adversarial network (GAN) losses to enhance perceptual quality, fundamentally only rely on discriminator designs. These designs assess the distance between artifactual and realistic images based on the statistical manifold of original natural images. However, such adversarial training imparts a limited generative prior, as the deterministic decoder remains incapable of generating samples from a specified distribution.
- *Limitations of deterministic decoding*: Deterministic decoding does not embody a truly generative process capable of achieving optimal perceptual quality while maintaining robustness. Recent theoretical work on stochastic sampling indicates that although deterministic decoding can achieve high perceptual quality, it does so at the expense of increased vulnerability to adversarial input perturbations, thus compromising robustness [18].

These insights suggest a need for integrating more comprehensive generative processes and enhancing receiver awareness of the data manifold and robustness to varying wireless channels in the design of end-to-end communication systems.

In this paper, we explore the superior capabilities of *stochastic sampling* methods over deterministic approaches to develop a *generative end-to-end communication system*. Our design objectives are articulated as follows:

- *Stochastic posterior sampler as the decoder*: We establish that to achieve perfect perceptual quality and maintain consistency with the ground truth, the decoding algorithm

must inherently operate as a posterior sampler and, consequently, must be stochastic in nature.

- *Utilizing channel received signal to guide posterior sampling*: Unlike coarse-grained conditions used in generation such as text or sketch descriptions, in communication setup, the channel received signal provides a natural, fine-grained condition for guiding posterior sampling. This controllable generative process allows decoder to produce reliable and consistent results with the ground truth.
- *Enhancing generalization and robustness*: We enhance the generalization capabilities by decoupling the learning of the data prior distribution of natural data from the inference of information lost due to nonlinear encoding and channel corruptions. This approach enables stochastic posterior sampling with decoupled model prior and data consistency, which is adaptively applicable to any type of forward measurement process. Consequently, our system will be not restricted to specific types of wireless degradation, significantly broadening its applicability and generalization. Furthermore, by utilizing stochastic decoders that can generate multiple reconstructions from a single input, our system naturally exhibits reduced sensitivity to input variations, thereby increasing robustness against diverse perturbations.

C. Contribution

With the aforementioned motivations, in this paper, we propose *DiffCom*, a novel end-to-end communication paradigm that exploits pre-trained diffusion generative priors while leveraging stochastic generative components. Unlike conventional methods that utilize deterministic decoders, *DiffCom* employs a unified source-channel encoder but decodes the channel received signal using probabilistic generative models. Specifically, for an image source, we seek an image x that resides on the generative prior. This image, after being processed by the source-channel encoder function $\mathcal{E}(\cdot)$ and the wireless channel operator $\mathcal{W}(\cdot)$, aligns closely with the corrupted channel received signal y in the latent space. Consequently, *DiffCom* always produces realistic image reconstructions, whose consistency with the original reflects the uncertainties inherent in the received signal. Moreover, *DiffCom* essentially enhances robustness against various unexpected wireless transmission degradations, such as mismatched channel signal-to-noise ratio (CSNR), unseen fading conditions, inaccurate or absent channel estimation, peak-to-average power ratio (PAPR) reduction, inter-symbol interference, etc., by incorporating these factors into the construction of the forward operator $\mathcal{W}(\cdot)$.

However, the stochastic nature of the generative process presents challenges in accurately guiding the generator based on the channel received signal, necessitating advanced generative capabilities and precise conditional control. Inspired by recent breakthroughs in diffusion probabilistic models [19]–[22], which offer enhanced generative modeling compared to GANs for tasks requiring fine-grained control, such as text-to-image synthesis and super-resolution [23], *DiffCom* utilizes these models' strong generative priors to reverse the corrupted channel received signal y . Specifically, our *DiffCom* integrates

off-the-shelf score-based log-likelihood gradient steps towards the received signal ($\nabla_{\mathbf{x}} \log p(\mathbf{y}|\mathbf{x})$) into the intermediate ancestral sampling stages of a pre-trained diffusion model with generative prior ($\nabla_{\mathbf{x}} \log p(\mathbf{x})$) to achieve precise conditional control, effectively employing the channel received signal as a fine-grained condition to guide diffusion posterior sampling. This idea of decoupled data consistency and diffusion model prior contributes to generalization.

We also note that in contrast to existing diffusion inverse solvers for vanilla vision applications [24]–[26], in communication setup, *DiffCom* confronts the challenges of highly-noisy channel received signal \mathbf{y} as the measurement and operates the inversion through a complex, highly-nonlinear encoder-function. These factors significantly elevate the difficulty of stable and efficient diffusion posterior sampling, subsequently affecting the quality of the decoded images.

To tackle these issues, we develop strategies to attain stable and efficient diffusion posterior sampling within *DiffCom*. We propose penalizing posterior mean-based latent samples by further enforcing consistency in the source space and tailoring the sampling process to the quality of measurements. Through these methods, *DiffCom* demonstrates the ability to stably generate realistic images that also retain faithful details consistent with the ground truth. Additionally, to enhance the robustness of *DiffCom* against unexpected wireless transmission degradations, we further extend the system to include blind posterior sampling capabilities. This is achieved by constructing an additional diffusion prior on the channel response distribution, enabling *DiffCom* to adapt to different transmission scenarios effectively. All at all, our *DiffCom*, i.e., the channel received signal guided diffusion posterior sampling framework, not only addresses the limitations of traditional deterministic decoders but also sets a new benchmark in designing reliable and controllable generative communication systems, while remaining robustness and generalization superiority.

Our core contributions in this paper are threefold:

- 1) *DiffCom Framework*: We introduce *DiffCom*, a novel generative end-to-end communication paradigm that utilizes the corrupted received signal as a natural condition to guide pre-trained unconditional diffusion generators. *DiffCom* sets a new benchmark in end-to-end transmission by achieving state-of-the-art performance across multiple perceptual quality metrics and demonstrating robustness against diverse wireless-related degradations.
- 2) *Enhanced Posterior Sampling Efficiency*: Leveraging the identical received signal as RD-optimized methods, *DiffCom* is capable of simultaneously decoding with optimal perceptual quality and minimal MSE. We enhance this process by introducing an extra confirming constraint that ensures generated samples remain on the manifold of real data, and by accelerating the sampling process to adapt to the quality of the received signal. These innovations have proven to enhance the sampling efficiency under various channel conditions in *DiffCom*.
- 3) *Extension to Blind Cases*: We further extend *DiffCom* by constructing a diffusion prior on the channel response distribution, enabling the system to tackle extreme blind transmission scenarios. This extension allows for the joint

estimation of channel parameters and source data in a coarse-to-fine manner, leveraging the interplay between source and channel diffusion models.

We have also noted other attempts to integrate diffusion models into end-to-end wireless visual communication systems [27], [28]. These approaches primarily utilize diffusion models either as denoisers for pre-processing the received latents, requiring additional joint training, or as post-processing modules to refine degraded reconstructions. Such strategies have resulted in pronounced blurring artifacts in the visual outcomes. According to the data-processing inequality in Shannon theory [1], both pre-processing and post-processing are prone to apparent information loss, failing to accurately represent the input or exacerbating unwanted artifacts. In contrast, our *DiffCom* leverages the raw channel received signal to guide posterior generative sampling directly. This approach enables the production of realistic visual results with details that are faithfully consistent with the ground truth, effectively avoiding the pitfalls of separate processing stages.

II. PROBLEM FORMULATION

Let us assume an input data sample \mathbf{x} , represented as a vector of intensities $\mathbf{x} \in \mathbb{R}^m$, whose distribution $p(\mathbf{x})$ could be modeling, for example, audio signals, natural images or videos. Under the JSCC setup, the goal of end-to-end data transmission is to create an encoder function \mathcal{E} , encoding \mathbf{x} to a vector of complex-valued channel-input symbols $\mathbf{z} \in \mathbb{C}^k$, and a decoder function \mathcal{D} , recovering the corrupted received signal $\mathbf{y} = \mathcal{W}_{\mathbf{h}^*}(\mathbf{z}) + \mathbf{n}$ back to the input sample. We also follow the setup of orthogonal frequency division multiplexing (OFDM) transmission [4], where the function $\mathcal{W}_{\mathbf{h}^*}(\cdot)$ encapsulates transmission-related signal processing operations and wireless-related degradations, such as add pilots, add cyclic-prefix (CP), PAPR reduction, channel fading with channel impulse response $\mathbf{h}^* \in \mathbb{C}^L$ with L multipaths (\mathbf{h}^* denotes the ground truth channel response), and so on. Addictive noise \mathbf{n} is independently sampled from Gaussian distribution $\mathbf{n} \sim \mathcal{CN}(0, \sigma_n^2 \mathbf{I}_k)$ with noise power σ_n^2 .

A. Rate-Distortion Optimized End-to-End Transmission

Typically, \mathcal{E} and \mathcal{D} are jointly optimized to minimize the RD objective in the presence of wireless degradations, formulated as a linear combination of a bandwidth rate and an end-to-end distortion term:

$$\mathbb{E}_{\mathbf{x} \sim p(\mathbf{x})} \mathbb{E}_{\mathbf{h}^* \sim p(\mathbf{h}^*)} [\mathcal{L}_R(\mathbf{z}) + \lambda \mathcal{L}_D(\mathcal{D}(\mathcal{W}_{\mathbf{h}^*}^{-1}(\mathbf{y})), \mathbf{x})], \quad (1)$$

where \mathcal{L}_R is the bandwidth rate term measured by *channel bandwidth ratio* (CBR) $\rho = k/m$, $\mathcal{L}_D(\cdot, \cdot)$ denotes a distance measure typically formulated by signal-level distortions such as mean-squared error (MSE), and $\mathcal{W}_{\mathbf{h}^*}^{-1}$ indicates the necessary explicit inverse operations on \mathbf{y} with estimated channel response \mathbf{h} , such as channel estimation, and equalization.

For simplicity, in fixed-length coding methods [2]–[5], the bandwidth rate term \mathcal{L}_R is a constant value specified to the autoencoder bottleneck dimension, in which case \mathcal{L}_R can be dropped from the optimization formulation. In contrast, for variable-length JSCC codecs, \mathcal{L}_R is instance-adaptive, which

can be optimized through learned entropy estimation [7]–[9], policy networks with categorical reparameterization [29], and reinforcement learning approaches [30].

In general, despite the natural uncertainty introduced by wireless channel, both \mathcal{E} and \mathcal{D} are deterministic for the majority of end-to-end learned transmission methods. In this case, we empirically find that as CBR ρ or CSNR decreases, their reconstructions will incur increasing degradations, such as blurring, blocking, and aliasing artifacts. The inherent reason for this discrepancy is that low signal-level distortions do not necessarily equate to high perceptual quality. The latter is more accurately described as a divergence between the distributions of the source and the reconstructed data, with perfect perceptual quality achieved when the two distributions are identical [13], [14].

We have also observed that these end-to-end trained methods often perform worse than expected or even fail to function properly when evaluated under unseen wireless environments, such as mismatched CSNR and unseen fading. The characteristics of wireless-related degradations are only implicitly considered during the end-to-end codec training, leading to inferior generalization when the testing channel response distribution differs from the one used during model training. In such cases, deterministic decoders typically require either additional training [4] or online adaptation [31] to accommodate new channel domain knowledge.

B. Distribution-Preserving Generative Transmission

To address above limitations of RD optimized end-to-end transmission paradigm, we take further insights from rate-distortion-perception theory [13], which suggest that perfect realism can be achieved with no more than a twofold increase in distortion from the RD optimal codec. This insight has catalyzed the development of advanced generative compression codecs [10], [15], [32]. Motivated by these works, in this paper, we propose a novel generative transmission paradigm “*DiffCom*” as shown in Fig. 1, which primarily focusing on minimizing the divergence between the distributions of source and reconstruction, while searching for samples that consistent with the received signal at the same time. In this manner, our transmission paradigm strives to preserve the original distribution, ensuring that reconstructions are realistic and free of artifacts and unreasonable results even in case of unseen wireless environments.

To achieve this, we leverage the RD-optimized deterministic encoder \mathcal{E} but decodes stochastically with a pre-trained unconditional generator. To be specific, we aim to find an image \mathbf{x}_0 that lives on the generative prior $p_\theta(\mathbf{x}_0)$ and, after being processed through \mathcal{E} and \mathcal{W}_h , closely aligns with the corrupted received signal (measurement) \mathbf{y} in latent space. Formally, the problem we aim to solve at the receiver is expressed as:

$$\operatorname{argmin}_{\mathbf{x}_0} \|\mathbf{y} - \mathcal{W}_h(\mathcal{E}(\mathbf{x}_0))\|_2^2, \text{ s.t. } \mathbf{x}_0 \sim p_\theta(\mathbf{x}_0), \quad (2)$$

where $\mathcal{W}_h(\cdot)$ represents the wireless transmission-related operations and degradations, which are simulated by the receiver using the estimated parameter \mathbf{h} . Our proposed generative transmission framework is easy for implementation, since we

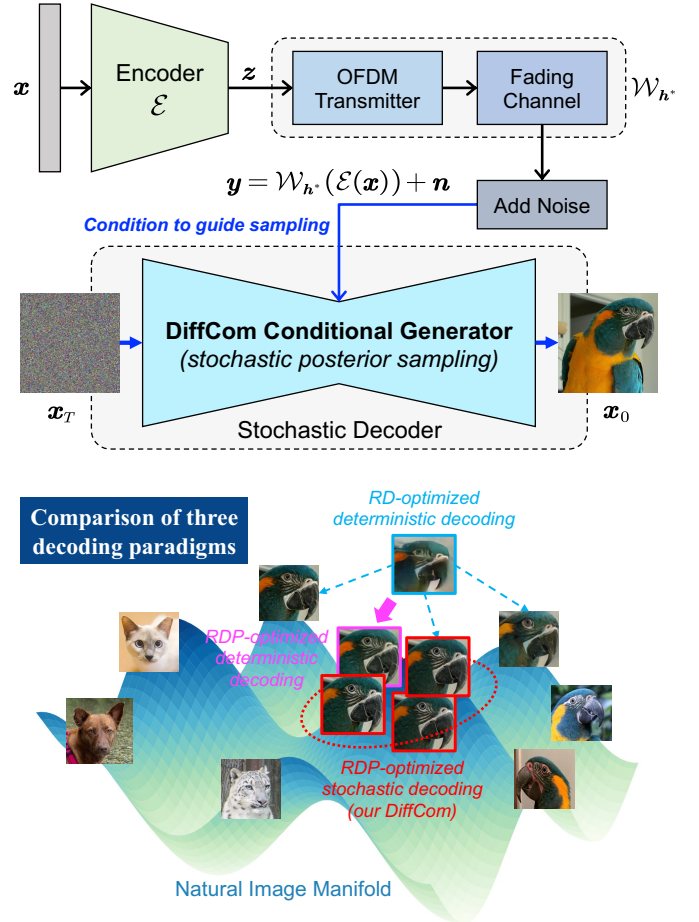


Fig. 1. Overview of our *DiffCom* system architecture, and the illustration of three decoding paradigms. (1) The RD-optimized deterministic decoding result appears overly smooth reconstructions due to the pixel-wise averaging of potential solutions in the source space; (2) The RDP-optimized deterministic decoding promotes reconstructions towards regions of the search space that are likely to contain photo-realistic images, thereby aligning more closely with the natural image manifold; (3) Our RDP-optimized stochastic decoding employs diffusion posterior sampling to generate a diverse array of solutions. The channel received signal serves as a fine-grained condition to guide the sampling process, consistently yielding high-fidelity outcomes. This paradigm enhances both the robustness and generalization capabilities of the decoding process.

can employ off-the-shelf JSCC encoder \mathcal{E} and a pre-trained unconditional generator. Furthermore, our framework naturally exhibits superior robustness to unexpected perturbations in \mathcal{W}_h , offering a significant advantage over existing deterministic decoders that fragile to unseen input signal distribution.

We note that the problem defined in (2) has a similar form with the generative model inversion works [24]–[26], which employ generative priors to solve linear ill-posed problems with known degradations in *source pixel space*, such as super-resolution, inpainting, and other restoration tasks. However, our *DiffCom* still differs clearly from them as inverting measurement signal in *latent space* and through a *highly-nonlinear* neural encoder. Moreover, in the context of wireless transmission, *DiffCom* deals with much more noisy measurement signal, and the degradations estimated by receiver \mathcal{W}_h can also be different from the ground truth \mathcal{W}_h , which is typically intractable. These factors significantly elevate the difficulty of stable and efficient generative sampling, subsequently affect-

ing the quality of the decoded images.

III. METHODOLOGY

Due to the stochastic nature of the generative process, it is hard to solve (2) under strict distribution constraint. Inspired by restoration tasks, such as deep image prior [33], we relax this problem by optimizing the following objective function

$$\operatorname{argmin}_{\mathbf{x}_0} \underbrace{\mathcal{P}(\mathbf{x}_0)}_{\text{for realism}} + \zeta \cdot \underbrace{\|\mathbf{y} - \mathcal{W}_h(\mathcal{E}(\mathbf{x}_0))\|_2^2}_{\text{for latent consistency}}, \quad (3)$$

where $\mathcal{P}(\cdot)$ represents a regularization function of the generative prior, such as $-\log p_\theta(\mathbf{x}_0)$, and ζ controls the *guidance strength* of the channel received signal. The first term of (3) is responsible for *realism term*, which encourages \mathbf{x}_0 to live close to the generative prior. Whereas the second term is the *latent consistency term*, which quantifies the latent distance between the received corrupted feature \mathbf{y} and the feature extracted from the generated image \mathbf{x}_0 .

The overall performance of this generative end-to-end transmission framework depends on three key factors:

- 1) How much information \mathbf{y} and \mathbf{h} preserve about the source image \mathbf{x} and the ground truth channel response \mathbf{h}^* , which is primarily dependent on the end-to-end transmission performance of JSCC codec.
- 2) How accurately the prior-imposing function $\mathcal{P}(\cdot)$ estimates the true prior, which relies on the distribution coverage capability of the adopted generative models.
- 3) How effectively the optimization procedure identifies the minima, dependent on the efficiency of sampling algorithms used in conjunction with the specific generator.

The first factor has been extensively investigated by existing end-to-end transmission methods and wireless channel estimation algorithms. Therefore, this paper primarily focuses on the last two factors.

A. Unconditional Diffusion Probabilistic Models

DiffCom employs diffusion probabilistic models [21] as a powerful generative prior to stochastically decode channel-received signals. As a preliminary, we offer a brief overview of diffusion models. Diffusion models generate images with forward process and reverse process defined over T reversible time steps. The forward process is to diffuse the data distribution $p(\mathbf{x})$ to a standard Gaussian distribution, $p_T(\mathbf{x}) = \mathcal{N}(\mathbf{0}, \mathbf{I})$, by injecting noise continuously at each step t . Under the variance-preserving (VP) setting [20], the forward *noising transition kernel* is parameterized as

$$q(\mathbf{x}_t|\mathbf{x}_{t-1}) = \mathcal{N}(\mathbf{x}_t; \sqrt{1 - \beta_t}\mathbf{x}_{t-1}, \beta_t\mathbf{I}_m), \quad (4)$$

where $\{\beta_t\}_{t=1}^T$ denotes a pre-defined or learned noise variance schedule. With reparametrization trick, the marginal distribution at arbitrary timestep t can be computed analytically:

$$q(\mathbf{x}_t|\mathbf{x}_0) = \mathcal{N}(\mathbf{x}_t; \sqrt{\bar{\alpha}_t}\mathbf{x}_0, (1 - \bar{\alpha}_t)\mathbf{I}_m), \quad (5)$$

where $\alpha_t = 1 - \beta_t$ and $\bar{\alpha}_t = \prod_{i=0}^t \alpha_i$ fix the noise strength, varying from $\bar{\alpha}_0 \approx 1$ for no noise to $\bar{\alpha}_T \approx 0$ for pure Gaussian noise.

Under the continuous time viewpoint, the forward diffusion process can also be written as a stochastic differential equation (SDE) of the form [21]:

$$d\mathbf{x} = -\frac{\beta_t}{2}\mathbf{x}_t dt + \sqrt{\beta_t}d\mathbf{w}, \quad (6)$$

where $\beta_t > 0$ controls the speed of diffusion and \mathbf{w} follows the standard Wiener process. To sample an image, we can employ the reverse SDE, which takes the form:

$$d\mathbf{x} = \left[-\frac{\beta_t}{2}\mathbf{x}_t - \beta_t \nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t) \right] dt + \sqrt{\beta_t}d\bar{\mathbf{w}}, \quad (7)$$

where $\bar{\mathbf{w}}$ is the standard Wiener process running backward in time. The quantity $\nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t)$ is the *prior score*, which can be practically estimated using a neural network $s_\theta : \mathbb{R}^m \times [0, 1] \rightarrow \mathbb{R}^m$ with the U-net architecture parameterized by θ . The training objective of score function s_θ is denoising score matching [21]:

$$\operatorname{argmin}_{\theta} \mathbb{E}_{t, \mathbf{x}_0, \mathbf{x}_t|\mathbf{x}_0} [\|s_\theta(\mathbf{x}_t, t) - \nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t|\mathbf{x}_0)\|_2^2], \quad (8)$$

where $t \sim \mathcal{U}(0, T)$, $\mathbf{x}_0 \sim p(\mathbf{x})$, and $\mathbf{x}_t|\mathbf{x}_0$ is sampled with (5). In the discretized form, the forward and reverse SDE is formulated as

$$\mathbf{x}_t = \sqrt{1 - \beta_t}\mathbf{x}_{t-1} + \sqrt{\beta_t}\boldsymbol{\epsilon}_{t-1}, \quad (9)$$

$$\mathbf{x}_{t-1} = \frac{1}{\sqrt{1 - \beta_t}}(\mathbf{x}_t + \beta_t \nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t)) + \sqrt{\beta_t}\boldsymbol{\epsilon}_t, \quad (10)$$

respectively, where $\boldsymbol{\epsilon} \sim \mathcal{N}(0, \mathbf{I}_m)$.

B. The Basic Architecture of DiffCom

With score-based diffusion generative modeling, we are able to generate samples in the unconditional manner from the prior data distribution by utilizing the pre-trained score function $s_\theta(\mathbf{x}, t)$. In the context of end-to-end transmission, however, our goal shifts to sampling from the posterior distribution $p(\mathbf{x}|\mathbf{y})$, which requires carefully conditioning the stochastic generative process on the corrupted channel received signal. Therefore, we modify (7) by solving the conditional reverse SDE to facilitate the posterior sampling:

$$d\mathbf{x} = \left[-\frac{\beta_t}{2}\mathbf{x} - \beta_t \nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t|\mathbf{y}) \right] dt + \sqrt{\beta_t}d\bar{\mathbf{w}}. \quad (11)$$

Herein, the *posterior score* $\nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t|\mathbf{y})$ is intractable to compute. A straightforward approach, as suggested in [23], is to train a new conditional diffusion model $s_\theta(\mathbf{x}, \mathbf{y}, t)$ explicitly with paired data points $\{(\mathbf{x}_i, \mathbf{y}_i)\}_{i=1}^N$. However, such a supervised training method will be tightly restricted to the specific operations and channel response distributions encapsulated by \mathcal{W}_{h^*} in our communication setup, potentially preventing models from generalizing effectively under varying wireless conditions. Therefore, we explore the use of diffusion inverse solvers to infer the lost information due to nonlinear encoding and channel corruptions, which have shown impressive results in vanilla image restoration tasks [24]–[26], [34].

In specific, the posterior score can be decomposed through Bayesian rule:

$$\nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t|\mathbf{y}) = \nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t) + \nabla_{\mathbf{x}_t} \log p(\mathbf{y}|\mathbf{x}_t), \quad (12)$$

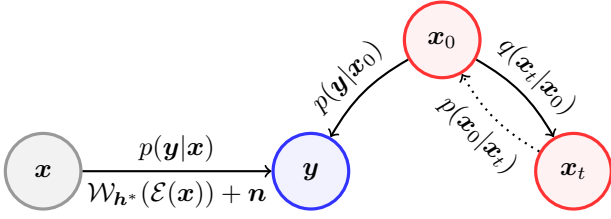


Fig. 2. Probabilistic graph of standard *DiffCom*. Solid line: tractable, dotted line: intractable in general.

where the prior score can be approximated with the pre-trained diffusion model, i.e., $\nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t) \approx s_{\theta}(\mathbf{x}_t, t)$.

For the time-conditional *likelihood score* $\nabla_{\mathbf{x}_t} \log p(\mathbf{y}|\mathbf{x}_t)$, as shown in Fig. 2, there does not exist explicit dependency between \mathbf{y} and \mathbf{x}_t . What we can exploit is the measurement model $\mathbf{x}_0 \rightarrow \mathbf{y}$ with estimated channel response \mathbf{h} , which is represented as

$$\begin{aligned} p(\mathbf{y}|\mathbf{x}_0) &= \mathcal{N}(\mathbf{y}; \mathcal{W}_{\mathbf{h}^*}(\mathcal{E}(\mathbf{x}_0)), \sigma_n^2 \mathbf{I}_k), \\ &\approx \mathcal{N}(\mathbf{y}; \mathcal{W}_{\mathbf{h}}(\mathcal{E}(\mathbf{x}_0)), \sigma_n^2 \mathbf{I}_k). \end{aligned} \quad (13)$$

To seek for a tractable surrogate, leveraging the idea of diffusion posterior sampling (DPS) [25], the likelihood score term can be approximated by

$$\begin{aligned} \nabla_{\mathbf{x}_t} \log p(\mathbf{y}|\mathbf{x}_t) &= \nabla_{\mathbf{x}_t} \log \mathbb{E}_{\mathbf{x}_0 \sim p(\mathbf{x}_0|\mathbf{x}_t)} [p(\mathbf{y}|\mathbf{x}_0)], \\ &\stackrel{(a)}{\approx} \nabla_{\mathbf{x}_t} \mathbb{E}_{\mathbf{x}_0 \sim p(\mathbf{x}_0|\mathbf{x}_t)} [\log p(\mathbf{y}|\mathbf{x}_0)], \\ &\stackrel{(b)}{\approx} \nabla_{\mathbf{x}_t} \log p(\mathbf{y}|\mathbb{E}_{\mathbf{x}_0 \sim p(\mathbf{x}_0|\mathbf{x}_t)} [\mathbf{x}_0]), \end{aligned} \quad (14)$$

where the two approximations follow Jensen inequality. [34] has pointed out that there are indeed two biased approximations in (14):

- (a) is always biased as $\log(\cdot)$ is concave.
- (b) is also biased as the posterior sample $\mathbf{x}_{0|t}$ is different from the mean $\hat{\mathbf{x}}_{0|t} := \mathbb{E}_{\mathbf{x}_0 \sim p(\mathbf{x}_0|\mathbf{x}_t)} [\mathbf{x}_0]$.

The posterior mean $\hat{\mathbf{x}}_{0|t} := \mathbb{E}_{\mathbf{x}_0 \sim p(\mathbf{x}_0|\mathbf{x}_t)} [\mathbf{x}_0]$ can be obtained through the Tweedie's formula

$$\begin{aligned} \hat{\mathbf{x}}_{0|t} &= \frac{1}{\sqrt{\bar{\alpha}_t}} (\mathbf{x}_t + (1 - \bar{\alpha}_t) \nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t)), \\ &\approx \frac{1}{\sqrt{\bar{\alpha}_t}} (\mathbf{x}_t + (1 - \bar{\alpha}_t) s_{\theta}(\mathbf{x}_t, t)). \end{aligned} \quad (15)$$

Substituting (13) and (15) into (14), the likelihood score can be concluded as

$$\nabla_{\mathbf{x}_t} \log p(\mathbf{y}|\mathbf{x}_t) \approx -\frac{1}{\sigma_n^2} \nabla_{\mathbf{x}_t} \underbrace{\|\mathbf{y} - \mathcal{W}_{\mathbf{h}}(\mathcal{E}(\hat{\mathbf{x}}_{0|t}))\|_2^2}_{\text{measurement distance: } d_m}. \quad (16)$$

As a result, we can decode \mathbf{y} stochastically with the posterior score

$$\nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t|\mathbf{y}) \approx s_{\theta}(\mathbf{x}_t, t) - \zeta_t \nabla_{\mathbf{x}_t} \|\mathbf{y} - \mathcal{W}_{\mathbf{h}}(\mathcal{E}(\hat{\mathbf{x}}_{0|t}))\|_2^2, \quad (17)$$

where ζ_t controls the guidance strength of time step t .

Recall the optimization constraint in (3), now we tackle it iteratively in a coarse-to-fine manner. In practice, for each time step t , our method alternates between two operations:

- *Enforce realism*: We sample the approximate posterior mean $\hat{\mathbf{x}}_{0|t}$ using an unconditional diffusion reverse step

Algorithm 1 Standard Posterior Sampling of DiffCom

Require: $\mathbf{y}, \mathcal{E}, \mathcal{W}_{\mathbf{h}}, T, \{\zeta_t\}_{t=1}^T, \{\sigma_t\}_{t=1}^T, s_{\theta}(\cdot, \cdot)$.

- 1: Initialize $\mathbf{x}_T \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_m)$
- 2: $\mathbf{h} = \text{Channel-Estimation}(\mathbf{y}_{\text{pilot}})$
- 3: **for** $t = T, \dots, 1$ **do**
- 4: ▷ Estimate posterior mean $\mathbb{E}[\mathbf{x}_0|\mathbf{x}_t]$
- 5: $\hat{\mathbf{s}} \leftarrow s_{\theta}(\mathbf{x}_t, t)$
- 6: $\hat{\mathbf{x}}_{0|t} \leftarrow \frac{1}{\sqrt{\bar{\alpha}_t}} (\mathbf{x}_t + (1 - \bar{\alpha}_t) \hat{\mathbf{s}})$
- 7: ▷ Sample *i.i.d.* Gaussian noise
- 8: $\boldsymbol{\epsilon} \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_m)$ **if** $t > 0$, **else** $\boldsymbol{\epsilon} = \mathbf{0}$
- 9: ▷ Diffusion ancestral sampling
- 10: $\mathbf{x}'_{t-1} \leftarrow \frac{\sqrt{\bar{\alpha}_t(1-\bar{\alpha}_{t-1})}}{1-\bar{\alpha}_t} \mathbf{x}_t + \frac{\sqrt{\bar{\alpha}_{t-1}\beta_t}}{1-\bar{\alpha}_t} \hat{\mathbf{x}}_{0|t} + \tilde{\sigma}_t \boldsymbol{\epsilon}$
- 11: ▷ Enforcing data consistency in latent space
- 12: $\mathcal{L} \leftarrow \|\mathbf{y} - \mathcal{W}_{\mathbf{h}}(\mathcal{E}(\hat{\mathbf{x}}_{0|t}))\|_2^2$
- 13: ▷ Finish one step posterior sampling
- 14: $\mathbf{x}_{t-1} \leftarrow \mathbf{x}'_{t-1} - \zeta_t \nabla_{\mathbf{x}_t} \mathcal{L}$
- 15: **end for**
- 16: **return** \mathbf{x}_0

as (15), which aims to align the sampled data closer to the generative prior, reinforcing the realism of produced image.

- *Enforce data consistency*: We perform gradient descents with $\hat{\mathbf{x}}_{0|t}$ to update the ancestral sample \mathbf{x}_{t-1} . This step gradually refines samples to be consistent with the latent measurement (channel received signal) \mathbf{y} .

As the iteration progresses, each step refines the solution, converging towards the optimization goal outlined in (3). We will achieve a promising solution that meets our optimization objectives when $t = 0$. The specific steps of standard DiffCom posterior sampling process are detailed in Algorithm 1.

C. High-Fidelity DiffCom: Improving Sampling Efficiency

In contrast to existing diffusion inverse solvers for vanilla vision applications [24]–[26], *DiffCom* confronts the challenge of highly-noisy channel received signal \mathbf{y} as the measurement and operates the inversion through a complex, highly-nonlinear encoder-function. In that cases, we find these inverse solvers often overfit the forward operator $\mathcal{E}(\cdot)$, i.e., the likelihood score approximation in (16) often leads to a small-enough measurement distance d_m , but by inspecting $\hat{\mathbf{x}}_{0|t}$, one can easily conclude that it is not aligned with \mathbf{y} . This *ambiguity*, driven by high-power noise and the nonlinear nature of the encoder-function in communication setups, considerably increases the difficulty of achieving stable and efficient diffusion posterior sampling, thereby impacting the quality of the finally decoded images. Addressing this, *DiffCom* necessitates a critical balance: exploring \mathbf{x}_t in proximity to the generative prior, while exploiting the received latent signal to enhance consistency.

1) *Mitigating Ambiguity with Confirming Constraint*: To address the ambiguity in posterior sampling, we conducted a thorough investigation into the factors contributing to this issue. Fig. 3 illustrates the impact of the guidance strength controlling hyperparameter ζ (we set all ζ_t to be identical as ζ in (17)) on the visual quality of generated images. Our analysis reveals that a lower ζ value initiates an almost unconditional generation process, producing realistic images that, however,

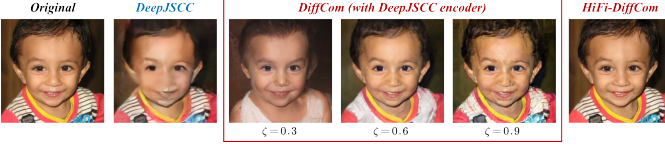


Fig. 3. Visual results to demonstrate the effect of hyperparameters ζ . We evaluate all the schemes under AWGN channel with CSNR = 0dB.

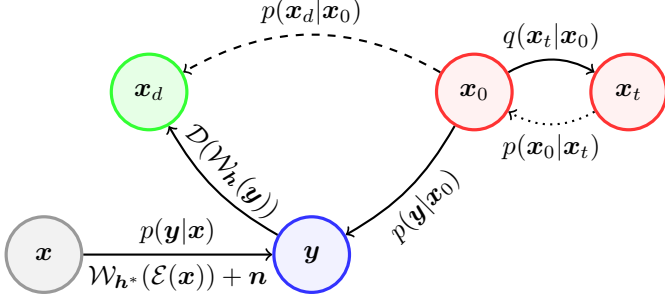


Fig. 4. Probabilistic graph of *HiFi-DiffCom*.

may not faithfully represent the original data. Conversely, a higher ζ value can lead the model to overfit the nonlinear neural encoder-function based on the measurement signal \mathbf{y} . While this may result in sharper images, it often exacerbates noise artifacts, detracting from the overall image fidelity.

Further analysis from Fig. 3 reveals that increasing ζ initially prioritizes the fitting of high-level content semantics, and consistency in appearance details manifests at higher ζ values. However, as ζ values rise, while consistency in appearance details improves, noise artifacts become prominent in the main body of the content. This phenomenon presents a significant challenge in *DiffCom*: *achieving an optimal balance between high-level semantic features and low-level appearance details*, which are manipulated by latent space and source space alignment, respectively.

To address the ambiguity of posterior sampling in standard *DiffCom*, we introduce an enhanced version, “*HiFi-DiffCom*”, which refines the prior score function with likelihood score functions in both latent space and source space. This modification aims to reduce the overfitting to noisy measurements \mathbf{y} . Specifically, we utilize a paired JSCC decoder \mathcal{D} , which is jointly trained with the JSCC encoder \mathcal{E} . When provided with \mathbf{y} as input, the JSCC decoder \mathcal{D} delivers an MSE-optimized reconstruction $\mathbf{x}_d = \mathcal{D}(\mathbf{y})$. This output serves as the basis for our newly devised *confirming constraint* term, enhancing the fidelity and robustness of the generated images.

Under this setting, as shown in Fig. 4, the posterior score for diffusion reverse sampling is derived as

$$\begin{aligned} \nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t | \mathbf{y}, \mathbf{x}_d) &= \nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t) + \nabla_{\mathbf{x}_t} \log p(\mathbf{y}, \mathbf{x}_d | \mathbf{x}_t) \\ &\approx s_{\theta}(\mathbf{x}_t, t) + \nabla_{\mathbf{x}_t} \log p(\mathbf{y}, \mathbf{x}_d | \mathbf{x}_t), \end{aligned} \quad (18)$$

where the likelihood score for *HiFi-DiffCom* is then formalized

Algorithm 2 High-Fidelity Posterior Sampling of *DiffCom*

Require: \mathbf{y} , \mathcal{E} , \mathcal{D} , \mathcal{W}_h , σ_n^2 , T , $\{\zeta_t\}_{t=1}^T$, $\{\gamma_t\}_{t=1}^T$, $\{\sigma_t\}_{t=1}^T$, and $s_{\theta}(\cdot, \cdot)$.

- 1: \triangleright Deterministic decoding
- 2: $\mathbf{h} = \text{Channel-Estimation}(\mathbf{y}_{\text{pilot}})$
- 3: $\mathbf{x}_d = \mathcal{D}(\mathcal{W}_h^{-1}(\mathbf{y}))$
- 4: \triangleright Timestep initialization as (21)
- 5: $T_s = \min\left(\eta\left(\underset{t \in [1, T]}{\operatorname{argmin}} \left\| \left(1 + \frac{1}{\sigma_n^2}\right)^{\frac{t}{2}} \cdot \tau - \frac{\bar{\alpha}_t}{(1 - \bar{\alpha}_t)} \right\|_2^2\right), T\right)$
- 6: \triangleright Put \mathbf{x}_d into the matched noise manifold
- 7: $\boldsymbol{\epsilon}_{T_s} \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_m)$
- 8: Initialize $\mathbf{x}_{T_s} = \sqrt{\bar{\alpha}_{T_s}} \mathbf{x}_d + \sqrt{1 - \bar{\alpha}_{T_s}} \boldsymbol{\epsilon}_{T_s}$
- 9: **for** $t = T_s, \dots, 1$ **do**
- 10: $\hat{\mathbf{s}} \leftarrow s_{\theta}(\mathbf{x}_t, t)$
- 11: $\hat{\mathbf{x}}_{0|t} \leftarrow \frac{1}{\sqrt{\bar{\alpha}_t}} (\mathbf{x}_t + (1 - \bar{\alpha}_t) \hat{\mathbf{s}})$
- 12: $\boldsymbol{\epsilon} \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_m)$ **if** $t > 0$, **else** $\boldsymbol{\epsilon} = \mathbf{0}$
- 13: $\mathbf{x}'_{t-1} \leftarrow \frac{\sqrt{\bar{\alpha}_t(1 - \bar{\alpha}_{t-1})}}{1 - \bar{\alpha}_t} \mathbf{x}_t + \frac{\sqrt{\bar{\alpha}_{t-1}\beta_t}}{1 - \bar{\alpha}_t} \hat{\mathbf{x}}_{0|t} + \tilde{\sigma}_t \boldsymbol{\epsilon}$
- 14: \triangleright Enforcing measurement consistency in latent space
- 15: $\mathcal{L}_m \leftarrow \|\mathbf{y} - \mathcal{W}_h(\mathcal{E}(\hat{\mathbf{x}}_{0|t}))\|_2^2$
- 16: \triangleright Confirming low-level details in source space
- 17: $\mathcal{L}_c \leftarrow \|\mathbf{x}_d - \mathcal{D}(\mathcal{W}_h^{-1}(\mathcal{W}_h(\mathcal{E}(\hat{\mathbf{x}}_{0|t}))))\|_2^2$
- 18: \triangleright Finish one step posterior sampling
- 19: $\mathbf{x}_{t-1} \leftarrow \mathbf{x}'_{t-1} - \zeta_t \nabla_{\mathbf{x}_t} \mathcal{L}_m - \gamma_t \nabla_{\mathbf{x}_t} \mathcal{L}_c$
- 20: **end for**
- 21: **return** \mathbf{x}_0

as follows by leveraging the proxy $\hat{\mathbf{x}}_{0|t}$ in (15):

$$\begin{aligned} \nabla_{\mathbf{x}_t} \log p(\mathbf{y}, \mathbf{x}_d | \mathbf{x}_t) &= \nabla_{\mathbf{x}_t} \log p(\mathbf{y} | \mathbf{x}_t) + \nabla_{\mathbf{x}_t} \log p(\mathbf{x}_d | \mathbf{x}_t, \mathbf{y}) \\ &\approx \nabla_{\mathbf{x}_t} \log p(\mathbf{y} | \hat{\mathbf{x}}_{0|t}) + \nabla_{\mathbf{x}_t} \log p(\mathbf{x}_d | \hat{\mathbf{x}}_{0|t}) \\ &\approx -\zeta_t \underbrace{\nabla_{\mathbf{x}_t} \|\mathbf{y} - \mathcal{W}_h(\mathcal{E}(\hat{\mathbf{x}}_{0|t}))\|_2^2}_{\text{for latent space alignment}} + \\ &\quad - \gamma_t \underbrace{\nabla_{\mathbf{x}_t} \|\mathbf{x}_d - \mathcal{D}(\mathcal{W}_h^{-1}(\mathcal{W}_h(\mathcal{E}(\hat{\mathbf{x}}_{0|t}))))\|_2^2}_{\text{“confirming” of } \hat{\mathbf{x}}_{0|t} \text{ for source space alignment}}, \end{aligned} \quad (19)$$

where γ_t controls the confirming strength of time step t in the source pixel domain, and the extra confirming term takes into account the effect of nonlinear decoder and wireless channel.

Leveraging JSCC decoder, our extra confirming constraint ensures that the generated sample remains at the manifold of real data, particularly enhancing the reproduction of faithful low-level details consistent with the original. This method substantially surpasses approaches that rely solely on direct pixel domain alignment, such as minimizing $\|\mathbf{x}_d - \hat{\mathbf{x}}_{0|t}\|_2^2$. Instead, our strategy focuses on aligning the sampled results with the measurements in both the source and latent domains, explicitly considering the nonlinear autoencoder functions and wireless-related operations. A comprehensive numeric comparison is presented in our later detailed ablation study, showcasing the superiority of this method over other variants.

2) *Accelerate Sampling with Adaptive Initialization*: When the JSCC decoder \mathcal{D} is utilized, it indeed imparts strong prior knowledge, substantially accelerating the diffusion posterior sampling process. Observationally, if the MSE-optimized decoding result \mathbf{x}_d closely approximates the ground truth, it is advantageous to initiate the reverse sampling from a lightly-noised manifold (corresponding to a smaller timestep) rather than starting from a pure Gaussian distribution $\mathcal{N}(\mathbf{0}, \mathbf{I}_m)$ at the maximum timestep T . Leveraging this insight, we optimize

the use of the channel received signal \mathbf{y} by starting posterior sampling at an intermediate timestep T_s . Specifically, we apply the marginal distribution in (5) to appropriately inject noise into \mathbf{x}_d onto some proper noise manifold:

$$\mathbf{x}_{T_s} = \sqrt{\bar{\alpha}_{T_s}} \mathbf{x}_d + \sqrt{1 - \bar{\alpha}_{T_s}} \boldsymbol{\epsilon}_{T_s}, \quad \boldsymbol{\epsilon}_{T_s} \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_m). \quad (20)$$

The selection of T_s is crucial and highly dependent on the quality of \mathbf{x}_d . Intuitively, \mathbf{x}_{T_s} should retain more information from \mathbf{x}_d when its quality is higher. Given the pre-defined noise variance schedule $\{\beta_t\}_{t=1}^T$, the SNR of VP diffusion process, referred to as DSNR to differentiate from CSNR, at timestep t is given by $\text{DSNR}(t) = \bar{\alpha}_t / (1 - \bar{\alpha}_t)$. To determine an optimal T_s , we seek for an alignment between the wireless channel quality and the noisy manifold characteristics of our diffusion model. The end-to-end performance for a test Gaussian source signal transmitted over a wireless channel, characterized by the signal-to-distortion ratio (SDR) at a given CSNR, is evaluated [35]. Combining the RD function and the Gaussian channel capacity, the SDR is calculated as $(1 + \frac{1}{\sigma_n^2})^{\frac{\rho}{2}}$ with the CBR $\rho = k/m$ [35]. The intermediate timestep T_s is then selected by matching the SDR with the DSNR:

$$T_s = \min \left(\eta \left(\underset{t \in [1, T]}{\operatorname{argmin}} \left\| \left(1 + \frac{1}{\sigma_n^2}\right)^{\frac{\rho}{2}} - \frac{\bar{\alpha}_t}{(1 - \bar{\alpha}_t)} \right\|_2^2 \right), T \right), \quad (21)$$

where τ is a constant introduced for numerical stability, and η is a scaling factor to adjust the total rounds of reverse sampling steps. This approach significantly reduces the required reverse sampling steps from $4\times$ to $50\times$, depending on the specific codec \mathcal{E} and \mathcal{D} , CBR ρ , and CSNR. The whole procedure of the HiFi-DiffCom posterior sampling is given in Algorithm 2.

D. Blind-DiffCom: Enhancing Sampling Robustness

In both standard *DiffCom* and *HiFi-DiffCom*, we have demonstrated the utilization of the channel received signal for posterior sampling to establish a high-fidelity generative end-to-end communications framework. Typically, the actual channel response \mathbf{h}^* in wireless operations $\mathcal{W}_{\mathbf{h}^*}$ is approximated by \mathbf{h} , derived using channel estimation algorithms. As an extension, we further propose “*Blind-DiffCom*” to address extreme scenarios where channel estimation is unavailable or highly inaccurate, facilitating pilot-free end-to-end communication that enhances system efficiency and robustness.

In the blind scenario, only the prior knowledge about the distribution of \mathbf{h}^* , obtained through channel modeling techniques, is available; the specific channel response remains underestimated or unestimated. *Blind-DiffCom* incorporates an additional diffusion model that samples the channel response based on its distribution. This setup enables the joint estimation of channel parameters and source data in a coarse-to-fine manner by exploiting the interplay between source and channel diffusion models. Similar joint estimation strategies have been successfully employed in blind image restoration techniques, where the forward operation kernel is unknown [36].

In alignment with the OFDM transmission configurations adopted in [4], this paper models a multipath fading channel with L independent paths, each subject to Rayleigh fading,

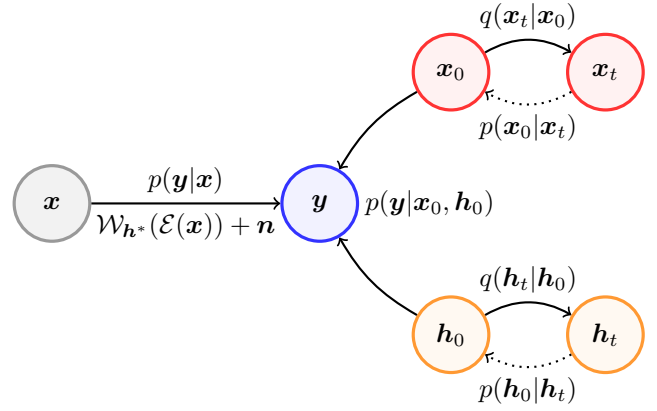


Fig. 5. Probabilistic graph of *Blind-DiffCom*.

represented as $\mathbf{h} \sim \mathcal{CN}(\mathbf{0}, \sigma_h^2 \mathbf{I}_L)$. The power for each path, $\sigma_{h,l}^2$ for $l = 0, 1, \dots, L-1$, is characterized by an exponential decay profile: $\sigma_{h,l}^2 = c_l e^{-\frac{l}{r}}$, where c_l is a normalization coefficient ensuring $\sum_{l=0}^{L-1} \sigma_{h,l}^2 = 1$, and r is the decay rate or time delay constant [4]. In the context of *Blind-DiffCom*, our optimization objective is redefined to jointly estimate the source data and the channel vector as follows:

$$\underset{\mathbf{x}_0, \mathbf{h}_0}{\operatorname{argmin}} \mathcal{P}_{\mathbf{x}}(\mathbf{x}_0) + \mathcal{P}_{\mathbf{h}}(\mathbf{h}_0) + \zeta \|\mathbf{y} - \mathcal{W}_{\mathbf{h}_0}(\mathcal{E}(\mathbf{x}_0))\|_2^2, \quad (22)$$

where \mathbf{h}_0 denotes the estimated channel impulse response in time domain, and $\mathcal{P}_{\mathbf{x}}$, $\mathcal{P}_{\mathbf{h}}$ are regularization functions for the source image and the channel vector, respectively.

We solve (22) iteratively in a coarse-to-fine manner through posterior sampling. As demonstrated in Fig. 5, since \mathbf{x}_0 and \mathbf{h}_0 are typically independent, the posterior distribution can be factorized as

$$p(\mathbf{x}_0, \mathbf{h}_0 | \mathbf{y}) \propto p(\mathbf{y} | \mathbf{x}_0, \mathbf{h}_0) p(\mathbf{x}_0) p(\mathbf{h}_0), \quad (23)$$

where the likelihood term $p(\mathbf{y} | \mathbf{x}_0, \mathbf{h}_0)$ is represented as

$$p(\mathbf{y} | \mathbf{x}_0, \mathbf{h}_0) = \mathcal{N}(\mathbf{y}; \mathcal{W}_{\mathbf{h}_0}(\mathcal{E}(\mathbf{x}_0)), \sigma_n^2 \mathbf{I}_k). \quad (24)$$

As a natural extension of *DiffCom*, *Blind-DiffCom* constructs the posterior score for sampling source as follows:

$$\nabla_{\mathbf{x}_t} \log p(\mathbf{x}_t, \mathbf{h}_t | \mathbf{y}) \approx s_{\theta}(\mathbf{x}_t, t) - \zeta_{\mathbf{x}}^t \nabla_{\mathbf{x}_t} \|\mathbf{y} - \mathcal{W}_{\hat{\mathbf{h}}_{0|t}}(\mathcal{E}(\hat{\mathbf{x}}_{0|t}))\|_2^2. \quad (25)$$

Consistent with the formulation in (16), the likelihood score is tied to the source posterior mean $\hat{\mathbf{x}}_{0|t}$, but involves a wireless-related operator parameterized by the estimated posterior mean $\mathcal{W}_{\hat{\mathbf{h}}_{0|t}}$, where the channel posterior is computed as (15). For channel variable \mathbf{h}_t , since we know the analytical expression for its distribution, $p(\mathbf{h}_t) = \mathcal{CN}(\mathbf{h}_t; \mathbf{0}, \sigma_h^2 \mathbf{I}_L)$, its score function can be analytically derived as $\nabla_{\mathbf{h}_t} \log p(\mathbf{h}_t) = -\mathbf{h}_t / \sigma_h^2$ for any timestep t . The resulting expression for the channel posterior score is

$$\nabla_{\mathbf{h}_t} \log p(\mathbf{x}_t, \mathbf{h}_t | \mathbf{y}) = -\frac{\mathbf{h}_t}{\sigma_h^2} - \zeta_{\mathbf{h}}^t \nabla_{\mathbf{h}_t} \|\mathbf{y} - \mathcal{W}_{\hat{\mathbf{h}}_{0|t}}(\mathcal{E}(\hat{\mathbf{x}}_{0|t}))\|_2^2. \quad (26)$$

This configuration allows for the parallel updating of \mathbf{h}_t and \mathbf{x}_t with guidance strength $\zeta_{\mathbf{h}}^t$ and $\zeta_{\mathbf{x}}^t$, respectively. The steps

Algorithm 3 Blind Posterior Sampling of DiffCom

Require: \mathbf{y} , \mathcal{E} , \mathcal{W}_h , T , $\{\zeta_x^t\}_{t=1}^T$, $\{\zeta_h^t\}_{t=1}^T$, $\{\sigma_t\}_{t=1}^T$, and $s_\theta(\cdot, \cdot)$.

- 1: Initialize $\mathbf{x}_T \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_m)$, $\mathbf{h}_T \sim \mathcal{CN}(\mathbf{0}, \mathbf{I}_L)$
- 2: **for** $t = T, \dots, 1$ **do**
- 3: $\hat{\mathbf{s}} \leftarrow s_\theta(\mathbf{x}_t, t)$
- 4: $\hat{\mathbf{x}}_{0|t} \leftarrow \frac{1}{\sqrt{\alpha_t}} (\mathbf{x}_t + (1 - \bar{\alpha}_t) \hat{\mathbf{s}})$
- 5: $\hat{\mathbf{h}}_{0|t} \leftarrow \frac{1}{\sqrt{\alpha_t}} (\mathbf{h}_t + (1 - \bar{\alpha}_t) \frac{\mathbf{h}_t}{\sigma_h^2})$
- 6: $\epsilon_x \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_m)$ **if** $t > 1$, **else** $\epsilon_x = \mathbf{0}$
- 7: $\epsilon_h \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_L)$ **if** $t > 1$, **else** $\epsilon_h = \mathbf{0}$
- 8: ▷ Source and channel diffusion ancestral sampling
- 9: $\mathbf{x}'_{t-1} \leftarrow \frac{\sqrt{\alpha_t(1-\bar{\alpha}_{t-1})}}{1-\bar{\alpha}_t} \mathbf{x}_t + \frac{\sqrt{\alpha_{t-1}\beta_t}}{1-\bar{\alpha}_t} \hat{\mathbf{x}}_{0|t} + \tilde{\sigma}_t \epsilon_x$
- 10: $\mathbf{h}'_{t-1} \leftarrow \frac{\sqrt{\alpha_t(1-\bar{\alpha}_{t-1})}}{1-\bar{\alpha}_t} \mathbf{h}_t + \frac{\sqrt{\alpha_{t-1}\beta_t}}{1-\bar{\alpha}_t} \hat{\mathbf{h}}_{0|t} + \tilde{\sigma}_t \epsilon_h$
- 11: ▷ Enforcing data consistency through estimated $\hat{\mathbf{h}}_{0|t}$
- 12: $\mathcal{L} \leftarrow \|\mathbf{y} - \mathcal{W}_{\hat{\mathbf{h}}_{0|t}}(\mathcal{E}(\hat{\mathbf{x}}_{0|t}))\|_2^2$
- 13: ▷ Finish one step guided posterior sampling
- 14: $\mathbf{x}_{t-1} \leftarrow \mathbf{x}'_{t-1} - \zeta_x^t \nabla_{\mathbf{x}_t} \mathcal{L}$
- 15: $\mathbf{h}_{t-1} \leftarrow \mathbf{h}'_{t-1} - \zeta_h^t \nabla_{\mathbf{h}_t} \mathcal{L}$
- 16: **end for**
- 17: **return** $\mathbf{x}_0, \mathbf{h}_0$

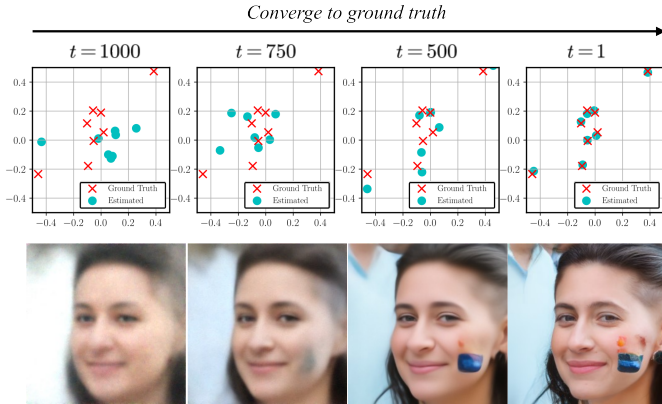


Fig. 6. Progress of channel estimation-free transmission over a multipath fading channel with $L = 8$. Top row: trajectories of estimated $\mathbf{h}_{t|0}$ at $t = 1000, 750, 500$, and 0 , respectively. Bottom row: evolution of $\mathbf{x}_{t|0}$ over time.

of the *Blind-DiffCom* posterior sampling process are outlined in Algorithm 3. We illustrate the joint estimation process visually in Fig. 6, conducted under a multipath fading channel with CSNR = 10dB and $L = 8$. The results clearly show that both the source image and the channel response begin with coarse estimations and progressively refine toward their ground truths over successive timesteps. Given the analytical form of the channel diffusion model, it is noteworthy that *Blind-DiffCom* incurs only minimal additional computational costs. This efficiency significantly enhances its applicability and generalization capabilities for in-the-wild scenarios.

IV. EXPERIMENTAL RESULTS

A. Implementation Details

1) *Dataset and Metrics:* We conduct experiments on FFHQ 256×256 [37] and ImageNet 256×256 [38] datasets. For each dataset, we evaluate 100 hold-out validation images. We use three types of image quality assessment (IQA) methods to provide a thorough performance evaluation: (a) pixel-level distortion metrics, such as PSNR, which focus on the quantitative accuracy of the pixel values; (b) low-level consistency

metrics, such as LPIPS [39] and DISTS [40], which are deep feature-based distances developed to model the Human Visual System (HVS); (c) high-level realism metrics, such as Fréchet Inception Distance (FID) [11], which are no-reference metrics focusing on the distributional alignment, widely used to access the quality of generated images. We use “↓” and “↑” to mark that lower or higher metrics represent better quality.

2) *Diffusion Models and End-to-end Transmission Models:* Our methodology is adaptable to a broad range of diffusion and differentiable JSCC models. For all experiments, we use the pre-trained DDPM models from [22] and [41] to conduct experiments on the ImageNet and FFHQ datasets, respectively. We keep their pre-defined noise variance schedule used during pre-training, where β is linearly decayed from an initial value 0.02 to 0.0001 with 1000 discretized timesteps. For JSCC models, we integrate two representative RD-optimized image JSCC methods: DeepJSCC [2] and NTSCC [7]. Here, we employ the implementations from ADJSCC [3] and the compatible NTSCC+ [9]. We use parentheses to indicate the specific JSCC encoder paired with our *DiffCom*, such as “*DiffCom* (NTSCC)” and “*DiffCom* (DeepJSCC)”. By default, for *DiffCom*, we use a constant guidance strength $\zeta = 0.6$. For *HiFi-DiffCom*, we set $\zeta = 0.3$ and $\gamma = 0.3$, with the starting timestep T_s determined using $\tau = 20$ and $\eta = 1$ as (21). While further performance improvements could be achieved by finely tuning these hyperparameters, we primarily focus on demonstrating the efficacy of proposed methods.

3) *Configurations for OFDM Transmission:* In our evaluation of end-to-end communication under multipath fading conditions, we implement an OFDM transmission configured with $L_{\text{fft}} = 256$ sub-carriers and add $L_{\text{cp}} = 10$ CP symbols to each frame. Each OFDM sub-carrier carries $N_s = \lceil k/L_{\text{fft}} \rceil$ data symbols and $N_p = 1$ pilot symbol along the time axis. The multipath channel model consists of $L = 8$ independent paths with a constant time decay parameter of $r = 4$. For channel estimation and equalization, we employ the linear minimum mean square error (LMMSE) technique. To enhance robustness against unexpected channel fading, we also incorporate an interleaver to shuffle the JSCC coded symbols z prior to transmission through the OFDM system.

4) *Comparison Schemes:* To evaluate the proposed method, we conducted comparative analyses with established transmission techniques across several categories. For separation-based image transmission schemes, our benchmarks include mainstream image codecs, both handcrafted and learned, paired with 5G LDPC channel coding (code length 4096) and digital modulation in line with the 3GPP TS 38.214 standard. Handcrafted codecs assessed include VTM (intra coding for VVC, the state-of-the-art codec) and BPG (compliant with HEVC intra coding). Neural Image Codecs (NICs) considered are the MSE-optimized Hyperprior [42], GMM-Attn [43], and the perceptually-oriented HiFiC [10], which incorporates MSE, LPIPS, and adversarial loss in its optimization criteria. In the category of end-to-end optimized image transmission methods, we compare against DeepJSCC [2], [3], SwinJSCC [5], NTSCC [9], and perceptually optimized DeepJSCC (PDJSCC) [16]. All neural codecs were tested using their respective open-source implementations with pretrained weights to maintain

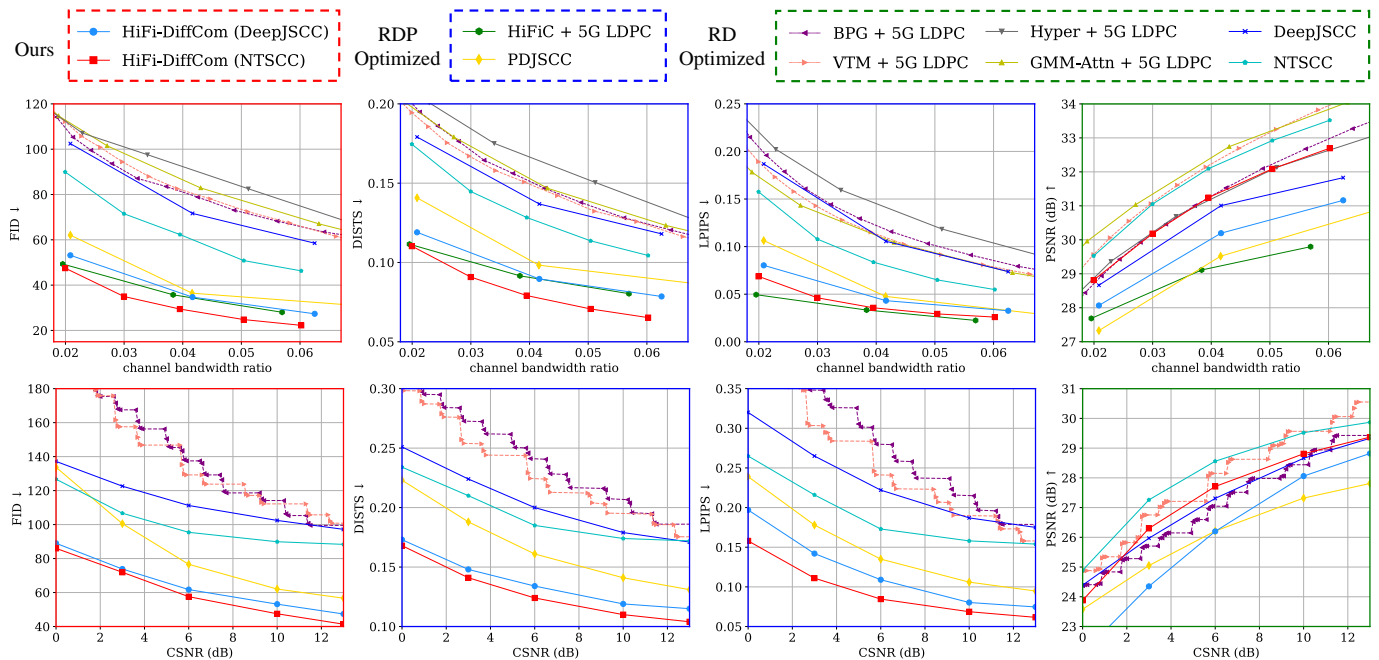


Fig. 7. Comparisons of wireless image transmission methods across various distortion and fidelity metrics, tested on FFHQ testset under AWGN channel. Metrics are categorized into realism (red frames), consistency (blue frames), and distortion (green frames). First row: reconstruction quality vs. channel bandwidth ratio (CBR) tested under CSNR = 10dB; Second row: reconstruction quality vs. channel SNR with a very low CBR of approximately 1/48.

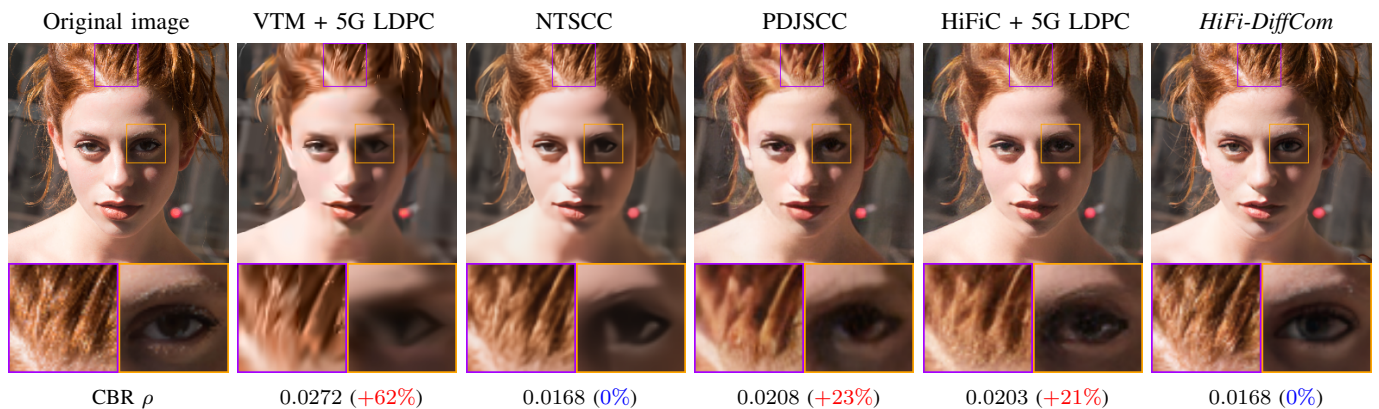


Fig. 8. Qualitative results under AWGN channel with CSNR = 10dB. ρ denotes the channel bandwidth ratio. The red numbers indicate the extra percentage of bandwidth cost compared to the our *HiFi-DiffCom*. Please zoom in for a better view.

TABLE I
RDP RESULTS ON IMAGENET UNDER AWGN CHANNEL CSNR = 10dB.
BOLD: BEST, UNDERLINE: SECOND BEST.

ImageNet, CSNR=10dB	Distortion		Consistency		Realism		
	PSNR↑	MS-SSIM↑	LPIPS↓	DISTS↓	NIQE↓	HIQA↑	FID↓
VTM + 5G LDPC	<u>30.05</u>	0.96	0.202	0.206	10.58	0.52	123.7
NTC [43] + 5G LDPC	30.33	0.97	0.188	0.215	9.94	0.63	135.9
HiFiC [10] + 5G LDPC	26.39	0.96	0.065	<u>0.132</u>	<u>6.15</u>	0.55	53.9
DeepJSCC [3]	28.55	0.97	0.211	0.200	6.85	0.66	164.9
SwinJSCC [5]	29.90	0.97	0.171	0.182	8.64	0.53	88.3
NTSCC [9]	29.88	0.97	0.166	0.188	6.85	0.66	89.4
PDJSCC [16]	26.00	0.96	0.123	0.161	6.73	0.49	69.4
<i>HiFi-DiffCom</i> (DeepJSCC)	27.96	0.95	0.142	0.143	6.22	0.60	52.6
<i>HiFi-DiffCom</i> (NTSCC)	29.02	0.96	<u>0.088</u>	0.117	6.05	0.64	43.2

consistency with published results.

B. Rate-Distortion-Perception Performance Comparison

1) *Quantitative Results*: Fig. 7 presents a benchmark of advanced wireless image transmission methods on the FFHQ

TABLE II
RDP RESULTS ON IMAGENET UNDER AWGN CHANNEL CSNR = 0dB.

ImageNet, CSNR=0dB	Distortion		Consistency		Realism		
	PSNR↑	MS-SSIM↑	LPIPS↓	DISTS↓	NIQE↓	HIQA↑	FID↓
VTM + 5G LDPC	<u>25.12</u>	0.88	0.421	0.312	12.21	0.30	242.6
DeepJSCC [3]	24.62	0.89	0.358	0.277	6.85	<u>0.66</u>	213.9
SwinJSCC [5]	25.53	0.90	0.293	0.251	9.16	0.42	152.1
NTSCC [9]	24.89	0.90	0.284	0.249	6.85	0.66	166.7
PDJSCC [16]	22.89	0.88	<u>0.266</u>	0.245	6.58	0.35	183.5
<i>HiFi-DiffCom</i> (DeepJSCC)	22.07	0.83	0.283	<u>0.203</u>	<u>5.54</u>	0.60	113.8
<i>HiFi-DiffCom</i> (NTSCC)	23.83	0.88	0.211	0.191	5.50	0.60	106.5

dataset under an AWGN channel. The first row evaluates rate-fidelity curves at a fixed 10dB CSNR, while the second row examines reconstruction quality across various CSNRs with a CBR of 1/48. These results indicate that our *HiFi-DiffCom* dominates in all realism and consistency metrics, while preserving a competitive signal distortion as measured by PSNR. Notably, our method surpasses HiFiC + 5G LDPC in all

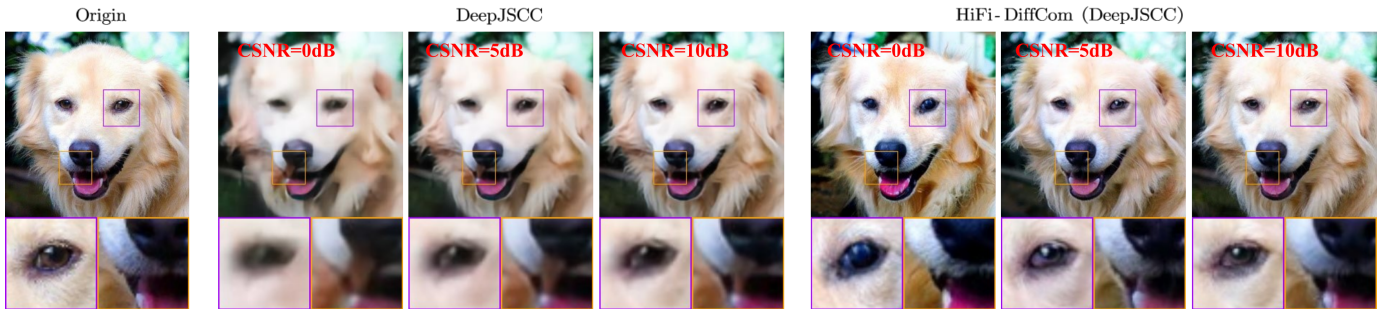


Fig. 9. A visual example illustrating how generative transmission methods preserve perfect realism, while exhibiting graceful consistency degradation in details when CSNRs decrease.

metrics except for LPIPS, which is understandable considering HiFiC uses LPIPS as training loss function.

In Tables I and II, we expand our comparative analysis using a larger-scale ImageNet database, assessing image quality under two CSNRs of 10dB and 0dB, respectively, with a very low CBR of approximately $1/48$. We report both full-reference distortion metrics, such as MS-SSIM, and no-reference realism metrics, including NIQE [44] and HIQA [45], to provide a comprehensive assessment encompassing both classical and advanced modern quality indicators. The results reveal that while some existing methods may excel in specific categories such as distortion, consistency, or realism, they often underperform in others. In contrast, our *HiFi-DiffCom* consistently delivers superior performance across all evaluated metrics.

2) *Qualitative Results*: In Fig. 8, we present qualitative visual comparisons of our approach with advanced perceptual or RD-optimized image transmission schemes. Apparently, our *HiFi-DiffCom* performs visually more pleasing with lower channel bandwidth cost. Fig. 9 illustrates the reconstructions by “DeepJSCC” and our “*HiFi-DiffCom* (DeepJSCC)” across various CSNRs from 10dB to 0dB at a very low CBR of $\rho = 1/48$. Under low CSNR conditions, traditional DeepJSCC reconstructions exhibit decreased realism, characterized by blurring and inconsistent details due to artifact introduction. In contrast, our *HiFi-DiffCom* system always produces visually appealing results with faithful details, where the consistency of these details decreases gracefully as CSNR decreases.

C. Generalization and Robustness Comparison

In this subsection, we evaluate the generalization capability and robustness of the proposed diffusion posterior sampling algorithms. The baseline model adopted is a DeepJSCC codec, pre-trained under an AWGN channel and unexposed to fading, clipping, or interference during training. We introduce various unexpected wireless transmission-related degradations to its encoded JSCC codewords to assess and compare the reconstruction quality between our *DiffCom* and the traditional DeepJSCC deterministic decoder.

Results under multipath fading channel with MMSE channel estimation across multiple CSNRs is presented in Fig. 10(a). We report distortion vs. realism for a fixed CBR $\rho = 1/48$, measured by PSNR and FID, where the optimal point is at the top left. It is clear that *HiFi-DiffCom* outperforms DeepJSCC by a large margin in terms of FID metric, and also exhibits PSNR gain for high CSNR points.

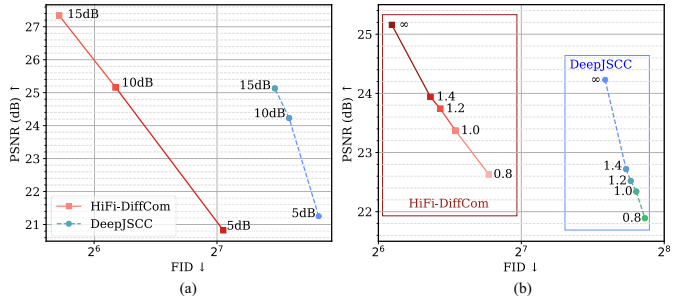


Fig. 10. Distortion (PSNR) vs. realism (FID) under multipath fading channel, evaluated (a) across multiple CSNRs, and (b) at different clipping ratios with a fixed 10dB CSNR (∞ denotes no clipping). Each marker includes the corresponding CSNR or clipping ratio for clarity.

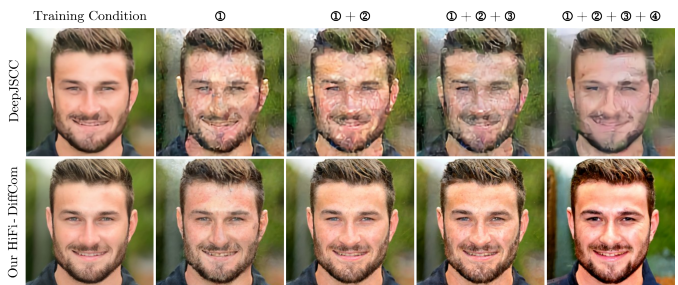


Fig. 11. A visual comparison illustrating the impact of several unexpected transmission degradations: ① unseen channel fading, ② PAPR reduction, ③ with ISI (removed CP symbols), and ④ very low CSNR (0dB).

Our methods support flexible formulations of the forward operator \mathcal{W}_{h^*} . As an example, we integrate a PAPR reduction module after OFDM modulation to clip OFDM signals. This module serves as a peak clipping function, limiting the amplitude of each complex-valued transmission symbol to no more than $c\sqrt{P_s}$, where c is the clipping ratio and P_s is the average transmission signal power [4]. Results in Fig. 10(b) confirm that, decoding from the same received signal, *HiFi-DiffCom* maintains superior FID and PSNR versus DeepJSCC.

To verify robustness, Fig. 11 depicts the exposure of DeepJSCC codewords to a series of unexpected degradations, decoding the received signals using both our proposed stochastic posterior sampling paradigm and the deterministic DeepJSCC decoder. The results demonstrate that the RD-optimized deterministic decoder produces blurry reconstructions even under trained conditions and is particularly vulnerable to transmission perturbations, highlighting its inferior fidelity and inferior robustness. Conversely, *HiFi-DiffCom* maintains high-quality image details, effectively counteracting the effects of in-the-

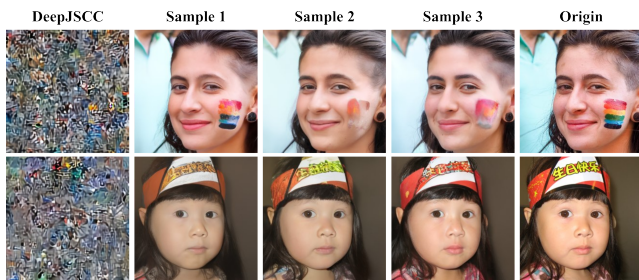


Fig. 12. Reconstructions of DeepJSCC (first column) compared with our *Blind-DiffCom* (second to fourth columns) under a multipath fading channel without channel estimation ($L = 8$, CSNR = 10dB).

TABLE III
PERFORMANCE OF BLIND-DIFFCOM FOR PILOT-FREE TRANSMISSION.

Method	ζ_x	ζ_h	Success ratio	d_h	PSNR \uparrow	LPIPS \downarrow	DISTS \downarrow	FID \downarrow
DeepJSCC	/	/	0%	/	8.23	0.828	0.473	376.3
Blind-DiffCom without CE	0.3	0.1	85%	0.265	18.19	0.297	0.216	105.5
	0.3	0.2	73%	0.204	17.42	0.323	0.230	115.3
	0.3	0.3	58%	0.193	17.35	0.320	0.228	118.3
	0.6	0.1	35%	0.089	22.66	0.234	0.188	106.6
	0.9	0.1	43%	0.041	20.18	0.228	0.190	98.5

wild transmission degradations.

In a challenging scenario without channel estimation (CE), most existing end-to-end transmission methods underperform or fail due to their heavy reliance on accurate CE. In Table III and Fig. 12, we evaluate the performance on the FFHQ dataset under a multipath channel with 10dB CSNR. The visual results in Fig. 12 demonstrate that DeepJSCC fails in the absence of CE, yielding garbled images. In contrast, our *Blind-DiffCom* robustly produces diverse and accurate reconstructions. We also observe that the joint estimation process of the source image and channel response does not always succeed. In Table III, we report the success ratio of *Blind-DiffCom* across 100 different test images, taking into account the guidance strengths ζ_x and ζ_h . We calculate the averaged quality metrics and channel estimation precision in terms of $d_h = \|\mathbf{h} - \mathbf{h}^*\|_2^2$ only for meaningful reconstructions, identified by PSNR \geq 15dB. Empirical observations suggest that while higher guidance strengths may improve reconstruction quality, they also reduce the likelihood of success. Lower guidance strengths, conversely, yield meaningful reconstructions more frequently but with some slightly reduced quality. One effective strategy is to iteratively perform joint posterior sampling on the same received signal to enhance the chances of obtaining valuable reconstructions. The potential of *Blind-DiffCom* for pilot-free communication scenarios highlights an important avenue for future research.

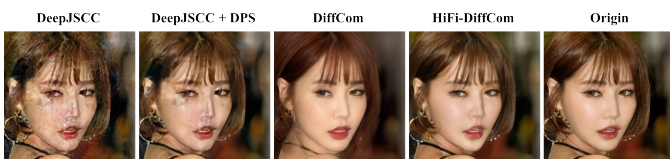


Fig. 13. Reconstructions under a multipath fading channel. DeepJSCC, which was trained under an AWGN channel, displays severe artifacts. In contrast, decoding from the same channel received signal, our proposed *DiffCom* and *HiFi-DiffCom* maintain realistic reconstructions.

TABLE IV
ABLATION STUDIES ON THE DESIGN COMPONENTS OF HiFi-DIFFCOM.

Components		CSNR = 10dB				CSNR = 0dB			
Adapt. init.	Conf. term	PSNR \uparrow	LPIPS \downarrow	DISTS \downarrow	FID \downarrow	PSNR \uparrow	LPIPS \downarrow	DISTS \downarrow	FID \downarrow
\times	\times	19.98	0.161	0.160	71.1	18.1	0.239	0.202	97.2
\checkmark	\times	<u>27.77</u>	0.091	0.121	53.9	20.42	0.262	0.211	104.2
\times	\checkmark	27.63	<u>0.088</u>	<u>0.120</u>	54.2	23.34	0.181	0.164	81.2
\checkmark	\checkmark	28.06	0.080	0.119	53.2	<u>22.1</u>	<u>0.197</u>	<u>0.173</u>	<u>89.0</u>

TABLE V
ABLATION STUDIES ON THE FORMULATION OF POSTERIOR SCORE.

Method	AWGN channel				Multipath Fading channel			
	$T_s \downarrow$	PSNR \uparrow	LPIPS \downarrow	FID \downarrow	$T_s \downarrow$	PSNR \uparrow	LPIPS \downarrow	FID \downarrow
DeepJSCC	/	<u>28.66</u>	0.187	102.4	/	24.23	0.311	192.2
DeepJSCC + DPS [25]	1000	28.69	0.194	100.4	1000	<u>24.79</u>	0.232	126.6
<i>DiffCom</i>	1000	19.98	<u>0.161</u>	<u>71.0</u>	1000	18.18	0.227	105.5
<i>DiffCom</i> + Pixel Align.	1000	26.88	0.161	76.3	1000	23.20	<u>0.200</u>	<u>82.8</u>
<i>HiFi-DiffCom</i>	160	28.06	0.080	53.2	330	25.16	0.143	68.3

D. Ablation Study

In this subsection, we conduct three ablation studies to validate our key design choices. By default, our proposed *DiffCom* methods are evaluated paired with DeepJSCC encoder.

1) *Contributions of the Components of HiFi-DiffCom*: In Table IV and Fig. 13, we dissect the key design components of *HiFi-DiffCom* to assess the impact of the proposed confirming constraint and accelerating sampling strategy. The confirming loss significantly improves sample quality across all evaluated metrics. Additionally, the adaptive initialization strategy not only accelerates the generation process by reducing the number of required sampling steps, but also influences the reconstruction performance based on the quality of \mathbf{x}_d used for initialization. When combined, these components enable *HiFi-DiffCom* (highlighted in Table IV) to produce high-quality reconstructions in substantially fewer timesteps.

2) *Formulations of Posterior Score Function*: Table V compares potential decoding schemes: (a) DeepJSCC: Trained under AWGN channel with CSNR = 10dB. (b) DeepJSCC + DPS [25]: Utilizes diffusion model as a post-processing tool to refine deterministic reconstructions \mathbf{x}_d , with likelihood scores based on source pixel-domain distances $\|\mathbf{x}_d - \hat{\mathbf{x}}_{0|t}\|_2^2$. (c) Standard *DiffCom*: Our basic generative communication approach. (d) *DiffCom* with pixel-domain alignment: Enhances *DiffCom* by incorporating $\|\mathbf{x}_d - \hat{\mathbf{x}}_{0|t}\|_2^2$ into the posterior score function. (e) *HiFi-DiffCom*: Integrates confirming constraints and adaptive initialization for improved fidelity. These methods were assessed for generalization capabilities beyond the AWGN training conditions. Results show that diffusion models used as post-processing steps do not significantly improve realism under AWGN conditions and only moderately reduce artifacts under fading conditions. Similarly, *DiffCom* with pixel domain alignment faces comparable challenges. Conversely, our *HiFi-DiffCom* consistently delivers realistic reconstructions with better detail consistency across varying channel conditions, demonstrating superior performance especially under scenarios of unseen channel fading.

V. CONCLUSION

This paper has introduced *DiffCom*, a pioneering framework designed to catalyze the paradigm shift from discriminative to generative communications. In this new paradigm, the channel received signal is utilized not merely as input to a deterministic decoder but as a powerful guidance for generative posterior sampling. We have demonstrated that a posterior sampler, by leveraging the received signal as a fine-grained condition for diffusion posterior sampling, can achieve perfect perceptual quality while retaining faithful details consistent with the ground truth at the same time, thus overcoming the limitations inherent in traditional deterministic decoders. This approach not only enhances the reliability of generative communication systems but also significantly improves their robustness and generalization capabilities. Furthermore, we have developed two variants of *DiffCom*: *HiFi-DiffCom*, which enhances the efficiency of posterior sampling, and *Blind-DiffCom*, which caters to scenarios lacking precise or even without channel estimations. These advancements verifies that robust, stochastic posterior sampling algorithms can provide superior data recovery under extreme wireless transmission conditions. This work takes an important step towards fostering generative perceptual communication and lays foundational insights for future developments in semantic communication design.

REFERENCES

- [1] T. M. Cover, *Elements of information theory*, John Wiley & Sons, 1999.
- [2] E. Boursoulatte, D. B. Kurka, and D. Gündüz, "Deep joint source-channel coding for wireless image transmission," *IEEE Trans. Cognit. Commun. Networking*, vol. 5, no. 3, pp. 567–579, 2019.
- [3] J. Xu, B. Ai, W. Chen, et al., "Wireless image transmission using deep source channel coding with attention modules," *IEEE Trans. Circuits Syst. Video Technol.*, vol. 32, no. 4, pp. 2315–2328, 2021.
- [4] M. Yang, C. Bian, and H. Kim, "Ofdm-guided deep joint source channel coding for wireless multipath fading channels," *IEEE Trans. Cognit. Commun. Networking*, vol. 8, no. 2, pp. 584–599, 2022.
- [5] K. Yang, S. Wang, J. Dai, et al., "Swinjscc: Taming swin transformer for deep joint source-channel coding," *arXiv preprint arXiv:2308.09361*, 2023.
- [6] J. Ballé, P. A Chou, D. Minnen, , et al., "Nonlinear transform coding," *IEEE J. Sel. Top. Signal Process.*, vol. 15, no. 2, pp. 339–353, 2020.
- [7] J. Dai, S. Wang, K. Tan, , et al., "Nonlinear transform source-channel coding for semantic communications," *IEEE J. Sel. Areas Commun.*, vol. 40, no. 8, pp. 2300–2316, 2022.
- [8] S. Wang, J. Dai, Z. Liang, et al., "Wireless deep video semantic transmission," *IEEE J. Sel. Areas Commun.*, vol. 41, no. 1, pp. 214–229, 2023.
- [9] S. Wang, J. Dai, X. Qin, et al., "Improved nonlinear transform source-channel coding to catalyze semantic communications," *IEEE J. Sel. Top. Signal Process.*, 2023.
- [10] F. Mentzer, G. D. Toderici, M. Tschannen, et al., "High-fidelity generative image compression," *Proc. Adv. Neural Inf. Process. Syst.*, vol. 33, pp. 11913–11924, 2020.
- [11] M. Heusel, H. Ramsauer, T. Unterthiner, et al., "Gans trained by a two time-scale update rule converge to a local nash equilibrium," *Proc. Adv. Neural Inf. Process. Syst.*, vol. 30, 2017.
- [12] C. Ledig, L. Theis, F. Huszár, et al., "Photo-realistic single image super-resolution using a generative adversarial network," in *Proc. IEEE Conf. Comput. Vis. Pattern Recog.*, 2017, pp. 4681–4690.
- [13] Y. Blau and T. Michaeli, "The perception-distortion tradeoff," in *Proc. IEEE Conf. Comput. Vis. Pattern Recog.*, 2018, pp. 6228–6237.
- [14] Y. Blau and T. Michaeli, "Rethinking lossy compression: The rate-distortion-perception tradeoff," in *International Conference on Machine Learning*. PMLR, 2019, pp. 675–685.
- [15] F. Mentzer, E. Agustsson, J. Ballé, et al., "Neural video compression using gans for detail synthesis and propagation," in *Proc. Eur. Conf. Comput. Vis.* Springer, 2022, pp. 562–578.
- [16] J. Wang, S. Wang, J. Dai, et al., "Perceptual learned source-channel coding for high-fidelity image semantic transmission," in *GLOBECOM 2022-2022*. IEEE, 2022, pp. 3959–3964.
- [17] W. Yue, J. Dai, S. Wang, et al., "Learned source and channel coding for talking-head semantic transmission," in *2023 IEEE Wireless Comms. & Netw. Conf.*, 2023, pp. 1–6.
- [18] G. Ohayon, T. J. Adrai, M. Elad, et al., "Reasons for the superiority of stochastic estimators over deterministic ones: Robustness, consistency and perceptual quality," in *International Conference on Machine Learning*. PMLR, 2023, pp. 26474–26494.
- [19] Y. Song and S. Ermon, "Generative modeling by estimating gradients of the data distribution," *Proc. Adv. Neural Inf. Process. Syst.*, vol. 32, 2019.
- [20] J. Ho, A. Jain, and P. Abbeel, "Denoising diffusion probabilistic models," *Proc. Adv. Neural Inf. Process. Syst.*, vol. 33, pp. 6840–6851, 2020.
- [21] Y. Song, J. Sohl-Dickstein, D. P. Kingma, et al., "Score-based generative modeling through stochastic differential equations," *arXiv preprint arXiv:2011.13456*, 2020.
- [22] A. Q. Nichol and P. Dhariwal, "Improved denoising diffusion probabilistic models," in *International Conference on Machine Learning*. PMLR, 2021, pp. 8162–8171.
- [23] R. Rombach, A. Blattmann, D. Lorenz, et al., "High-resolution image synthesis with latent diffusion models," in *Proc. IEEE Conf. Comput. Vis. Pattern Recog.*, 2022, pp. 10684–10695.
- [24] H. Chung, B. Sim, D. Ryu, et al., "Improving diffusion models for inverse problems using manifold constraints," *Proc. Adv. Neural Inf. Process. Syst.*, vol. 35, pp. 25683–25696, 2022.
- [25] H. Chung, J. Kim, M. T. Mccann, et al., "Diffusion posterior sampling for general noisy inverse problems," in *The Eleventh International Conference on Learning Representations*, 2022.
- [26] Y. Zhu, K. Zhang, J. Liang, et al., "Denoising diffusion models for plug-and-play image restoration," in *Proc. IEEE Conf. Comput. Vis. Pattern Recog.*, 2023, pp. 1219–1229.
- [27] T. Wu, Z. Chen, D. He, et al., "Cddm: Channel denoising diffusion models for wireless semantic communications," *IEEE Trans. Wireless Commun.*, pp. 1–1, 2024.
- [28] S. F. Yilmaz, X. Niu, B. Bai, et al., "High perceptual quality wireless image delivery with denoising diffusion models," *arXiv preprint arXiv:2309.15889*, 2023.
- [29] M. Yang and H. Kim, "Deep joint source-channel coding for wireless image transmission with adaptive rate control," in *Proc. IEEE Int. Conf. Acoust. Speech Signal Process.* IEEE, 2022, pp. 5193–5197.
- [30] T. Tung and D. Gündüz, "Deepwive: Deep-learning-aided wireless video transmission," *IEEE J. Sel. Areas Commun.*, vol. 40, no. 9, pp. 2570–2583, 2022.
- [31] J. Dai, S. Wang, K. Yang, et al., "Toward adaptive semantic communications: Efficient data transmission via online learned nonlinear transform source-channel coding," *IEEE J. Sel. Areas Commun.*, vol. 41, no. 8, pp. 2609–2627, 2023.
- [32] M. Tschannen, E. Agustsson, and M. Lucic, "Deep generative models for distribution-preserving lossy compression," *Proc. Adv. Neural Inf. Process. Syst.*, vol. 31, 2018.
- [33] D. Ulyanov, A. Vedaldi, and V. Lempitsky, "Deep image prior," in *Proc. IEEE Conf. Comput. Vis. Pattern Recog.*, 2018, pp. 9446–9454.
- [34] Y. Song, Li. Shen, L. Xing, et al., "Solving inverse problems in medical imaging with score-based generative models," in *International Conference on Learning Representations*, 2021.
- [35] Y. M. Saidutta, A. Abdi, and F. Fekri, "Joint source-channel coding over additive noise analog channels using mixture of variational autoencoders," *IEEE J. Sel. Areas Commun.*, vol. 39, no. 7, pp. 2000–2013, 2021.
- [36] H. Chung, J. Kim, S. Kim, et al., "Parallel diffusion models of operator and image for blind inverse problems," in *Proc. IEEE Conf. Comput. Vis. Pattern Recog.*, 2023, pp. 6059–6069.
- [37] T. Karras, S. Laine, and T. Aila, "A style-based generator architecture for generative adversarial networks," in *Proc. IEEE Conf. Comput. Vis. Pattern Recog.*, 2019, pp. 4401–4410.
- [38] J. Deng, W. Dong, R. Socher, et al., "Imagenet: A large-scale hierarchical image database," in *2009 IEEE Conf. Comput. Vis. Pattern Recog.* IEEE, 2009, pp. 248–255.
- [39] R. Zhang, P. Isola, A. A Efros, et al., "The unreasonable effectiveness of deep features as a perceptual metric," in *Proc. IEEE Conf. Comput. Vis. Pattern Recog.*, 2018, pp. 586–595.
- [40] K. Ding, K. Ma, S. Wang, et al., "Image quality assessment: Unifying structure and texture similarity," *CoRR*, vol. abs/2004.07728, 2020.

- [41] J. Choi, S. Kim, Y. Jeong, et al., “Ilvr: Conditioning method for denoising diffusion probabilistic models,” in *Proc. IEEE Int. Conf. Comput. Vis.* IEEE Computer Society, 2021, pp. 14347–14356.
- [42] J. Ballé, D. Minnen, S. Singh, et al., “Variational image compression with a scale hyperprior,” *arXiv preprint arXiv:1802.01436*, 2018.
- [43] Z. Cheng, H. Sun, M. Takeuchi, et al., “Learned image compression with discretized gaussian mixture likelihoods and attention modules,” in *Proc. IEEE Conf. Comput. Vis. Pattern Recog.*, 2020.
- [44] A. Mittal, R. Soundararajan, and A. C Bovik, “Making a “completely blind” image quality analyzer,” *IEEE Signal Process Lett.*, vol. 20, no. 3, pp. 209–212, 2012.
- [45] S. Su, Q. Yan, Y. Zhu, et al., “Blindly assess image quality in the wild guided by a self-adaptive hyper network,” in *IEEE Conf. Comput. Vis. Pattern Recog.*, June 2020.