

Non-reciprocal Beyond Diagonal RIS: Sum-Rate Maximization in Full-Duplex Communications

Ziang Liu, Hongyu Li, and Bruno Clerckx, *Fellow, IEEE*

Abstract—Reconfigurable intelligent surface (RIS) has been envisioned as a key technology in future wireless communication networks to enable smart radio environment. To further enhance the passive beamforming capability of RIS, beyond diagonal (BD)-RIS has been proposed considering reconfigurable interconnections among different RIS elements. BD-RIS has a unique feature that cannot be enabled by conventional diagonal RIS; it can be realized by non-reciprocal circuits and thus enables an asymmetric scattering matrix. This feature provides the capability to break the wireless channel reciprocity, and has the potential to benefit full-duplex (FD) systems. In this paper, we model the BD RIS-assisted FD systems, where the impact of BD-RIS non-reciprocity and that of structural scattering, which refers to the specular reflection generated by RIS when the RIS is turned OFF, are explicitly captured. To assess the benefits of non-reciprocal BD-RIS, we optimise the scattering matrix, precoder and combiner to maximize the DL and UL sum-rates in the FD system. To tackle this optimization problem, we propose an iterative algorithm based on block coordination descent (BCD) and penalty dual decomposition (PDD). Numerical results demonstrate surprising benefits of non-reciprocal BD-RIS that it can achieve much higher DL and UL sum-rates in the FD scenario than reciprocal BD-RIS and conventional diagonal RIS.

Index Terms—Beyond diagonal reconfigurable intelligent surface (BD-RIS), full-duplex (FD), non-reciprocity, structural scattering

I. INTRODUCTION

Reconfigurable intelligent surface (RIS) has been recognized as a key technology to enable beyond 5G and 6G wireless network due to its potential to manipulate the wireless propagation channel and enhance the spectrum and energy efficiency using low-cost hardware [1]–[3]. RIS is a planar surface composed of passive reconfigurable scattering elements, whose phase shift can be tuned to facilitate passive beamforming for both incident and reflected directions. Consequently, the incident, reflected, refracted, and scattered signals from RISs can be intentionally controlled without amplification, allowing manipulation of the radio signal’s propagation environment and enhancing the received signal power at the receiver. Thanks to these appealing features, RIS has been extensively studied to improve sum-rates [4] and energy efficiency [5] of the wireless communication systems. In addition, RIS has demonstrated effectiveness in assisting various wireless applications, such as assisting full-duplex (FD) systems [6], [7],

enabling integrated sensing and communications (ISAC) [8], and interplaying with rate-splitting multiple access (RSMA) to enhance performance [9].

From the technical perspective, RIS can be modeled as multiple scattering elements connected to a reconfigurable impedance network [10]–[12]. All the above research [4]–[9] focuses on conventional RIS with a single-connected architecture, also called Diagonal RIS (D-RIS), in which each port of the reconfigurable impedance network is connected to its own impedance component to ground. This simple architecture allows only the phase of the impinging waves to be tuned and thus limits the capability to manipulate the propagation environment [10]. To enhance the functionality of RISs, RIS 2.0, known as Beyond Diagonal RIS (BD-RIS), has been proposed in [10], [11]. In this architecture, ports are interconnected, enabling the impinging waves to be reconfigured as they flow through the surfaces. Consequently both the phases and magnitudes of the impinging waves can be adjusted. This enhances the ability of controlling passive beamforming of the RIS, resulting in a further improvement of the received signal power at the expense of higher circuit complexity. In the family of BD-RIS, fully-connected architecture has been first proposed, in which all ports are connected to each other via impedance components, leading to a full scattering matrix [10]. To reduce the required number of impedance components while keeping the wave manipulation flexibility, group-connected architecture with a block-diagonal scattering matrix has been proposed [10], in which ports are divided into groups with each group being fully-connected. To show the benefits of group/fully-connected BD-RIS, a closed-form optimization has been proposed in [13] to maximize the received power. In addition, to find the best performance-circuit complexity trade-off, tree- and forest-connected architectures have been proposed and found to achieve the performance-complexity Pareto frontier [14], [15].

Based on the reciprocity of the impedance network, the BD-RIS can be further classified into reciprocal and non-reciprocal BD-RIS, *i.e.*, the reciprocal BD-RIS has symmetric scattering matrix and non-reciprocal BD-RIS has asymmetric scattering matrix. The reciprocal one is widely studied in existing research [1], [10], [11], [14], [16], realized by reciprocal circuits with various circuit topologies. A representative example is the group and fully-connected architectures proposed in [10]. However, non-reciprocal BD-RIS has received limited investigation in the RIS literature. The non-reciprocal impedance network in the non-reciprocal BD-RIS relaxes the symmetry constraint, resulting in potential flexibility to improve system performances and enable new applications. In

This work has been partially supported by UKRI grant EP/X040569/1, EP/Y037197/1, EP/X04047X/1, EP/Y037243/1.

Z. Liu, H. Li and B. Clerckx are with the Communications & Signal Processing (CSP) Group at the Dept. of Electrical and Electronic Engg., Imperial College London, SW7 2AZ, UK. (e-mails: {ziang.liu20, c.li21, b.clerckx}@imperial.ac.uk).

[17], a novel architecture is proposed for non-diagonal BD-RIS based on phase shifting. Additionally, [18], [19] demonstrate that reciprocity can be broken by properly customizing the coding sequence in field-programmable gate arrays (FPGAs) integrated with RIS. Non-reciprocity can also be achieved by adding non-reciprocal microwave devices, *e.g.*, isolator and circulator [12] in the BD-RIS impedance networks. These works provide a foundation for leveraging non-reciprocal BD-RIS in wireless communications. More potential applications have been envisioned in [20], such as utilizing non-reciprocal BD-RIS to enable secure information transmission by introducing interfering signals in specific directions and delivering energy to designated targets. In [21], channel reciprocity attack (CRACK) is explored, where the non-reciprocity in the BD-RIS is utilized to inherently break the reciprocity of uplink (UL) and downlink (DL) channels. Consequently, the performance of DL transmission deteriorates in time-division duplex (TDD) systems that rely on channel reciprocity.

The design of FD wireless communication system is a promising research direction due to its potential to double the communication rates. In FD systems, transceivers can transmit and receive simultaneously on the same frequency band, thereby addressing the challenge of frequency spectrum scarcity confronted by modern communication systems and enhancing the communication rates [22]. Notably, RISs inherently support FD transmission with aligned DL and UL users due to that the aligned DL and UL transmissions are reversible and RISs introduce no noise corruption [2]. These properties have motivated research on RIS-assisted in-band FD systems. In FD case, the primary difficulty lies in the signal of interest (SoI) drowning in the self interference (SI) due to the coupling between transmitter and receiver. As a result, substantial research has focused on boosting the SoI, and thus reducing the effect of SI via RISs [6], [7]. However, one challenge of the reciprocal BD-RIS and diagonal RIS is that only *aligned* DL and UL users can be optimally and simultaneously served in FD communication. This is constrained by reciprocal architecture at RIS, such that the impinging and reflected beams can each only probe at one respective direction.

Recently, [23] has theoretically analyzed in which condition both DL and UL users can simultaneously achieve the best received power of the signal of interest in a specific single-antenna FD system aided by non-reciprocal BD-RIS. Results are very promising and demonstrated the potential to serve an UL and DL user simultaneously at different directions thanks to non-reciprocal BD-RIS, which would not be possible with a reciprocal BD-RIS (and hence D-RIS). Given the flexibility and limited study of non-reciprocal BD-RIS in FD systems, we here extend those results and focus on sum-rate maximization for non-reciprocal BD-RIS in a general FD scenario with multi-antennas, multiple DL, and UL users.

Contributions and Overview of Results. In this paper, we investigate non-reciprocal BD-RIS in FD systems, comparing it to reciprocal BD-RIS and diagonal RIS. We provide a comprehensive study by considering: (1) single DL and UL users, and (2) multiple DL and UL users. Our contributions

are summarized as follows:

- We propose a non-reciprocal BD-RIS assisted FD system design. For the case of single DL and UL users, we focus on designing the scattering matrix, which demonstrates the superiority of non-reciprocal BD-RIS in FD systems in terms of DL and UL sum-rates, compared to reciprocal BD-RIS and conventional diagonal RIS. For the case of multiple DL and UL users, we design not only the scattering matrix, but also the precoder and combiner in the BS to further improve the sum-rates performances. Numerical simulations demonstrate surprising benefits of non-reciprocal BD-RIS:
 - 1) Non-reciprocal BD-RIS achieves higher DL and UL sum-rates when DL and UL users occupy different locations in both single and multiple DL and UL users cases. We attribute this benefit to the greater flexibility of non-reciprocal BD-RIS, allowing the impinging and reflected beams to probe in desired directions.
 - 2) Non-reciprocal BD-RIS achieves greater gains when considering both DL and UL transmissions, but shows smaller gains when the system design prioritizes one-sided transmission.
 - 3) Structural scattering is the specular reflection constructed by RIS when the RIS is turned OFF. It affects specific DL and UL users locations. Specifically, it degrades sum-rates when DL and UL users are aligned due to the strong interference induced by structural scattering in the DL transmission. It enhances sum-rates when UL users are positioned at the conjugate angles relative to the base station.
 - 4) The sum-rate gain of non-reciprocal BD-RIS over reciprocal BD-RIS and D-RIS increases as the number of RIS element and group size increase. We attribute this to the fact that more reconfigurable RIS elements provide higher flexibility, enabling better probing of the beam in the desired directions.
- We formulate the maximization of FD DL and UL sum-rates as a non-convex optimization problem. The constraints relate to the matrix structures characterized by symmetry, asymmetry and diagonality. We propose a general algorithm to design the precoder and combiner at the BS, and scattering matrix of the BD-RIS. To make the optimization problem tractable, we transform it using Lagrangian dual and quadratic transformations. Subsequently, block coordinate descent (BCD) framework is employed to update each block until convergence. Within the BCD, the block of scattering matrix is updated by the penalty dual decomposition (PDD) to address the unitary constraint. This optimization framework considers the maximization of both DL and UL sum-rates and provides a general solution for designing the asymmetric and symmetric matrices, making it different from other BD-RIS optimization methods.

Organization of This Paper. The paper organization is as follows. The system model is described in Section II. We briefly analyze the effect of reciprocity on the received power in Section III. In Section IV, the details of sum-rate maximization problem formulation and transformation are introduced. The proposed solution algorithm, and computational complexity

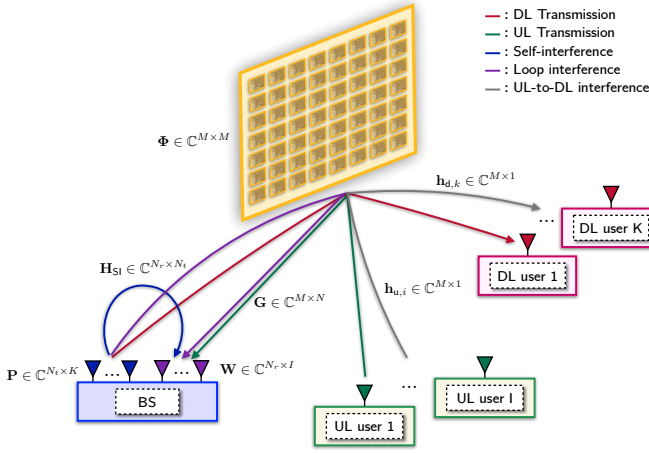


Fig. 1. BD-RIS-assisted full-duplex (FD) system model.

are provided in Section V. Section VI provides numerical evaluations, and we conclude this work in Section VII.

Notation. The set of binary elements $\{0, 1\}$, integers, real numbers, and complex numbers are respectively represented by \mathbb{B} , \mathbb{Z} , \mathbb{R} , and \mathbb{C} . Matrices, vectors and scalars are expressed by capital boldface, small boldface and normal fonts, respectively. $\text{Re}(\cdot)$ represent the real part of a complex number. We denote conjugate, transpose, conjugate-transpose, and inversion of matrix \mathbf{X} by \mathbf{X}^* , \mathbf{X}^\top , \mathbf{X}^H , and \mathbf{X}^{-1} , respectively. The element in the i^{th} row and j^{th} column in the matrix \mathbf{X} is denoted by $\mathbf{X}(i, j)$. $\text{Tr}(\cdot)$ and $\|\mathbf{X}\|_F$ denote trace operation, and Frobenius norm of matrix \mathbf{X} . \mathbf{I} and $\mathbf{0}$ represent identity matrix, and all-zero matrix. $\text{vec}(\cdot)$, $\text{diag}(\cdot)$ and $\text{blkdiag}(\cdot)$ denote the vectorization operation, diagonal matrix, and block matrix. $|\cdot|$, $\mathbb{E}(\cdot)$, $\|\cdot\|_2$, and \otimes are utilized to denote absolute value, statistical expectation, Euclidean norm, and Kronecker product.

II. SYSTEM MODEL

As depicted in Fig. 1, we consider an M -element BD-RIS-assisted FD base station (BS) equipped with N_t and N_r transmit and receive antennas, respectively. We assume that $N_t = N_r = N$ for simplicity, and all antenna arrays are uniform linear arrays (ULA) with half-wavelength spacing between adjacent antenna elements. The FD system serves half-duplex (HD) single-antenna DL users and HD UL users, simultaneously. The DL and UL users are indexed by $\mathcal{K} = \{1, \dots, K\}$ and $\mathcal{I} = \{1, \dots, I\}$, respectively. In this system, we have the following assumptions: *i*) The direct links are blocked between BS and both UL and DL users. Therefore, only links through RIS exist. More detailed modeling can be found in [23]. Note that the optimization algorithm we propose also works in cases where direct links are present. *ii*) The perfect instantaneous channel state information (CSI) is available at the BS. We use $\Phi \in \mathbb{C}^{M \times M}$ to denote the scattering matrix of BD-RIS. If we consider the group-connected BD-RIS, the group size is denoted by M_g , and the total number of groups is $G = M/M_g$. The mathematical expression of the group-connected BD-RIS is expressed as

$$\Phi = \text{blkdiag}(\Phi_1, \dots, \Phi_G). \quad (1)$$

Then the single-connected (diagonal) RIS and fully-connected BD-RIS are two extreme case with $G = M$ and $G = 1$, respectively.

In the DL direction, the FD BS first precodes the transmit symbol vector $\mathbf{s} \triangleq [s_1, \dots, s_K]^\top \in \mathbb{C}^K$, $\mathbb{E}\{\mathbf{s}\mathbf{s}^H\} = \mathbf{I}$ by the precoding matrix $\mathbf{P} \triangleq [\mathbf{p}_1, \dots, \mathbf{p}_K] \in \mathbb{C}^{N \times K}$, where $\mathbf{p}_k \in \mathbb{C}^N$ is the precoding vector for the k^{th} user. After pulse shaping and up-conversion, the signal is transmitted through the N antennas, and propagates through the BD-RIS-aided channel. Additionally, the BS will receive the interference from the UL users reflected by the BD-RIS. Finally, the received signal at the k^{th} DL user is given by¹

$$y_k = \mathbf{h}_{d,k}^\top (\Phi - \mathbf{I}) \mathbf{G} \mathbf{p}_k s_k + \mathbf{h}_{d,k}^\top (\Phi - \mathbf{I}) \mathbf{G} \sum_{j \in \mathcal{K}, j \neq k} \mathbf{p}_j s_j + \underbrace{\sqrt{P_u} \sum_{i \in \mathcal{I}} \mathbf{h}_{d,k}^\top (\Phi - \mathbf{I}) \mathbf{h}_{u,i} x_i}_{\text{Interference from UL Users}} + n_k, \quad \forall k \in \mathcal{K}, \quad (2)$$

where x_i represents the transmitted streams from the UL users to the BS, $\mathbf{h}_{d,k} \in \mathbb{C}^N$, $\mathbf{h}_{u,i} \in \mathbb{C}^N$, and $\mathbf{G} \in \mathbb{C}^{M \times N}$ denote the channel between the BD-RIS and k^{th} DL user, the channel between the BD-RIS and i^{th} UL user, and the channel between the BS and BD-RIS, respectively. We assume the transmit power of each UL user is the same and is denoted by P_u . The term $n_k \sim \mathcal{CN}(0, \sigma^2)$ represents the additive Gaussian white noise (AWGN). Note that the terms $-\mathbf{h}_{d,k}^\top \mathbf{G}$ and $-\mathbf{h}_{d,k}^\top \mathbf{h}_{u,i}$ are used to model structural scattering. It is usually ignored in most RIS literature, while it has its own physical meaning and will cause non-negligible impact on system performance [23]–[26].

In the UL direction, the signal is transmitted from the i^{th} user and reflected by the BD-RIS. The FD BS will receive self-interference (SI) due to the coupling between transmitter and receiver [22], and the loop interference due to the reflection by the BD-RIS of the transmitted signal. Finally, the signals are combined using the combiner matrix $\mathbf{W} \triangleq [\mathbf{w}_1, \dots, \mathbf{w}_I] \in \mathbb{C}^{N \times I}$. The received signal from the i^{th} UL is expressed as

$$z_i = \sqrt{P_u} \mathbf{w}_i^H \mathbf{G}^\top (\Phi - \mathbf{I}) \mathbf{h}_{u,i} x_i + \sqrt{P_u} \sum_{p \in \mathcal{I}, p \neq i} \mathbf{w}_i^H \mathbf{G}^\top (\Phi - \mathbf{I}) \mathbf{h}_{u,p} x_p + \underbrace{\mathbf{w}_i^H \mathbf{H}_{\text{SI}} \mathbf{P} \mathbf{s}}_{\text{Self-interference}} + \underbrace{\mathbf{w}_i^H \mathbf{G}^\top (\Phi - \mathbf{I}) \mathbf{G} \mathbf{P} \mathbf{s}}_{\text{Loop interference}} + \mathbf{w}_i^H \mathbf{n}_u, \quad \forall i \in \mathcal{I}, \quad (3)$$

where $\mathbf{H}_{\text{SI}} \in \mathbb{C}^{N \times N}$ denotes the SI channel, and $\mathbf{n}_u \sim \mathcal{CN}(\mathbf{0}, \sigma^2 \mathbf{I})$ represents the AWGN at the FD BS.

Define $\mathbf{h}_{d,k} \triangleq (\mathbf{h}_{d,k}^\top (\Phi - \mathbf{I}) \mathbf{G})^\top \in \mathbb{C}^{N \times 1}$, $\tilde{\mathbf{h}}_{u,i} \triangleq \mathbf{G}^\top (\Phi - \mathbf{I}) \mathbf{h}_{u,i} \in \mathbb{C}^{N \times 1}$, the signal-to-interference-plus-noise ratio (SINR) for the k^{th} DL user and SINR at the FD BS from the i^{th} UL user is calculated as

$$\gamma_{d,k} = \frac{|\tilde{\mathbf{h}}_{d,k}^\top \mathbf{p}_k|^2}{I_d(\mathbf{P}, \Phi) + \sigma^2}, \quad (4)$$

$$\gamma_{u,i} = \frac{P_u |\mathbf{w}_i^H \tilde{\mathbf{h}}_{u,i}|^2}{I_u(\mathbf{W}, \mathbf{P}, \Phi) + \|\mathbf{w}_i\|_F^2 \sigma^2}, \quad (5)$$

¹Since we utilize the DL and UL channel reciprocity in the FD system, we use transpose $(\cdot)^\top$ instead of Hermitian $(\cdot)^H$ in the channel related expressions to have a more accurate modeling of the channel reciprocity.

where the interference term of the DL and UL transmissions are expressed by

$$I_d(\mathbf{P}, \Phi) = \sum_{j \in \mathcal{K}, j \neq k} \left| \tilde{\mathbf{h}}_{d,k}^\top \mathbf{p}_j \right|^2 + P_u \sum_{i \in \mathcal{I}} \left| \mathbf{h}_{d,k}^\top (\Phi - \mathbf{I}) \mathbf{h}_{u,i} \right|^2 \quad (6)$$

$$I_u(\mathbf{W}, \mathbf{P}, \Phi) = P_u \sum_{p \in \mathcal{I}, p \neq i} \left| \mathbf{w}_i^H \tilde{\mathbf{h}}_{u,p} \right|^2 + \sum_{k \in \mathcal{K}} \left| \mathbf{w}_i^H \mathbf{H}_{S1} \mathbf{p}_k + \mathbf{w}_i^H \mathbf{G}^\top (\Phi - \mathbf{I}) \mathbf{G} \mathbf{p}_k \right|^2. \quad (7)$$

III. ANALYSIS OF THE RIS RECIPROCITY

As shown in the SINRs expression for the DL user (4) and UL user (5), the SINRs are mainly affected by the received power term in the numerator and the interference terms in the denominator. To show how the RIS reciprocity affects the system performance, we consider a simple scenario where the RIS-assisted FD system serves one DL user and one UL user. Inspired by [10], we focus on simultaneously maximizing the received power of the signal of interest at both sides of DL user and BS.

Starting from maximizing the UL received power, the UL received power of the signal of interest is determined by the channel strength, which is given by

$$\eta_u = |\mathbf{g}^\top (\Phi - \mathbf{I}) \mathbf{h}_{u,i}|^2. \quad (8)$$

We apply the triangle inequality, which leads to

$$|\mathbf{g}^\top (\Phi - \mathbf{I}) \mathbf{h}_{u,i}| \leq |\mathbf{g}^\top \Phi \mathbf{h}_{u,i}| + |\mathbf{g}^\top \mathbf{h}_{u,i}|. \quad (9)$$

Subsequently, we apply the Cauchy-Schwarz inequality and the unitary condition $\Phi^H \Phi = \mathbf{I}$ [10] to scale (9). Therefore, the upper bound of η_u is given by

$$|\mathbf{g}^\top (\Phi - \mathbf{I}) \mathbf{h}_{u,i}|^2 \leq (\|\mathbf{g}\|_2 \|\mathbf{h}_{u,i}\|_2 + |\mathbf{g}^\top \mathbf{h}_{u,i}|)^2. \quad (10)$$

The equality holds true when

$$\beta_u \frac{\mathbf{g}^*}{\|\mathbf{g}\|_2} = \Phi \frac{\mathbf{h}_{u,i}}{\|\mathbf{h}_{u,i}\|_2}, \quad (11)$$

where $\beta_u = e^{j\angle(-\mathbf{g}^\top \mathbf{h}_{u,i})}$.

In the DL side, the DL received power is also determined by channel strength, which is given by

$$\eta_d = |\mathbf{h}_{d,k}^\top (\Phi - \mathbf{I}) \mathbf{g}|^2. \quad (12)$$

We subsequently apply the triangular and Cauchy-Schwarz inequalities to find the upper bound of η_d , expressed as

$$|\mathbf{h}_{d,k}^\top (\Phi - \mathbf{I}) \mathbf{g}|^2 \leq (\|\mathbf{h}_{d,k}\|_2 \|\mathbf{g}\|_2 + |\mathbf{h}_{d,k}^\top \mathbf{g}|)^2, \quad (13)$$

where the equality holds true if and only if

$$\beta_d \frac{\mathbf{h}_{d,k}^*}{\|\mathbf{h}_{d,k}\|_2} = \Phi \frac{\mathbf{g}}{\|\mathbf{g}\|_2}, \quad (14)$$

and $\beta_d = e^{j\angle(-\mathbf{h}_{d,k}^\top \mathbf{g})}$.

To simultaneously maximize both the DL and UL received power, the optimal solution for Φ should satisfy both (11) and (14). To investigate reciprocity in the BD-RIS, we rewrite η_d

by taking the transpose, such that $|\mathbf{g}^\top (\Phi^\top - \mathbf{I}) \mathbf{h}_{d,k}|^2$, resulting in the equality condition

$$\beta_d \frac{\mathbf{g}^*}{\|\mathbf{g}\|_2} = \Phi^\top \frac{\mathbf{h}_{d,k}}{\|\mathbf{h}_{d,k}\|_2}. \quad (15)$$

For reciprocal BD-RIS, since $\Phi = \Phi^\top$, the equalities (11) and (15) for maximizing both DL and UL power can be satisfied when $\mathbf{h}_{d,k}/\|\mathbf{h}_{d,k}\|_2 = \mathbf{h}_{u,i}/\|\mathbf{h}_{u,i}\|_2$, and $\beta_d = \beta_u$. This condition only occurs when the DL and UL users are aligned, meaning that reciprocal BD-RIS cannot support simultaneous DL and UL transmission for not aligned DL and UL users. In contrast, non-reciprocal BD-RIS does not impose a symmetry constraint, *i.e.*, $\Phi \neq \Phi^\top$, thereby providing greater freedom in the solution space to maximize both DL and UL received power, which has been theoretically proven in [23]. Inspired this result, in the following sections, we focus on a more complex and general scenario with multiple DL and UL users, formulate a sum-rate maximization problem and solve it, and check if the benefits of non-reciprocal BD-RIS still exist.

IV. PROBLEM FORMULATION AND TRANSFORMATION

In this section, we formulate the optimization problem for maximizing the DL and UL sum-rates in the FD system. We then address the non-convexity of the formulated problem. Due to the intractability of the fractional structure within the $\log(\cdot)$ function, we apply the Lagrangian dual transform to separate this term from the $\log(\cdot)$ function. Next, we employ the quadratic transform to further transform the fractional components into integral expressions [27], [28]. The details of the problem formulation and transformation are provided below.

A. Problem Formulation

Our objective is to maximize the DL and UL sum rates in this RIS-aided FD system. To achieve this, we formulate a sum-rate maximization problem and optimize the precoder matrix \mathbf{P} , the receive combiner matrix \mathbf{W} , and the RIS scattering matrix Φ . The weighted DL and UL sum-rates are given by

$$f_o(\mathbf{P}, \mathbf{W}, \Phi) \triangleq \alpha_d \sum_{k \in \mathcal{K}} \log_2(1 + \gamma_{d,k}) + \alpha_u \sum_{i \in \mathcal{I}} \log_2(1 + \gamma_{u,i}), \quad (16)$$

where α_d and α_u are the priority of DL and UL communications, and $\alpha_d + \alpha_u = 1$. The optimization problem is then formulated as

$$\mathcal{P}1: \max_{\mathbf{P}, \mathbf{W}, \Phi} f_o(\mathbf{P}, \mathbf{W}, \Phi) \quad (17a)$$

$$\text{s.t.} \quad \|\mathbf{P}\|_F^2 \leq P_d, \quad (17b)$$

$$\|\mathbf{W}\|_F^2 = 1, \quad (17c)$$

$$\Phi \in \mathcal{R}_i, \quad \forall i \in \{1, 2\}, \quad (17d)$$

$$\Phi \in \mathcal{S}_\ell, \quad \forall \ell \in \{1, 2, 3\}. \quad (17e)$$

Constraint (17b) and (17c) limit the total transmit and receive power of the FD BS, respectively, with P_d representing the power budget at the transmit side. Constraint (17d) guarantees the scattering matrix is symmetric for reciprocal BD-RIS, *i.e.*, $\Phi \in \mathcal{R}_1 = \{\Phi | \Phi = \Phi^\top\}$ and asymmetric

for non-reciprocal BD-RIS, *i.e.*, $\Phi \in \mathcal{R}_2 = \{\Phi | \Phi \neq \Phi^\top\}$. Constraint (17e) ensures losslessness in the multi-port network [10], [12], such that Φ is constrained by: *i)* $\mathcal{S}_1 = \{\Phi = \text{diag}(\phi_1, \dots, \phi_M) | |\phi_m| = 1, \forall m \in \mathcal{M}\}$ for the single-connected (diagonal) RIS, *ii)* $\mathcal{S}_2 = \{\Phi = \text{blkdiag}(\Phi_1, \dots, \Phi_G) | \Phi_g^H \Phi_g = \mathbf{I}, \forall g \in \mathcal{G}\}$ for the group-connected BD-RIS, and *iii)* $\mathcal{S}_3 = \{\Phi | \Phi^H \Phi = \mathbf{I}\}$ for the fully-connected BD-RIS. Problem $\mathcal{P}1$ includes an intractable $\log(\cdot)$ term and a fractional structure in the objective function, along with non-convex constraints. These conditions result in difficulty in a direct solution. To address this difficulty, we use a fractional programming-based method [27], [28] to make $\mathcal{P}1$ more tractable and subsequently solve it using an iterative method.

B. Problem Transformation

Lagrangian Dual Transformation. Since the fractional term is challenging to tackle with, we separate it out of the $\log(\cdot)$ from the objective function (17a) by Lagrangian dual transformation [27], [28]. This introduces a summation over a new fractional term. The transformed function is given by

$$f_l(\mathbf{P}, \mathbf{W}, \Phi, \boldsymbol{\nu}) = \alpha_d \sum_{k \in \mathcal{K}} \left(\log_2(1 + \iota_{d,k}) - \iota_{d,k} + \frac{(1 + \iota_{d,k}) |\tilde{\mathbf{h}}_{d,k}^\top \mathbf{p}_k|^2}{\Gamma_d + \sigma^2} \right) + \alpha_u \sum_{i \in \mathcal{I}} \left(\log_2(1 + \iota_{u,i}) - \iota_{u,i} + \frac{(1 + \iota_{u,i}) P_u |\mathbf{w}_i^H \tilde{\mathbf{h}}_{u,i}|^2}{\Gamma_u + \|\mathbf{w}_i\|_F^2 \sigma^2} \right), \quad (18)$$

where $\boldsymbol{\nu} \triangleq [\boldsymbol{\nu}_d^\top, \boldsymbol{\nu}_u^\top]^\top = [\iota_{d,1}, \dots, \iota_{d,K}, \iota_{u,1}, \dots, \iota_{u,I}]^\top \in \mathbb{R}^{K+I}$ is the auxiliary vector. Γ_d and Γ_u are defined by

$$\Gamma_d = I_d(\mathbf{P}, \Phi) + |\tilde{\mathbf{h}}_{d,k}^\top \mathbf{p}_k|^2, \quad (19)$$

$$\Gamma_u = I_u(\mathbf{W}, \mathbf{P}, \Phi) + P_u |\mathbf{w}_i^H \tilde{\mathbf{h}}_{u,i}|^2. \quad (20)$$

Quadratic Transformation. The fractional term is still not tractable, thus we utilize quadratic transformation [27], [28] to transform these components to integral expressions. The reformulated objective function is expressed as

$$f_\tau(\mathbf{P}, \mathbf{W}, \Phi, \boldsymbol{\nu}, \boldsymbol{\tau}) = \alpha_d \sum_{k \in \mathcal{K}} \left(\log_2(1 + \iota_{d,k}) - \iota_{d,k} + 2\sqrt{1 + \iota_{d,k}} \text{Re}\{\tau_{d,k}^* \tilde{\mathbf{h}}_{d,k}^\top \mathbf{p}_k\} - |\tau_{d,k}|^2 (\Gamma_d + \sigma^2) \right) + \alpha_u \sum_{i \in \mathcal{I}} \left(\log_2(1 + \iota_{u,i}) - \iota_{u,i} + 2\sqrt{1 + \iota_{u,i}} \sqrt{P_u} \text{Re}\{\tau_{u,i}^* \mathbf{w}_i^H \tilde{\mathbf{h}}_{u,i}\} - |\tau_{u,i}|^2 (\Gamma_u + \|\mathbf{w}_i\|_F^2 \sigma^2) \right), \quad (21)$$

where $\boldsymbol{\tau} \triangleq [\boldsymbol{\tau}_d^\top, \boldsymbol{\tau}_u^\top]^\top = [\tau_1, \dots, \tau_{d,K}, \tau_1, \dots, \tau_{u,I}]^\top \in \mathbb{R}^{K+I}$ is another introduced auxiliary vector.

Algorithm 1: Proposed Algorithm for FD DL and UL Sum-rates Design

Input: $\mathbf{H}_d, \mathbf{H}_u, \mathbf{H}_{S1}, \mathbf{G}$.

Output: $\Phi^{\text{opt}}, \mathbf{P}^{\text{opt}}, \mathbf{W}^{\text{opt}}$.

- 1 Initialize $\Phi, \mathbf{P}, \mathbf{W}, t = 1$.
 - 2 **while** no convergence of objective function (22a) & $t < t_{\max}$ **do**
 - 3 Update ι_d^{opt} and ι_u^{opt} by (23) and (24), respectively.
 - 4 Update τ_d^{opt} and τ_u^{opt} by (25) and (26), respectively.
 - 5 Update \mathbf{P}^{opt} by (30).
 - 6 Update \mathbf{W}^{opt} by (33).
 - 7 Update Φ^{opt} by Algorithm 2.
 - 8 $t = t + 1$.
 - 9 **end**
 - 10 Return $\Phi^{\text{opt}}, \mathbf{P}^{\text{opt}}, \mathbf{W}^{\text{opt}}$.
-

After the above transformations, the original problem $\mathcal{P}1$ is reformulated to

$$\mathcal{P}2: \max_{\Phi, \mathbf{P}, \mathbf{W}, \boldsymbol{\nu}, \boldsymbol{\tau}} f_\tau(\mathbf{P}, \mathbf{W}, \Phi, \boldsymbol{\nu}, \boldsymbol{\tau}) \quad (22a)$$

$$\text{s.t.} \quad \|\mathbf{P}\|_F^2 \leq P_d, \quad (22b)$$

$$\|\mathbf{W}\|_F^2 = 1, \quad (22c)$$

$$\Phi \in \mathcal{S}_\ell, \quad \forall \ell \in \{1, 2, 3\}. \quad (22d)$$

V. SOLUTION TO DL AND UL SUM-RATE MAXIMIZATION

To tackle with the unitary constraint in the optimization problem, we transform the problem based on PDD method. To solve this reformulated multi-variable problem, we adopt the BCD framework [16] to iteratively update each variable until the objective function converges. The details of the algorithm are given below. The transformed problem, $\mathcal{P}2$, is a typical multi-variable problem, which can be efficiently solved by the BCD iterative algorithms [29]. Specifically, we first initialize the optimization variables (*i.e.*, $\mathbf{P}, \mathbf{W}, \Phi$), then each variable is updated while keeping the others fixed until convergence. The proposed design algorithm is summarized in Algorithm 1. To make the expressions compact, we denote all the DL and UL individual channels by $\mathbf{H}_d \triangleq [\mathbf{h}_{d,1}, \dots, \mathbf{h}_{d,K}] \in \mathbb{C}^{M \times K}$, $\mathbf{H}_u \triangleq [\mathbf{h}_{u,1}, \dots, \mathbf{h}_{u,I}] \in \mathbb{C}^{M \times I}$, respectively. In the following subsections, we will provide the details of decomposition of $\mathcal{P}1$ to several sub-problems. Additionally, the derivations of the optimal solution of each block are given.

Auxiliary Vectors: Block $\boldsymbol{\nu}$. When $\mathbf{P}, \mathbf{W}, \Phi, \boldsymbol{\tau}$ are all fixed, the two separate sub-problems with regards to ι_d and ι_u are both convex and unconstrained. Thus, we can obtain the optimal by taking the derivatives with respect to (w.r.t) these two variables and setting to $\mathbf{0}$, *i.e.*, $\frac{\partial f_\tau(\mathbf{P}, \mathbf{W}, \Phi, \boldsymbol{\nu}, \boldsymbol{\tau})}{\partial \iota_d} = \mathbf{0}$, or $\frac{\partial f_\tau(\mathbf{P}, \mathbf{W}, \Phi, \boldsymbol{\nu}, \boldsymbol{\tau})}{\partial \iota_u} = \mathbf{0}$. Therefore, the optimal ι_d^{opt} and ι_u^{opt} are given by

$$\iota_{d,k}^{\text{opt}} = \gamma_{d,k} = \frac{|\tilde{\mathbf{h}}_{d,k}^\top \mathbf{p}_k|^2}{I_d(\mathbf{P}, \Phi) + \sigma^2}, \quad \forall k \in \mathcal{K}, \quad (23)$$

$$\iota_{u,i}^{\text{opt}} = \gamma_{u,i} = \frac{P_u |\mathbf{w}_i^H \tilde{\mathbf{h}}_{u,i}|^2}{I_u(\mathbf{W}, \mathbf{P}, \Phi) + \|\mathbf{w}_i\|_F^2 \sigma_k^2}, \quad \forall i \in \mathcal{I}. \quad (24)$$

Auxiliary Vectors: Block τ . Similar to the update process of blocks ι , the two sub problems are unconstrained convex optimization under the fixed $\mathbf{P}, \mathbf{W}, \Phi, \iota$. As a result, the optimal $\tau_{d,k}^{\text{opt}}$ and $\tau_{u,i}^{\text{opt}}$ are obtained by $\frac{\partial f_\tau(\mathbf{P}, \mathbf{W}, \Phi, \iota, \tau)}{\partial \tau_d} = \mathbf{0}$, or $\frac{\partial f_\tau(\mathbf{P}, \mathbf{W}, \Phi, \iota, \tau)}{\partial \tau_u} = \mathbf{0}$. The expressions are given by

$$\tau_{d,k}^{\text{opt}} = \frac{\sqrt{1 + \iota_{d,k}} \tilde{\mathbf{h}}_{d,k}^\top \mathbf{p}_k}{\Gamma_d + \sigma^2}, \quad (25)$$

$$\tau_{u,i}^{\text{opt}} = \frac{\sqrt{(1 + \iota_{u,i})} \sqrt{P_u} \mathbf{w}_i^H \tilde{\mathbf{h}}_{u,i}}{\Gamma_u + \|\mathbf{w}_i\|_F^2 \sigma^2}. \quad (26)$$

Transmit Precoder: Block \mathbf{P} . Under the condition that \mathbf{W}, Φ, ι , and τ are all fixed, we extract the terms related to \mathbf{P} , which are expressed by

$$\begin{aligned} f_\tau(\mathbf{P}) &= \alpha_d \sum_{k \in \mathcal{K}} \left(2\sqrt{1 + \iota_{d,k}} \text{Re} \left\{ \tau_{d,k}^* \tilde{\mathbf{h}}_{d,k}^\top \mathbf{p}_k \right\} \right. \\ &\quad \left. - \mathbf{p}_k^H \left(\sum_{p \in \mathcal{K}} |\tau_{d,p}|^2 \tilde{\mathbf{h}}_{d,p}^* \tilde{\mathbf{h}}_{d,p}^\top \right) \mathbf{p}_k \right) - \alpha_u \left(\sum_{i \in \mathcal{I}} |\tau_{u,i}|^2 \right. \\ &\quad \left. \sum_{k \in \mathcal{K}} |\mathbf{w}_i^H \mathbf{H}_{\text{SI}} \mathbf{p}_k + \mathbf{w}_i^H \mathbf{G}^\top (\Phi - \mathbf{I}) \mathbf{G} \mathbf{p}_k|^2 \right). \end{aligned} \quad (27)$$

The sub-problem w.r.t \mathbf{P} is given by

$$\mathcal{P}3: \max_{\mathbf{P}} f_\tau(\mathbf{P}) \quad (28a)$$

$$\text{s.t.} \quad \|\mathbf{P}\|_F^2 \leq P_d. \quad (28b)$$

Since the objective function (28a) and constraint (28b) are all convex, the Lagrange multiplier method based on Karush–Kuhn–Tucker (KKT) condition can be used to obtain the optimum. The expression with an introduced multiplier μ is given below

$$\mathcal{P}4: \max_{\mathbf{P}} f_\tau(\mathbf{P}) - \mu (\|\mathbf{P}\|_F^2 - P_d). \quad (29a)$$

Subsequently, we take the partial derivative of the Lagrangian function with regard to \mathbf{P} and μ , respectively, and set both to $\mathbf{0}$. We can obtain the optimal solution of each precoder \mathbf{p}_k :

$$\begin{aligned} \mathbf{p}_k^{\text{opt}} &= \left(\alpha_d \sum_{p \in \mathcal{K}} |\tau_{d,p}|^2 \tilde{\mathbf{h}}_{d,p}^* \tilde{\mathbf{h}}_{d,p}^\top + \alpha_u \left(\sum_{i \in \mathcal{I}} |\tau_{u,i}|^2 ((\mathbf{H}_{\text{SI}}^H \mathbf{w}_i \mathbf{w}_i^H \mathbf{H}_{\text{SI}}) \right. \right. \\ &\quad \left. \left. + 2 \text{Re} \{ \mathbf{H}_{\text{SI}}^H \mathbf{w}_i \mathbf{w}_i^H \mathbf{G}^\top (\Phi - \mathbf{I}) \mathbf{G} \} \right. \right. \\ &\quad \left. \left. + \mathbf{G}^H (\Phi - \mathbf{I})^H \mathbf{G}^* \mathbf{w}_i \mathbf{w}_i^H \mathbf{G}^\top (\Phi - \mathbf{I}) \mathbf{G} \right) + \mu^{\text{opt}} \mathbf{I} \right)^{-1} \\ &\quad \alpha_d \sqrt{1 + \iota_{d,k}} \tau_{d,k} \tilde{\mathbf{h}}_{d,k}^*, \quad k \in \mathcal{K}, \end{aligned} \quad (30)$$

where μ^{opt} can be obtained through the bisection search.

Receive Combiner: Block \mathbf{W} . With determined \mathbf{P}, Φ, ι , and τ , we extract the components w.r.t \mathbf{W} in (21):

$$\begin{aligned} f_\tau(\mathbf{W}) &= \alpha_u \sum_{i \in \mathcal{I}} \left(2\sqrt{1 + \iota_{u,i}} \sqrt{P_u} \text{Re} \left\{ \tau_{u,i}^* \mathbf{w}_i^H \tilde{\mathbf{h}}_{u,i} \right\} \right. \\ &\quad \left. - |\tau_{u,i}|^2 \left(P_u \sum_{p \in \mathcal{I}} |\mathbf{w}_i^H \tilde{\mathbf{h}}_{u,p}|^2 + \sum_{k \in \mathcal{K}} |\mathbf{w}_i^H \mathbf{H}_{\text{SI}} \mathbf{p}_k \right. \right. \\ &\quad \left. \left. + \mathbf{w}_i^H \mathbf{G}^\top (\Phi - \mathbf{I}) \mathbf{G} \mathbf{p}_k|^2 + \|\mathbf{w}_i\|^2 \sigma^2 \right) \right). \end{aligned} \quad (31)$$

The sub-problem is thus given by

$$\mathcal{P}5: \max_{\mathbf{W}} f_\tau(\mathbf{W}) \quad (32a)$$

$$\text{s.t.} \quad \|\mathbf{W}\|_F^2 = 1. \quad (32b)$$

Although the constraint (32b) is non-convex, we first address this sub-problem as an unconstrained complex optimization problem w.r.t \mathbf{W} . Once the algorithm converges, we normalize the obtained solution. The optimal solution of each combiner \mathbf{w}_i is obtained by setting $\frac{\partial f_\tau(\mathbf{W})}{\partial \mathbf{w}_i} = \mathbf{0}$:

$$\mathbf{w}_i^{\text{opt}} = \left(\alpha_u |\tau_{u,i}|^2 \zeta \right)^{-1} \left(\alpha_u \sqrt{1 + \iota_{u,i}} \sqrt{P_u} \tau_{u,i}^* \tilde{\mathbf{h}}_{u,i} \right), \quad (33)$$

where ζ is given by

$$\begin{aligned} \zeta &= P_u \sum_{p \in \mathcal{I}} \tilde{\mathbf{h}}_{u,i} \tilde{\mathbf{h}}_{u,i}^H + \mathbf{H}_{\text{SI}} \sum_{k \in \mathcal{K}} \mathbf{p}_k \mathbf{p}_k^H \mathbf{H}_{\text{SI}}^H \\ &\quad + \mathbf{G}^\top (\Phi - \mathbf{I}) \mathbf{G} \sum_{k \in \mathcal{K}} \mathbf{p}_k \mathbf{p}_k^H \mathbf{G}^H (\Phi - \mathbf{I})^H \mathbf{G}^* \\ &\quad + 2 \text{Re} \left\{ \mathbf{G}^\top (\Phi - \mathbf{I}) \mathbf{G} \sum_{k \in \mathcal{K}} \mathbf{p}_k \mathbf{p}_k^H \mathbf{H}_{\text{SI}} \right\} + \sigma^2. \end{aligned} \quad (34)$$

Finally, \mathbf{W} is normalized (*i.e.*, $\mathbf{W}/\|\mathbf{W}\|_F$) to satisfy the receiver side power constraint.

BD-RIS Scattering Matrix: Φ . With the given $\mathbf{P}, \mathbf{W}, \iota, \tau$, we extract the terms w.r.t Φ given by

$$\begin{aligned} f_\tau(\Phi) &= \alpha_d \sum_{k \in \mathcal{K}} 2\sqrt{1 + \iota_{d,k}} \text{Re} \left\{ \tau_{d,k}^* \tilde{\mathbf{h}}_{d,k}^\top \Phi \mathbf{p}_k \right\} \\ &\quad + \alpha_u \sqrt{P_u} \sum_{i \in \mathcal{I}} 2\sqrt{1 + \iota_{u,i}} \text{Re} \left\{ \tau_{u,i}^* \mathbf{w}_i^H \mathbf{G}^\top \Phi \mathbf{h}_{u,i} \right\} \\ &\quad - \alpha_d \sum_{k \in \mathcal{K}} |\tau_{d,k}|^2 \left(\sum_{j \in \mathcal{K}} |\tilde{\mathbf{h}}_{d,k}^\top \mathbf{p}_j|^2 + P_u \sum_{i \in \mathcal{I}} |\mathbf{h}_{d,k}^\top (\Phi - \mathbf{I}) \mathbf{h}_{u,i}|^2 \right) \\ &\quad - \alpha_u \sum_{i \in \mathcal{I}} |\tau_{u,i}|^2 \left(P_u \sum_{p \in \mathcal{I}} |\mathbf{w}_i^H \tilde{\mathbf{h}}_{u,p}|^2 + \sum_{k \in \mathcal{K}} |\mathbf{w}_i^H \mathbf{H}_{\text{SI}} \mathbf{p}_k \right. \\ &\quad \left. + \mathbf{w}_i^H \mathbf{G}^\top (\Phi - \mathbf{I}) \mathbf{G} \mathbf{p}_k|^2 \right) \\ &= 2\alpha_d \text{Re} \{ \text{Tr}(\mathbf{C}_1 \Phi) \} + 2\alpha_u \sqrt{P_u} \text{Re} \{ \text{Tr}(\mathbf{C}_2 \Phi) \} \\ &\quad - \alpha_d \text{Tr}(\mathbf{B}_1 \Phi \mathbf{A}_1 \Phi^H) + 2\alpha_d \text{Re} \{ \text{Tr}(\mathbf{F}_1 \Phi) \} \\ &\quad - \alpha_d P_u \text{Tr}(\mathbf{B}_1 \Phi \mathbf{B}_2 \Phi^H) + 2\alpha_d P_u \text{Re} \{ \text{Tr}(\mathbf{J}_1 \Phi) \} \\ &\quad - \alpha_u P_u \text{Tr}(\mathbf{B}_2 \Phi \mathbf{A}_2 \Phi^H) + 2\alpha_u P_u \text{Re} \{ \text{Tr}(\mathbf{F}_2 \Phi) \} \\ &\quad - \alpha_u \text{Tr}(\mathbf{A}_2 \Phi \mathbf{A}_1 \Phi^H) + 2\alpha_u \text{Re} \{ \text{Tr}(\mathbf{J}_2 \Phi) \} \\ &\quad - 2\alpha_u \text{Re} \{ \text{Tr}(\mathbf{D} \Phi) \}, \end{aligned} \quad (35)$$

TABLE I
NEWLY INTRODUCED NOTATIONS

$\mathbf{A}_1 = \sum_{j \in \mathcal{K}} \mathbf{G} \mathbf{p}_j \mathbf{p}_j^H \mathbf{G}^H$	$\mathbf{F}_1 = \mathbf{A}_1 \mathbf{I} \mathbf{B}_1$
$\mathbf{A}_2 = \sum_{i \in \mathcal{I}} \tau_{u,i} ^2 \mathbf{G}^* \mathbf{w}_i \mathbf{w}_i^H \mathbf{G}^T$	$\mathbf{F}_2 = \mathbf{A}_2 \mathbf{I} \mathbf{B}_2$
$\mathbf{B}_1 = \sum_{k \in \mathcal{K}} \tau_{d,k} ^2 \mathbf{h}_{d,k}^* \mathbf{h}_{d,k}^T$	$\mathbf{J}_1 = \mathbf{B}_2 \mathbf{I} \mathbf{B}_1$
$\mathbf{B}_2 = \sum_{p \in \mathcal{I}} \mathbf{h}_{u,p} \mathbf{h}_{u,p}^H$	$\mathbf{J}_2 = \mathbf{A}_1 \mathbf{I} \mathbf{A}_2$
$\mathbf{C}_1 = \sum_{k \in \mathcal{K}} \sqrt{1 + \tau_{d,k} \tau_{d,k}^*} \mathbf{G} \mathbf{p}_k \mathbf{h}_{d,k}^T$	$\mathbf{C}_2 = \sum_{i \in \mathcal{I}} \sqrt{1 + \tau_{u,i} \tau_{u,i}^*} \mathbf{h}_{u,i} \mathbf{w}_i^H \mathbf{G}^T$
$\mathbf{D} = \mathbf{G} \sum_{j \in \mathcal{K}} \mathbf{p}_j \mathbf{p}_j^H \mathbf{H}_{S1}^H \sum_{i \in \mathcal{I}} \tau_{u,i} ^2 \mathbf{w}_i \mathbf{w}_i^H \mathbf{G}^T$	

Algorithm 2: PDD Algorithm for Updating BD-RIS Scattering Matrix Φ

Input: $\mathbf{P}, \mathbf{W}, \ell, \tau, \mathbf{H}_d, \mathbf{H}_u, \mathbf{H}_{S1}, \mathbf{G}$.
Output: Φ^{opt} .

- 1 Initialize $\{\Phi_g\}, \{\Psi_g\}, \{\Lambda_g\}, \rho, t_{\text{inner}} = t_{\text{outer}} = 1$.
- 2 **for** $g \leftarrow 1$ **to** G **do**
- 3 **while** $\|\Phi_g - \Psi_g\|_\infty > \varepsilon$ & $t_{\text{outer}} < t_{\text{outer max}}$ **do**
- 4 **while** no convergence of objective function (39a) & $t_{\text{inner}} < t_{\text{inner max}}$ **do**
- 5 Update Φ_g by (49).
- 6 Update Ψ_g by (51).
- 7 $t_{\text{inner}} = t_{\text{inner}} + 1$.
- 8 **end**
- 9 **if** $\|\Phi_g - \Psi_g\|_\infty < \epsilon$ **then**
- 10 $\Lambda_g = \Lambda_g + \rho^{-1}(\Phi_g - \Psi_g)$.
- 11 **else**
- 12 $\rho = c\rho$.
- 13 **end**
- 14 $t_{\text{outer}} = t_{\text{outer}} + 1$.
- 15 **end**
- 16 **end**
- 17 **return** $\Phi^{\text{opt}} = \text{blkdiag}(\Phi_1^{\text{opt}}, \dots, \Phi_G^{\text{opt}})$.

where the fresh notations above are defined as in the Table I. Since the group-connected BD-RIS includes single- and fully-connected BD-RIS as special cases, we focus on the following general sub-problem w.r.t Φ , which is formulated as

$$\mathcal{P6} : \max_{\Phi} f_\tau(\Phi) \quad (36a)$$

$$\text{s.t. } \Phi \in \mathcal{S}_2, \quad (36b)$$

$$\Phi \in \mathcal{R}_i, \forall i \in \{1, 2\}. \quad (36c)$$

Subsequently, we provide a general solution to design the scattering matrix, Φ , for non-reciprocal and reciprocal BD-RISs. In the following subsections, we will separately tackle the two difficult constraints: the self-orthogonality (unitary) constraint in (36b) and the symmetry constraint in (36c).

A. PDD Method to Decouple (36b) and (36c)

Inspired by research adopting the PDD method [30], [31], we adopt it to decouple constraints (36b) and (36c). Specifically, the PDD method is a two-loop iterative algorithm [30], where the inner loop solves the augmented Lagrangian problem using the BCD method. In our case, each $\Phi_g, \forall g \in \mathcal{G}$ is designed by iteration. In each iteration, with the fixed Λ_g and ρ , the PDD framework alternately updates the Φ_g and Ψ_g

until the minimization of the objective function. In the outer loop, the PDD framework selectively updates $\{\Lambda_g\}$ and ρ until convergence (i.e., $\|\Phi - \Psi\|_\infty \leq \varepsilon$). The PDD algorithm for updating Φ is summarized in Algorithm 2. Specifically, we introduce a copy $\{\Psi_g\}$ of $\{\Phi_g\}$ with an equality constraint $\Psi_g = \Phi_g, \forall g \in \mathcal{G}$. The reformulated problem is given by

$$\mathcal{P7} : \max_{\Phi, \Psi} f_\tau(\Phi) \quad (37a)$$

$$\text{s.t. } \Psi_g^H \Psi_g = \mathbf{I}, \quad \forall g \in \mathcal{G}, \quad (37b)$$

$$\Phi_g = \Psi_g, \quad \forall g \in \mathcal{G}, \quad (37c)$$

$$(36c).$$

Subsequently, the PDD framework [30] is adopted and we formulate the augmented Lagrangian function by penalizing the equality constraint (37c), expressed by

$$L(\{\Phi_g\}, \{\Psi_g\}, \{\Lambda_g\}, \rho) = -f_\tau(\Phi) + \frac{1}{2\rho} \sum_{g \in \mathcal{G}} \|\Phi_g - \Psi_g\|^2 + \sum_{g \in \mathcal{G}} \text{Re}\{\text{Tr}(\Lambda_g^H (\Phi_g - \Psi_g))\}, \quad (38)$$

where $\Lambda_g \in \mathbb{C}^{M \times M}, \forall g \in \mathcal{G}$, and $1/\rho$ are the Lagrangian dual variable and penalty coefficient in the PDD framework, respectively. Thus, $\mathcal{P7}$ is reformulated as

$$\mathcal{P8} : \min_{\Phi, \Psi} L(\{\Phi_g\}, \{\Psi_g\}, \{\Lambda_g\}, \rho) \quad (39a)$$

$$\text{s.t. } (36c), (37b).$$

The following sections explain the details for updating the inner and outer loops in the PDD method.

B. Inner Loop

In this section, we first explain the linear reformulation of the symmetry constraint. Based on this, the detailed update process is then provided.

1) *Linear Reformulation of Symmetry Constraint:* The main idea of addressing symmetry constraint is to design the necessary elements in the matrix: *i*) all elements of Φ_g for non-reciprocal BD-RIS, and *ii*) the diagonal and lower-triangular elements of Φ_g for reciprocal BD-RIS. We extract these required elements and store them in a vector φ_g in a column-by-column order. To recover $\phi_g = \text{vec}(\Phi_g)$ from φ_g , a permutation matrix is introduced. The permutation process is represented by

$$\phi_g \triangleq \text{vec}(\Phi_g) = \mathbf{K}_g \varphi_g, \quad \forall g \in \mathcal{G}. \quad (40)$$

The permutation matrix \mathbf{K}_g has different forms for the two cases:

i) non-reciprocal BD-RIS: $\mathbf{K}_g \in \mathbb{B}^{M_g^2 \times M_g^2}$ and $\mathbf{K}_g = \mathbf{I}$,

ii) reciprocal BD-RIS: $\mathbf{K}_g \in \mathbb{B}^{M_g^2 \times \frac{M_g(M_g+1)}{2}}$, and

$$\mathbf{K}_g(i, j) = \begin{cases} 1, & \text{if } \{i = (p-1)M_g + q \text{ or } (q-1)M_g + p\}, \text{ and} \\ & j = \frac{(q-1)(2M_g - q + 2)}{2} + (p - q + 1) \\ 0, & \text{otherwise,} \end{cases} \quad (41)$$

where p and q are the row and column indices of the diagonal and lower-triangular elements in Φ_g , *i.e.*, $\Phi_g(p, g)$ with $1 \leq p \leq M_g$ and $1 \leq q \leq p$.

To map the group vector ϕ_g to its corresponding position in the ϕ , we introduce reshaping matrices $\{\mathbf{R}_g\}$, where $\mathbf{R}_g \in \mathbb{B}^{M^2 \times M_g^2}$. The mapping process is express as

$$\phi \triangleq \text{vec}(\Phi) = \sum_{g \in \mathcal{G}} \mathbf{R}_g \phi_g, \quad (42)$$

where $\mathbf{R}_g, \forall g \in \mathcal{G}$ is expressed by

$$\mathbf{R}_g(i, j) = \begin{cases} 1, & \text{if } i = (M_g(g-1) + m - 1)M \\ & + (M_g(g-1) + n), \text{ and} \\ & j = (m-1)M_g + n \\ 0, & \text{otherwise,} \end{cases} \quad (43)$$

where $1 \leq m \leq M_g$ and $1 \leq n \leq M_g$ are iteration indices. After preprocessing the constraints, we can subsequently utilize the PDD method to obtain the optimal solution for the scattering matrix.

2) Φ_g in the inner loop: We first extract the terms w.r.t Φ_g in the objective function and constraints. With the above transformations and the following equations,

$$\text{Tr}(\mathbf{C}\Phi) = \text{vec}^\top(\mathbf{C}^\top) \phi = \sum_{g \in \mathcal{G}} \text{vec}^\top(\mathbf{C}^\top) \mathbf{R}_g \mathbf{K}_g \varphi_g, \quad (44)$$

$$\begin{aligned} \text{Tr}(\mathbf{B}\Phi\mathbf{A}\Phi^H) &= \phi^H (\mathbf{A}^\top \otimes \mathbf{B}) \phi \\ &= \left(\sum_{g \in \mathcal{G}} \mathbf{R}_g \mathbf{K}_g \varphi_g \right)^H (\mathbf{A}^\top \otimes \mathbf{B}) \left(\sum_{g \in \mathcal{G}} \mathbf{R}_g \mathbf{K}_g \varphi_g \right), \end{aligned} \quad (45)$$

the optimization problem w.r.t each Φ_g can be simplified to

$$\mathcal{P}9: \min_{\varphi_g} L(\varphi_g) = \varphi_g^H \Delta \varphi_g - 2 \text{Re}\{\varphi_g^H \delta\}. \quad (46a)$$

We have $\psi_g \triangleq \text{vec}(\Psi_g)$, $\lambda_g \triangleq \text{vec}(\Lambda_g)$, and

$$\begin{aligned} \Delta &= \alpha_d \mathbf{K}_g^H \mathbf{R}_g^H (\mathbf{A}_1^\top \otimes \mathbf{B}_1 + P_u \mathbf{B}_2^\top \otimes \mathbf{B}_1) \mathbf{R}_g \mathbf{K}_g \\ &+ \alpha_u \mathbf{K}_g^H \mathbf{R}_g^H (P_u \mathbf{A}_2^\top \otimes \mathbf{B}_2 + \mathbf{A}_1^\top \otimes \mathbf{A}_2) \mathbf{R}_g \mathbf{K}_g \\ &+ \frac{1}{2\rho} \mathbf{K}_g^H \mathbf{K}_g, \end{aligned} \quad (47)$$

$$\begin{aligned} \delta &= \alpha_d \mathbf{K}_g^H \mathbf{R}_g^H \left(\text{vec}^*(\mathbf{C}_1^\top) + \text{vec}^*(\mathbf{F}_1^\top) + P_u \text{vec}^*(\mathbf{J}_1^\top) \right) \\ &+ \alpha_u \mathbf{K}_g^H \mathbf{R}_g^H \left(\sqrt{P_u} \text{vec}^*(\mathbf{C}_2^\top) + P_u \text{vec}^*(\mathbf{F}_2^\top) + \text{vec}^*(\mathbf{J}_2^\top) \right. \\ &\left. - \text{vec}^*(\mathbf{D}^\top) \right) + \frac{1}{2\rho} \mathbf{K}_g^H \mathbf{K}_g \psi_g - \frac{1}{2} \mathbf{K}_g^H \lambda_g. \end{aligned} \quad (48)$$

Since $\mathcal{P}9$ is an unconstrained convex problem, we can take the derivative of $L(\varphi_g)$ w.r.t φ_g and set $\frac{\partial L(\varphi_g)}{\partial \varphi_g} = \mathbf{0}$ to obtain optimal φ_g^* , which is given by

$$\varphi_g^* = \Delta^{-1} \delta. \quad (49)$$

3) Ψ_g in the inner loop: With other variables determined, the optimization problem relates to Ψ_g is given by

$$\mathcal{P}10: \min_{\Psi_g} \|\Psi_g - (\rho \Lambda_g + \Phi_g)\|_F^2, \quad (50a)$$

$$\text{s.t. } \Psi_g^H \Psi_g = \mathbf{I}. \quad (50b)$$

This corresponds to the orthogonal procrustes problem, which has a close-form solution [31]–[34], expressed as

$$\Psi_g^{\text{opt}} = \mathbf{U}_g \mathbf{V}_g^H, \quad (51)$$

where the unitary matrices \mathbf{U}_g , and \mathbf{V}_g are obtained by singular vector decomposition (SVD) of $\rho \Lambda_g + \Phi_g$.

C. Outer loop

When the convergence of the inner loop is achieved, the dual variable Λ_g and penalty coefficient ρ^{-1} are selectively updated. If $\|\Phi_g - \Psi_g\|_\infty < \epsilon$, then the Λ_g is updated by

$$\Lambda_g = \Lambda_g + \rho^{-1}(\Phi_g - \Psi_g). \quad (52)$$

Otherwise, $\|\Phi_g - \Psi_g\|_\infty > \epsilon$ means the infinity distance between these two matrices are still large, thus the ρ is updated to force the equality between Φ_g and Ψ_g , given by

$$\rho = c\rho, \quad (53)$$

where penalty parameter $c \in (0, 1)$. After each Φ_g^{opt} is obtained, we reconstruct the Φ^{opt} by mapping each Φ_g^{opt} to the corresponding position, *i.e.*, $\Phi^{\text{opt}} = \text{blkdiag}(\Phi_1, \dots, \Phi_G)$.

Complexity Analysis. We briefly analyze the computational complexity of the proposed algorithm in this section. Within the BCD framework, we iteratively update the blocks. In each iteration, updating ι_d , and τ_d require $\mathcal{O}(K^2 M^2)$ operations, and ι_u , and τ_u require $\mathcal{O}(I^2 M^2)$ operations. The step for updating precoder \mathbf{P} has the complexity $\mathcal{O}(K(M^2 + I_p N^3))$ due to the matrix inversion and bisection search, where I_p is the iteration number of bisection search. The step for updating combiner \mathbf{W} requires $\mathcal{O}(IN^3)$ operations due to the matrix inversion. The most computationally intensive step in BCD is updating the scattering matrix Φ using the PDD based Algorithm 2. The calculations of (49) and (51) require $\mathcal{O}(M_g^2 M^4)$, primarily due to the Kronecker product and $\mathcal{O}(M_g^3)$ operations due to SVD, respectively. Therefore, the computational complexity of Algorithm 2 is $\mathcal{O}(GI_1 I_2 (M_g^2 M^4))$, where G is the total number of groups, I_1 is the number of PDD outer iteration, and I_2 is the number of PDD inner iterations in the PDD. Considering the BCD framework in Algorithm 1, the total computational complexity of the entire optimization algorithm is $\mathcal{O}(I_3 G I_1 I_2 (M_g^2 M^4))$, where I_3 is the number of BCD iteration until convergence.

VI. NUMERICAL EVALUATION

The objective of this section is to illustrate the superiority of the non-reciprocal BD-RIS over the reciprocal BD-RIS and conventional RIS (*i.e.*, diagonal RIS) in FD communication scenarios. Starting from the investigation of the convergence behaviours, we demonstrate that the proposed algorithm guarantees convergence. Subsequently, we utilize the proposed

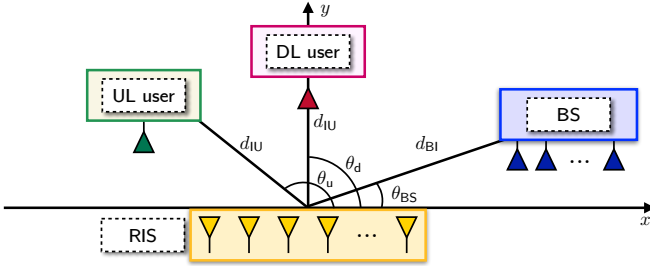


Fig. 2. 2D coordinate system for the RIS-assisted FD system.

algorithm to solve the FD DL and UL sum-rate maximization problem as formulated in $\mathcal{P}1$. We compare the FD DL and UL sum-rates of *i)* non-reciprocal BD-RIS, *ii)* reciprocal BD-RISs, and *iii)* conventional diagonal RIS versus locations of devices, RIS elements, group size in RIS. Additionally, we analyze the impinging and reflected beampattern performances of the three types of RIS and explain why the non-reciprocal BD-RIS achieves the best performance. By varying the priority parameter, α_d , between DL and UL communications, we observe the trade-offs of the three cases. We consider both cases which are single DL and UL user and multiple DL and UL users. Note that the results for the model without structural scattering can be obtained by removing $-\mathbf{I}$ right after Φ in all channel expressions.

A. Simulation Environment

The 2D coordinate system for the RIS-assisted FD system is given in Fig. 2. We consider a FD BD-RIS-assisted communication system where the BS is equipped with N_t transmit antenna elements and N_r receive antenna elements. We assume the $N_t = N_r = N$ for simplicity. All DL and UL users are deployed with single antenna. The channel models between BS and RIS, and between RIS and DL/UL users, consist of both large-scale and small-scale fading, consistent with the existing RIS studies [35], [36]. The large-scale fading is described by a distance-dependent pathloss model $PL_i = \zeta_0 (d_i/d_0)^{-\varepsilon_i}$, $\forall i \in \{\text{BI}, \text{IU}\}$. The ζ_0 denotes the signal attenuation at a reference distance $d_0 = 1$ m, and d_{BI} and d_{IU} refers to the distance between BS and RIS, and between RIS and DL/UL users, respectively. The path loss exponent is modeled by ε_i , $\forall i \in \{\text{BI}, \text{IU}\}$. The small-scale fading follows the Rician fading model, characterized by the Rician fading factor κ_i , $\forall i \in \{\text{BI}, \text{IU}\}$, which represents the power ratio of line of sight (LoS) component and non-LoS component. In the simulations, we set $\zeta_0 = -30$ dB, and the path loss exponent for both BS-RIS and RIS-user channels is $\varepsilon_i = 2.2$, $\forall i \in \{\text{BI}, \text{IU}\}$. The distances are set to $d_{\text{BI}} = 30$ m and $d_{\text{IU}} = 5$ m. We set $\kappa_i = 10$ to capture the strong LoS component. The K DL users and I UL users are randomly located near the RIS with the same distance. The transmit power at the BS and UL user are $P_d = 20$ dBm and $P_u = 20$ dBm, respectively. The noise power at BS and DL users is set as $\sigma^2 = -80$ dBm, and we assume that the SI is effectively suppressed to noise level through cancellation methods in propagation domain [37], analog domain [38] and

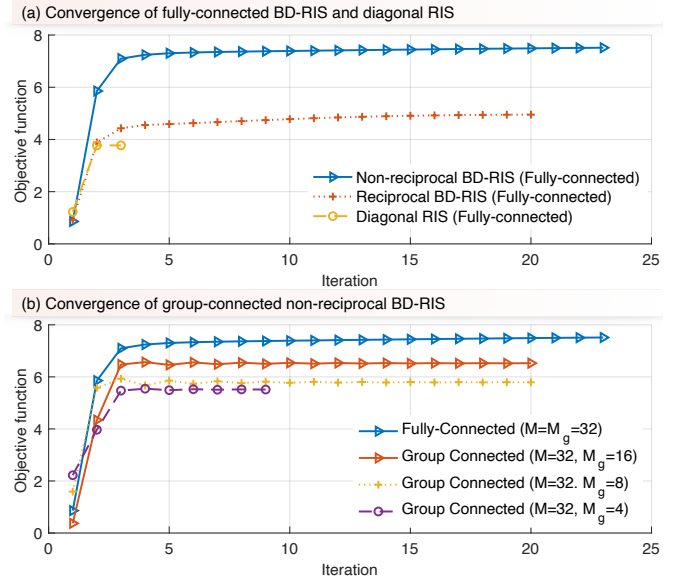


Fig. 3. Convergence illustration for Algorithm 1 with RIS element $M = 32$. The locations of BS, DL user, and UL user are 30° , 90° and 60° , respectively. Tx and Rx transmit antennas numbers $N = 1$.

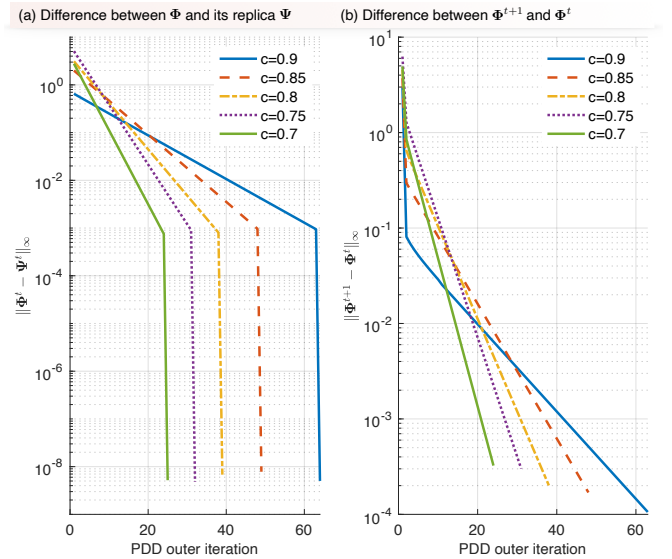


Fig. 4. Convergence illustration for Algorithm 2 (*i.e.*, PDD) with different c . The locations of BS, DL user, and UL user are 30° , 90° and 60° , respectively. Tx and Rx transmit antennas numbers $N = 1$.

digital domain [39]. Perfect CSI is assumed to be available at the BS.

B. Convergence Performance.

Starting from the convergence analysis, Fig. 3 (a) shows the values of the objective function (38) versus iterations for fully-connected non-reciprocal and reciprocal BD-RISs, as well as diagonal RIS, with $N = 1$, $K = I = 1$, and RIS element number $M = 32$. It can be observed that the proposed Algorithm 1 converges in 25 iterations for all three types of RIS. Additionally, the fully-connected non-reciprocal BD-RIS has the highest value of objective function. Fig. 3

(b) illustrates the convergence of the group-connected non-reciprocal BD-RIS. It verifies the effectiveness of the proposed Algorithm 1 for the group-connected cases. As shown, the objective function values decrease with decreasing group size M_g . We also examine the convergence behavior of the PDD method in Algorithm 2 for designing the RIS scattering matrix Φ . Fig. 4 (a) and Fig. 4 (b) demonstrate the variations of Φ and the difference between Φ and its replica in the outer loop of the PDD method. It can be observed that Algorithm 2 converges within 60 iterations. The difference of Φ itself in the adjacent iterations decreases to a level of 10^{-5} . Furthermore, the introduced equality constraint (37c) is well satisfied, where $\|\Phi - \Psi\|_\infty < 10^{-4}$. Additionally, a smaller penalty parameter c leads to a faster convergence to the stopping criteria. A suitable selection for the penalty parameter is $c \in (0.7, 0.9)$.

C. FD DL and UL Sum-rates

In this section, we analyze the DL and UL sum-rate performances to demonstrate the superiority of non-reciprocal BD-RIS in FD communications.

1) *Sum-rates versus the Location of the UL User:* We start by examining the sum-rate performance relative to the location of the UL user. Specifically, we fix the location of the BS and DL user at 30° and 90° , respectively. Subsequently, we vary the location of the UL user from 0° to 180° . To focus exclusively on observing the effect of different RIS scattering matrix Φ , we set the number of transmit and receive antenna elements to $N = 1$, the number of DL and UL users to $K = I = 1$, and assign $\alpha_d = \alpha_u = 0.5$. Since the considered interference terms are different in the DL and UL transmissions as shown in (2) and (3) respectively, *i.e.*, interference from UL users in the DL, and SI and loop interference in the UL, setting $\alpha_d = \alpha_u$ does not mean the DL and UL sum-rate perform same. The RIS element number is set to $M = 16$. Thus, the optimization problem $\mathcal{P}1$ simplifies to designing only the RIS scattering matrix Φ to maximize the FD DL and UL sum-rates.

As shown in Fig. 5 (a), the non-reciprocal BD-RIS achieves the best sum-rates performance except the case that the location of UL user overlaps with the DL user's location at 90° . This aligns with the explanation in Section III, when $\mathbf{h}_{u,i} = \mathbf{h}_{d,k}$, reciprocal BD-RIS can maximize both the DL and UL received power, resulting in identical sum-rate performances of the three types of RIS. In Fig. 5, the UL sum-rates of reciprocal BD-RIS and diagonal RIS are larger than their DL sum-rates. This is because the considered interference in UL is smaller than the interference in DL. Specifically, the loop interference in the UL experiences double $d_{B1} = 30$ m path delay. Its power is smaller than the interference from UL user, which experiences double $d_{B1} = 5$ m path delay. In contrast, the non-reciprocal BD-RIS can achieve larger received power of signal of interest in the DL compared to other two RISs, thus we can observe the gain in DL. Therefore, the non-reciprocal BD-RIS can support simultaneous DL and UL transmissions. Furthermore, the sum-rate performances of all three types of RISs deteriorate at 30° when the UL user is aligned with the BS. This is because, in the UL SINR expression (5), the

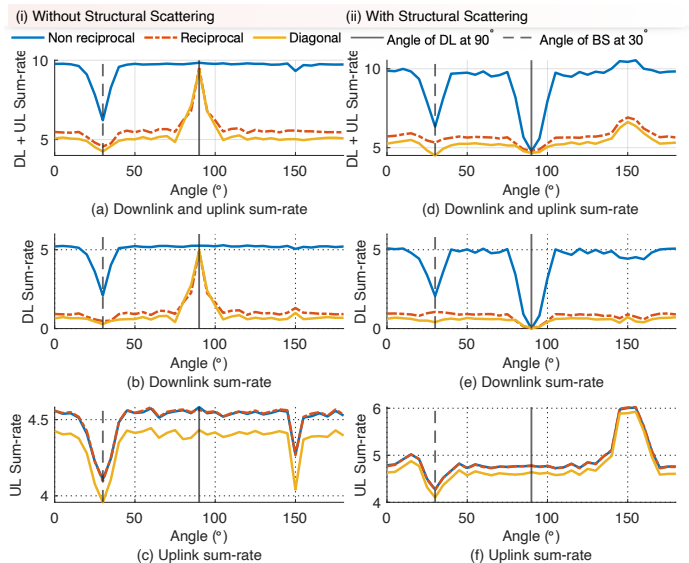


Fig. 5. DL and UL sum-rates, DL sum-rates, and UL sum-rates for non-reciprocal and reciprocal BD-RISs, and diagonal RIS with RIS element $M = 16$, and fixed BS location at 30° and DL user location at 90° , Tx and Rx transmit antennas numbers $N = 1$, and the number of DL and UL users $K = I = 1$.

ratio of loop interference term to the received signal power approaches 1. Additionally, a performance drop is observed at the supplementary angle of BS at 150° . Comparing cases that with and without structural scattering in Fig. 5, we observe that the structural scattering deteriorates the DL performances when DL user and UL user are aligned. This is because the interference term w.r.t structural scattering in DL SINR (4), *i.e.*, $|\mathbf{h}_{d,k}^\top \mathbf{h}_{u,i}|^2$, which achieves its maximum when $\mathbf{h}_{u,i}$ aligns with $\mathbf{h}_{d,k}$.

Additionally, the structural scattering enhances the UL performance at 150° because the maximum of structural scattering term is achieved when $\theta_u = \pi - \theta_{BS}$. We then use the UL received power with LoS channel to explain this specular reflection condition. As in (10), the structural scattering term is $|\mathbf{g}^\top \mathbf{h}_{u,i}|$. With the LoS channels

$$\mathbf{g} = \frac{1}{\sqrt{M}} [1, e^{j\pi \cos(\theta_{BS})}, \dots, e^{j\pi(M-1) \cos(\theta_{BS})}]^\top, \quad (54)$$

$$\mathbf{h}_{u,i} = \frac{1}{\sqrt{M}} [1, e^{j\pi \cos(\theta_u)}, \dots, e^{j\pi(M-1) \cos(\theta_u)}]^\top. \quad (55)$$

The amplitude of the structural scattering term can be expressed as

$$|\mathbf{g}^\top \mathbf{h}_{u,i}| = 1 + \left| \sum_{n=1}^{M-1} e^{jn\pi(\cos \theta_{BS} + \cos \theta_u)} \right|. \quad (56)$$

When $\theta_{BS} + \theta_u = \pi$, the maximum of (56) is achieved and has value M . This effect on the UL received power also affects the UL sum-rates as in the Fig. 5 (f). Therefore, if the direction of BS is fixed, a sum-rate performance enhancement can theoretically be observed at the angle $\theta_u = \pi - \theta_{BS}$. To further understand why the non-reciprocal BD-RIS achieves superior sum-rate performance, we examine the impinging and reflected beampatterns of the three types of RIS.

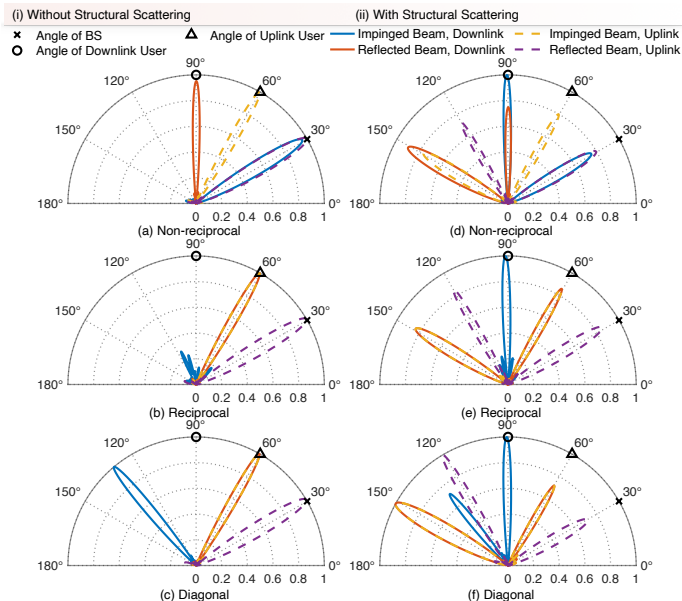


Fig. 6. The impinging and reflected beampatterns for (i) no structural scattering and (ii) structural scattering. The beampatterns for three types of RIS are shown in (a), (d) non-reciprocal BD-RIS, (b), (e) reciprocal BD-RIS, and (c), (f) diagonal RIS. The locations of BS, DL user, and UL user are 30° , 90° and 60° , respectively. Tx and Rx transmit antennas numbers $N = 1$.

2) *Beampattern*: We select a configuration where the BS, DL user, and UL user are located at 30° , 90° and 60° , respectively, and examine the normalized impinging and reflected beampatterns for DL and UL transmission. The impinging and reflected beampatterns for DL and UL transmission without structural scattering are defined by

$$P_d^{\text{impinging}}(\theta) = |\mathbf{h}_d^\top \Phi \mathbf{a}(\theta)|^2, \quad (57a)$$

$$P_d^{\text{reflected}}(\theta) = |\mathbf{a}^\top(\theta) \Phi \mathbf{g}|^2, \quad (57b)$$

$$P_u^{\text{impinging}}(\theta) = |\mathbf{g}^\top \Phi \mathbf{a}(\theta)|^2, \quad (57c)$$

$$P_u^{\text{reflected}}(\theta) = |\mathbf{a}^\top(\theta) \Phi \mathbf{h}_u|^2, \quad (57d)$$

where $\mathbf{a} = \frac{1}{\sqrt{N}}[1, e^{j\pi \cos(\theta)}, \dots, e^{j\pi(N-1) \cos(\theta)}]^\top \in \mathbb{C}^{N \times 1}$ is the steering vector, and $\theta \in [0, 180^\circ]$. Additionally, the impinging and reflected beampatterns with structural scattering can be calculated by changing Φ to $(\Phi - \mathbf{I})$ in all expressions (57). To plot the figure, we normalize the beampattern power and keep the relative difference of the beams, e.g., $P_d^{\text{impinging}}(\theta)/P_{\text{beam,max}}$, $P_{\text{beam,max}} \triangleq \max\{\max\{P_d^{\text{impinging}}(\theta)\}, \max\{P_d^{\text{reflected}}(\theta)\}, \max\{P_u^{\text{impinging}}(\theta)\}, \max\{P_u^{\text{reflected}}(\theta)\}\}$.

Specifically, the DL impinging beampattern should probe towards the BS direction to support the transmission from the BS to the RIS. The DL reflected beampattern should probe at the DL user direction to support the transmission from the RIS to the DL user. Similarly, the UL impinging beampattern should probe at the UL user direction, and the UL reflected beampattern should probe at the BS direction. Starting from the beampattern performances without structural scattering, as shown in Fig. 6 (i), all four beams probe towards their expected directions. In contrast, the DL impinging and reflected beams

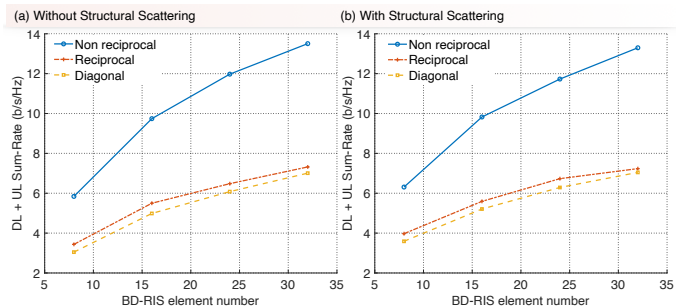


Fig. 7. The sum-rates versus RIS element number of the three types of RIS under (a) no structural scattering, and (b) structural scattering with BS location at 30° , DL user location at 90° and UL user location at 60° , Tx and Rx transmit antennas numbers $N = 1$.

of both reciprocal BD-RIS and diagonal RIS are not directed at the required directions. Therefore, as shown in Fig. 5 (b) and (e), the DL sum-rates of both reciprocal BD-RIS and diagonal RIS are significantly lower than that of the non-reciprocal BD-RIS. As a result, the total DL and UL sum-rate of non-reciprocal BD-RIS is higher than the sum-rates of other two types of RIS. Comparing the beampatterns with and without structural scattering, as shown in Fig. 6 (i) and (ii) respectively, we observe that the structural scattering forces the DL reflected beam and UL impinging beam to probe at 150° , as previously explained specular reflection condition. In conclusion, the non-reciprocal BD-RIS effectively supports simultaneous DL and UL transmission in FD communications. In contrast, reciprocal BD-RIS and diagonal RIS do not adequately support DL and UL transmissions in FD mode.

D. DL and UL Sum-rates over RIS elements

To observe the effect of the number of RIS element, we still fix the locations of BS, DL user, and UL user at 30° , 90° and 60° . As shown in Fig. 7 (a), (b), the DL and UL sum-rates increase as the number of RIS elements grows, in both cases that with and without structural scattering. The non-reciprocal BD-RIS consistently achieves the highest sum-rates compared to reciprocal BD-RIS and diagonal BD-RIS. Additionally, the gain of non-reciprocal BD-RIS increases as the number of RIS elements increases.

E. Sum-rate Regions

To understand the sum-rate regions of the three types of RISs, we vary the priority parameter α_d between DL and UL transmission as in (17a) from $\alpha_d = 1$ (i.e., only DL transmission) to $\alpha_d = 0$ (i.e., only UL transmission). Meanwhile, the locations of BS, DL user, and UL user are fixed at 30° , 90° and 60° . As shown in Fig. 8, the sum-rate region of the non-reciprocal BD-RIS is larger compared to that of reciprocal BD-RIS and diagonal RIS when supporting both DL and UL transmissions in FD communications. Additionally, when only DL or UL transmission is required, the non-reciprocal BD-RIS achieves the same sum-rate performance as the reciprocal BD-RIS, while still outperforming the diagonal RIS. This demonstrates the distinct benefits of the non-reciprocal BD-RIS in FD scenarios.

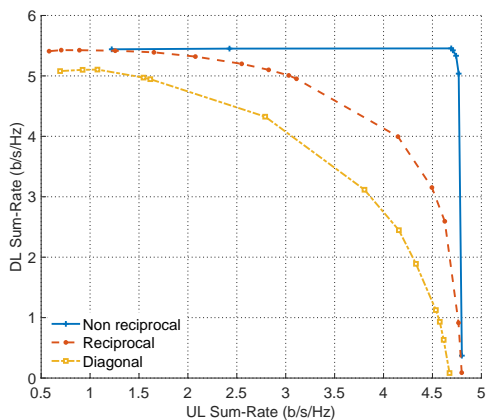


Fig. 8. The sum-rate regions for non-reciprocal BD-RIS, reciprocal BD-RIS, and diagonal RIS with structural scattering and BS location at 30° , DL user location at 90° and UL user location at 60° , Tx and Rx transmit antennas numbers $N = 1$.

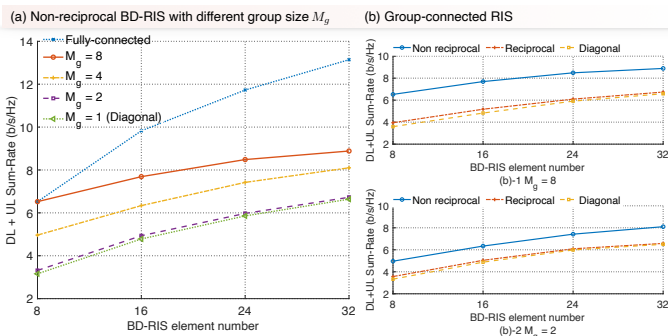


Fig. 9. (a) The DL and UL sum-rates of non-reciprocal BD-RIS with structural scattering and different group size M_g . (b)-1 The DL and UL sum-rates of non-reciprocal BD-RIS, reciprocal BD-RIS and diagonal RIS with fixed group size $M_g = 8$ and (b)-2 $M_g = 2$. The locations are BS at 30° , DL user location at 90° and UL user location at 60° . Tx and Rx transmit antennas numbers $N = 1$.

F. DL and UL Sum-rates of Group-connected BD-RIS

To understand the sum-rate performances of non-reciprocal BD-RIS, reciprocal BD-RIS and diagonal RIS with group-connected architecture, we maintain the same simulation conditions but vary the group size within the RISs. The structural scattering is captured in the group-connected case. As shown in Fig. 9 (a), a larger group size leads to higher DL and UL sum-rates for the non-reciprocal BD-RIS. The lower bound is obtained with the diagonal RIS, which is also the single-connected RIS (*i.e.*, $M_g = 1$). The upper bound is achieved by the fully-connected non-reciprocal BD-RIS. Fig. 9 (b)-1 and (b)-2 demonstrate that the non-reciprocal BD-RIS consistently achieves the highest DL and UL sum-rates compared to the other two types of RISs with a group-connected structure in the FD scenario. In addition, comparing Fig. 9 (b)-1 and (b)-2, it is observed that non-reciprocal BD-RIS achieves larger gain when group size increases.

G. MU FD DL and UL Sum-rates

The above results focus on the design of scattering matrix Φ . We now extend the analysis to the DL and UL multiple-user

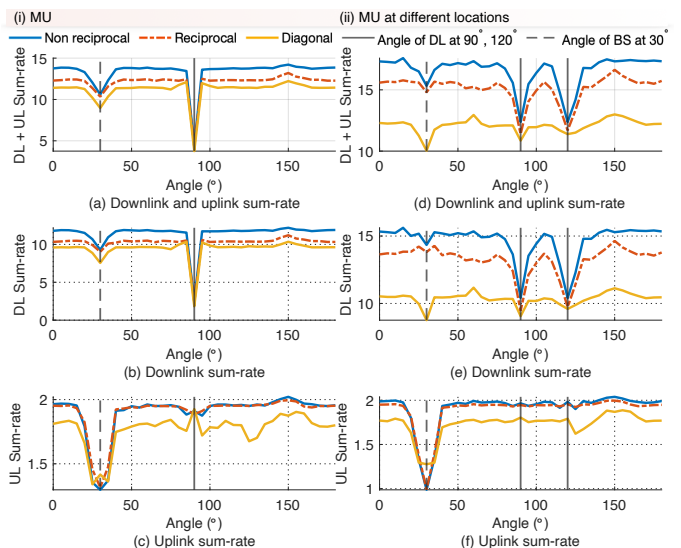


Fig. 10. MU DL and UL sum-rates, DL sum-rates, and UL sum-rates with structural scattering for non-reciprocal and reciprocal BD-RISs, and diagonal RIS with RIS element $M = 16$, and fixed BS location at 30° . (i) The $K = 2$ DL users are aligned at 90° , and $I = 2$ UL users are aligned. (ii) The $K = 2$ DL users are located at 90° and 120° , respectively, and $I = 2$ UL users are aligned. Tx and Rx transmit antennas numbers $N = 2$.

(MU) case, where the BS is equipped with multiple transmit and receive antennas, and multiple DL and UL users, each with a single antenna. The transmit power at the BS and UL user are set to $P_d = 40$ dBm and $P_u = 20$ dBm, respectively. The proposed Algorithm 1 is a general optimization framework that can design precoder and combiner at the BS, and also the scattering matrix in MU cases, making it adaptable to this setting. We first assume that $K = 2$ DL users are aligned at 90° , $I = 2$ UL users are also aligned. We vary the direction of the aligned UL users. Structural scattering is also captured in the MU case. As shown in Fig. 10 (i) (b), DL sum-rates deteriorate at two types of directions. First, when UL users are aligned with BS, the DL received signal power and interference terms are of the same order of magnitude. Second, when UL users are aligned with DL users, the interference term w.r.t structural scattering, $|\mathbf{h}_{d,k}^\top \mathbf{h}_{u,i}|^2$, achieves its maximum when $\mathbf{h}_{u,i} = \mathbf{h}_{d,k}^*$. Regarding UL sum-rates in Fig. 10 (i) (c), a significant performance drop is observed when UL users are aligned in the BS direction (*i.e.*, 30°) due to the SINR expression for UL (5) reaching comparable magnitudes. Additionally, there is a performance enhancement at the direction supplementary to the BS (*i.e.*, 150°), as the maximum UL received power is achieved when $\theta_{BS} + \theta_u = \pi$. When DL users are not aligned, we observe the similar sum-rates performances in Fig. 10 (ii) except for two performance drops at the DL users locations, *i.e.*, 90° and 120° , where the two co-located UL users align with each DL user and thus structural scattering reaches its maximum.

H. MU Sum-rates Regions

We also examine the sum-rate regions of the MU cases. In the first case, we assume that $K = 2$ DL users are aligned at 90° , and $I = 2$ UL users are aligned at 60° . Additionally, we

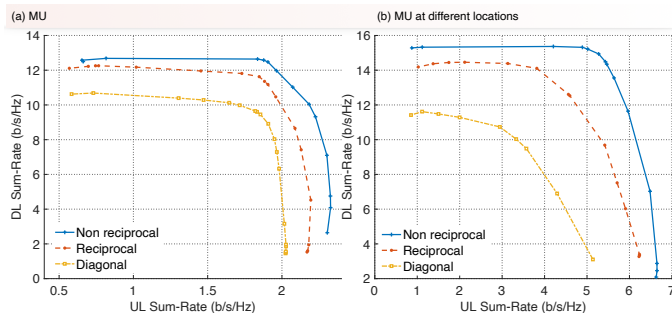


Fig. 11. The sum-rate regions for non-reciprocal BD-RIS, reciprocal BD-RIS, and diagonal RIS with structural scattering and RIS element $M = 16$, and fixed BS location at 30° . (a) The $K = 2$ DL users are aligned at 90° , and $I = 2$ UL users are aligned at 60° . (b) The $K = 2$ DL users are located at 90° and 120° , and $I = 2$ UL users are located at 60° and 75° . Tx and Rx antennas numbers are $N = 2$.

consider a non-aligned scenario where $K = 2$ DL users are located at 90° and 120° , and $I = 2$ UL users are located at 60° and 75° , respectively. The BS has $N = 2$ transmit and receive antennas. The weight α_d between DL and UL communications is adjusted to prioritize each function. In both two cases, as expected, the sum-rate regions of non-reciprocal BD-RIS are larger than the ones of reciprocal BD-RIS and diagonal RIS. Furthermore, the sum-rate regions for multiple DL and UL users at different locations are larger than those for aligned DL and UL users. This increase is due to the reduced channel correlation and, consequently, the higher diversity in the non-aligned scenario.

VII. CONCLUSION

In this paper, we have investigated the use of non-reciprocal, reciprocal BD-RISs and diagonal RIS in FD communication systems. Our system model captures the interference reflected by the RIS (*i.e.*, loop interference) at the BS, UL-to-DL user interference, and structural scattering. This problem has been formulated as a non-convex optimization problem, where we aim to maximize the DL and UL sum-rates by designing the precoder and combiner in the BS, and BD-RIS scattering matrix. An iterative algorithm based on BCD framework and PDD has been proposed to address the problem. Numerical results have demonstrated the superiority of the non-reciprocal BD-RIS compared to reciprocal BD-RIS and diagonal RIS in FD communications, as the non-reciprocal BD-RIS support DL and UL users in different directions. Specifically, the DL and UL sum-rates achieved by non-reciprocal BD-RIS are higher than the other two kinds of RIS in both cases of single DL and UL user, and multiple DL and UL users scenarios. The gain of non-reciprocal BD-RIS over other two kinds of RIS increases as the number of RIS elements and group size increase, due to the higher flexibility achieved by the reconfigurable elements. This work paves the way for further studies on non-reciprocal BD-RIS.

REFERENCES

[1] M. Di Renzo, A. Zappone, M. Debbah, M.-S. Alouini, C. Yuen, J. de Rosny, and S. Tretjakov, "Smart radio environments empowered by reconfigurable intelligent surfaces: How it works, state of research,

and the road ahead," *IEEE J. Sel. Areas Commun.*, vol. 38, no. 11, pp. 2450–2525, Nov. 2020.

[2] E. Basar, M. Di Renzo, J. De Rosny, M. Debbah, M.-S. Alouini, and R. Zhang, "Wireless communications through reconfigurable intelligent surfaces," *IEEE Access*, vol. 7, pp. 116 753–116 773, 2019.

[3] E. Björnson, Ö. Özdogan, and E. G. Larsson, "Reconfigurable intelligent surfaces: Three myths and two critical questions," *IEEE Commun. Mag.*, vol. 58, no. 12, pp. 90–96, 2020.

[4] H. Guo, Y.-C. Liang, J. Chen, and E. G. Larsson, "Weighted sum-rate maximization for reconfigurable intelligent surface aided wireless networks," *IEEE Trans. Wireless Commun.*, vol. 19, no. 5, pp. 3064–3076, 2020.

[5] C. Huang, A. Zappone, G. C. Alexandropoulos, M. Debbah, and C. Yuen, "Reconfigurable intelligent surfaces for energy efficiency in wireless communication," *IEEE Trans. Wireless Commun.*, vol. 18, no. 8, pp. 4157–4170, 2019.

[6] P. K. Sharma and P. Garg, "Intelligent reflecting surfaces to achieve the full-duplex wireless communication," *IEEE Commun. Lett.*, vol. 25, no. 2, pp. 622–626, Feb. 2021.

[7] A. M. Tota Khel and K. A. Hamdi, "Performance analysis of IRS-assisted full-duplex wireless communication systems with interference," *IEEE Commun. Lett.*, vol. 26, no. 9, pp. 2027–2031, Sep. 2022.

[8] K. Chen, C. Qi, O. A. Dobre, and G. Y. Li, "Simultaneous beam training and target sensing in ISAC systems with RIS," *IEEE Trans. Wireless Commun.*, 2023.

[9] H. Niu, Z. Lin, K. An, J. Wang, G. Zheng, N. Al-Dhahir, and K.-K. Wong, "Active RIS assisted rate-splitting multiple access network: Spectral and energy efficiency tradeoff," *IEEE J. Sel. Areas Commun.*, vol. 41, no. 5, pp. 1452–1467, 2023.

[10] S. Shen, B. Clerckx, and R. Murch, "Modeling and architecture design of reconfigurable intelligent surfaces using scattering parameter network analysis," *IEEE Trans. Wireless Commun.*, vol. 21, no. 2, pp. 1229–1243, Feb. 2022.

[11] H. Li, S. Shen, M. Nerini, and B. Clerckx, "Reconfigurable intelligent surfaces 2.0: Beyond diagonal phase shift matrices," *IEEE Commun. Mag.*, vol. 62, no. 3, pp. 102–108, Mar. 2024.

[12] D. M. Pozar, *Microwave engineering: Theory and techniques*. Hoboken, NJ, USA: Wiley, 2009.

[13] M. Nerini, S. Shen, and B. Clerckx, "Closed-form global optimization of beyond diagonal reconfigurable intelligent surfaces," *IEEE Trans. Wireless Commun.*, vol. 23, no. 2, pp. 1037–1051, 2023.

[14] M. Nerini, S. Shen, H. Li, and B. Clerckx, "Beyond diagonal reconfigurable intelligent surfaces utilizing graph theory: Modeling, architecture design, and optimization," *IEEE Trans. Wireless Commun.*, 2024.

[15] M. Nerini and B. Clerckx, "Pareto frontier for the performance-complexity trade-off in beyond diagonal reconfigurable intelligent surfaces," *IEEE Commun. Lett.*, 2023.

[16] H. Li, S. Shen, and B. Clerckx, "Beyond diagonal reconfigurable intelligent surfaces: From transmitting and reflecting modes to single-, group-, and fully-connected architectures," *IEEE Trans. Wireless Commun.*, vol. 22, no. 4, pp. 2311–2324, 2022.

[17] Q. Li, M. El-Hajjar, I. Hemadeh, A. Shojafard, A. A. M. Mourad, B. Clerckx, and L. Hanzo, "Reconfigurable intelligent surfaces relying on non-diagonal phase shift matrices," *IEEE Trans. Veh. Technol.*, vol. 71, no. 6, pp. 6367–6383, Jun. 2022.

[18] L. Zhang, X. Q. Chen, S. Liu, Q. Zhang, J. Zhao, J. Y. Dai, G. D. Bai, X. Wan, Q. Cheng, G. Castaldi *et al.*, "Space-time-coding digital metasurfaces," *Nature communications*, vol. 9, no. 1, p. 4334, 2018.

[19] L. Zhang, X. Q. Chen, R. W. Shao, J. Y. Dai, Q. Cheng, G. Castaldi, V. Galdi, and T. J. Cui, "Breaking reciprocity with space-time-coding digital metasurfaces," *Advanced Materials*, vol. 31, no. 41, p. 1904069, 2019.

[20] G. Pan, J. Ye, J. An, and M.-S. Alouini, "Full-duplex enabled intelligent reflecting surface systems: Opportunities and challenges," *IEEE Wireless Commun.*, vol. 28, no. 3, pp. 122–129, Jun. 2021.

[21] H. Wang, Z. Han, and A. L. Swindlehurst, "Channel reciprocity attacks using intelligent surfaces with non-diagonal phase shifts," *IEEE Open J. of the Comm. Society.*, 2024.

[22] A. Sabharwal, P. Schniter, D. Guo, D. W. Bliss, S. Rangarajan, and R. Wichman, "In-band full-duplex wireless: Challenges and opportunities," *IEEE J. Sel. Areas Commun.*, vol. 32, no. 9, pp. 1637–1652, Sep. 2014.

[23] H. Li and B. Clerckx, "Non-reciprocal beyond diagonal RIS: Multiport network models and performance benefits in full-duplex systems," Nov. 2024, arXiv:2411.04370.

[24] R. C. Hansen, "Relationships between antennas as scatterers and as radiators," *Proc. IEEE*, vol. 77, no. 5, pp. 659–662, 1989.

- [25] A. Abrardo, A. Toccafondi, and M. Di Renzo, "Design of reconfigurable intelligent surfaces by using s-parameter multiport network theory—optimization and full-wave validation," *IEEE Trans. Wireless Commun.*, 2024.
- [26] M. Nerini, G. Gradoni, and B. Clerckx, "Physics-compliant modeling and scaling laws of multi-RIS aided MIMO systems," *arXiv preprint arXiv:2411.06309*, 2024.
- [27] K. Shen and W. Yu, "Fractional programming for communication systems—Part I: Power control and beamforming," *IEEE Trans. Sig. Proc.*, vol. 66, no. 10, pp. 2616–2630, 2018.
- [28] —, "Fractional programming for communication systems—Part II: Uplink scheduling via matching," *IEEE Trans. Sig. Proc.*, vol. 66, no. 10, pp. 2631–2644, 2018.
- [29] D. P. Bertsekas, "Nonlinear programming," *J. Oper. Res. Soc.*, vol. 48, no. 3, pp. 334–334, 1997.
- [30] Q. Shi and M. Hong, "Penalty dual decomposition method for non-smooth nonconvex optimization—Part I: Algorithms and convergence analysis," *IEEE Trans. Sig. Proc.*, vol. 68, pp. 4108–4122, 2020.
- [31] Y. Zhou, Y. Liu, H. Li, Q. Wu, S. Shen, and B. Clerckx, "Optimizing power consumption, energy efficiency and sum-rate using beyond diagonal RIS—a unified approach," *IEEE Trans. Wireless Commun.*, 2023.
- [32] W. Gibson, "On the least-squares orthogonalization of an oblique transformation," *Psychometrika*, vol. 27, no. 2, pp. 193–195, 1962.
- [33] J. H. Manton, "Optimization algorithms exploiting unitary constraints," *IEEE Trans. Sig. Proc.*, vol. 50, no. 3, pp. 635–650, 2002.
- [34] G. H. Golub and C. F. Van Loan, "Matrix computations," *Johns Hopkins University Press, 3rd edition*, 1996.
- [35] Q. Wu and R. Zhang, "Intelligent reflecting surface enhanced wireless network via joint active and passive beamforming," *IEEE Trans. Wireless Commun.*, vol. 18, no. 11, pp. 5394–5409, 2019.
- [36] I. Yildirim, A. Uyrus, and E. Basar, "Modeling and analysis of reconfigurable intelligent surfaces for indoor and outdoor applications in future wireless networks," *IEEE Trans. Commun.*, vol. 69, no. 2, pp. 1290–1301, 2020.
- [37] E. Everett, C. Shepard, L. Zhong, and A. Sabharwal, "SoftNull: Many-antenna full-duplex wireless via digital beamforming," *IEEE Trans. Wireless Commun.*, vol. 15, no. 12, pp. 8077–8092, 2016.
- [38] B. Debaillie, D.-J. van den Broek, C. Lavin, B. van Liempd, E. A. Klumperink, C. Palacios, J. Craninckx, B. Nauta, and A. Pärssinen, "Analog/RF solutions enabling compact full-duplex radios," *IEEE J. Sel. Areas Commun.*, vol. 32, no. 9, pp. 1662–1673, 2014.
- [39] Z. Liu, A. Bhandari, and B. Clerckx, "Full-duplex beyond self-interference: The unlimited sensing way," *IEEE Commun. Lett.*, 2024.