

Design and Construction of an Affordable Adjustable Repetition Rate Optical Frequency Comb

Christopher E. Latchford^{a)} and Daniel L. Maser^{b)}

*Department of Physics, Astronomy, and Geophysics, Connecticut College,
270 Mohegan Ave, New London, Connecticut 06320, USA*

^{a)}clatchfor@conncoll.edu

^{b)}Corresponding Author: dmaser@conncoll.edu

Abstract. We designed and built an adjustable repetition rate optical frequency comb using off-the-shelf components with several improvements to an established erbium fiber design. This design, built fully by an undergraduate, was assembled at a fraction of the cost of a commercial comb. This comb has a repetition rate of roughly 100 MHz with a tuning range of 3 MHz. A stabilization control loop for f_{rep} achieved long term drifts of < 1 Hz over several days. This comb will eventually be implemented for use in dual-comb spectroscopy.

BACKGROUND AND MOTIVATION

An optical frequency comb is a specialized laser, winning the Nobel Prize in 2005, with many applications throughout physics, from its use in oil fields to find methane leaks [1] to its use as a breathalyzer to detect trace molecules indicating disease. [2] This technology combines the precision of a continuous-wave laser with the spectral bandwidth of a white-light source. [3] Optical frequency combs are distinct from the more traditional tunable continuous wave (CW) laser because, rather than containing a single instantaneous frequency, an optical frequency comb spans a large bandwidth of frequencies. [4] These lasers also have the precision to be used to measure fundamental constants and tests of fundamental physics, from new measurements of hydrogen [5] to the refractive index of air. [6] An optical frequency comb is composed of many different teeth, where each tooth is a CW laser described by the equation, $f_n = n f_{rep} + f_0$, [7] where f_{rep} is the repetition rate of the comb, dictated by the length of the oscillator, and f_0 is the offset frequency of the comb.

We plan to use this comb in conjunction with a previously built optical frequency comb for use in dual-comb spectroscopy, for use both combs need to be stabilized in f_{rep} and f_0 . [8] Our goal is to show that this technology is not only accessible to state-of-the-art facilities, but also to smaller-scale, liberal-arts institutions.

DESIGN AND CONSTRUCTION

We based our design on the "figure-9" laser in Ref. 9. Our improvements to this design include the addition of a 99/1 coupler, a fiber polarizing beam splitter (PBS), and a z-axis translation stage. The second output provided by the 99/1 coupler allowed better metrics for alignment. The use of a fiber PBS, rather than free-space, helped with the free space alignment.

The z-axis translation stage, as seen in Figure 1b, assists in achieving f_{rep} near that of our existing, fixed f_{rep} comb. In an all-fiber design, f_{rep} precision is limited to the accuracy of the fiber cleaver and fiber length measurements, which is insufficient to reach a Δf_{rep} of 10 kHz. In order to achieve higher precision, we introduce a free-space section, with several methods of free-space length adjustment. For both coarse and fine adjustment, we installed a z-axis translation stage along cage rails, where the stage can be slid along the rails for coarse adjustment of f_{rep} over a length of 3 cm, and the stage's micrometer can adjust f_{rep} over a distance of 2 mm to better match our previously constructed comb. Our free space section, as seen in the inner box of Figure 1a, consists of the z-axis translational stage with a micrometer attached, a Faraday rotator, a quarter wave-plate ($\lambda/4$), a PBS, and a mirror.

Outside of the oscillator we added an erbium-doped fiber amplifier (EDFA) into our box consisting of erbium doped fiber (EDF), a wavelength division multiplexer (WDM), and an isolator. This EDFA, seen at the bottom of Figure 1a, is reverse-pumped where the pump and signal counter-propagate. This EDFA allows us to run lower power in our oscillator while maintaining strong output power. Including an EDFA also allows us to use either output as our main output to science, therefore using the other output as a tap output.

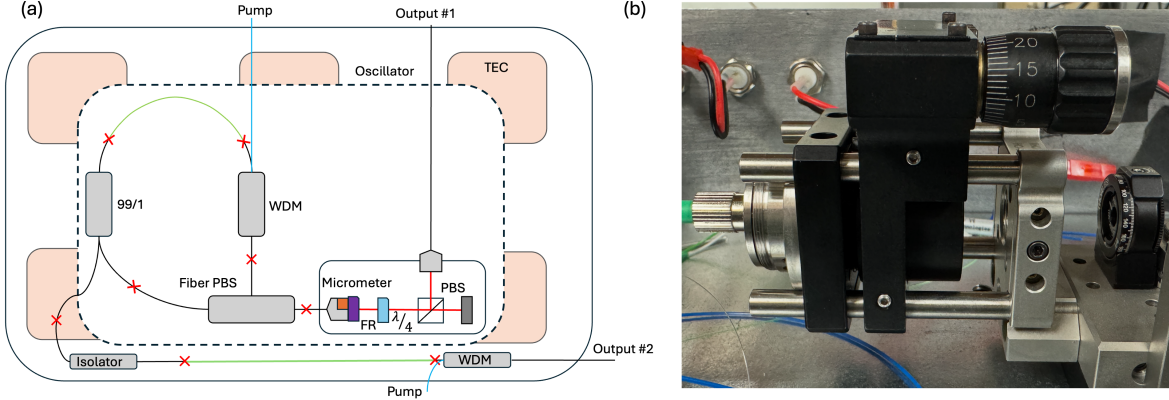


FIGURE 1. (a) A diagram of the "figure-9" design inside sealed aluminum box. The f_{rep} of the comb is roughly 100.037 MHz, which is achieved using roughly 2 m of fiber, 58 cm of which is EDF, and 14 cm of free space. 980 nm pump diodes drive both sections of EDF. Output 1 is the output of the free-space PBS and output 2 is the 99/1 coupler output, which in the diagram is amplified in the EDFA. Red X's indicate splices in fiber. (b) The adjustable free-space section, where the collimator position (left) can be adjusted coarsely by sliding the translation stage along the cage rails, and finely using the translation stage's micrometer. The FR is attached to the translation stage.

In order to maintain mode-lock for extended periods of time as well as use in dual-comb spectroscopy, each comb needs f_{rep} and f_0 stabilized. Many factors, such as temperature, vibrations, and electrical fluctuations, can cause both of these drift. The most dominant factor is temperature. As temperature drifts, the optical fibers will expand and contract, causing f_{rep} to drift. We measured the drift of f_{rep} using a high-speed photodetector. Our first step to counter these drifts is to enclose the comb in a sealed aluminum box, visible in Figure 1b, which eliminates air currents and reduces temperature fluctuations. To actively combat these f_{rep} changes, we have placed thermoelectric coolers (TEC) in our box underneath the oscillator. We use the TECs in a Python-based feedback loop tied to f_{rep} directly rather than locking it to a specific temperature. As dual-comb spectroscopy requires a much tighter, high-bandwidth phase-lock of f_{rep} , we also installed two piezoelectric transducers (PZT) to the control loop. We included one large PZT with a tunability of 20 μm , corresponding to changes of up to 100 Hz and a small PZT with a tunability of 2 μm , corresponding to changes of 10 Hz. The PZTs, in tandem with the TECs, can maintain phase-lock amid environmental changes, as the TECs can correct for any large-scale long-term drift. We epoxied the fiber to these PZTs and stabilized the fiber with modeling clay to negate high-frequency vibrations from the PZTs, based off the use of PZTs in Ref. 10. A summary of the f_{rep} tuning components is given in Table 1.

TABLE 1. Tunability, speed and accuracy of components used in f_{rep} control loop.

Component	Tunability Range	Response Time	Accuracy
z-axis translational stage	3 MHz	Manual	kHz
Micrometer	100 kHz	Manual	100 Hz
TECs	100 kHz	Minutes	Hz
Large PZT	100 Hz	10 ms	mHz
Small PZT	10 Hz	<1 ms	mHz

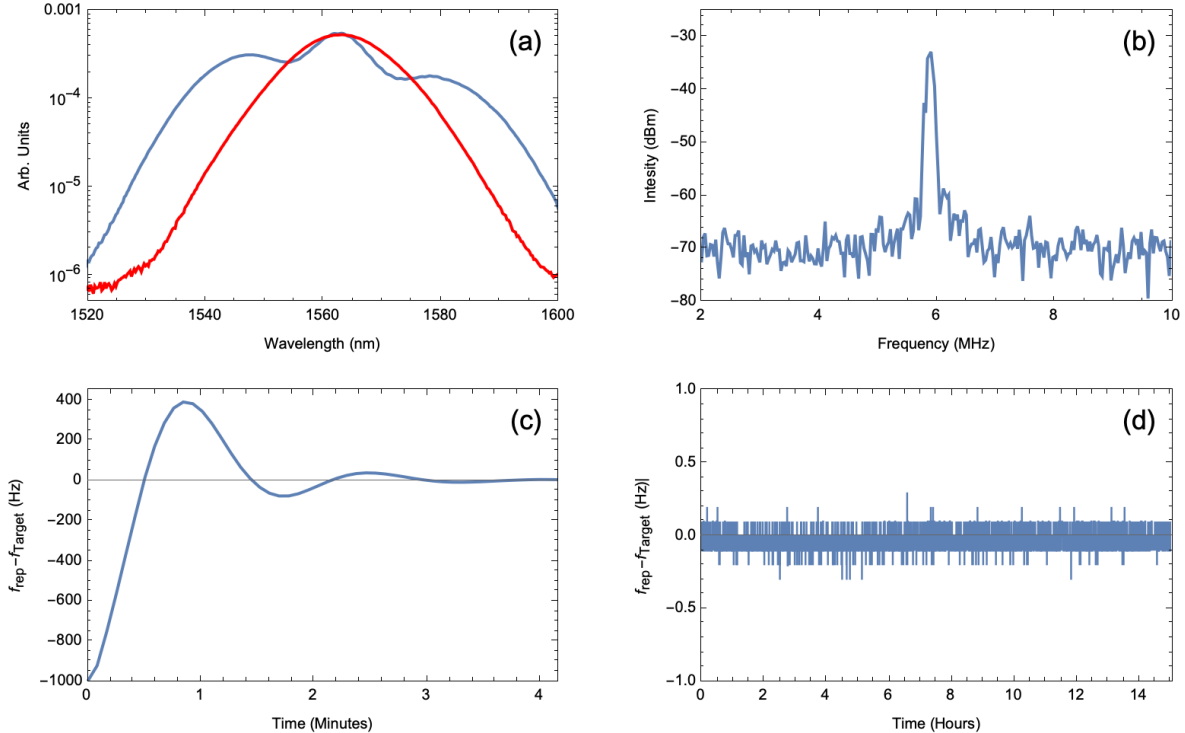


FIGURE 2. (a) Spectral output from the comb recorded on an optical spectrum analyzer with free-space output in blue and 99/1 coupler output in red. (b) Heterodyne beat between comb tooth and narrow-linewidth laser. (c) f_{rep} control loop performance, demonstrating the system’s ability to reach a target f_{rep} within minutes. (d) Long term stabilization of f_{rep} , showing drifts of only 0.2 Hz over the course of 15 hours.

RESULTS

To initially test this design, we added in extra patch cords to extend the length of the oscillator, first by 2 m to achieve f_{rep} of 60 MHz, then by 1 m to achieve f_{rep} of 80 MHz. This boosted the pulse energy making the comb easier to mode-lock. We did this not only to test the design but to find the angles on the quarter wave-plate where this comb would mode-lock at the lowest pump power. After finding the angle (between 60 and 64°) we cut and spliced the comb to its final length.

Two 980 nm pump diodes, combined with a fiber PBS, provided a power of 726 mW. At this power, our comb mode-locked with multipulsing, where, rather than forming a single pulse, the oscillator supports multiple evenly-spaced pulses per roundtrip, which appears as a modulated spectrum on an optical spectrum analyzer. Once the comb mode-locked with multipulsing we lowered the power until it single-pulsed with CW breakthrough. To eliminate this breakthrough, we further reduced the power until it was mode-locked without breakthrough, at roughly 300 mW of pump power, and remained mode-locked down to roughly 200 mW of pump power.

We collected optical spectra for both outputs, and, based on the spectral shape and how well it matched that of our existing comb, chose which would be used as a monitor and which would be used for spectroscopy. Figure 2a displays spectra of both the 99/1 coupler output and the free-space output, measured using an optical spectrum analyzer. As the spectrum of the 99/1 coupler output matched our desired spectrum better, the power numbers reported refer to the 99/1 coupler output. At a pump power of roughly 200 mW, the output is approximately $5\mu\text{W}$, but with the EDFA pumped with 150 mW of 980 nm light, we achieved an output power of 10 mW.

Once mode-locked, we were able to use the micrometer to achieve our goal of a 10 kHz difference between this comb and our preexisting comb. The comb is able to reach a target f_{rep} within minutes, as shown in Figure 2c, and remain at that target with a drift of under 1 Hz, as shown in Figure 2d. This stability is achieved only using the TECs inside the box. To achieve stabilization in the mHz realm our next step is to include the PZTs in our control loop to phase-lock the comb. We also recorded the heterodyne beat between a single comb tooth and a narrow-linewidth laser, as displayed in 2b, thus showing the structure of the oscillator. This will also be used in the future to allow us to lock

an RF reference to the tooth to indirectly stabilize f_0 , providing the required stabilization for dual-comb spectroscopy.

CONCLUSION

We were able to design and construct an adjustable f_{rep} optical frequency comb for a fraction of the cost of a commercial system at roughly \$5000 in parts. We were able to do this using off-the-shelf components while also having an undergraduate splice, align, and mode-lock the entirety of this project. Our future goal is to use this comb in conjunction with our preexisting comb to collect interferograms of the dual-comb spectra of hydrogen cyanide (HCN) which has absorption features centered in the spectral coverage of both our combs, thus being a good test of our combs, suitability for dual-comb spectroscopy.

ACKNOWLEDGMENTS

This work was supported by the donors of ACS Petroleum Research Fund under Undergraduate New Investigator Grant 65007-UN16. We acknowledge assistance in crimping and soldering electrical connections from Michael Moran, and machining the enclosure from Tom Dobkowski.

REFERENCES

1. S. Coburn, C. B. Alden, R. Wright, K. Cossel, E. Baumann, G.-W. Truong, F. Giorgetta, C. Sweeney, N. R. Newbury, K. Prasad, *et al.*, "Regional trace-gas source attribution using a field-deployed dual frequency comb spectrometer," *Optica* **5**, 320–327 (2018).
2. M. J. Thorpe, D. Balslev-Clausen, M. S. Kirchner, and J. Ye, "Cavity-enhanced optical frequency comb spectroscopy: application to human breath analysis," *Opt. Express* **16**, 2387–2397 (2008).
3. J. L. Hall, "Nobel lecture: Defining and measuring optical frequencies," *Rev. Mod. Phys.* **78**, 1279–1295 (2006).
4. S. Droste, G. Ycas, B. R. Washburn, I. Coddington, and N. R. Newbury, "Optical frequency comb generation based on erbium fiber lasers," *Nanophotonics* **5**, 196–213 (2016).
5. T. W. Hänsch, "Nobel lecture: Passion for precision," *Rev. Mod. Phys.* **78**, 1297–1309 (2006).
6. K. Minoshima and H. Matsumoto, "High-accuracy measurement of 240-m distance in an optical tunnel by use of a compact femtosecond laser," *Appl. Opt.* **39**, 5512–5517 (2000).
7. T. Ideguchi, "Dual-comb spectroscopy," *Opt. Photonics News* **28**, 32–39 (2017).
8. N. R. Newbury, I. Coddington, and W. Swann, "Sensitivity of coherent dual-comb spectroscopy," *Optics Express* **18**, 7929–7945 (2010).
9. W. Hänsel, H. Hoogland, M. Giunta, S. Schmid, T. Steinmetz, R. Doubek, P. Mayer, S. Dobner, C. Cleff, M. Fischer, and R. Holzwarth, "All polarization-maintaining fiber laser architecture for robust femtosecond pulse generation," *Applied Physics B* **123**, 41 (2017).
10. L. C. Sinclair, J.-D. Deschênes, L. Sonderhouse, W. C. Swann, I. H. Khader, E. Baumann, N. R. Newbury, and I. Coddington, "Invited article: A compact optically coherent fiber frequency comb," *Rev. Sci. Instrum.* **86** (2015).