

Load Asymptotics and Dynamic Speed Optimization for the Greenest Path Problem: A Comprehensive Analysis

Poulad Moradi, Joachim Arts

Luxembourg Centre for Logistics and Supply Chain Management, University of Luxembourg, Luxembourg City, Luxembourg,
6, rue Richard Coudenhove-Kalergi L-1359, {poulad.moradi, joachim.arts}@uni.lu

Josué C.Velázquez-Martínez

Center for Transportation and Logistics, Massachusetts Institute of Technology, Cambridge, MA, USA,
1 Amherst Street, MA 02142, josuevm@mit.edu

We study the effect of using high-resolution elevation data on the selection of the most fuel-efficient (greenest) path for different trucks in various urban environments. We adapt a variant of the Comprehensive Modal Emission Model (CMEM) to show that the optimal speed and the greenest path are slope dependent (dynamic). When there are no elevation changes in a road network, the most fuel-efficient path is the shortest path with a constant (static) optimal speed throughout. However, if the network is not flat, then the shortest path is not necessarily the greenest path, and the optimal driving speed is dynamic. We prove that the greenest path converges to an asymptotic greenest path as the payload approaches infinity and that this limiting path is attained for a finite load. In a set of extensive numerical experiments, we benchmark the CO₂ emissions reduction of our dynamic speed and the greenest path policies against policies that ignore elevation data. We use the geo-spatial data of 25 major cities across 6 continents, such as Los Angeles, Mexico City, Johannesburg, Athens, Ankara, and Canberra. Our results show that, on average, traversing the greenest path with a dynamic optimal speed policy can reduce the CO₂ emissions by 1.19% to 10.15% depending on the city and truck type for a moderate payload. They also demonstrate that the average CO₂ reduction of the optimal dynamic speed policy is between 2% to 4% for most of the cities, regardless of the truck type. We confirm that disregarding elevation data yields sub-optimal paths that are significantly less CO₂ efficient than the greenest paths. We observe numerically that the greenest path quickly diverges from the shortest path and attains to the asymptotic greenest path even for moderate payloads. Based on an analysis of variance, the main determinants of the CO₂ emissions reduction potential are the variation of the road gradients along the shortest path as well as the relative elevation of the source from the target. The same factors along with the length of the shortest path are the main indicators of the dissimilarity between the shortest path and the greenest path.

Key words: Sustainability, Routing, Asymptotics, Last-Mile

1. Introduction

The transportation sector is one of the largest sources of anthropogenic CO₂ emissions, as attested by the Intergovernmental Panel on Climate Change (2021), US Environmental Protection Agency

(2022), and the European Environment Agency (2021). In 2020, 36.3% of U.S. CO₂ emissions from fossil fuel combustion came from the transportation sector, of which 45.2% was generated by heavy-, medium-, and light-duty trucks (US Environmental Protection Agency 2022). Similarly, the transportation sector accounted for 22% of the EU’s CO₂ emissions in 2020 (European Environment Agency 2021). Accordingly, there has been considerable attention on reducing CO₂ emissions through “green routing”; see e.g. Demir et al. (2012), Scora et al. (2015), Raeesi and Zografos (2019). The objective to reduce CO₂ emissions in transportation aligns with efforts to reduce fuel expenditure. The reduction of fuel consumption has become imperative as fuel increases in price and volatility due to recent geopolitical events, namely the Russian invasion of Ukraine (Goldfarb and Patterson 2022).

Road gradient and vehicle speed are two major factors that influence the carbon footprint of a diesel truck (Demir et al. 2014). Demir et al. (2011) demonstrate through numerical analysis that a medium-duty truck may consume an additional six liters of diesel per 100 kilometer while traveling up a hill with a 1% gradient. The same study also shows that increasing the speed of an empty medium-duty truck from 50 km/h to 100 km/h can raise fuel consumption by more than 3% on a level path. Gravity is an important factor in finding the most efficient path between two points. Johann Bernoulli posed such a problem as early as 1696, in which a path was deemed efficient if the travel time was minimized and only gravity could be used to accelerate. The solution to this problem gave rise to so-called brachistochrone curves, which differ from the shortest path between two points. Gravity and speed interact when finding the greenest (or most fuel-efficient) route between two points in a road network. The aim of the present paper is to provide a thorough analysis of the difference between shortest paths and greenest paths as a function of speed and vehicle type for a large variety of geographic settings.

In principle, empirical methods are the most precise way of measuring carbon emissions associated with traversing a road with a certain vehicle at a certain speed. Unfortunately, it is not practical to empirically find carbon emissions for all roads, speeds, and vehicle types as well as many other parameters (e.g. road surface type) that affect fuel efficiency. Hence, several CO₂ emissions models for trucks have been proposed in literature. Demir et al. (2014) offers a summary of these models. The Comprehensive Modal Emission Model (CMEM) is an instantaneous emissions modeling approach that was introduced by Barth et al. (2005), Scora and Barth (2006), Boriboonsomsin and Barth (2009). Bektaş and Laporte (2011) and Demir et al. (2012) present a simplified variant of CMEM that is differentiable with respect to speed. This model is convenient in practical applications. Rao et al. (2016) and Brunner et al. (2021) show that this model can be made more realistic for cases where a vehicle travels downhill. Their modification of the CMEM, unfortunately,

renders it no longer differentiable at all speeds. Over the past decade, CMEM has been the prevalent emissions model utilized in green/pollution vehicle routing problems (e.g. Bektaş and Laporte (2011), Franceschetti et al. (2013), Huang et al. (2017), Xiao et al. (2020)).

We call an optimization problem that seeks a path between an origin and destination a *path selection* problem. In this paper, we focus on the selection of the greenest (most fuel-efficient) path. The greenest path is the path with the least CO₂ emissions. Some authors also call this the eco-friendly path (e.g. Scora et al. 2015, Andersen et al. 2013, Boriboonsomsin and Barth 2009, Schröder and Cabral 2019). Path selection is the backbone of a multitude of transport-based supply chain problems, from strategic supply chain network design to operational vehicle routing problems. The complexity of transportation problems forces many solution approaches to use path selection as a preprocessing activity. It is common to use either the shortest or the fastest path in this pre-processing step. The implicit assumption is that these paths are also the greenest. In this paper, we show that the actual topology of urban road networks requires that we consider the greenest path selection as a part of the main optimization problem, e.g. vehicle routing problem (VRP) or supply chain network design (SCND).

The development of Geographic Information Systems (GIS) have made high-resolution geospatial data available at low cost. It is not sufficient to only consider the elevation of the origin and destination of a path. Rather, for any path, elevation along different sections of a path determine whether gravity increases or decreases the amount of fuel needed for travel. Thus, detailed elevation data of each segment of a possible path is required to find the greenest path. Furthermore, the slope along different segments of a path also determines the most fuel efficient speed along each segment of a path.

In this paper, we show that the most fuel efficient speed will change along different segments of any path. Thus, dynamic speed optimization is important to find the greenest path between any origin and destination. The greenest path also depends on the payload of a vehicle. We prove that the greenest path converges to an asymptotic greenest path as the payload approaches infinity and that this limiting path is attained for a finite payload. Our results are illustrated through numerical experiments. These experiments consider a setting wherein a logistics service provider seeks to reduce the CO₂ emissions of their transport operations. The company's fleet consists of heavy-, medium-, and light-duty trucks that operate in an urban environment. We use the modified CMEM proposed by Brunner et al. (2021) and focus our analysis on the effects that road gradient, speed, payload, and truck type have on CO₂ emissions.

We use an extensive numerical study to provide statistical answers to empirical research questions listed at the end of this section. We utilize the real road network and elevation data of 25 cities across six continents. It is worth noting that the closest paper to our work in terms of the CO₂

emissions model is Brunner et al. (2021). Apart from the dissimilarity of our objective functions, the main differences between our study and Brunner et al. (2021) are twofold. Firstly, Brunner et al. (2021) base their analysis on the static speed policy along different segments of a path. We show that a static speed policy can be suboptimal in terms of CO₂ emissions for traversing a path in a city with uneven topography. In addition, we demonstrate that the speed policy influences which path is the greenest. Secondly, Brunner et al. (2021) solve the path selection problem as a preprocessing activity for their main VRP problem. Moving the path selection to a preprocessing step forces them to consider fixed loads and speeds. By contrast, we consider dynamic speed optimization, and study asymptotics greenest paths as payloads increase.

The main contributions of this paper are listed below:

1. We show that the greenest path is speed and payload dependent for accurate emission models. We provide a tractable algorithm to optimize the path and the speed jointly, where the speed varies along the path.
2. We show that the greenest path converges to an asymptotic greenest path when the load becomes large and that this path is attained for a finite load in Section 3.5. In Sections 4.3 and 4.4, we show that this convergence happens relatively quickly in practice. We also show, in Section 4.3, that the greenest path for a slope-dependent optimal speed policy is quite similar to the one associated with the static speed policy of Demir et al. (2012), yet significantly different from the shortest path.
3. We conduct an extensive numerical study with data from 25 cities over 6 continents and over 3 million origin destination pairs. We use detailed elevation data from U.S. Geological Survey (2000)'s SRTM 1 Arc-Second Global data set. This thorough study allows us to answer the following research questions:
 - (a) How much CO₂ emissions can dynamic speed and path policies reduce? What are the effects of truck type, payload, and city on the carbon reduction potential?
 - (b) What is the marginal contribution of speed optimization and path optimization in the reduction of CO₂ emissions?
 - (c) How different is the slope-dependent greenest path from the shortest path (which is the slope-disregarding path)?
 - (d) What is the impact of the speed policy on the greenest path?
 - (e) In what settings are the integration of elevation data in path selection most valuable?

The rest of this paper is organized as follows. We review the related literature in Section 2. Section 3 describes the mathematical model used in this study and the policies that can minimize CO₂ emissions. Section 4 provides the setting and results of the extensive numerical studies. Finally, we offer the conclusions and final remarks in Section 5.

2. Literature review

Green transportation has been studied extensively over various decision-making settings. Asghari and Alehashem (2021), Moghdani et al. (2021), Demir et al. (2014) give reviews on the most important recent literature on the green VRP. Additionally, Waltho et al. (2019) reviews pivotal studies in the field of green SCND from 2010 to 2017. In most of the main stream green VRP and SCND, the path between every two nodes of interest is computed as a preprocessing step (e.g. Demir et al. (2012)). This has been partially relaxed for the VRP by Behnke and Kirschstein (2017). In other words, road networks are reduced to distances between origin and destination pairs to simplify later computations. The implicit assumption is that distances or travel times are the main drivers of costs and/or emissions. This paper extensively studies to which extent this implicit assumption is tenable.

A large body of work in the field of green transportation relies on macroscopic (average aggregate), microscopic (instantaneous) fuel consumption models, or a combination of both. Demir et al. (2014) and Zhou et al. (2016) provide an extensive review of fuel consumption models. A number of studies, including Boriboonsomsin et al. (2012), Scora et al. (2015), and Ericsson et al. (2006), estimate the CO₂ emissions of a specific vehicle based on the real-time measurement of that vehicle. Demir et al. (2014) explain the main factors that influence fuel consumption in road freight transportation. Among the pertinent determinants for the case of the greenest path are road gradient, speed, truck type, and payload.

The path optimization under environmental consideration (the greenest path) has been explored over the past two decades. This problem can be formulated based on a variant of the shortest path algorithm of Dijkstra (1959) to minimize the total fuel consumption of a vehicle between two nodes. Ericsson et al. (2006) studies the CO₂ emissions of light-duty cars by using a navigation system that computes the greenest path based on in-vehicle data and traffic information in Lund, Sweden. They conclude that selecting the greenest path can reduce fuel consumption by 4% on average in Lund. Boriboonsomsin et al. (2012) presents an Eco-Routing Navigation System (EFNav) as a framework to integrate GIS and traffic data with emissions model estimates to compute eco-friendly paths for light vehicles. Scora et al. (2015) extend the EFNav model to heavy-duty trucks (EFNav-HDT) and conduct a numerical study to test the benefits of EFNav-HDT across different vehicle weights in Southern California. Scora et al. (2015) provide excellent insights into the specifications of the greenest path for trucks. Both Boriboonsomsin et al. (2012) and Scora et al. (2015) base their studies on the CMEM model and estimate the energy/emissions model using linear regression over data from actual measurements. Boriboonsomsin et al. (2012) take advantage of a logarithmic transformation and Scora et al. (2015) use a minimum fuel cutoff point to avoid negative fuel consumption results. Andersen et al. (2013) take advantage of free road network data, such as

OpenStreetMap, and use Controller Area Network (CAN bus) data to compute the greenest path by assigning weights to the different segments of the network. Since this work does not rely on a fuel consumption model, it is very accurate for the paths and vehicles for which fuel consumption data is available, but it does not transfer to other settings without the collection of a large amount of data in that setting. Pamučar et al. (2016) utilize a similar approach and include other negative externalities associated with transportation, such as noise, land use, and pollutants other than CO₂. Schröder and Cabral (2019) consider a Digital Elevation Model and Copert III emissions model to compute the greenest path. Dündar et al. (2022) propose an approach to increase the resolution of the road network and compute the fuel consumption over along a path more accurately.

Speed optimization as a means to reduce the emissions and driving costs was first introduced by Demir et al. (2012). Franceschetti et al. (2013) present a speed optimization technique that can also be used for traffic congestion. Both of these works, as well as many other well-cited papers, such as Lai et al. (2021), rely on the CMEM model of Demir et al. (2011), which results in negative fuel consumption over many downhill paths (Brunner et al. 2021). Brunner et al. (2021) modify the fuel consumption model, yet only consider a constant travel speed. Some papers consider the shortest path under dynamic speeds induced by congestion (e.g. Ehmke et al. 2016a,b, Huang et al. 2017, Ehmke et al. 2018).

A summary of the relevant works is presented in Table 1. In our paper, we consider the modified CMEM (Brunner et al. 2021). We explore the individual and combined effects of elevation, speed optimization, truck type, payload, and characteristic city topography on CO₂ emissions reduction and the greenest path policies. This paper, is the first paper to provide asymptotic results for a path selection problem and the the greenest path problem in particular.

Table 1 Literature comparison.

	GP	T	θ	SSO	DSO	l	C	S
Ericsson et al. (2006)	✓						1	< 1K
Boriboonsomsin et al. (2012)	✓		✓				1	< 1K
Demir et al. (2012)				✓			-	-
Andersen et al. (2013)	✓						-	-
Franceschetti et al. (2013)				✓			-	-
Koc et al. (2014)		✓		✓			-	-
Scora et al. (2015)	✓		✓			✓	1	< 1K
Schröder and Cabral (2019)	✓		✓				1	< 1K
Brunner et al. (2021)			✓				1	-
This paper	✓	✓	✓	✓	✓	✓	25	> 3M

GP: The greenest path problem.

T: The effect of truck type type.

θ : The effect of high-resolution road gradient data.

SSO: The effect of static speed optimization.

DSO: The effect of dynamic speed optimization.

l : The effect of payload ratio.

C: Number of cities for which the elevation data/empirical fuel consumption data is considered in the study.

S: Sample size of the origin-destination pairs for which the greenest path is computed.

K: Thousands.

M: Million.

3. Model Description

In this section, we introduce the notations (Section 3.1) and mathematical foundations of our research, including the CO₂ emissions models (Section 3.2) together with the optimal speed policies (Section 3.3). We formally introduce the greenest paths between two locations in a city road network and discuss how optimal speed policies complicate the computation of the greenest path (Section 3.4). We study the asymptotic behavior of the greenest path when the payload increases (Section 3.5). In Section 3, we only consider speed, payload, and/or path (or a single arc) as the explicit arguments of functions, since these three factors are the focus of our analysis in Sections 3.3, 3.4, and 3.5.

3.1. City Network and Notations

Let a directed graph $\mathcal{G} = (V, A)$ represent the road network of a city, where $V = \{1, \dots, m\}$ is the set of m vertices, the points of interest along the roads (e.g. road intersections), and $A \subseteq V \times V$ is the set of arcs (road segments) that connects the vertices. Any arc $a \in A$ has the following features: the length $\delta : A \rightarrow \mathbb{R}_{++}$, the angle $\theta : A \rightarrow \mathbb{R}$, the maximum allowable speed by $v^{\max} : A \rightarrow \mathbb{R}_{++}$, and the minimum allowable speed by $v^{\min} : A \rightarrow \mathbb{R}_{++}$, where $\mathbb{R}_{++} = \{x \in \mathbb{R} : x > 0\}$. We consider an internal combustion engine truck that traverses an arc $a \in A$ with speed $v \in [v^{\min}(a), v^{\max}(a)]$. v is constant along arc a , but the speed of the truck can vary on other arcs. The truck consumes f_a liters of diesel fuel and produces e_a kilograms of CO₂ to traverse arc $a \in A$ (v will be selected to minimize f_a and e_a according to different emission models). Notation, including those of truck properties, are listed in Table 2.

3.2. Emission Models

We discuss two emission models. The first of these models is most commonly used in recent papers on the green/pollution routing problem (e.g. Bektaş and Laporte 2011, Demir et al. 2012, Franceschetti et al. 2013, Dabia et al. 2017). We will call this the standard model. The second model is a small improvement on the standard model to disallow negative fuel consumption on downward sloping road segments.

3.2.1. Standard Emissions Model The CMEM (Barth et al. 2005, Scora and Barth 2006, Boriboonsomsin and Barth 2009) is a microscopic truck fuel consumption model that has been widely used in literature for pollution/green vehicle routing problems. The Standard model is an instantiation of the CMEM approach. Suppose a truck with the parameters given in Table 2 and payload l travels along arc $a \in V$ with speed v . In the standard emission model introduced by Bektaş and Laporte (2011) and Demir et al. (2012), the truck's fuel consumption is given by:

Table 2 Overview of notation.

Notation	Description
Sets	
\mathcal{G}	Directed multigraph representing the urban road network, $\mathcal{G} = (V, A)$.
V	Set of vertices of \mathcal{G} , $V = \{1, \dots, m\}$, where m is the number of vertices.
A	Set of arcs of \mathcal{G} , $A \subseteq V \times V$.
Π	Set of all paths between a pair of nodes $n_s, n_t \in A$.
Π_d	Subset of Π such that for all $a \in \Pi_d$, $\tan\theta(a) < -C_r$.
Network Features	
$\delta(a)$	$\delta^{\max} : A \rightarrow \mathbb{R}_{++}$, length of arc $a \in A$.
$\theta(a)$	$\theta^{\max} : A \rightarrow \mathbb{R}$, angle of arc $a \in A$.
$h'(a)$	$h' : A \rightarrow \mathbb{R}$, augmented ascent of arc $a \in A$, i.e. $h'(a) = \delta(a) \sin(\theta(a) + \arctan C_r)^+$.
$v^{\max}(a)$	$v^{\max} : A \rightarrow \mathbb{R}_{++}$, maximum allowable speed for traversing arcs $a \in A$.
$v^{\min}(a)$	$v^{\min} : A \rightarrow \mathbb{R}_{++}$, minimum allowable speed for traversing arcs $a \in A$.
Parameters	
ξ	Fuel-to-air mass ratio.
g	Gravitational constant (m/s^2).
ρ	Air density (kg/m^3).
C_r	Coefficient of rolling resistance.
η	Efficiency parameter for diesel engines
η_{tf}	Vehicle drivetrain efficiency.
κ	Heating value of a typical diesel fuel (kJ/g).
ψ	Conversion factor (g/s to L/s).
w	Curb weight (kg).
L	Maximum payload (kg).
k	Engine friction factor (kJ/rev/L).
N	Engine speed (rps).
D	Engine displacement (L).
C_d	Coefficient of aerodynamic drag.
S	Frontal surface area (m^2).
c_e	Fuel's CO_2 Emissions Coefficient.
Variables	
l	$l \in \mathbb{R}_+$, payload (kg).
v	$v \in \mathbb{R}_{++}$, speed of a truck to traverse arc $a \in A$.
c_v	Constant speed (Equation (7)) that minimizes the standard emissions model (Equation (1)).
$v(a)$	$v : A \rightarrow \mathbb{R}_{++}$, speed policy for a truck to traverse arc $a \in V$.
$v^d(a, l)$	$v^d : A \times \mathbb{R}_+ \rightarrow \mathbb{R}_{++}$, dynamic speed policy on arc $a \in A$ with payload l as per Proposition 1.
$v^s(a)$	$v^s : A \rightarrow \mathbb{R}_{++}$, static speed policy on arc $a \in A$ as per Equation (7).
$v^t(a, l)$	$v^t : A \times \mathbb{R}_+ \rightarrow \mathbb{R}_{++}$, terminal velocity on arc $a \in A$ with payload l as per Proposition 1.
$t_a(v)$	$t_a : \mathbb{R}_{++} \rightarrow \mathbb{R}_{++}$, traveling time on arc $a \in A$ with speed $v \in \mathbb{R}_{++}$.
π	$\pi \in \Pi$, path between a pair of nodes $n_s, n_t \in A$.
π^{sp}	$\pi^{sp} \in \Pi$, the shortest path between a pair of nodes (Equation (13)).
$\pi^g(v, l)$	$\pi^g(v, l) \in \Pi$, the most fuel-efficient (greenest) path between a pair of nodes under the speed policy v and payload l (Equation (12)).
$\pi^\infty(v)$	$\pi^\infty(v) \in \Pi$, the asymptotic greenest path between a pair of nodes under the speed policy v , i.e. the greenest path when the payload is arbitrarily large (Proposition 3).
$\tilde{f}_a(v, l)$	$\tilde{f}_a : \mathbb{R}_{++} \times \mathbb{R}_+ \rightarrow \mathbb{R}_{++}$, amount of fuel (liter) that a truck consumes for traversing arc $a \in V$ with speed v and payload l under the standard emissions model (Section 3.2.1).
$f_a(v, l)$	$f_a : \mathbb{R}_{++} \times \mathbb{R}_+ \rightarrow \mathbb{R}_{++}$, amount of fuel (liter) that a truck consumes for traversing arc $a \in V$ with speed v and payload l under the improved emissions model (Section 3.2.2).
$\tilde{e}_a(v, l)$	$\tilde{e}_a : \mathbb{R}_{++} \times \mathbb{R}_+ \rightarrow \mathbb{R}_{++}$, amount of CO_2 (kg) that a truck emits for traversing arc $a \in V$ with speed v and payload l under the improved emissions model (Section 3.2.2).
$e_a(v, l)$	$e_a : \mathbb{R}_{++} \times \mathbb{R}_+ \rightarrow \mathbb{R}_{++}$, amount of CO_2 (kg) that a truck emits for traversing arc $a \in V$ with speed v and payload l under the improved emissions model (Section 3.2.2).
$\mathcal{E}(\pi, v, l)$	Total amount of CO_2 emitted by a truck along a \mathcal{E} path π under the speed policy v and payload l , i.e. $\mathcal{E}(\pi, v, l) = \sum_{a \in \pi} e_a(v(a), l)$.

$$\tilde{f}_a(v, l) = \frac{P\delta(a)}{v} + Q\delta(a) (g \sin \theta(a) + C_r g \cos \theta(a)) (w + l) + R\delta(a)v^2 \quad (1)$$

$$\text{with } P = \frac{\xi k N D}{\kappa \psi}, \quad (2)$$

$$Q = \frac{\xi}{1000 \eta \eta_{t,f} \kappa \psi}, \quad (3)$$

$$R = \frac{\xi C_d \rho S}{2000 \eta \eta_{t,f} \kappa \psi}. \quad (4)$$

The main assumption behind (1) is that the truck parameters remain constant along each arc $a \in V$. This model sets aside a number of minor sources of fuel consumption, such as air conditioning and compressed air systems. Burning one liter of diesel in a combustion engine produces $c_e = 2.67$ kg/L of CO₂ (U.S. Environmental Protection Agency 2005). Thus we find that the CO₂ emissions associated with traversing an arc a with load l at speed v is given by

$$\tilde{e}_a(v, l) = c_e \tilde{f}_a(v, l) = 2.67 \tilde{f}_a(v, l)$$

under the standard model.

3.2.2. Improved Emissions Model Rao et al. (2016) and Brunner et al. (2021) establish that the standard emission model gives rise to negative fuel consumption on some negative road angles that are not realistic for internal combustion engine vehicles. Thus, Brunner et al. (2021) propose the following adjustment to equation (1):

$$f_a(v, l) = \frac{P \delta(a)}{v} + (Q \delta(a) (g \sin \theta(a) + C_r g \cos \theta(a)) (w + l) + R \delta(a) v^2)^+, \quad (5)$$

where $(\cdot)^+ = \max(\cdot, 0)$. Equation (5) shows that gravity works in favor of the vehicle over downhill arcs to compensate the energy loss caused by drag and rolling resistance force. This equation assumes that any engine-powered brakes consume a negligible amount of fuel. The standard and improved emission models (1) and (5) are identical on a flat network ($\theta(a) = 0$ for all $a \in A$). We note that a slight modification of the above models can also allow for electric vehicles with regenerative braking; see Larminie and Lowry (2012). As before we now find that the CO₂ emissions associated with traversing arc a with load l at speed v is given by

$$e_a(v, l) = c_e f_a(v, l) = 2.67 f_a(v, l). \quad (6)$$

3.3. Optimal Speed

The most fuel efficient speed to traverse an arc depends on the emission model that is used. We will show below that there is one optimal speed for all arcs in a network under the standard emission model, but that the optimal speed may differ by arc for the improved emission model.

3.3.1. Static Speed Optimization The *speed optimization problem (SO)* is to compute the speed policy which minimizes the carbon emissions when a vehicle travels across an arc $a \in A$. Under the standard emissions model, SO can be formulated as

$$\tilde{e}_a^* = \min_{v \in [v^{\min}(a), v^{\max}(a)]} \tilde{e}_a(v, l) \quad \text{and} \quad v^s(a) = \arg \min_{v \in [v^{\min}(a), v^{\max}(a)]} \tilde{e}_a(v, l)$$

This implies that the most fuel efficient speed is the same along any arc $a \in A$ and is given by $v^s : A \rightarrow \mathbb{R}_{++}$ that is defined by,

$$v^s(a) := \begin{cases} v^{\min}(a) & \text{if } c_v \leq v^{\min}(a) \\ c_v & \text{if } v^{\min}(a) < c_v \leq v^{\max}(a) \\ v^{\max}(a) & \text{if } v^{\max}(a) < c_v, \end{cases} \quad (7)$$

where c_v ,

$$c_v = \sqrt[3]{\frac{P}{2R}}. \quad (8)$$

is the optimal speed without any speedlimits. Expressions for P and R are given by Equations (2) and (4). Equation (8) is obtained by solving the first order conditions to minimize (1) with respect to v . Since c_v is constant along all arcs, we use the term *static speed* policy to denote a policy that will have a vehicle traverse every arc at the speed v^s . We note that for practically meaningful values of $v^{\min}(a)$ and $v^{\max}(a)$ the optimal speed is usually given by (8), or the second case in (7).

3.3.2. Dynamic Speed Optimization In the improved emissions model, the most fuel-efficient speed to traverse an arc depends on its slope. Under the improved emissions model (5), the speed optimization problem is formulated as

$$e_a^* = \min_{v \in [v^{\min}(a), v^{\max}(a)]} e_a(v, l) \quad \text{and} \quad v^d(a, l) = \arg \min_{v \in [v^{\min}(a), v^{\max}(a)]} e_a(v, l)$$

Note that the derivative of $e_a(v, l) = \frac{c_e P \delta(a)}{v} + c_e (Q \delta(a) (g \sin \theta(a) + C_r g \cos \theta(a)) (w + l) + R \delta(a) v^2)^+$ with respect to v is given by

$$\frac{\partial e_a(v, l)}{\partial v} = \begin{cases} -\frac{c_e P \delta(a)}{v^2} & \text{if } 0 \leq v < v^t(a, l) \\ -\frac{c_e P \delta(a)}{v^2} + 2c_e R \delta(a) v & \text{if } v^t(a, l) < v(a) \end{cases}$$

where $v^t : A \times \mathbb{R}_+ \rightarrow \mathbb{R}_+$ is defined by,

$$v^t(a, l) := \begin{cases} \sqrt{\frac{-Q(g \sin \theta(a) + C_r g \cos \theta(a))(w + l)}{R}}, & \text{if } \tan \theta(a) < -C_r \\ 0, & \text{if } \tan \theta(a) \geq -C_r. \end{cases} \quad (9)$$

This derivation shows that the CO₂ emissions of an arc $e_a(v, l)$ is not differentiable with respect to v at the point $v^t(a, l)$. The speed v^t has a physical interpretation as the terminal velocity of a

vehicle on a slope with inclination θ . It is the speed at which the gravitational force along the slope equals the sum of the drag and rolling resistance forces (see e.g. Fox et al. (2020)). A vehicle reaches a non-zero terminal velocity on an arc if the angle falls below $-\arctan C_r$. The optimal solution to the speed optimization problem in (3.3.2) is slightly more involved as it needs to account for the terminal velocity. The solution is given in Proposition 1.

PROPOSITION 1. *The optimal solution to the speeds optimization problem under the improved emissions model given in (3.3.2) is given by $v^d : A \times \mathbb{R}_+ \rightarrow \mathbb{R}_{++}$ that is defined by,*

$$v^d(a, l) := \arg \min_{v \in [v^{\min}(a), v^{\max}(a)]} e_a(v, l) = \begin{cases} v^{\min}(a), & \text{if } \max(c_v, v^t(a, l)) \leq v^{\min}(a) \\ \max(c_v, v^t(a, l)), & \text{if } v^{\min}(a) < \max(c_v, v^t(a, l)) \leq v^{\max}(a) \\ v^{\max}(a), & \text{if } v^{\max}(a) < \max(c_v, v^t(a, l)). \end{cases} \quad (10)$$

Proof of Proposition 1. We consider the case where the terminal velocity is zero, and where it is strictly positive separately.

Case 1 ($\tan \theta(a) \geq -C_r$; $v^t(a, l) = 0$): Equation (5) reduces to Equation (1) so that one may verify that

$$v^d(a, l) = c_v > v^t(a, l) = 0.$$

Case 2 ($\tan \theta(a) < -C_r$; $v^t(a, l) > 0$): In this case,

$$e_a(v, l) = \begin{cases} e_a^1 = \frac{c_e P \delta(a)}{v}, & \text{if } 0 \leq v < v^t(a, l) \\ e_a^2 = c_e \left(\frac{P \delta(a)}{v} + Q \delta(a) (g \sin \theta(a) + C_r g \cos \theta(a)) (w + l) + R \delta(a) v^2 \right), & \text{if } v^t(a, l) \leq v. \end{cases}$$

It is straightforward to verify that $e_a(v, l)$ is continuous, e_a^1 is convex and non-increasing in v , and e_a^2 is convex in v with a minimum at c_v . Consequently, the optimal speed exceeds the terminal velocity, i.e. $v^d(a, l) \geq v^t(a, l)$.

As $e_a(v, l)$ is convex in v on $[v^t(a, l), \infty)$, it has an extremum at c_v if $v^t(a, l) \leq c_v$, or at $v^t(a, l)$ if $v^t(a, l) > c_v$. It follows that the optimal speed is $\max(c_v, v^t(a, l))$ if it lies within the allowable speed interval, $[v^{\min}(a), v^{\max}(a)]$. In case $\max(c_v, v^t(a, l)) < v^{\min}(a)$, then $e_a(v, l)$ is non-decreasing in $v \in [v^{\min}(a), v^{\max}(a)]$ and the optimal speed is $v^{\min}(a)$. If $\max(c_v, v^t(a, l)) \geq v^{\max}(a)$, then $e_a(v, l)$ is non-increasing in $v \in [v^{\min}(a), v^{\max}(a)]$ and the optimal speed is $v^{\max}(a)$. \square

The main insight from Proposition 1 is that it is efficient to use gravity to reduce the required engine power and emission. Proposition 1 indicates that a static speed policy is not optimal on a path that contains downhill arcs. Thus, a *dynamic speed* policy (v^d), as per Proposition 1, reduces a truck's fuel consumption, CO₂ emissions, and travel time since it requires higher speeds on downhills.

3.4. The Greenest Path

Let n_s and n_t be two different vertices of \mathcal{G} such that n_t is reachable from n_s . Let Π be the set of all possible paths between n_s and n_t . Under a given speed policy $v: A \rightarrow \mathbb{R}_{++}$ and a constant payload l , the total CO₂ emissions of a truck to travel between n_s and n_t along a path $\pi \in \Pi$, $\mathcal{E}(\pi, v, l)$, is defined as,

$$\mathcal{E}(\pi, v, l) = \sum_{a \in \pi} e_a(v(a), l) \quad (11)$$

Based on this definition, the *greenest path problem (GPP)* is to compute the path with the least CO₂ emissions, π^g , between n_s and n_t , i.e.

$$\mathcal{E}^*(v, l) = \min_{\pi \in \Pi} \mathcal{E}(\pi, v, l) = \min_{\pi \in \Pi} \sum_{a \in \pi} e_a(v(a), l) \quad \text{and} \quad \pi^g(v, l) = \arg \min_{\pi \in \Pi} \mathcal{E}(\pi, v, l) = \arg \min_{\pi \in \Pi} \sum_{a \in \pi} e_a(v(a), l). \quad (12)$$

We define the *shortest path problem (SPP)* as the computation of the minimum-distance path (π^{sp}) between n_s and n_t , i.e.

$$\delta^{sp} = \min_{\pi \in \Pi} \sum_{a \in \pi} \delta(a) \quad \text{and} \quad \pi^{sp} = \arg \min_{\pi \in \Pi} \sum_{a \in \pi} \delta(a). \quad (13)$$

The following proposition addresses π^g if the elevation data is not integrated in the GPP.

PROPOSITION 2. *The Greenest Path ($\pi^g(v, l)$) is the Shortest Path (π^{sp}) if the road gradient $\theta(a) = 0$ and the speeds $v(a)$ are constant for all arcs $a \in A$.*

Proof of Proposition 2 Let angle $\theta(a) = 0$ for all $a \in A$, and the payload l and speed policy $v(a)$ be constant, i.e. $v(a) = v^*$, where $v^* \in \mathbb{R}$ is constant. Taking into account that $\sin \theta(a) = 0$ and $\cos \theta(a) = 1$ for all $a \in A$, the GPP implies that,

$$\begin{aligned} \mathcal{E}^* &= c_e \min_{\pi \in \Pi} \sum_{a \in \pi} \frac{P\delta(a)}{v(a)} + Q\delta(a)(g \sin \theta(a) + C_r g \cos \theta(a))(w + l) + R\delta(a)v(a)^2 \\ &= c_e \min_{\pi \in \Pi} \sum_{a \in \pi} \frac{P\delta(a)}{v^*} + Q\delta(a)C_r g(w + l) + R\delta(a)v^{*2} \\ &= c_e \left(\frac{P}{v^*} + QC_r g(w + l) + Rv^{*2} \right) \min_{\pi \in \Pi} \sum_{a \in \pi} \delta(a) \\ &= c_e \left(\frac{P}{v^*} + QC_r g(w + l) + Rv^{*2} \right) \delta_{n_s, n_t}^*. \end{aligned}$$

Thus, the π^{sp} satisfies this problem that proves the proposition. \square

It is straightforward to verify that the greenest path is the fastest path when all road gradients are zero; see Proposition 2. Further notice that by Proposition 1, the speed c_v in (7) is optimal for all arcs when $\theta(a) = 0$ for all $a \in A$. This implies that a decision maker will believe the shortest path is the greenest path when she ignores elevation data.

Nonetheless, the improved emissions model and Proposition 1 show that if the elevation data is considered, the speed along each segment of a path can change. Even under the static speed policy, the greenest path is not necessarily the shortest due to the non-linearity of emission along an arc when in the gradient. We note that the emission model does not explicitly account for acceleration and deceleration of a vehicle and so the estimates emissions $\mathcal{E}^*(v^d, l)$ are a lower-bound for the CO₂ emissions of a truck traveling from n_s to n_t .

3.5. The Asymptotic Greenest Path

In this section, we explore the greenest path as the payload becomes arbitrarily large. Let $e'_a(v)$ be the CO₂ emissions per unit payload when a truck traverses arc $a \in A$ with speed v , that is to say,

$$e'_a(v) = \frac{e_a(v, l)}{l} = \frac{c_e P \delta(a)}{vl} + c_e \left(Q \delta(a) (g \sin \theta(a) + C_r g \cos \theta(a)) \left(1 + \frac{w}{l} \right) + \frac{R}{l} \delta(a) v^2 \right)^+. \quad (14)$$

Consider two distinct connected vertices n_s and n_t . Observe that under a speed policy $v: A \rightarrow \mathbb{R}^+$ and a constant load $l \in \mathbb{R}_+$, the greenest path, i.e. $\pi^g(v, l)$, minimizes the total CO₂ emissions and the total CO₂ emissions per unit payload between n_s and n_t . Thus, we can interchangeably use the total CO₂ emissions and the total CO₂ emissions per unit payload to compute the greenest path.

Let Π be the set of all paths from n_s to n_t . Let $\Pi_d \subseteq \Pi$ be the subset of paths Π that are entirely downhill with a slope below $\arctan(-C_r)$, i.e. $\tan \theta(a) < -C_r$ for all $a \in \pi$ with $\pi \in \Pi_d$. We can now state the definition of the asymptotic greenest path:

DEFINITION 1. The asymptotic greenest path satisfies

$$\pi^\infty(v) \in \begin{cases} \arg \min_{\pi \in \Pi} \lim_{l \rightarrow \infty} \sum_{a \in \pi} e'_a(v(a)) & \text{if } \Pi_d \neq \emptyset \\ \arg \min_{\pi \in \Pi} \lim_{l \rightarrow \infty} \sum_{a \in \pi} e_a(v(a), l) & \text{if } \Pi_d = \emptyset \end{cases} \quad (15)$$

Note that the set Π_d plays an important role in this definition. The emission per load vanishes for any sufficiently steep down downhill path ($\Pi_d \neq \emptyset$) because gravity will get the vehicle to its destination. Among all sufficiently steep downhill paths ($\pi \in \Pi_d$), the one with the least absolute emission is given by the second case in (15). When gravity does not suffice to move a vehicle from its origin to its destination ($\Pi_d = \emptyset$) then the asymptotic greenest path is the one that minimizes emissions per load; see case 1 in (15). The following proposition demonstrates that $\pi^\infty(v)$ exists and provides an explicit form to compute it.

PROPOSITION 3. $\pi^\infty(v)$ exists and can be computed as follows.

$$\pi^\infty(v) \in \begin{cases} \arg \min_{\pi \in \Pi_d} \sum_{a \in \pi} t_a(v(a)) & \text{if } \Pi_d \neq \emptyset \\ \arg \min_{\pi \in \Pi} \sum_{a \in \pi} h'(a) & \text{if } \Pi_d = \emptyset, \end{cases} \quad (16)$$

where $t_a : \mathbb{R}_{++} \rightarrow \mathbb{R}_{++}$, is defined by

$$t_a(v) = \frac{\delta(a)}{v},$$

and $h' : A \rightarrow \mathbb{R}_+$, is defined by

$$h'(a) = \delta(a) \sin(\theta(a) + \arctan C_r)^+,$$

if $-90^\circ < \theta(a) + \arctan C_r < 90^\circ$ for all $a \in A$.

We call $\pi^\infty(v)$ the asymptotic greenest path. Proposition 3 explains that $\pi^\infty(v)$ is the fastest downward path $\pi \in \Pi_d$, if Π_d is non-empty. Otherwise, it is the path with the minimum total augmented ascents, h' . Evidently, $\pi^\infty(v)$ can be computed using the algorithms offered to solve the shortest path problem (e.g. Dijkstra (1959)). The requirement that $-90^\circ < \theta(a) + \arctan C_r < 90^\circ$ for all $a \in A$ is completely benign.

Proof of Proposition 3 For all payloads $l \in \mathbb{R}_+$, and any speed policy v , $\pi^g(v, l)$ exists from n_s to n_t , since by Equations (6) and (14) there are no negative emissions cycles between the vertices. Suppose that the payload l satisfies,

$$l \geq \max_{a \in A} \left\{ \frac{R(v^{\max}(a))^2}{-Q(g \sin \theta(a) + C_r g \cos \theta(a))} - w \right\}. \quad (17)$$

Then for arc $a \in A$,

$$e_a(v(a), l) = \begin{cases} \frac{c_e P \delta(a)}{v(a)} & \text{if } \tan \theta(a) < -C_r \\ \frac{c_e P \delta(a)}{v(a)} + c_e (Q \delta(a)(g \sin \theta(a) + C_r g \cos \theta(a))(w + l) + R \delta(a) v(a)^2) & \text{if } \tan \theta(a) \geq -C_r, \end{cases} \quad (18a)$$

$$e'_a(v(a)) = \begin{cases} \frac{c_e P \delta(a)}{lv(a)} & \text{if } \tan \theta(a) < -C_r \\ \frac{c_e P \delta(a)}{lv(a)} + c_e \left(Q \delta(a)(g \sin \theta(a) + C_r g \cos \theta(a)) \left(1 + \frac{w}{l} \right) + \frac{R \delta(a) v(a)^2}{l} \right) & \text{if } \tan \theta(a) \geq -C_r, \end{cases} \quad (18b)$$

by Equations (6) and (14).

Suppose that Π_d is a non-empty set. For this case, we use the total CO₂ emissions to compute the $\pi^\infty(v)$. Thus, by Equations (18a),

$$\lim_{l \rightarrow \infty} \sum_{a \in \pi} e_a(v(a), l) = \begin{cases} \sum_{a \in \pi} \frac{c_e P}{v(a)} \delta(a) & \text{if } \pi \in \Pi_d \\ \infty & \text{if } \pi \in \Pi \setminus \Pi_d. \end{cases}$$

Then it follows that from Equation (15) that

$$\pi^\infty(v) = \arg \min_{\pi \in \Pi_d} \sum_{a \in \pi} \frac{c_e P \delta(a)}{v(a)} = \arg \min_{\pi \in \Pi_d} \sum_{a \in \pi} \frac{\delta(a)}{v(a)} = \arg \min_{\pi \in \Pi_d} \sum_{a \in \pi} t_a(v(a)),$$

since P and c_e are constant across all arcs $a \in A$.

Now, suppose that Π_d is an empty set. For this case, we use the total CO₂ emissions per unit load to compute $\pi^\infty(v)$. Thus, by Equation (18b),

$$\begin{aligned} \lim_{l \rightarrow \infty} \sum_{a \in \pi} e'_a(v(a)) &= \sum_{a \in \pi} c_e Q (g \sin \theta(a) + C_r g \cos \theta(a))^+ \delta(a) \\ &= c_e Q g \sqrt{1 + C_r^2} \sum_{a \in \pi} \delta(a) (\sin(\theta(a) + \arctan C_r))^+ = c_e Q g \sqrt{1 + C_r^2} \sum_{a \in \pi} \delta(a) \sin(\theta(a) + \arctan C_r)^+, \end{aligned}$$

as $-90^\circ < \theta(a) + \arctan C_r < 90^\circ$ for all $a \in A$ by supposition. Again, since c_e , Q , and C_r are constant for all $a \in A$, by Equation (15),

$$\pi^\infty(v) = \arg \min_{\pi \in \Pi} \sum_{a \in \pi} \delta(a) \sin(\theta(a) + \arctan C_r)^+ = \arg \min_{\pi \in \Pi} \sum_{a \in \pi} h'(a). \quad \square$$

Proposition 3 demonstrates the convergence of the $\pi^g(v, l)$ to the $\pi^\infty(v)$ for a very large payload. On the other hand, by Proposition 2 the shortest path, π^{sp} , is the greenest path under the dynamic speed policy, i.e. $\pi^g(v^d, l)$, if $w + l = 0$ and $v^{\min}(a) \leq c_v \leq v^{\max}(a)$ for all $a \in A$. The reason is that if $w + l = 0$, the dynamic speed policy equals the static speed policy ($v^d = v^s$) by Proposition 1. Therefore, one can argue that $\pi^g(v, l)$ diverges from π^{sp} and converges to the $\pi^\infty(v)$ as the load increases. We will explore this idea in Section 4.4 through numerical experiments.

Finally, if the payload l satisfies Inequality (17), by Proposition 1, $v^d(a, l)$, for arc $a \in A$ can be computed as follows.

$$v^d(a) = \begin{cases} v^{\min}(a), & \text{if } \tan \theta(a) \geq -C_r \wedge c_v \leq v^{\min}(a) \\ c_v, & \text{if } \tan \theta(a) \geq -C_r \wedge v^{\min}(a) < c_v \leq v^{\max}(a) \\ v^{\max}(a), & \text{if } \tan \theta(a) < -C_r \vee \tan \theta(a) \geq -C_r \wedge v^{\max}(a) < c_v. \end{cases}$$

Consequently, if $v^{\min}(a)$ and $v^{\max}(a)$ are constant for all arcs $a \in A$ and if Π_d is non-empty, then $\pi^\infty(v^d) = \pi^\infty(v^s)$, by Proposition 3. Evidently, if Π_d is empty then Proposition 3 requires $\pi^\infty(v, l)$ to be independent of the speed policy v . As a result, $\pi^\infty(v^d) = \pi^\infty(v^s)$ if $v^{\min}(a)$ and $v^{\max}(a)$ are constant for all arcs $a \in A$.

4. Numerical Experiments

In this section, we explore the value of using elevation data to inform routing and speed decisions to reduce emissions over a comprehensive data set. Additionally, we explore the major drivers of CO₂ emissions reduction. We benchmark the greenest path (π^g) and dynamic speed policy (v^d) against the shortest path (π^{sp}) and the static speed policy (v^s). Note that the shortest path is also the greenest path under a dynamic speed policy (i.e. $\pi^g(v^d, l) = \pi^{sp}$) if the effect of road gradients is ignored, as shown in Proposition 2. We also study how the greenest path changes, $\pi^g(v, l)$, as the payload l increases and how the asymptotic greenest path $\pi^\infty(v)$ performs in terms of CO₂

emissions reduction and similarity to $\pi^g(v, l)$. In our numerical experiments the asymptotic greenest path under the dynamic speed policy, i.e. $\pi^\infty(v^d)$, and the one under the static speed policy, i.e. $\pi^\infty(v^s)$, are identical since $v^{\min}(a)$ and $v^{\max}(a)$ are constant for all $a \in A$ (see Section 3.5), i.e. $\pi^\infty = \pi^\infty(v^d) = \pi^\infty(v^s)$.

Given a pair of source and target vertices and a constant payload l , we compute the relative CO₂ emissions reduction of one policy in comparison with another. In particular we study the CO₂ reduction of using path-speed policy 2, $d_2 = (\pi_2, v_2, l)$, relative to path-speed policy 1, $d_1 = (\pi_1, v_1, l)$, ($\% \mathcal{E}_{d_1}^{d_2}$) to quantify the benefit of using the elevation data in CO₂ reduction. That is to say,

$$\% \mathcal{E}_{d_1}^{d_2} = 100 \cdot \frac{\mathcal{E}(\pi_1, v_1, l) - \mathcal{E}(\pi_2, v_2, l)}{\mathcal{E}(\pi_1, v_1, l)},$$

where $\mathcal{E}(\pi_i, v_i, l)$, $i = 1, 2$ is the total CO₂ emissions as per Equation (11). If π_i , $i = 1, 2$, is a greenest path then $\pi_i = \pi^g(v_i, l)$. Similarly, we compute the relative distinction between the paths of policies π_1 and π_2 ($\% \delta_{\pi_1}^{\pi_2}$) weighted by distance, as follows.

$$\% \delta_{\pi_1}^{\pi_2} = 100 \cdot \frac{\sum_{a \in \pi_1 \setminus \pi_2} \delta(a)}{\sum_{a \in \pi_1} \delta(a)}.$$

Table 3 briefly summarizes the ratios that we use in our comparative studies.

In Section 4.1, we outline the test-bed that we consider. This test-bed comprises 25 cities and all the ratios in Table 3 are computed for instances in this test-bed. We present the results of our computations in Sections 4.2 through 4.5. Section 4.2 focuses on the results for the CO₂ emissions reduced by π^g and v^d relative to π^{sp} and v^s . In Section 4.3, we address the distinctions between π^g and π^{sp} and the effect of the speed policies v^s and v^d on the greenest path. In Section 4.4, we study the asymptotic greenest path π^∞ and explore the performance of π^∞ relative to the shortest path π^{sp} and the greenest path π^g in terms of CO₂ emissions reduction. In Sections 4.2 through 4.4, we elaborate on how payload affects our results. Finally, Section 4.5 concentrates on the major determinants of CO₂ emissions reduction and path alteration.

4.1. Data and test-bed

We consider the 25 cities shown in Table 4 and three truck types, namely heavy-duty diesel (HDD), medium-duty diesel (MDD), and light-duty diesel (LDD) for which we utilise the typical parameters as found in Table 5 of Koc et al. (2014).

We use OpenStreetMap’s database (OpenStreetMap contributors 2017) to obtain the information of a 2D road network including all vertices within a 20 km radius around a manually selected point for each city. We only use roads that the database designates as public and driveable (OpenStreetMap contributors 2022). We only consider arcs with a gradient ranging from -10% to 10% (i.e. $[-5.71^\circ, 5.71^\circ]$) so that gradients are in line with the implicit assumptions of the modified

Table 3 List of ratios used in the comparative studies.

Ratio	Description
$\% \mathcal{E}_{(\pi^{sp}, v^s, l)}^{(\pi^g, v^d, l)}$	Relative CO ₂ emissions reduction by selecting the greenest path with the dynamic speed policy relative to the shortest path with the static speed policy given the load l .
$\% \mathcal{E}_{(\pi^{sp}, v^s, l)}^{(\pi^g, v^s, l)}$	Relative CO ₂ emissions reduction by selecting the greenest path with the static speed policy relative to the shortest path with the static speed policy given the load l .
$\% \mathcal{E}_{(\pi^{sp}, v^d, l)}^{(\pi^g, v^d, l)}$	Relative CO ₂ emissions reduction by selecting the greenest path with the dynamic speed policy relative to the shortest path with the dynamic speed policy given the load l .
$\% \mathcal{E}_{(\pi^g, v^s, l)}^{(\pi^g, v^d, l)}$	Relative CO ₂ emissions reduction by selecting the greenest path with the dynamic speed policy relative to the greenest path with the static speed policy given the load l .
$\% \mathcal{E}_{(\pi^{sp}, v^d, l)}^{(\pi^\infty, v^d, l)}$	Relative CO ₂ emissions reduction by selecting the asymptotic greenest path with the dynamic speed policy relative to the shortest path with the dynamic speed policy given the load l .
$\% \mathcal{E}_{(\pi^{sp}, v^s, l)}^{(\pi^\infty, v^s, l)}$	Relative CO ₂ emissions reduction by selecting the asymptotic greenest path with the static speed policy relative to the shortest path with the static speed policy given the load l .
$\% \mathcal{E}_{(\pi^g, v^d, l)}^{(\pi^\infty, v^d, l)}$	Relative CO ₂ emissions reduction by selecting the asymptotic greenest path with the dynamic speed policy relative to the greenest path with the dynamic speed policy given the load l .
$\% \mathcal{E}_{(\pi^g, v^s, l)}^{(\pi^\infty, v^s, l)}$	Relative CO ₂ emissions reduction by selecting the asymptotic greenest path with the static speed policy relative to the greenest path with the static speed policy given the load l .
$\% \delta_{\pi^{sp}}^{\pi^g(v^d, l)}$	Ratio of the length of the shortest path that is not shared with the greenest path under the dynamic speed policy given the load l .
$\% \delta_{\pi^{sp}}^{\pi^g(v^s, l)}$	Ratio of the length of the shortest path that is not shared with the greenest path under the static speed policy given the load l .
$\% \delta_{\pi^g(v^d, l)}^{\pi^g(v^s, l)}$	Ratio of the length of the greenest path under the dynamic speed policy that is not shared with the greenest path under the static speed policy given the load l .
$\% \delta_{\pi^g(v^d, l)}^{\pi^\infty}$	Ratio of the length of the greenest path under the dynamic speed policy that is not shared with the asymptotic greenest path given the load l .
$\% \delta_{\pi^g(v^s, l)}^{\pi^\infty}$	Ratio of the length of the greenest path under the static speed policy that is not shared with the asymptotic greenest path given the load l .

emissions model (5). We retrieve the elevation (height above sea level) of the vertices from the U.S. Geological Survey (2000)'s SRTM 1 Arc-Second Global data sets. We consider payloads of 30%, 40%, 50%, 60%, 70%, and 80% of the maximum capacity for each truck type. For all arcs the $v^{\max} = 90$ km/h and $v^{\min} = 20$ km/h.

We select several unique pairs of source and target vertices uniformly at random for each city. We make sure that the vertices in each pair are non-identical and connected. The number of selected pairs of vertices (sample size) for each city is presented in Table 4.

The Dijkstra algorithm (Dijkstra 1959) is used to solve the shortest path and the greenest path problems. We use the arcs' distance $\delta(a)$, $a \in A$, to compute the shortest path π^{sp} . We consider two speed policies, namely dynamic speed policy, v^d , and static speed policy, v^s to calculate the the CO₂ emissions, $e_a(v, l)$, for all arcs. Then we use the calculated $e_a(v, l)$ to compute the greenest paths ($\pi^g(v^d, l)$ and $\pi^g(v^s, l)$). We use the Dijkstra algorithm to compute π^∞ as per Proposition 3.

We consider two sets of ratios, as shown in Table 3, to compare the different path (π^{sp} , π^g , and π^∞) and speed (v^s and v^d) policies. The first group of ratios measure the relative CO₂ emis-

Table 4 List of cities and sample sizes.

City	Country	Number of S-T pairs
Amsterdam	Netherlands	146842
Ankara	Turkey	114675
Athens	Greece	114687
Barcelona	Spain	100649
Canberra	Australia	131565
Geneva	Switzerland	125605
Guadalajara	Mexico	126600
Guangzhou	China	124940
Huston	US	148548
Istanbul	Turkey	94999
Johannesburg	South Africa	130054
Lima	Peru	119174
Los Angeles	US	142452
Luxembourg	Luxembourg	136201
Madrid	Spain	117686
Mexico City	Mexico	93076
Monterrey	Mexico	128619
Mumbai	India	143116
New York	US	146875
Rome	Italy	124452
San Francisco	US	93504
Santiago	Chile	142212
Shiraz	Iran	90935
Tehran	Iran	110104
Tel Aviv	Israel	131066

Table 5 Truck parameters.

Parameter	HDD	MDD	LDD
w	14000	5500	3500
L	26000	12500	4000
k	0.15	0.2	0.25
N	30	36.67	38.34
D	10.5	6.9	4.5
η	0.45	0.45	0.45
η_{tf}	0.45	0.45	0.45
ξ	1	1	1
κ	44	44	44
ϕ	737	737	737
C_d	0.9	0.7	0.6
ρ	1.2041	1.2041	1.2041
A	10	8	7
g	9.81	9.81	9.81
C_r	0.01	0.01	0.01

sions reduction and the second group measures the geometrical distinctions between the paths. We compute the ratios for a full factorial combination of trucks and payloads traversing all samples, resulting in a total of more than 58.5 million path selection instances with a total shortest distance of more than 1.27 billion km. Evidently, it is hardly possible to determine CO₂ emissions experimentally by letting trucks drive 1.27 billion km as the approaches of Boriboonsomsin et al. (2012) and Scora et al. (2015). The confidence intervals of any estimate reported later are negligibly small due to the large sample size. Considering the large test-bed, we notice that the distribution and the sample mean of the ratios varies between different cities. For a given city, we use the overbar to denote the average of a ratio across all instances within a city. For instance, $\overline{\% \mathcal{E}_{(\pi^{sp}, v^s, l)}^{(g, v^d, l)}}$ for a city represents the sample mean of $\% \mathcal{E}_{(\pi^{sp}, v^s, l)}^{(g, v^d, l)}$ for that city.

4.2. Results: CO₂ Emissions Reduction by Greenest Path and Dynamic Speed Policy

In this section, we consider the payload as a percentage of the truck's maximum carrying capacity rather than the payload in kilograms, to make the notations simpler. For instance, $l = 60\%$ indicates that the payload equals 60% of the maximum capacity of the truck. Since the payload varies the results, we use $l = 60\%$ as our base case to maintain consistency.

Figures 1 through 4 visualize the empirical distribution of CO₂ emissions reduction ratios for the base case instances. We present the distributions separately for each truck type and each city. The sample size of each empirical distribution is listed in Table 4.

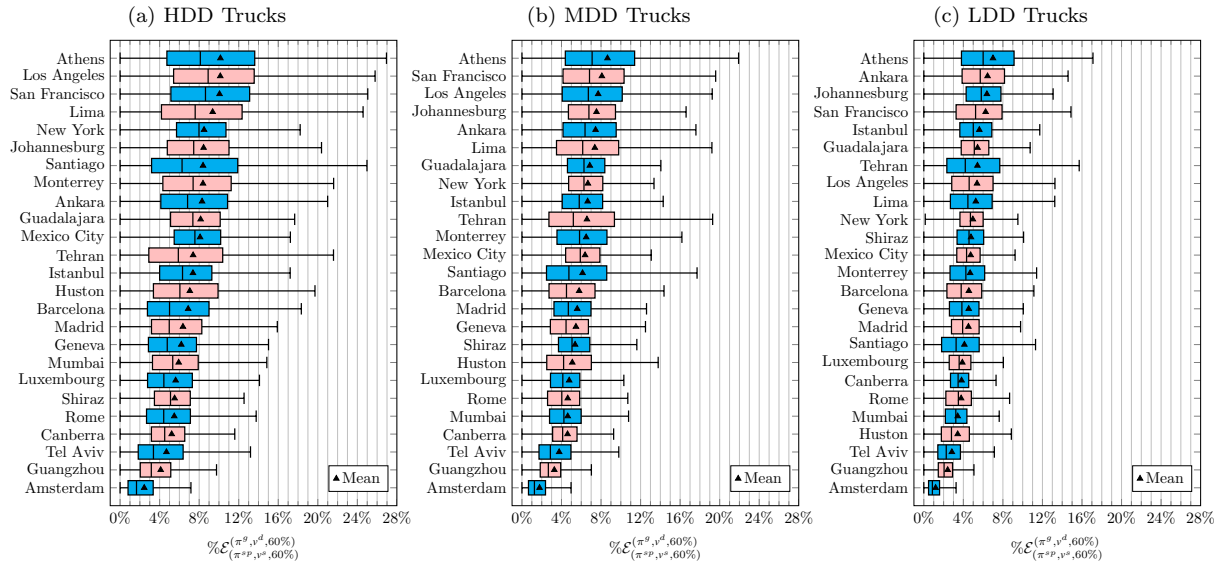


Figure 1 Relative CO₂ emissions reduction by selecting $(\pi^g, v^d, 60\%)$ rather than $(\pi^{sp}, v^s, 60\%)$.

Figure 1 shows that $\overline{\%E(\pi^g, v^d, 60\%)}_{(\pi^{sp}, v^s, 60\%)}$ lies between 4.11% and 10.15% for HDD trucks across 24 out of 25 cities. Figure 1 also shows that $\%E(\pi^g, v^d, 60\%)_{(\pi^{sp}, v^s, 60\%)}$ decreases in truck class such that $\overline{\%E(\pi^g, v^d, 60\%)}_{(\pi^{sp}, v^s, 60\%)}$ ranges from 3.27% to 8.65% for MDD, and from 2.41% to 7.00% for LDD trucks, in the same cities. Amsterdam, a known flat city, is the lone exception, but even here $\overline{\%E(\pi^g, v^d, 60\%)}_{(\pi^{sp}, v^s, 60\%)}$ are 2.44%, 1.78%, and 1.19%, respectively, showing that it is possible to use significantly more fuel-efficient paths. The distribution of $\%E(\pi^g, v^d, 60\%)_{(\pi^{sp}, v^s, 60\%)}$, on the other hand, sheds more light on the potential CO₂ emissions reduction by using the greenest path with a dynamic speed policy, $\pi^g(v^d, 60\%)$. In Los Angeles, for instance, 25% of cases have a $\%E(\pi^g, v^d, 60\%)_{(\pi^{sp}, v^s, 60\%)}$ of at least 13.57% for HDD, 10.14% for MDD, and 7.00% for LDD trucks. It may appear that these effects are not consistent with the numerical results of earlier studies, for instance Scora et al. (2015), Schröder and Cabral (2019) and Brunner et al. (2021). We submit that this is due to the long tail of the distribution of fuel savings which is found only with a sufficiently large sample.

To discern the individual effect of road gradient on CO₂ emissions reduction, we fix a speed policy $v \in \{v^s, v^d\}$ and then take into account the CO₂ emissions reduction by traveling along the greenest path $\pi^g(v, l)$ rather than the shortest path π^{sp} . We consider two ratios $\%E(\pi^g, v^s, l)_{(\pi^{sp}, v^s, l)}$ and $\%E(\pi^g, v^d, l)_{(\pi^{sp}, v^d, l)}$ to assess this effect. Figures 2 and 3 indicate the distribution and mean of these ratios for base case instances in different cities. Figure 2 demonstrates that the selection of $\pi^g(v^s, 60\%)$ rather than π^{sp} can reduce, on average, 1.76% to 8.15% of the CO₂ emissions, if $l = 60\%$ and v^s is decided. As explained before, this CO₂ emissions reduction capacity is lower for the MDD and LDD trucks, yet remains substantive. In the case of a dynamic speed policy v^d , the statistics, i.e. $\%E(\pi^g, v^d, l)_{(\pi^{sp}, v^d, l)}$, remain close to that of v^s , i.e. $\%E(\pi^g, v^s, l)_{(\pi^{sp}, v^s, l)}$, but they are slightly smaller. This implies

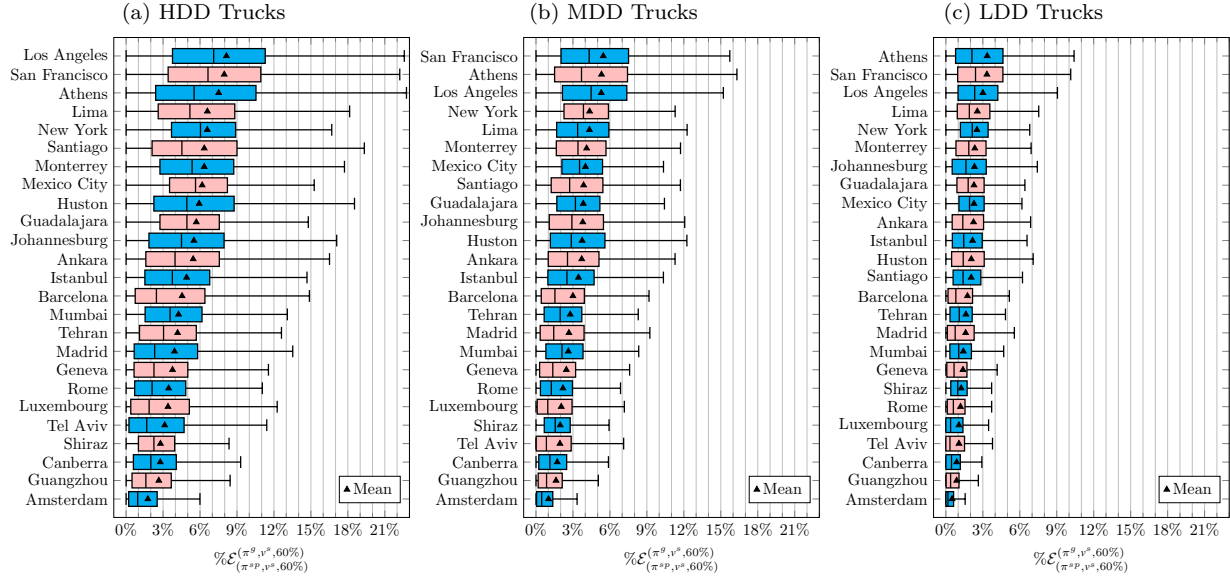


Figure 2 Relative CO₂ emissions reduction by selecting $(\pi^g, v^s, 60\%)$ rather than $(\pi^{sp}, v^s, 60\%)$.

that regardless of speed, taking into account the road gradient results in significant reductions in CO₂ emissions.

Next, to investigate the effect of speed policies on fuel-efficient paths and CO₂ emissions reduction, we appraise the carbon reduction by modifying the policy from (π^g, v^s, l) to (π^g, v^d, l) for the same truck, i.e. $\% \mathcal{E}_{(\pi^g, v^s, l)}^{(\pi^g, v^d, l)}$. Figure 4 shows that for most cities, $\overline{\% \mathcal{E}_{(\pi^g, v^s, l)}^{(\pi^g, v^d, l)}}$ is between 2% and 4%, and in all cases the estimates do not depend on the truck type.

We contrast $\% \mathcal{E}_{(\pi^g, v^s, 60\%)}^{(\pi^g, v^d, 60\%)}$ and $\% \mathcal{E}_{(\pi^{sp}, v^d, 60\%)}$, as shown in Figure 5, in order to experimentally evaluate the relative efficacy of the greenest path and speed optimization in reducing CO₂ emissions

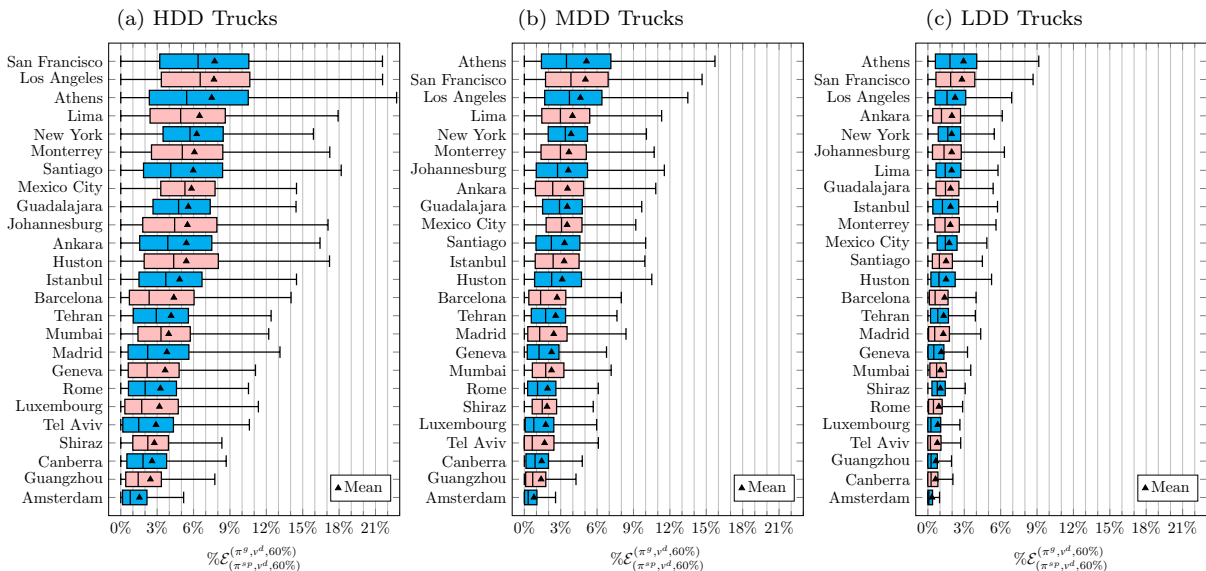


Figure 3 Relative CO₂ emissions reduction by selecting $(\pi^g, v^d, 60\%)$ rather than $(\pi^{sp}, v^d, 60\%)$.

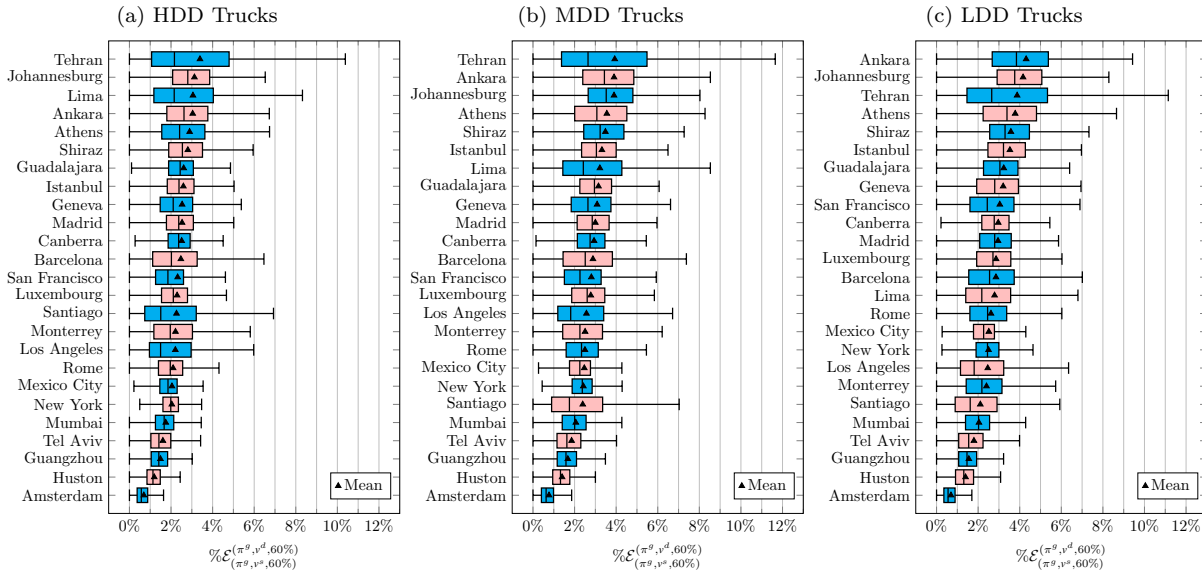


Figure 4 Relative CO₂ emissions reduction by selecting $(\pi^g, v^d, 60\%)$ rather than $(\pi^g, v^s, 60\%)$.

for each type of vehicle (i.e. HDD, MDD, and LDD). For HDD trucks, the road gradient is more crucial than the dynamic speed policy, whereas the dynamic speed policy has more impact for LDD trucks. The greenest path and dynamic speed policy can bring down the CO₂ emissions of MDD trucks to the same extent.

To analyze the effect of payload on CO₂ emissions reduction, we vary payload ratio for the base case instances (30%, 40%, 50%, 70%, and 80%) and repeat the same experiments. Figures 6 through 9 present the distributions of the sample mean of the relative CO₂ emissions reduction ratios over the 25 cities, where the sample size of each box plot is 25. The figures also present the alteration of the distributions as the payload increases. These results show that, on average, $\overline{\%E}(\pi^g, v^d, l)$ (Figure 6), $\overline{\%E}(\pi^g, v^s, l)$ (Figure 7), and $\overline{\%E}(\pi^g, v^d, l)$ (Figure 8) are non-decreasing in payload. However, all graphs are concave, so that the growth rate of $\overline{\%E}$ decreases in payload. In

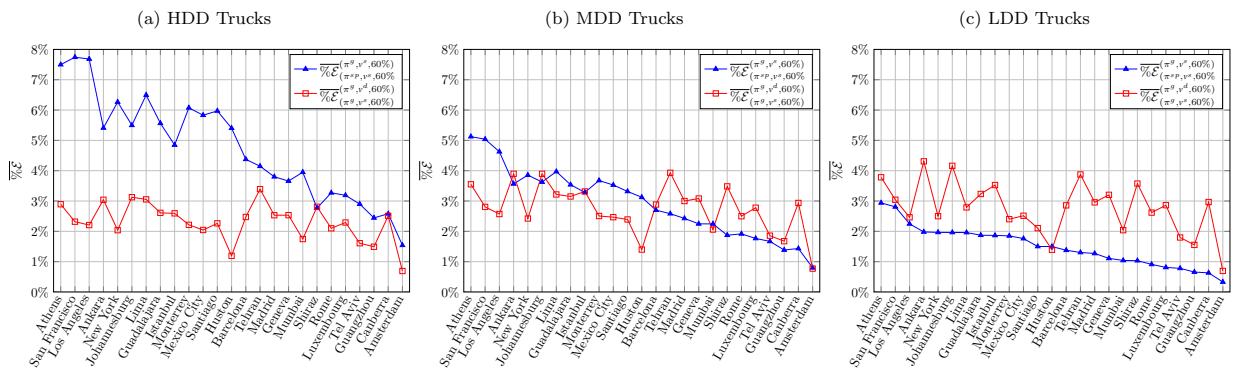


Figure 5 Comparison of the CO₂ emissions reduction potential: sole π^g ($\overline{\%E}(\pi^g, v^d, 60\%)$) vs. sole v^d ($\overline{\%E}(\pi^g, v^s, 60\%)$) across different cities.

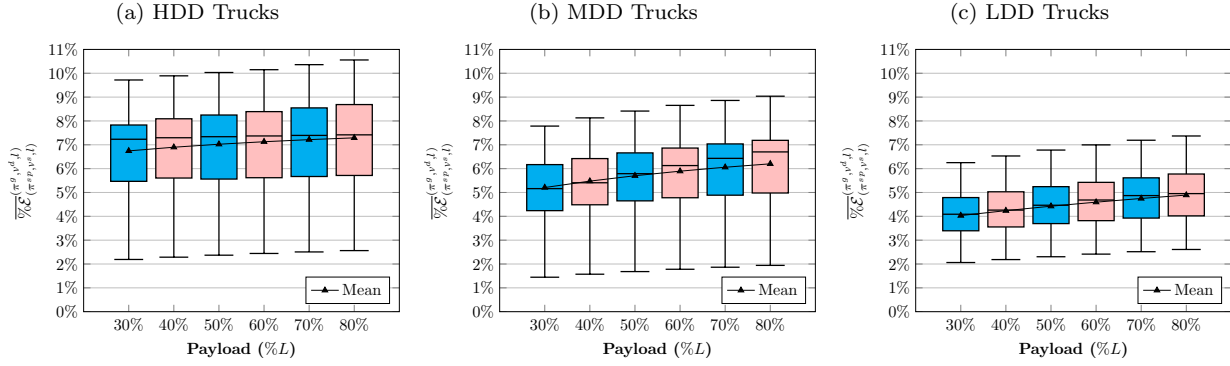


Figure 6 Effect of payload on $\overline{\%E}_{(\pi^{sp}, v^s, l)}$ across 25 cities.

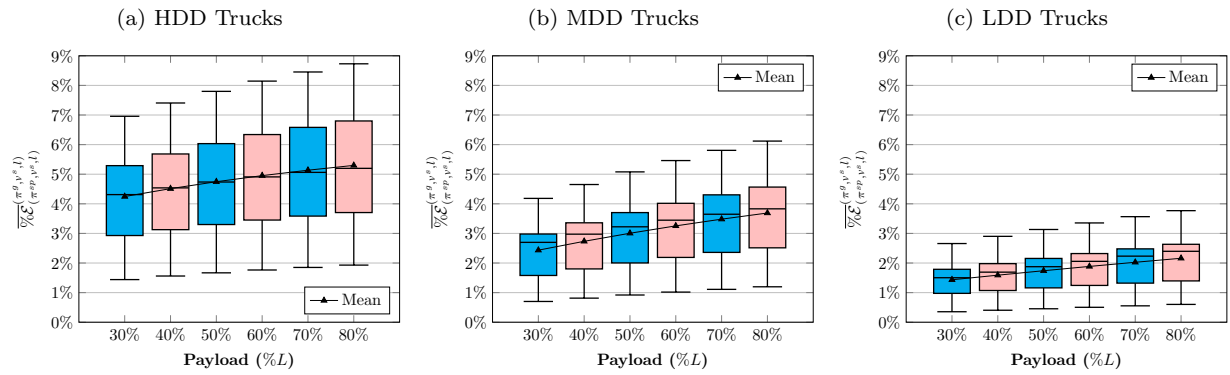


Figure 7 Effect of payload on $\overline{\%E}_{(\pi^{sp}, v^s, l)}$ across 25 cities.

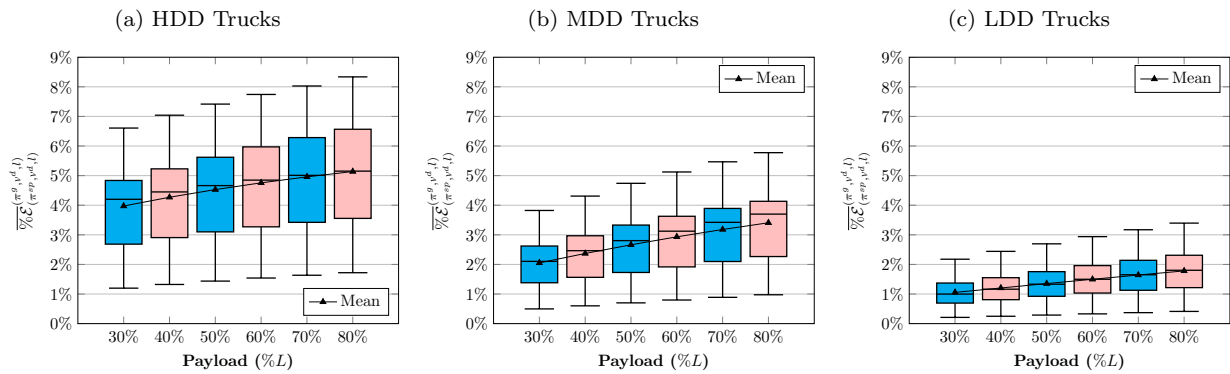


Figure 8 Effect of payload on $\overline{\%E}_{(\pi^{sp}, v^s, l)}$ across 25 cities.

many cities, this phenomenon results in a slow increase, and in one case (Shiraz) slight decrease of $\overline{\%E}_{(\pi^{sp}, v^s, l)}$ for HDD trucks. The same concave pattern takes place for $\overline{\%E}_{(\pi^g, v^d, l)}$ (Figure 9) with the exception that the maxima of the concave functions are typically in the MDD or LDD regions. This result can explain the close range of $\overline{\%E}_{(\pi^g, v^d, l)}$ across different truck types as shown in Figure 4.

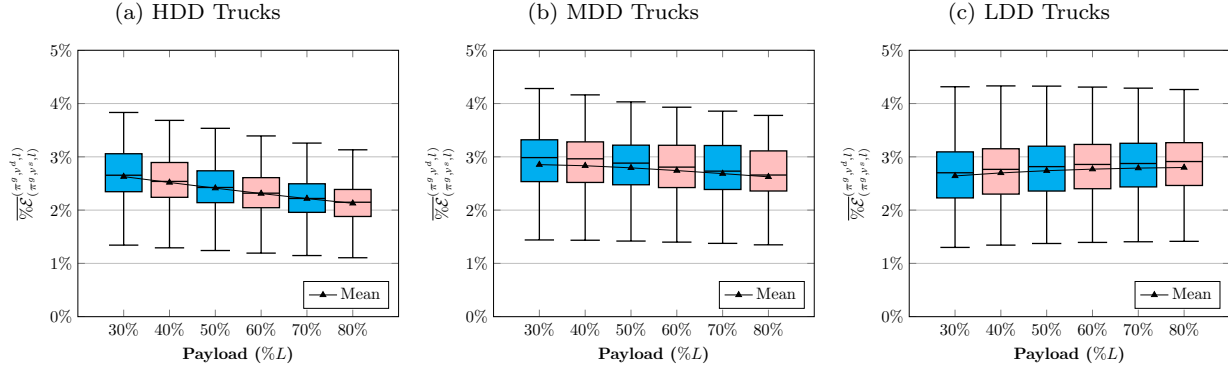


Figure 9 Effect of payload on $\frac{\overline{\% \mathcal{E}}(\pi^g, v^d, l)}{\overline{\% \mathcal{E}}(\pi^g, v^s, l)}$ across 25 cities.

4.3. Results: Paths of the $\pi^g(v^d, l)$, $\pi^g(v^s, l)$, and π^{sp}

The differences between the greenest path and the shortest path have been covered in earlier sections, along with an analysis of the impact of speed and road gradient. Although our findings indicate significant differences in fuel consumption and CO₂ emissions, it is important to consider whether the shortest path's trajectory differs significantly from the trajectory produced by the greenest path.

To illustrate this difference, we consider a LDD truck that delivers cargo weighing 60% of its maximum capacity from point A to B within a district of Los Angeles, see Figure 10. Figure 10 displays the greenest paths ($\pi^g(v^d, l)$ and $\pi^g(v^s, l)$) and the shortest path path (π^{sp}) on the map, and Figure 11 shows the elevation of the vertices and total CO₂ emissions for different path and speed choices. In this instance, π^{sp} differs significantly from $\pi^g(v^d, l)$ and $\pi^g(v^s, l)$, whereas the two greenest paths share a number of arcs. In this section, we examine whether such an observation is common throughout our test-bed.

Figures 12 through 14 encapsulate the distribution and sample mean of $\% \delta_{(\pi^g, v^d, 60\%)}^{\pi^g, v^s, 60\%}$, $\% \delta_{\pi^{sp}}^{\pi^g, v^d, 60\%}$, and $\% \delta_{\pi^{sp}}^{\pi^g, v^s, 60\%}$ for the base cases. Figure 12 shows that the average difference of $\pi^g(v^s, 60\%)$ and $\pi^g(v^d, 60\%)$ is between 1.16% and 12.01% across the cities. In fact, the quartiles of $\% \delta_{(\pi^g, v^d, 60\%)}^{\pi^g, v^s, 60\%}$ show that for the most part $\pi^g(v^d, 60\%)$ are quite similar to $\pi^g(v^s, 60\%)$. In other words, in a majority of instances, the greenest path is independent of the speed policy. Additionally, for heavier trucks the greenest path is less likely to vary as a result of speed optimization. Figures 13 and 14 show that the distinction between the shortest and the greenest paths, i.e. $\% \delta_{\pi^{sp}}^{\pi^g, v^d, 60\%}$ and $\% \delta_{\pi^{sp}}^{\pi^g, v^s, 60\%}$, are conspicuously larger than the distinction between the greenest paths, i.e. $\% \delta_{(\pi^g, v^d, 60\%)}^{\pi^g, v^s, 60\%}$. This gap intensifies with heavier truck classes.

To expand our understanding of the payload's influence on paths, we study whether $\pi^g(v^s, l)$ and $\pi^g(v^d, l)$ converge to each other and diverge from π^{sp} as the payload increases. Figures 15 and 16 demonstrate that both $\frac{\overline{\% \delta_{\pi^{sp}}^{\pi^g, v^d, l}}}{\overline{\% \delta_{\pi^{sp}}^{\pi^g, v^s, l}}}$ and $\frac{\overline{\% \delta_{\pi^{sp}}^{\pi^g, v^s, l}}}{\overline{\% \delta_{\pi^{sp}}^{\pi^g, v^d, l}}}$ are non-decreasing in payload in contrast

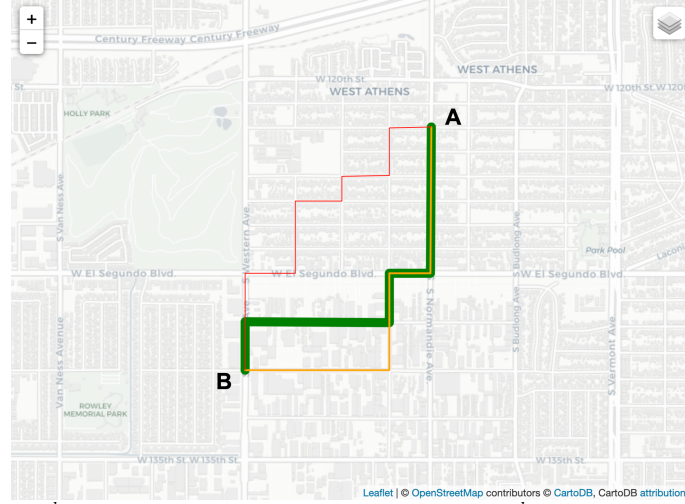


Figure 10 Example of $\pi^g(v^d, 60\%)$, $\pi^g(v^s, 60\%)$, π^{sp} (Green/Bold: $\pi^g(v^d, 60\%)$, Orange/Medium: $\pi^g(v^s, 60\%)$, and Red/Thin: π^{sp}).

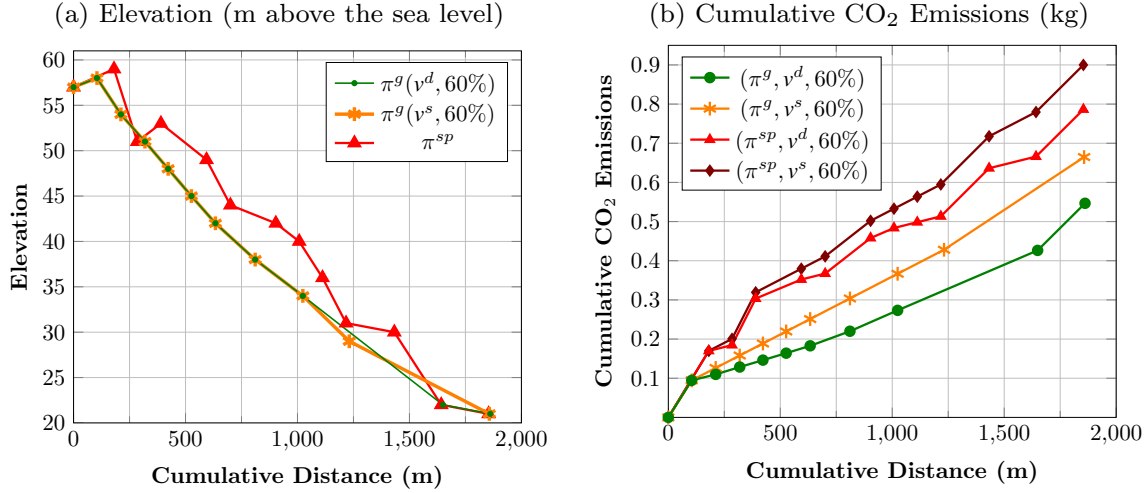


Figure 11 Elevation of the vertices and CO₂ emissions along the paths as per Figure 10.

to $\frac{\partial}{\partial l} \pi^g(v^s, l)$ which is mostly decreasing, as indicated by Figure 17. Note that, $\frac{\partial}{\partial l} \pi^g(v^s, l)$ is always higher than $\frac{\partial}{\partial l} \pi^g(v^d, l)$ since the more efficient dynamic speed policy of $\pi^g(v^d, l)$ usually allows for a shorter (and faster) path relative to $\pi^g(v^s, l)$. However, increase in payload erodes the impact of speed policy.

4.4. Results: Performance of the Asymptotic Greenest Paths

The greenest path converges to the asymptotic greenest path for arbitrarily large payloads as shown in Section 3.5. In this section, we study the performance of the asymptotic greenest path relative to the shortest path and the greenest path. Then we study the rate of convergence of the greenest path to the asymptotic greenest path for the dynamic speed policy. In Appendix B we study these things under the static speed policy. Figures 18 and 19 show that the distribution of

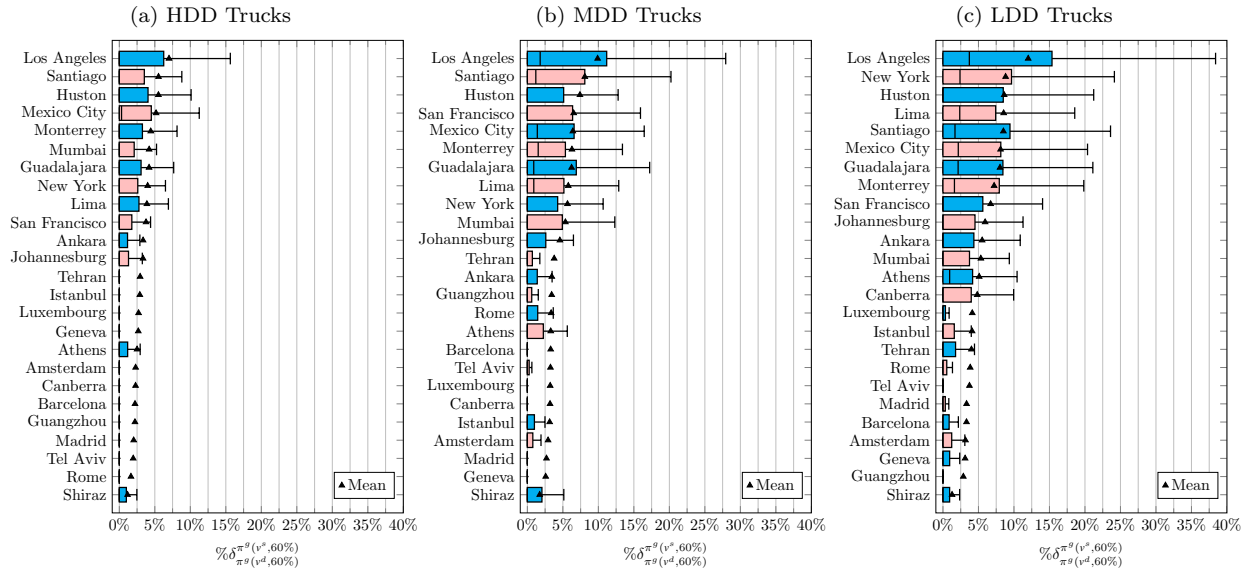


Figure 12 Ratio of the length of $\pi^g(v^d, 60\%)$ that is not shared with $\pi^g(v^s, 60\%)$.

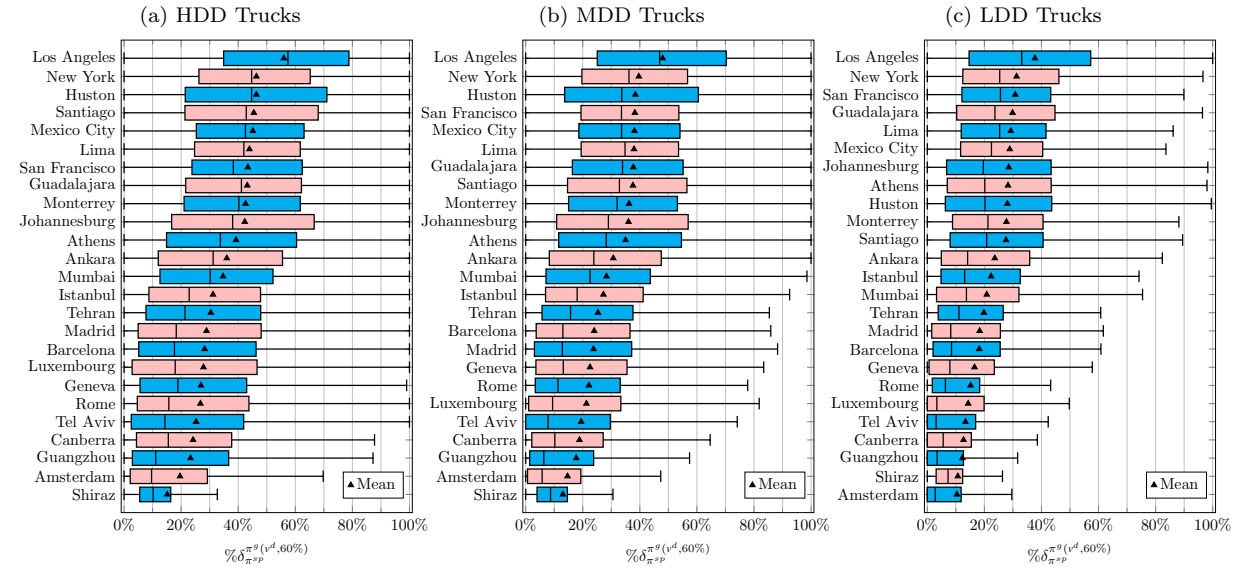


Figure 13 Ratio of the length of π^{sp} that is not shared with $\pi^g(v^d, 60\%)$.

the CO₂ emissions reduction of π^∞ relative to π^{sp} and $\pi^g(v^d, 60\%)$ for different cities. Similar to Section 4.2, we present the results for the base cases (60% payload ratio). Figure 18 shows that for the most part an LDD truck emits slightly more CO₂ if it traverses π^∞ instead of π^{sp} in 18 cities. Whereas, the π^∞ is greener than the π^{sp} for MDD and HDD trucks in more than 50% of the instances in all cities. The CO₂ emissions reduction of $(\pi^\infty, v^d, 60\%)$ relative to $(\pi^g, v^d, 60\%)$, i.e. $\% \mathcal{E}_{(\pi^g, v^d, 60\%)}^{\pi^\infty, v^d, 60\%}$, is consistent with this observation. Figure 19 shows that the median of extra CO₂ emissions along π^∞ compared to the $\pi^g(v^d, 60\%)$ ranges from 0.48% to 2.70% for LDD trucks. This range decreases to between 0.11% and 1.40% for MDD trucks, and 0% and 0.45% for HDD trucks.

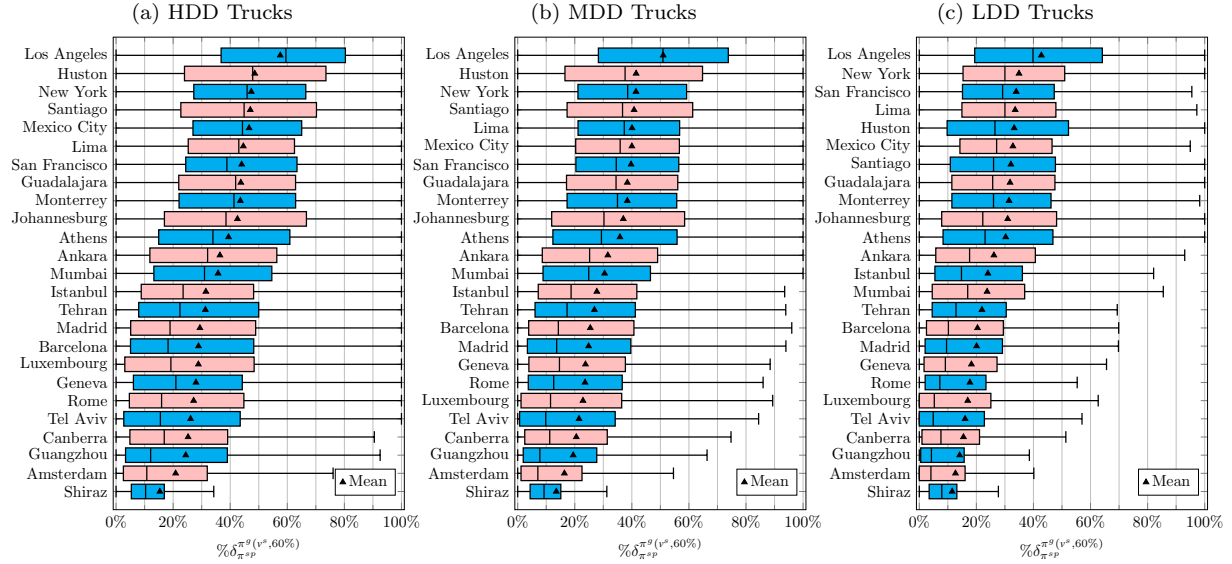


Figure 14 Ratio of the length of π^{sp} that is not shared with $\pi^g(v^s, 60\%)$.

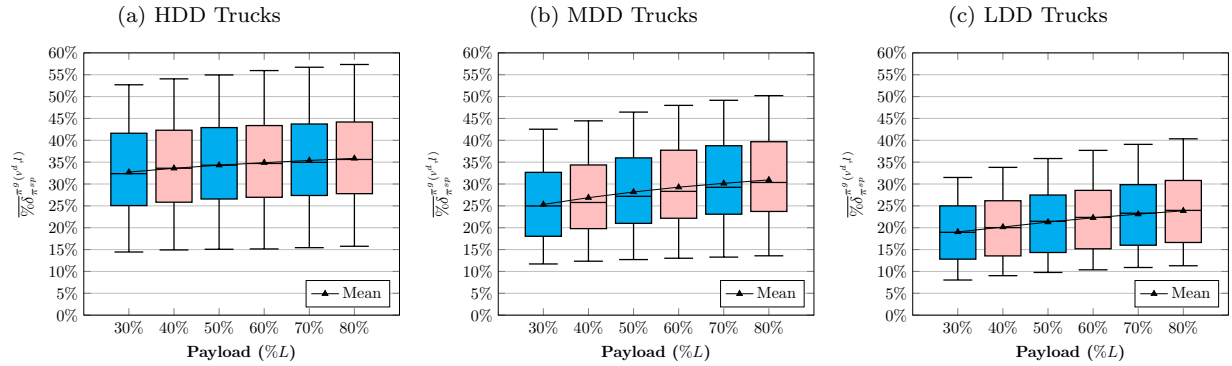


Figure 15 Effect of payload on $\frac{\overline{\% \delta_{\pi^{sp}}^g(v^d, l)}}{\% \delta_{\pi^{sp}}^g(v^d, l)}$ across 25 cities.

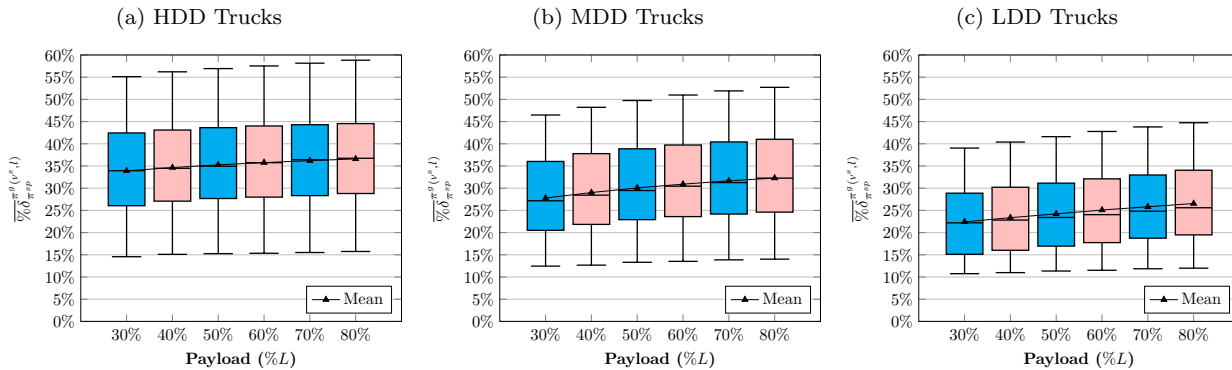


Figure 16 Effect of payload on $\frac{\overline{\% \delta_{\pi^{sp}}^g(v^s, l)}}{\% \delta_{\pi^{sp}}^g(v^s, l)}$ across 25 cities.

Figure 20 shows the distribution of the sample mean of $\% \mathcal{E}_{(\pi^{sp}, v^d, l)}(\pi^\infty, v^d, l)$ across the 25 cities for various payload ratios, i.e. $\overline{\% \mathcal{E}_{(\pi^{sp}, v^d, l)}(\pi^\infty, v^d, l)}$. Correspondingly, Figure 21 presents $\overline{\% \mathcal{E}_{(\pi^g, v^d, l)}(\pi^\infty, v^d, l)}$. The two figures

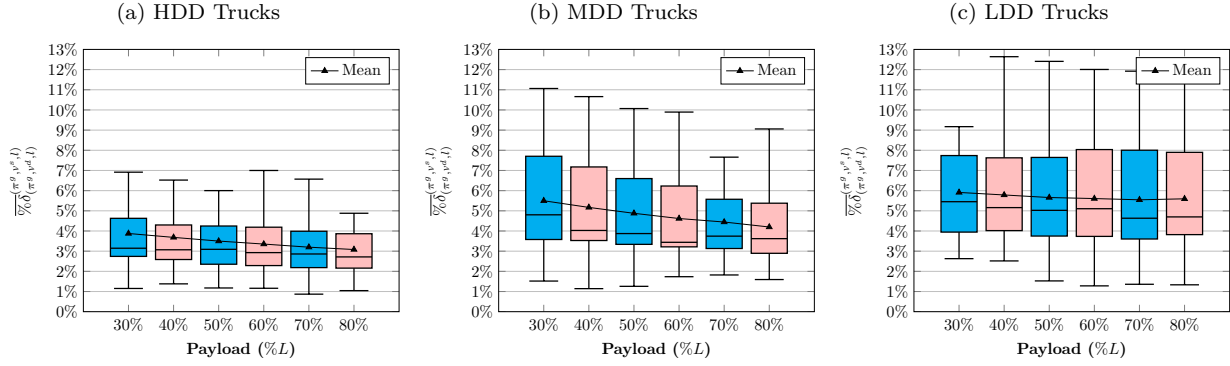


Figure 17 Effect of payload on $\overline{\% \delta_{(\pi^g, v^d, l)}^{(\pi^g, v^s, l)}}$ across 25 cities.

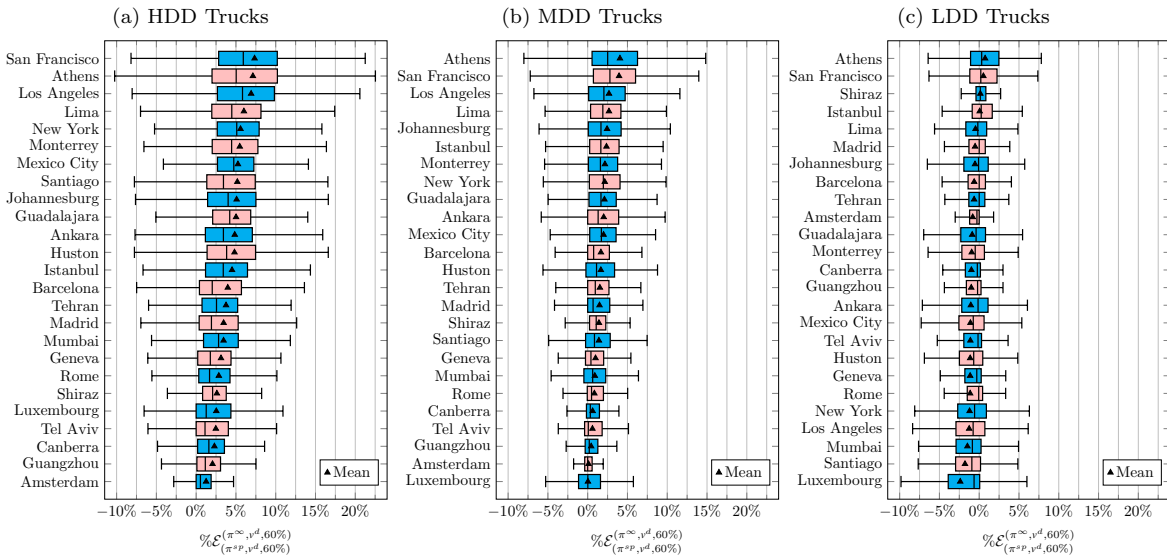


Figure 18 Relative CO₂ emissions reduction by selecting $(\pi^\infty, v^d, 60\%)$ rather than $(\pi^{sp}, v^d, 60\%)$.

show that the average CO₂ emissions along π^∞ relative to π^{sp} and $\pi^g(v^d, l)$ is non-increasing in load, l . Evidently, π^{sp} outperforms π^∞ in terms of average CO₂ emissions for LDD trucks with any payload ratio. Whereas, π^∞ is on average greener than π^{sp} for MDD and HDD truck types for all payload ratios. The mean excess CO₂ emissions of π^∞ relative to $\pi^g(v^d, l)$ is less than 1%, 2%, and 3% for HDD, MDD, and LDD trucks, respectively.

The median of the difference between $\pi^g(v^d, l)$ and π^∞ , i.e. $\% \delta_{\pi^g(v^d, 60\%)}^{\pi^\infty}$, varies between 4.97% and 49.14% for the LDD trucks in base cases as Figure 22 shows. However, the similarity increases in MDD and HDD truck types as the median $\% \delta_{\pi^g(v^d, 60\%)}^{\pi^\infty}$ ranges from 2.84% to 34.81% for MDD trucks and 0% to 18.14% for HDD trucks. Moreover, the difference between the $\pi_{(\pi^g, v^d, l)}$ and π^∞ reduces in the payload ratio in all truck types. Figures 22 and 23 show that $\pi^g(v^d, l)$ converges to π^∞ in the payload ratio as established in Proposition 3. These results confirm that $\pi^g(v^d, l)$

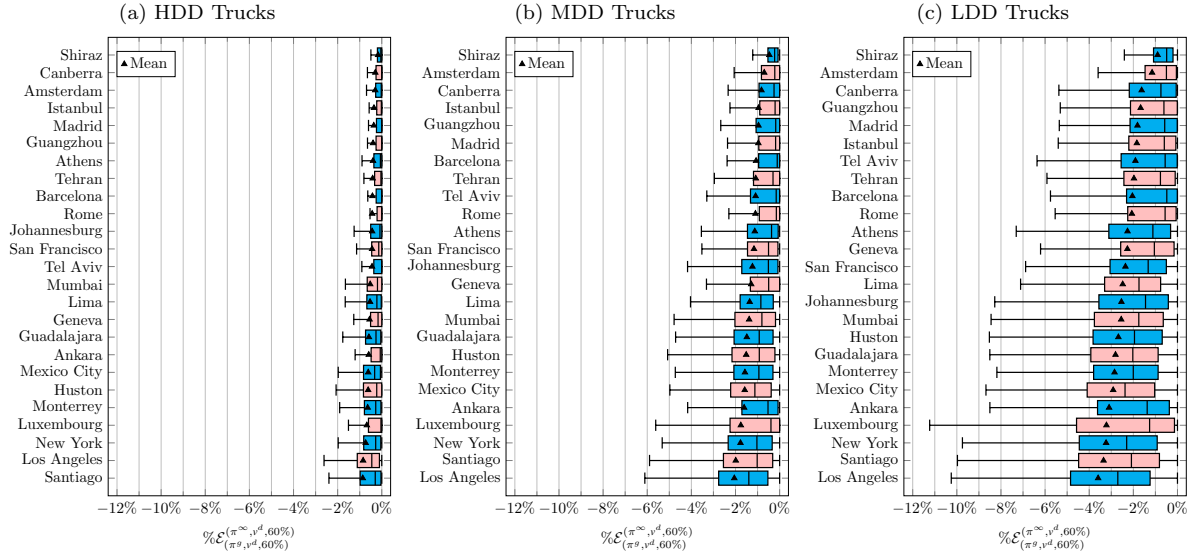


Figure 19 Relative CO₂ emissions reduction by selecting $(\pi^\infty, v^d, 60\%)$ rather than $(\pi^g, v^d, 60\%)$.

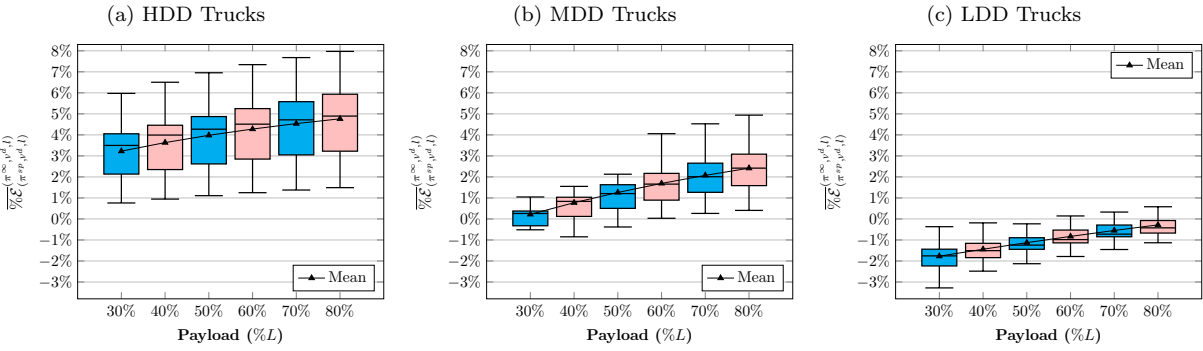


Figure 20 Effect of payload on $\overline{\% \mathcal{E}}_{(\pi^{sp}, v^d, l)}$ across 25 cities.

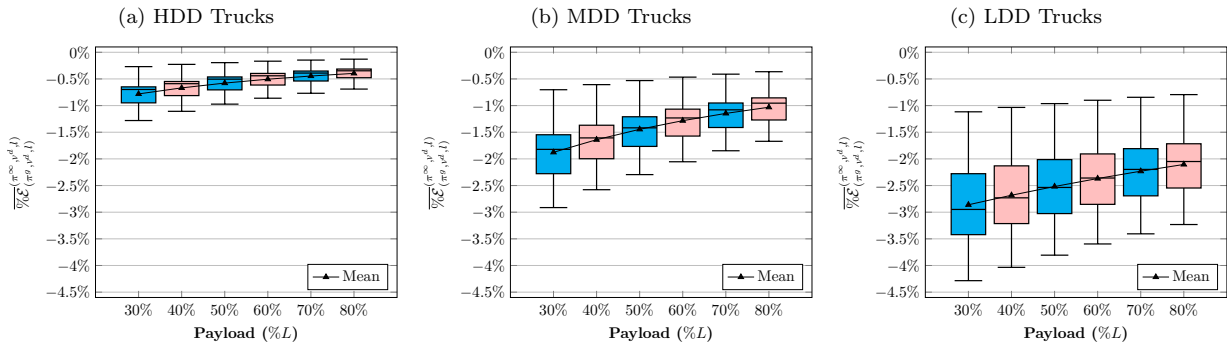


Figure 21 Effect of payload on $\overline{\% \mathcal{E}}_{(\pi^g, v^d, l)}$ across 25 cities.

diverges from π^{sp} (Figures 13 and 15) and converges to π^∞ (Figures 22 and 23) as the payload (and curb weight) increases.

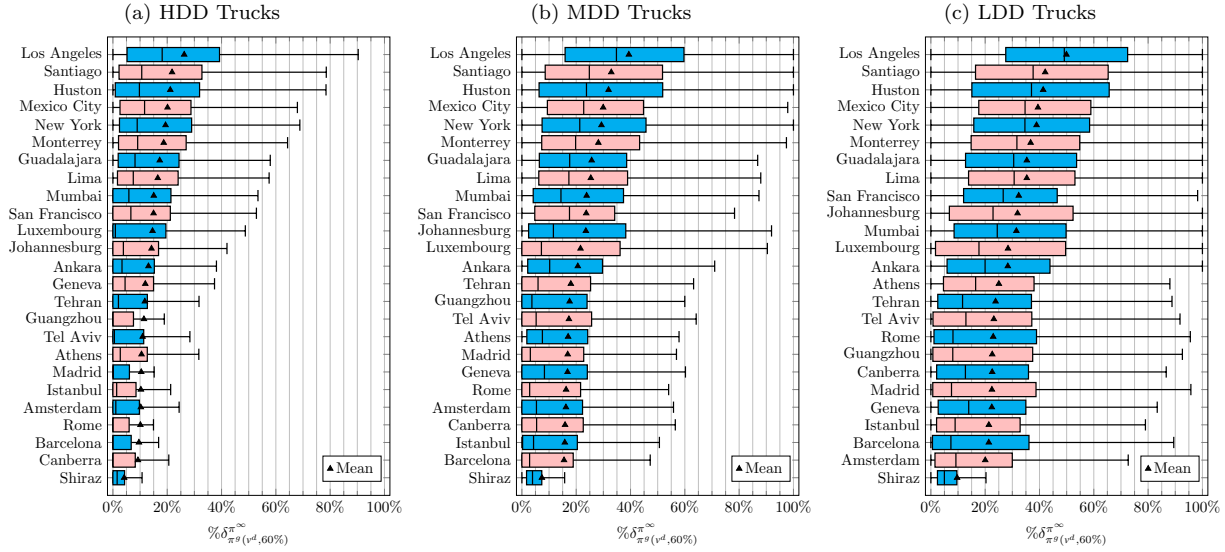


Figure 22 Ratio of the length of $\pi^g(v^d, 60\%)$ that is not shared with π^∞ .

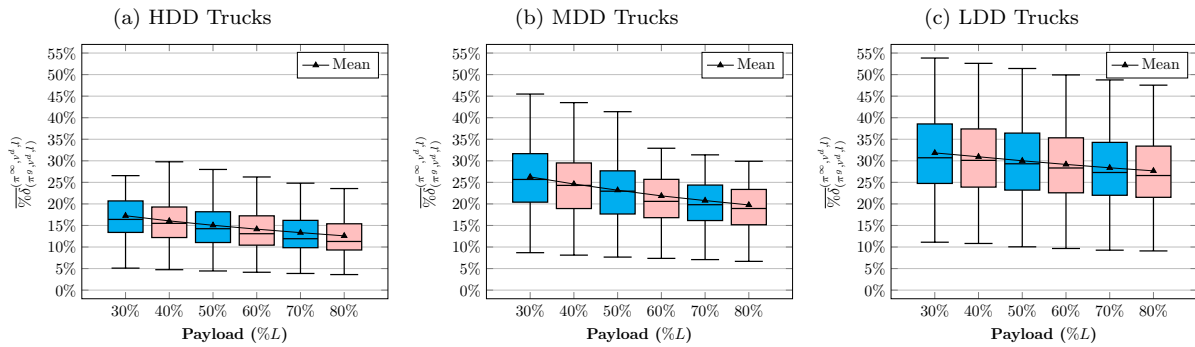


Figure 23 Effect of payload on $\overline{\delta_{\pi^g}^{\pi^\infty}(v^d, l)}$ across 25 cities.

4.5. Results: Main Determinants

In this section, we address the major determinants of the CO₂ emissions reduction and path alteration. We consider the following input features: city, truck type, payload, the elevation difference of source and target (Δh), the distance of the shortest path (δ^{sp}) and the standard deviation of the gradients along the shortest path ($\sigma^{sp}(\theta)$). The latter characterizes the hilliness of the shortest path. All of these features can be efficiently computed. We use linear regression accompanied by the analysis of variance (ANOVA) to regress these features against seven responses, namely $\% \mathcal{E}_{(\pi^{sp}, v^s, l)}^{\pi^g, v^d, l}$, $\% \mathcal{E}_{(\pi^{sp}, v^d, l)}^{\pi^g, v^d, l}$, $\% \mathcal{E}_{(\pi^{sp}, v^s, l)}^{\pi^g, v^s, l}$, $\% \mathcal{E}_{(\pi^g, v^s, l)}^{\pi^g, v^d, l}$, $\% \delta_{\pi^{sp}}^{\pi^g}(v^d, l)$, $\% \delta_{\pi^{sp}}^{\pi^g}(v^s, l)$, and $\% \delta_{(\pi^g, v^d, l)}^{\pi^g, v^s, l}$. We apply min-max normalization for the continuous features and dummy encode the categorical features. The encoding removes the redundant dummy features including Canberra and HDD among cities and trucks, respectively. We use the type III sum of squares in the ANOVA. The full report is available in Appendix A.

Table 6 Summary of the linear regression and ANOVA for seven different responses.

Features	df	$\% \mathcal{E}_{(\pi^{sp}, v^s, l)}^{(\pi^g, v^d, l)}$		$\% \mathcal{E}_{(\pi^{sp}, v^s, l)}^{(\pi^g, v^s, l)}$		$\% \mathcal{E}_{(\pi^{sp}, v^d, l)}^{(\pi^g, v^d, l)}$		$\% \mathcal{E}_{(\pi^g, v^s, l)}^{(\pi^g, v^d, l)}$		$\% \delta_{\pi^{sp}}^{\pi^g(v^s, l)}$		$\% \delta_{\pi^{sp}}^{\pi^g(v^d, l)}$		$\% \delta_{(\pi^g, v^s, l)}^{(\pi^g, v^s, l)}$	
		R	S	R	S	R	S	R	S	R	S	R	S	R	S
$\sigma^{sp}(\theta)$	1	2	+	1	+	1	+	3	+	1	+	1	+	1	+
Δh	1	1	-	2	-	2	-	1	-	4	-	4	-	4	-
δ^{sp}	1	7	-	7	+	7	+	4	-	2	+	2	+	2	+
l	1	6	+	3	+	3	+	5	-	6	+	6	+	5	-
City	24	4	\pm	4	\pm	5	\pm	6	\pm	3	\pm	3	\pm	3	\pm
Truck	2	5	-	5	-	4	-	7	\pm	5	-	5	-	7	+
(Intercept)	1	3	-	6	-	6	-	2	-	7	-	7	-	6	+

R: Feature's ranking in ANOVA

S: Sign of the feature's weight in linear regression

Table 6 summarizes the ranking and sign of different features in the ANOVA as per Appendix A. By the results, $\sigma^{sp}(\theta)$, i.e. the standard deviation of road gradient along the π^{sp} has the most explanatory power for CO₂ reduction capacity. In addition, $\sigma^{sp}(\theta)$ is has the strongest association with the dissimilarity of the greenest and shortest paths. That is to say, a higher $\sigma^{sp}(\theta)$ indicates a higher potential of CO₂ emissions reduction by selecting the greenest path instead of the shortest path. Next comes difference in elevation between the target and the source, Δh , which is negatively associated with the CO₂ emissions reduction capacity. This relation is strongest when comparing the dynamic speed policy with the static speed policy as in $\% \mathcal{E}_{(\pi^g, v^s, l)}^{(\pi^g, v^d, l)}$. This implies that using elevation data in routing policies is more pivotal for downward trips. Table 6 also reveals the positive association of $\% \mathcal{E}_{(\pi^{sp}, v^d, l)}^{(\pi^g, v^d, l)}$ and $\% \mathcal{E}_{(\pi^{sp}, v^s, l)}^{(\pi^g, v^s, l)}$ with payload. Our analysis shows that relative dissimilarity of the shortest and greenest paths increases in distance of the shortest path, i.e. δ^{sp} . However, δ^{sp} is less important for CO₂ emissions reduction. A city's individual characteristics have a fair impact on the CO₂ emissions reduction capacity, albeit this effect is not comparable with that of $\sigma^{sp}(\theta)$ and Δh . Finally, the truck type has an effect that is similar to the payload. It follows that curb weight and payload of truck are more significant than other parameters for the CO₂ emissions reduction.

5. Conclusions

In this paper, we studied the greenest path selection problem for a logistics service provider that operates a fleet of heavy-, medium-, and light-duty trucks in an urban environment. We established that the policies for the speed and path that minimize CO₂ emissions are slope-dependent (dynamic). We also showed that the greenest path converges to a fixed path as the payload increases and provided an efficient algorithm to compute the asymptotic greenest path. We conducted extensive numerical experiments using elevation data of 25 cities around the world to investigate the potential CO₂ reduction by such dynamic policies. The results in section 4.2 showed that, on average, the combined dynamic path and speed selection can reduce CO₂ emissions by 1.19% to 10.15%

based on the truck type and city. Our analysis also showed that in most cities, the average emissions reduction potential of dynamic speed optimization lies between 2% to 4% regardless of the truck type. Nonetheless, the effect of slope-dependent path selection (the greenest path) depends on the payload and truck type. In section 4.3, we explained that the greenest path significantly differs from the shortest path. While the greenest path depends on the speed policy in theory, the experiments show that this dependence is weak and that the greenest path under the static speed policy is usually optimal or near optimal. Moreover, we demonstrated, in Sections 3.5 and 4.4, that the greenest path diverges from the shortest path as the payload increases and converges to the asymptotic greenest path, i.e. the greenest path for the arbitrary large payloads. These results could be used for the approximation of the greenest path to simplify complex transportation problems. The analysis of variance (ANOVA) indicated that the potential CO₂ emissions reduction by the greenest path and the dynamic speed policy is associated positively with the variability of arc gradients along the shortest path, and negatively with the relative elevation of the source and target.

Acknowledgments

We thank Dennis Davydov for sharing initial explorations on this topic and Tiffany Nguyen for extensive feedback on early drafts.

References

- Andersen O, Jensen CS, Torp K, Yang B (2013) Ecotour: Reducing the environmental footprint of vehicles using eco-routes. *Proceedings - IEEE international conference on mobile data management*, 338–340.
- Asghari M, Alehashem SMJM (2021) Green vehicle routing problem: A state-of-the-art review. *International Journal of Production Economics* 231, ISSN 09255273.
- Barth M, Younglove T, Scora G (2005) Development of a heavy-duty diesel modal emissions and fuel consumption model ISSN 1055-1425.
- Behnke M, Kirschstein T (2017) The impact of path selection on ghg emissions in city logistics. *Transportation Research Part E: Logistics and Transportation Review* 106:320–336, ISSN 13665545, URL <http://dx.doi.org/10.1016/j.tre.2017.08.011>.
- Bektaş T, Laporte G (2011) The pollution-routing problem. *Transportation Research Part B: Methodological* 45:1232–1250, ISSN 01912615.
- Boriboonsomsin K, Barth M (2009) Impacts of road grade on fuel consumption and carbon dioxide emissions evidenced by use of advanced navigation systems. *Transportation Research Record* 21–30, ISSN 03611981.
- Boriboonsomsin K, Barth MJ, Zhu W, Vu A (2012) Eco-routing navigation system based on multisource historical and real-time traffic information. *IEEE Transactions on Intelligent Transportation Systems* 13:1694–1704, ISSN 15249050.

- Brunner C, Giesen R, Klapp MA, Flórez-Calderón L (2021) Vehicle routing problem with steep roads. *Transportation Research Part A: Policy and Practice* 151:1–17, ISSN 09658564.
- Dabia S, Demir E, Woensel TV (2017) An exact approach for a variant of the pollution-routing problem. *Transportation Science* 51:607–628, ISSN 15265447.
- Demir E, Bektaş T, Laporte G (2011) A comparative analysis of several vehicle emission models for road freight transportation. *Transportation Research Part D: Transport and Environment* 16:347–357, ISSN 13619209.
- Demir E, Bektaş T, Laporte G (2012) An adaptive large neighborhood search heuristic for the pollution-routing problem. *European Journal of Operational Research* 223:346–359, ISSN 03772217.
- Demir E, Bektaş T, Laporte G (2014) A review of recent research on green road freight transportation. *European Journal of Operational Research* 237:775–793, ISSN 03772217.
- Dijkstra EW (1959) A note on two problems in connexion with graphs. *Numerische Mathematik* 1:269–271.
- Dündar H, Soysal M, Ömürganülşen M, Kanellopoulos A (2022) A green dynamic tsp with detailed road gradient dependent fuel consumption estimation. *Computers and Industrial Engineering* 168, ISSN 03608352.
- Ehmke JF, Campbell AM, Thomas BW (2016a) Data-driven approaches for emissions-minimized paths in urban areas. *Computers and Operations Research* 67:34–47, ISSN 03050548.
- Ehmke JF, Campbell AM, Thomas BW (2016b) Vehicle routing to minimize time-dependent emissions in urban areas. *European Journal of Operational Research* 251:478–494, ISSN 03772217.
- Ehmke JF, Campbell AM, Thomas BW (2018) Optimizing for total costs in vehicle routing in urban areas. *Transportation Research Part E: Logistics and Transportation Review* 116:242–265, ISSN 13665545.
- Ericsson E, Larsson H, Brundell-Freij K (2006) Optimizing route choice for lowest fuel consumption - potential effects of a new driver support tool. *Transportation Research Part C: Emerging Technologies* 14:369–383, ISSN 0968090X.
- European Environment Agency (2021) Trends and projections in europe 2021 URL <http://dx.doi.org/10.2800/80374>.
- Fox RW, McDonald AT, Mitchell JW (2020) *Fox and McDonald's introduction to fluid mechanics* (John Wiley & Sons).
- Franceschetti A, Honhon D, Woensel TV, Bektaş T, Laporte G (2013) The time-dependent pollution-routing problem. *Transportation Research Part B: Methodological* 56:265–293, ISSN 01912615.
- Goldfarb S, Patterson S (2022) Why Are Gasoline Prices So High? Ukraine-Russia War Sparks Increases Across U.S. *The Wall Street Journal* URL <https://www.wsj.com/articles/why-gas-prices-expensive-11646767172>.
- Huang Y, Zhao L, Woensel TV, Gross JP (2017) Time-dependent vehicle routing problem with path flexibility. *Transportation Research Part B: Methodological* 95:169–195, ISSN 01912615.

- Intergovernmental Panel on Climate Change (2021) Climate change 2021: The physical science basis. contribution of working group I to the sixth assessment report of the intergovernmental panel on climate change.
- Koc C, Bektaş T, Jabali O, Laporte G (2014) The fleet size and mix pollution-routing problem. *Transportation Research Part B: Methodological* 70:239–254, ISSN 01912615.
- Lai D, Costa Y, Demir E, Florio A, Woensel TV (2021) The pollution-routing problem with speed optimization and uneven topography URL <http://arxiv.org/abs/2105.09229>.
- Larminie J, Lowry J (2012) *Electric vehicle technology explained, Second Edition* (John Wiley & Sons), ISBN 9781119942733.
- Moghdani R, Salimifard K, Demir E, Benyettou A (2021) The green vehicle routing problem: A systematic literature review. *Journal of Cleaner Production* 279, ISSN 09596526.
- OpenStreetMap contributors (2017) Planet dump retrieved from <https://planet.osm.org> . <https://www.openstreetmap.org>.
- OpenStreetMap contributors (2022) Osmnx user reference. URL <https://osmnx.readthedocs.io/en/stable/osmnx.html>.
- Pamučar D, Gigović L, Čirović G, Regodić M (2016) Transport spatial model for the definition of green routes for city logistics centers. *Environmental Impact Assessment Review* 56:72–87, ISSN 01959255.
- Raeesi R, Zografos KG (2019) The multi-objective steiner pollution-routing problem on congested urban road networks. *Transportation Research Part B: Methodological* 122:457–485, ISSN 01912615.
- Rao W, Liu F, Wang S (2016) An efficient two-objective hybrid local search algorithm for solving the fuel consumption vehicle routing problem. *Applied Computational Intelligence and Soft Computing* 2016:1–16, ISSN 1687-9724.
- Schröder M, Cabral P (2019) Eco-friendly 3d-routing: A gis based 3d-routing-model to estimate and reduce co2-emissions of distribution transports. *Computers, Environment and Urban Systems* 73:40–55, ISSN 01989715.
- Scora G, Barth M (2006) Comprehensive modal emissions model (cmem), version 3.01: User’s guide. URL https://www.cert.ucr.edu/sites/default/files/2019-07/CMEM_User_Guide_v3.01d.pdf.
- Scora G, Boriboonsomsin K, Barth M (2015) Value of eco-friendly route choice for heavy-duty trucks. *Research in Transportation Economics* 52:3–14, ISSN 07398859.
- US Environmental Protection Agency (2005) Emission facts: Average carbon dioxide emissions resulting from gasoline and diesel fuel (EPA420-F-05-001).
- US Environmental Protection Agency (2022) Inventory of U.S. greenhouse gas emissions and sinks: 1990–2020. EPA 430-R-22-003.
- US Geological Survey (2000) Digital Elevation Model - SRTM 1 Arc-Second 30m (NASA, NGA). <https://lta.cr.usgs.gov/citation>.

- Waltho C, Elhedhli S, Gzara F (2019) Green supply chain network design: A review focused on policy adoption and emission quantification. *International Journal of Production Economics* 208:305–318, ISSN 09255273.
- Xiao Y, Zuo X, Huang J, Konak A, Xu Y (2020) The continuous pollution routing problem. *Applied Mathematics and Computation* 387, ISSN 00963003.
- Zhou M, Jin H, Wang W (2016) A review of vehicle fuel consumption models to evaluate eco-driving and eco-routing. *Transportation Research Part D: Transport and Environment* 49:203–218, ISSN 13619209.

Appendix A: ANOVA Results

Table 7 Response: $\% \mathcal{E}_{(\pi^{sp}, v^s, l)}^{(\pi^g, v^d, l)}$

Feature	df	SS	MSS	F-value	p-value
$\sigma^{sp}(\theta)$	1	11771	11771	9061762	$< 10^{-15}$
Δh	1	22347	22347	17203995	$< 10^{-15}$
l	1	293	293	225597	$< 10^{-15}$
δ^{sp}	1	47	47	36175	$< 10^{-15}$
City	24	12477	520	400209	$< 10^{-15}$
Truck	2	926	463	356459	$< 10^{-15}$
(Intercept)	1	7265	7265	5592723	$< 10^{-15}$
Residuals	55415417	71983			

Table 8 Response: $\% \mathcal{E}_{(\pi^{sp}, v^s, l)}^{(\pi^g, v^s, l)}$

Feature	df	SS	MSS	F-value	p-value
$\sigma^{sp}(\theta)$	1	10020	10020	5973305	$< 10^{-15}$
Δh	1	6261	6261	3732651	$< 10^{-15}$
l	1	908	908	541007	$< 10^{-15}$
δ^{sp}	1	225	225	134066	$< 10^{-15}$
City	24	16178	674	401852	$< 10^{-15}$
Truck	2	1156	578	344674	$< 10^{-15}$
(Intercept)	1	420	420	250138	$< 10^{-15}$
Residuals	55415417	92958			

Table 9 Response: $\% \mathcal{E}_{(\pi^{sp}, v^d, l)}^{(\pi^g, v^d, l)}$

Feature	df	SS	MSS	F-value	p-value
$\sigma^{sp}(\theta)$	1	7092	7092	6099148	$< 10^{-15}$
Δh	1	4822	4822	4147274	$< 10^{-15}$
l	1	816	816	701716	$< 10^{-15}$
δ^{sp}	1	82	82	70510	$< 10^{-15}$
City	24	10056	419	360351	$< 10^{-15}$
Truck	2	918	459	394610	$< 10^{-15}$
(Intercept)	1	347	347	298743	$< 10^{-15}$
Residuals	55415417	64434			

Table 10 Response: $\% \mathcal{E}_{(\pi^g, v^s, l)}^{(\pi^g, v^d, l)}$

Feature	df	SS	MSS	F-value	p-value
$\sigma^{sp}(\theta)$	1	1431	1431	3270532	$< 10^{-15}$
Δh	1	16335	16335	37344012	$< 10^{-15}$
l	1	147	147	335105	$< 10^{-15}$
δ^{sp}	1	870	870	1989427	$< 10^{-15}$
City	24	3102	129	295466	$< 10^{-15}$
Truck	2	81	40	91981	$< 10^{-15}$
(Intercept)	1	10731	10731	24531295	$< 10^{-15}$
Residuals	55415417	24240			

Table 11 Response: $\% \delta_{\pi^{sp}}^{\pi^g(v^s, l)}$

Feature	df	SS	MSS	F-value	p-value
$\sigma^{sp}(\theta)$	1	204303	204303	3344542	$< 10^{-15}$
Δh	1	15691	15691	256873	$< 10^{-15}$
l	1	5270	5270	86270	$< 10^{-15}$
δ^{sp}	1	44990	44990	736513	$< 10^{-15}$
City	24	640819	26701	437105	$< 10^{-15}$
Truck	2	13408	6704	109750	$< 10^{-15}$
(Intercept)	1	2732	2732	44716	$< 10^{-15}$
Residuals	55415417	3385080			

Table 12 Response: $\% \delta_{\pi^{sp}}^{\pi^g(v^d, l)}$

Feature	df	SS	MSS	F-value	p-value
$\sigma^{sp}(\theta)$	1	208923	208923	3601979	$< 10^{-15}$
Δh	1	17790	17790	306719	$< 10^{-15}$
l	1	7602	7602	131065	$< 10^{-15}$
δ^{sp}	1	37788	37788	651499	$< 10^{-15}$
City	24	577881	24078	415128	$< 10^{-15}$
Truck	2	18821	9411	162244	$< 10^{-15}$
(Intercept)	1	3005	3005	51805	$< 10^{-15}$
Residuals	55415417	3214225			

Table 13 Response: $\% \delta_{(\pi^g, v^d, l)}^{(\pi^g, v^s, l)}$

Feature	df	SS	MSS	F-value	p-value
$\sigma^{sp}(\theta)$	1	1190	1190	74122	$< 10^{-15}$
Δh	1	596	596	37147	$< 10^{-15}$
l	1	390	390	24271	$< 10^{-15}$
δ^{sp}	1	1096	1096	68270	$< 10^{-15}$
City	24	22738	947	59004	$< 10^{-15}$
Truck	2	310	155	9667	$< 10^{-15}$
(Intercept)	1	203	203	12647	$< 10^{-15}$
Residuals	55415417	889779			

Appendix B: Results: Performance of the Asymptotic Paths with Static Speed policies

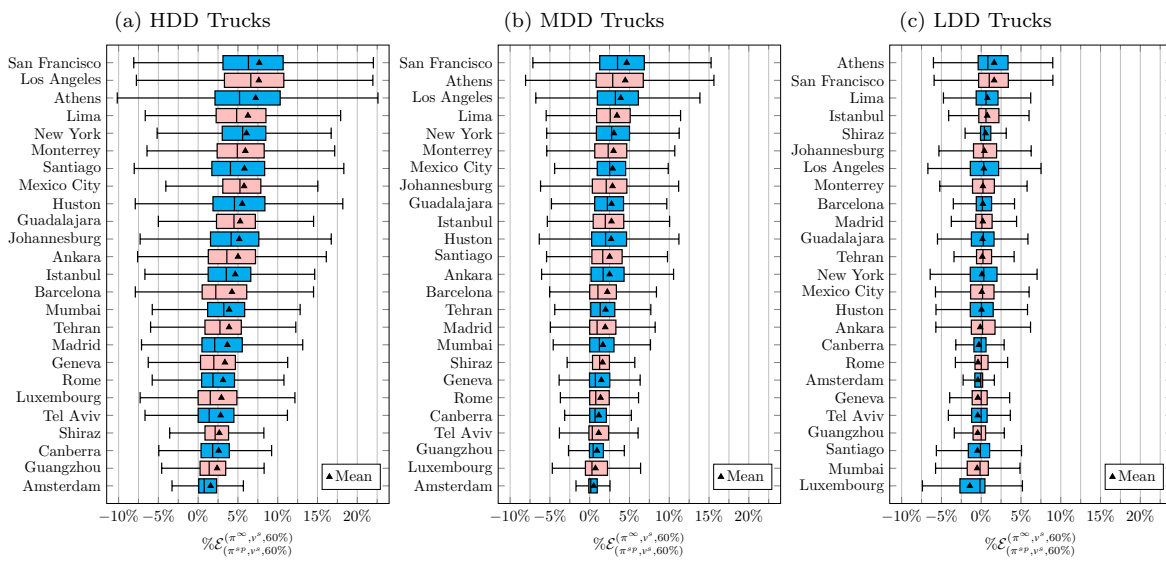


Figure 24 Relative CO₂ emissions reduction by selecting $(\pi^\infty, v^s, 60\%)$ rather than $(\pi^{sp}, v^s, 60\%)$.

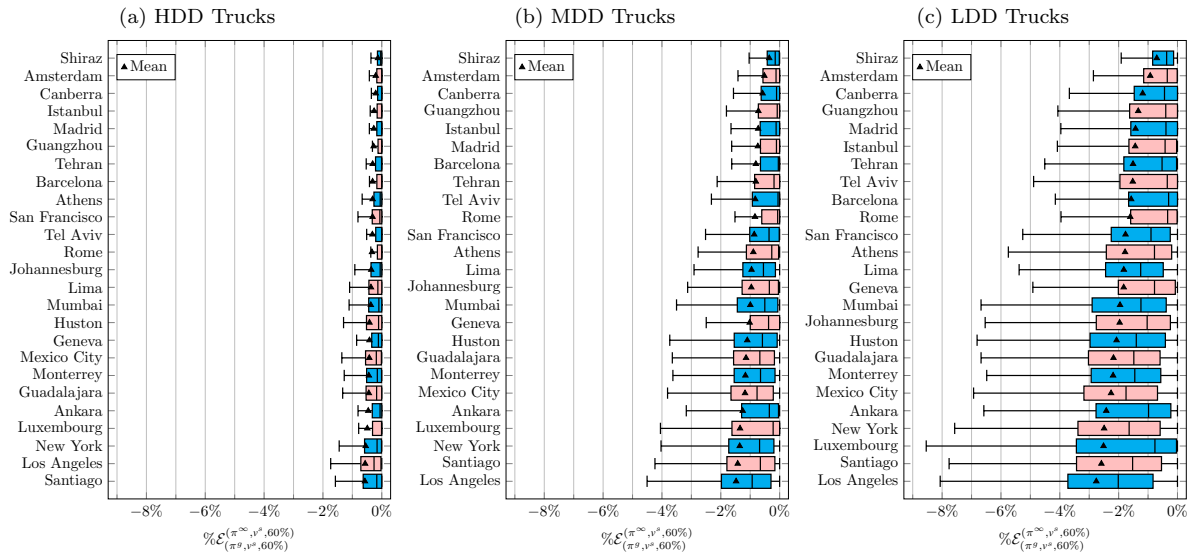


Figure 25 Relative CO₂ emissions reduction by selecting $(\pi^\infty, v^s, 60\%)$ rather than $(\pi^g, v^s, 60\%)$.

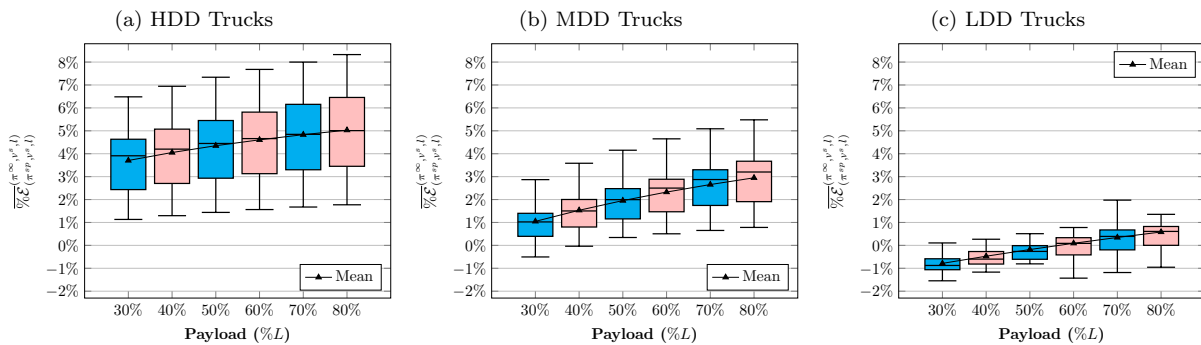


Figure 26 Effect of payload on $\frac{\% \mathcal{E}(\pi^\infty, v^s, l)}{\% \mathcal{E}(\pi^{sp}, v^s, l)}$ across 25 cities.

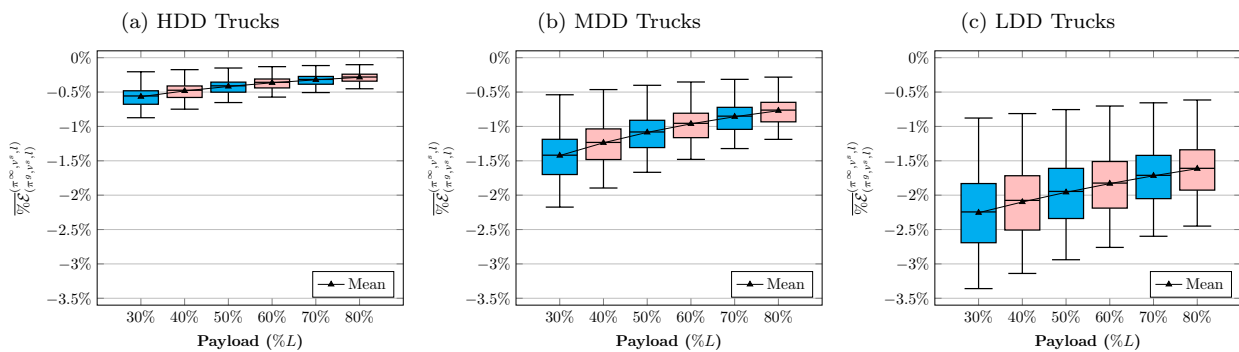


Figure 27 Effect of payload on $\frac{\% \mathcal{E}(\pi^\infty, v^s, l)}{\% \mathcal{E}(\pi^g, v^s, l)}$ across 25 cities.

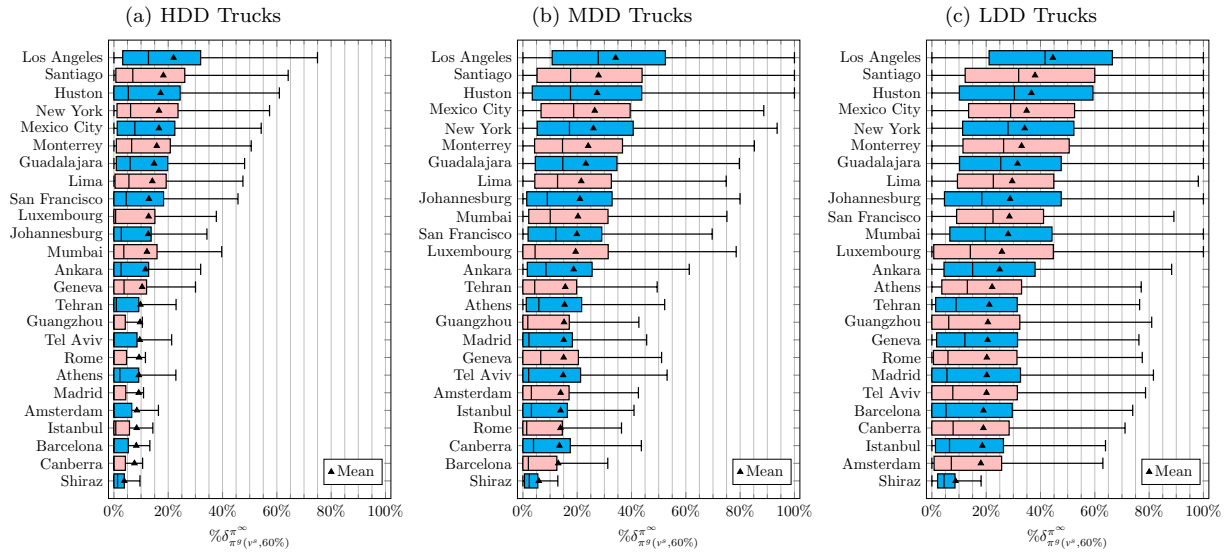


Figure 28 Ratio of the length of $\pi^g(v^s, 60\%)$ that is not shared with π^∞ .

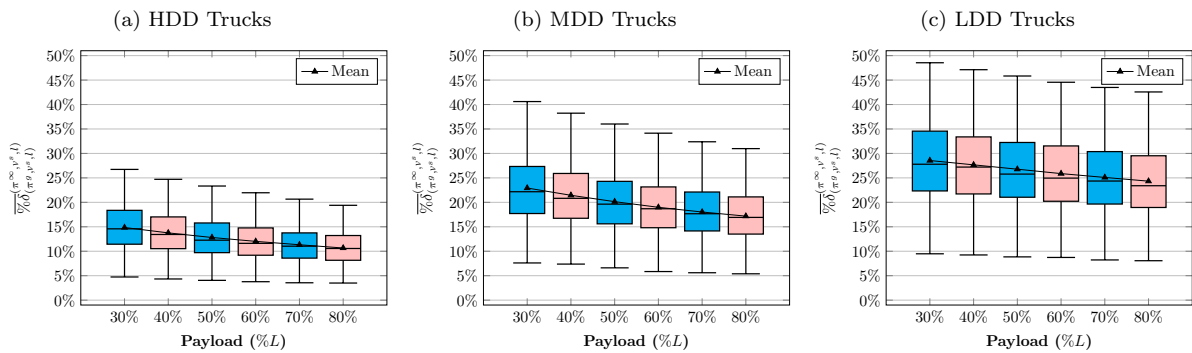


Figure 29 Effect of payload on $\% \delta_{\pi^g(v^s, l)}^{\pi^\infty}$ across 25 cities.