

Optimizing helical disc dynamo

J. Priede^{1,2}, *R. A. Avalos-Zúñiga*³

¹ *Fluid and Complex Systems Research Centre, Coventry University,*

Coventry, CV1 5FB, United Kingdom

² *Department of Physics, University of Latvia, Riga, LV-1004, Latvia*

³ *Research Centre in Applied Science and Advanced technology (CICATA - Querétaro), Instituto*

Politécnico Nacional, Cerro Blanco 141, Colinas del Cimatarío, Querétaro, Mexico

We present an optimized design of our recently realized helical disc dynamo. Like the original set-up, the optimized dynamo consists of a flat multi-arm spiral coil and a co-axially placed disc which is connected to the former by sliding liquid metal contacts. In contrast to the original set-up, the disc and the coil in the optimized design have different sizes. This allows the disc to capture more of the high-density magnetic flux generated in the inner part of the coil and to avoid the reverse flux in the outer part of the coil. By optimizing the coil and disc radii, the critical magnetic Reynolds number can be reduced from ≈ 34.6 when the disc and coil have equal inner and outer radii with the ratio $r_i/r_o \approx 0.36$ to $Rm \approx 11.6$. This lowest possible disc dynamo threshold is attained when the disc and coil have relatively narrow widths. Using a slightly suboptimal but more practical set-up with the inner and outer radii of the disc and coil equal to $(0.3, 0.9)$ and $(0.74, 1)$, respectively, self-excitation is expected at $Rm \approx 14.6$.

1. Introduction. The disc dynamo is a very simple physical model that is often used to illustrate the self-excitation of the magnetic field by moving conductors [10]. This is known as the dynamo action, which is currently the most likely explanation for the origin of the magnetic fields of the Earth, the Sun, and other cosmic bodies [5]. The basic disc dynamo model, which is due to Bullard [6], consists of a solid metal disc that rotates about its central axis, and a wire that is twisted around and connected through sliding contacts to the rim and the axis of the disc. If the disc spins sufficiently fast and in the right direction, such a set-up can amplify electric current circulating in the system and, thus, the associated magnetic field. This happens when the rotation rate of the disc exceeds a certain critical threshold above which the potential difference induced across the disc exceeds the voltage drop caused by

the ohmic resistance of the system. Then the current starts to grow exponentially in time, resulting in the self-excitation of the magnetic field. The growth stops when the braking electromagnetic torque becomes so strong that it slows the disc.

Bullard dynamo has several extensions and modifications. The most well-known is perhaps the so-called Rikitake dynamo [19], which consists of two coupled disc dynamos. This dynamo can generate an oscillating magnetic field with complex dynamics [15]. The latter study uses a modified disc dynamo model proposed by [11]. In this model, the disc is radially segmented, and azimuthal current is enforced at the rim. The aim of these modifications is to eliminate the unphysical growth of the magnetic field in the limit of perfectly conducting disc. We used this model to show that the dynamo can be excited by the parametric resonance mechanism at a substantially reduced rotation rate when the latter contains harmonic oscillations in certain frequency bands [17].

Despite its simplicity, the implementation of the disc dynamo is faced with severe technical difficulties. The most challenging problem is the sliding electrical contacts which are required to convey the current between the rim and the axis of the rotating disc. The electrical resistance of such contacts, which are usually made of solid graphite brushes, can significantly exceed that of the rest of the set-up. This results in an unrealistically high rotation rate required for the dynamo to operate. Therefore, in contrast to fluid dynamos, which have been performed in several laboratory experiments using liquid metal [8, 21, 12] ([20] in preparation), the disc dynamo was generally considered technically unfeasible [18, 7, 9].

To overcome this problem, we proposed a feasible disc dynamo design with sliding liquid-metal electrical contacts [16]. This design was realized in a set-up consisting of a copper disc with a radius of 30 cm and thickness of 3 cm which was placed coaxially beneath a flat multi-arm spiral coil of the same size and electrically connected to it electrically at the centre and along the circumference by sliding liquid-metal contacts [4]. The slits make the conductivity of the coil anisotropic, which allows this essentially axially symmetric dynamo to generate an axially symmetric magnetic field [14, 2]. In this set-up, we observed a dynamo action

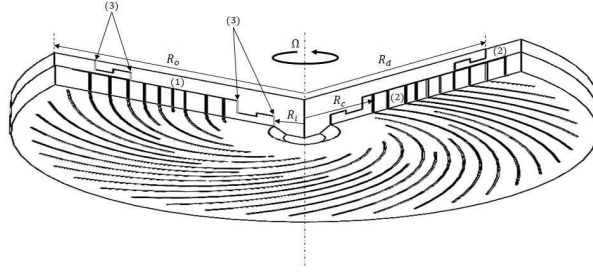


Figure 1: Schematic bottom view of the set-up which consists of a coil (1) and a disc (2) with inner radius r_i and the outer radius r_d . The coil is sectioned by spiral slits, which extend from the inner radius r_c to the outer radius r_o , and has two solid parts: the lower one between radii r_i and r_c and the upper one between r_d and r_o , which are electrically connected to the disc by sliding liquid-metal contacts (3).

when the disc rotation rate reached $\Omega \approx 7$ Hz [3].

It is important to note that this observed critical rotation rate is somewhat lower than the theoretically predicted threshold $\Omega_c \approx 8.2$ Hz which corresponds to the minimal critical magnetic Reynolds number $Rm \approx 35$ for a negligible contact resistance [16]. The most likely reason for this difference is the very approximate nature of the current sheet model, which we used to evaluate the dynamo threshold [16]. In particular, our original disc dynamo model is based on the assumption that the magnetic flux through the disc is the same as that through the coil. In reality, however, the effective inner radius of the disc is somewhat smaller than that of the coil. Due to the relatively high strength of the magnetic field in the central part of the helical coil, the total magnetic flux through the disc may be larger than theoretically predicted. This hints at the possibility, which is investigated theoretically in the present note, that the critical rotation rate can be reduced further by optimizing the inner and outer radii of the disc and coil.

2. Mathematical model. The principal set-up of the disc dynamo considered in this study is shown in Fig. 1. It consists of a thin rotating disc with inner radius r_i and outer radius r_d , and a coaxial coil of similar shape with the same inner radius r_i but a larger outer radius $r_o > r_d$. In contrast to our original set-up [16], now the coil is placed below the disc and sectioned by spiral slits starting only from the radius $r_c > r_i$. The sectioned part

of the coil, which generates an axial magnetic field, extends to the outer radius r_o . Between the radii r_d and r_o , the coil has a solid upper part that connects its rim to that of the disc by a sliding liquid-metal contact. The circuit made of the disc and the coil is closed by the second sliding liquid-metal contact which is located at the inner radius r_i .

As before, to simplify the analysis, the thickness of the disc and the coil is assumed to have the same thickness d , which is much smaller than the radial dimensions of the system. The same assumption applies also to the vertical separation between the disc and the coil. Thus, the disc and the coil are treated as vertically collocated thin sheets with effective linear conductance $\bar{\sigma} = \sigma d$.

Now consider an equilibrium dynamo state in which the disc rotating with a fixed angular velocity Ω in the magnetic field \mathbf{B} generated by a constant electric current I_0 sustains this current. In the solid disc this stationary current flows is purely radial with the linear density $J_r = \frac{I_0}{2\pi r}$, which decreases due to charge conservation inversely with the cylindrical radius r . This current flowing in the opposite radial direction through the coil is deflected sideways by the spiral slits, which thus produce an azimuthal current component proportional to the radial one:

$$J_\phi = -J_r \beta = \frac{I_0 \beta}{2\pi r}, \quad (1)$$

where $\arctan \beta$ the pitch angle of the current lines relative to the radial direction. The shape of slits is governed by $\frac{J_\phi}{J_r} = \frac{rd\phi}{dr} = -\beta$. The general solution of this ordinary differential equation

$$\phi(r) = \phi_0 - \beta \ln r \quad (2)$$

describes logarithmic spirals. The electric potential distribution in the sectioned part of the coil can be found from the Ohm's law

$$\mathbf{J} = \frac{I_0}{2\pi r} (-\mathbf{e}_r + \beta \mathbf{e}_\phi) = -\sigma d \nabla \varphi, \quad (3)$$

as

$$\varphi(r, \phi) = \frac{I_0}{2\pi\sigma d} (\ln r - \beta\phi).$$

Thus, the potential difference along the current line over the sectioned part of the coil is

$$\Delta\varphi_c^o = [\varphi(r, \phi(r))]_{r_c}^{r_o} = \frac{I_0}{2\pi\sigma d} (1 + \beta^2) \ln \frac{r_o}{r_c}. \quad (4)$$

Over the solid part of the coil ($r_i \leq r \leq r_c$), where the current is purely radial, which corresponds to $\beta = 0$, we respectively have

$$\Delta\varphi_i^c = \frac{I_0}{2\pi\sigma d} \ln \frac{r_c}{r_i}.$$

The potential difference across the disc, which rotates as a solid body with the azimuthal velocity $v_\phi = r\Omega$, is defined by the radial component of Ohm's law for a moving medium

$$J_r = \frac{I_0}{2\pi r} = \sigma d(-\partial_r \varphi + v_\phi B_z),$$

where B_z is the axial component of the magnetic field. Integrating the expression above over the upper part of the set-up from r_i to r_o , which includes the disc and the solid upper part of the coil, where $\Omega = 0$, we have

$$\frac{I_0}{2\pi} \ln \frac{r_o}{r_i} = \sigma d (-\Delta\varphi_i^o + \Omega\Phi_i^d), \quad (5)$$

where $\Delta\varphi_i^o = [\varphi_d(r)]_{r_i}^{r_o}$ is the potential difference across the upper part of the set-up and $\Phi_i^d = \int_{r_i}^{r_d} B_z r dr$ is the magnetic flux through the disc. Using the relation $B_z = r^{-1} \partial_r (rA_\phi)$, the latter can be expressed in terms of the azimuthal component of the magnetic vector potential A_ϕ as

$$\Phi_i^d = [rA_\phi]_{r=r_i}^{r_d}. \quad (6)$$

In the stationary state, which is assumed here, the potential difference induced by the ro-

tating ring in Eq. (5) is supposed to balance that over the coil defined by Eq. (4) as well as the potential drop over the liquid-metal contacts with the effective resistance \mathcal{R} :

$$\Delta\varphi_i^o = \Delta\varphi_i^c + \Delta\varphi_c^o + \mathcal{R}I_0. \quad (7)$$

This equation implicitly defines the critical rotation rate at which a steady current can sustain itself.

To complete the solution, we need to evaluate the magnetic flux (6) through the rotating disc. The azimuthal component of the vector potential that appears in Eq. (6) is generated by the respective component of the electric current which is present only in the coil. Thus, we have

$$A_\phi(r, z) = \frac{\mu_0}{4\pi} \int_0^{2\pi} \int_{r_c}^{r_o} \frac{J_\phi(r') \cos \phi r' dr' d\phi}{\sqrt{r'^2 - 2r'r \cos \phi + r^2 + z^2}},$$

where z is the axial distance from the coil ring carrying the azimuthal current J_ϕ defined by Eq. (1). Note that the poloidal currents with radial and axial components circulating through the rings and liquid-metal contacts produce a purely toroidal magnetic field, which is parallel to the velocity of the rotating ring, and thus do not interact with the latter. In the plane of the ring ($z = 0$), the double integral above can be evaluated analytically as

$$A_\phi(r, 0) = \frac{\mu_0 \beta I_0}{8\pi^2} [F(r_c/r) - F(r_o/r)],$$

where $F(x) = (1 - x)K(m_+) + (1 + x)E(m_+) + \text{sgn}(1 - x) [(1 + x)K(m_-) + (1 - x)E(m_-)]$ is defined in terms of the complete elliptic integrals of the first and second kind, $K(m_\pm)$ and $E(m_\pm)$, of the *parameter* $m_\pm = \frac{\pm 4x}{(1 \pm x)^2}$ [1]. Using the above definition, the magnetic flux (6) can be written as

$$\Phi_i^d = \frac{\mu_0 \beta I_0 r_o}{8\pi^2} \bar{\Phi}(\lambda_i, \lambda_c, \lambda_d) \quad (8)$$

where

$$\bar{\Phi}(\lambda_i, \lambda_c, \lambda_d) = \lambda_d [F(\lambda_c/\lambda_d) - F(\lambda_d^{-1})] - \lambda_i [F(\lambda_c/\lambda_i) - F(\lambda_i^{-1})] \quad (9)$$

is a dimensionless magnetic flux and $\lambda_i = r_i/r_o, \lambda_c = r_c/r_o, \lambda_d = r_d/r_o$ are the dimensionless counterparts of the corresponding radii which are defined using the outer coil radius r_o as the length scale for this problem. Substituting the relevant parameters into Eq. (7), we obtain the critical magnetic Reynolds number

$$Rm = \mu_0 \sigma d r_o \Omega = \frac{4\pi(\bar{\mathcal{R}} - 2 \ln \lambda_i - \beta^2 \ln \lambda_c)}{\beta \bar{\Phi}(\lambda_i, \lambda_c, \lambda_d)}, \quad (10)$$

which defines the dynamo threshold depending on the dimensionless contact resistance $\bar{\mathcal{R}} = 2\pi\sigma d \mathcal{R}$, the spiral pitch β , and three radii ratios $\lambda_i, \lambda_c, \lambda_d$.

3. Results In the following, we assume $\bar{\mathcal{R}} = 0$, which corresponds to a relatively small contact resistance, as in our previous set-up, and search for an optimal set the remaining four parameters which yield the lowest possible Rm . First, an optimal β is found in terms of the the radii ratios by solving the stationarity condition $\frac{\partial Rm}{\partial \beta} = 0$, which reduces to

$$2\beta^{-2} \ln \lambda_i - \ln \lambda_c = 0, \quad (11)$$

and straightforwardly yields

$$\beta = \sqrt{2 \ln \lambda_i / \ln \lambda_c}. \quad (12)$$

Substituting this back into Eq. (10), we obtain

$$Rm = \frac{16\pi}{\sqrt{2}} \frac{\sqrt{\ln \lambda_i \ln \lambda_c}}{\bar{\Phi}(\lambda_i, \lambda_c, \lambda_d)} \quad (13)$$

depending on $\lambda_i, \lambda_c, \lambda_d$.

With $\lambda_d = 1$ and $\lambda_i = \lambda_c$, which correspond to $r_c = r_i$ and $r_d = r_o$, as in our original model, the lowest $Rm \approx 34.6$ is obtained in the radii ratio $\lambda = r_i/r_o \approx 0.36$ (see Fig. 2) [16]. First, this basic set-up can be improved by optimizing the inner coil radius λ_c so that to minimize Rm for the given inner disc radius λ_i . The optimal λ_c along with the corresponding

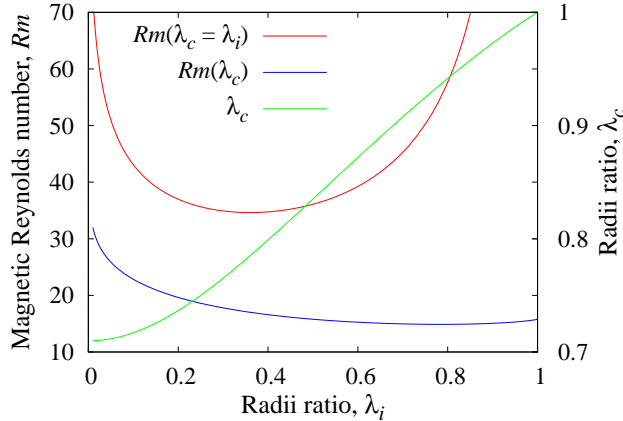


Figure 2: Marginal Rm versus the inner disc radius λ_i for the same-size inner coil radius $\lambda_c = \lambda_i$ and for optimal λ_c which is shown on the axis at the right; here $\lambda_d = 1$ and $\bar{\mathcal{R}} = 0$.

Rm found numerically using Mathematica [22] are plotted in Fig. 2 against λ_i . As seen in Fig. 3, for this partially constrained set-up with $\lambda_d = 1$, the lowest $Rm \approx 14.9$ is attained at $\lambda_i \approx 0.78$ and $\lambda_c \approx 0.94$. Optimizing also λ_d , we find the lowest possible $Rm \approx 11.6$ at $\lambda_d \approx 0.98$, $\lambda_i \approx 0.88$ and $\lambda_c \approx 0.96$.

It is important to note that the coil in this optimal set-up represents a very narrow ring with the relative width $1 - \lambda_c \approx 0.04$. First, such a coil may be difficult to make. Second, it may not be adequately described by the thin-sheet approximation used in our mathematical model. The same applies largely also to the previous (suboptimal) set-up with $\lambda_d = 1$. On the other hand, Fig. 2 indicates that the increase in Rm caused by the reduction of λ_i below its optimal value remains relatively small down to $\lambda_i \approx 0.3$. Choosing this value for the inner disc radius, and minimizing Rm with respect to λ_c and λ_d , we obtain $Rm \approx 14.6$ at $\lambda_c \approx 0.74$ and $\lambda_d \approx 0.9$. The spiral pitch angle, which corresponds to the optimal β and is defined by Eq. (12), is $\arctan \beta \approx 70.5^\circ$.

4. Conclusion. We found a feasible disc dynamo set-up with a critical magnetic Reynolds number $Rm \approx 15$ that is more than twice lower than that for our original design. For a set-up with an outer radius $R_o = 15$ cm and a thickness of $d = 1.5$ cm, that is twice smaller than in our original set-up, dynamo is expected to work at the critical rotation

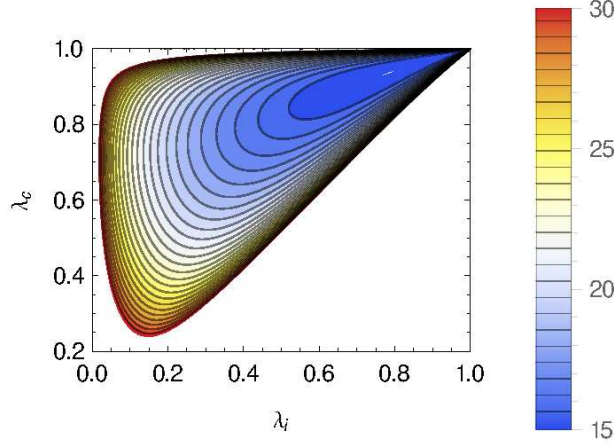


Figure 3: Isocontours of the magnetic Reynolds number Rm in the plane of radii ratios (λ_i, λ_c) for $\lambda_i \leq \lambda_c$ and $\lambda_d = 1$.

frequency

$$f = \frac{\Omega}{2\pi} = \frac{Rm}{2\pi\mu_0\sigma_{\text{Cu}}dR_o} \approx 15 \text{ Hz},$$

where $\mu_0 = 4\pi \times 10^{-7} \text{ H/m}$ is the vacuum permeability and $\sigma_{\text{Cu}} = 5.96 \times 10^7 \text{ S/m}$ is the conductivity of copper. For sliding contacts with a gap of width $\delta = 0.25 \text{ mm}$ filled with the eutectic alloy of GaInSn, as in our original set-up [3], the relative contact resistance can be estimated as [16]

$$\bar{\mathcal{R}} \approx \frac{\sigma_{\text{Cu}}}{\sigma_{\text{GaInSn}}} \frac{\delta}{R_o} \left(\frac{1}{\lambda_i} + \frac{1}{\lambda_d} \right) \approx 10^{-2},$$

where $\sigma_{\text{GaInSn}} = 3.3 \times 10^6 \text{ S/m}$ [13]. This confirms the assumed negligibility of $\bar{\mathcal{R}}$.

References

1. M. Abramowitz and I. A. Stegun. *Handbook of Mathematical Functions*. Dover, New York, 1972.
2. T. Alboussière, F. Plunian, and M. Moulin. Fury: an experimental dynamo with anisotropic electrical conductivity. *Proc. R. Soc. Lond. A*, 478:20220374, 2022.

3. A. R. Avalos-Zúñiga and J. Priede. Realization of Bullard’s disc dynamo. *Proc. R. Soc. Lond. A*, 479(2271):20220740, 2023.
4. R.A. Avalos-Zúñiga, J Priede, and CE Bello-Morales. A homopolar disc dynamo experiment with liquid metal contacts. *Magnetohydrodynamics*, 53:341–348, 2017.
5. R. Beck, A. Brandenburg, D. Moss, A. Shukurov, and D. Sokoloff. Galactic magnetism: recent developments and perspectives. *Annu. Rev. Astron. Astrophys.*, 34(1):155–206, 1996.
6. E. Bullard. The stability of a homopolar dynamo. *Proc. Camb. Phil. Soc.*, 51(4):744–760, 1955.
7. E. Dormy and A. M. Soward. *Mathematical aspects of natural dynamos*. CRC, 2007.
8. A. Gailitis, O. Lielausis, E. Platacis, S. Dement’ev, A. Cifersons, G. Gerbeth, T. Gundrum, F. Stefani, M. Christen, and G. Will. Magnetic field saturation in the riga dynamo experiment. *Phys. Rev. Lett.*, 86(14):3024, 2001.
9. P. Lorrain, F. Lorrain, and S. Houle. *Magneto-fluid dynamics: fundamentals and case studies of natural phenomena*. Springer, 2006.
10. H. K. Moffatt. *Magnetic field generation in electrically conducting fluids*. Cambridge monographs on mechanics and applied mathematics. Cambridge, 1978.
11. H. K. Moffatt. A self-consistent treatment of simple dynamo systems. *Geophys. Astrophys. Fluid Dyn.*, 14(1):147–166, 1979.
12. R. Monchaux, M. Berhanu, M. Bourgoïn, M. Moulin, Ph. Odier, J.-F. Pinton, R. Volk, S. Fauve, N. Mordant, F. Pétrélis, A. Chiffaudel, F. Daviaud, B. Dubrulle, C. Gasquet, L. Marié, and F. Ravelet. Generation of a magnetic field by dynamo action in a turbulent flow of liquid sodium. *Phys. Rev. Lett.*, 98:044502, Jan 2007.
13. U. Müller and L. Bühler. *Magneto-fluid dynamics in Channels and Containers*. Springer, 2001.
14. F. Plunian and T. Alboussière. Axisymmetric dynamo action is possible with anisotropic conductivity. *Phys. Rev. Res.*, 2(1):013321, 2020.

15. F. Plunian, Ph. Marty, and A. Alemany. Chaotic behaviour of the rikitake dynamo with symmetric mechanical friction and azimuthal currents. *Proc. R. Soc. Lond. A*, 454(1975):1835–1842, 1998.
16. J. Priede and R. Avalos-Zúñiga. Feasible homopolar dynamo with sliding liquid-metal contacts. *Phys. Lett. A*, 377(34-36):2093–2096, 2013.
17. J. Priede, R. Avalos-Zúñiga, and F. Plunian. Homopolar oscillating-disc dynamo driven by parametric resonance. *Phys. Lett. A*, 374(4):584–587, 2010.
18. K.H. Rädler and M. Rheinhardt. Can a disc dynamo work in the laboratory? *Magnetohydrodynamics*, 38(1-2):211–217, 2002.
19. T. Rikitake. Oscillations of a system of disk dynamos. *Math. Proc. Cambridge Philos. Soc.*, 54(1):89–105, 1958.
20. F. Stefani, A. Gailitis, G. Gerbeth, A. Giesecke, Th. Gundrum, G. Rüdiger, M. Seilmayer, and T. Vogt. The dresdyn project: liquid metal experiments on dynamo action and magnetorotational instability. *Geophys. Astrophys. Fluid Dyn.*, 113(1-2):51–70, 2019.
21. R. Stieglitz and U. Müller. Experimental demonstration of a homogeneous two-scale dynamo. *Phys. Fluids*, 13(3):561–564, 2001.
22. S. Wolfram. *The Mathematica Book*. Wolfram Media, 2003.