

Wind Noise Reduction with a Diffusion-based Stochastic Regeneration Model

Jean-Marie Lemerrier,* Joachim Thiemann,† Raphael Koning,† Timo Gerkmann*

* {first.name}@uni-hamburg.de, Universität Hamburg, Hamburg, Germany

† {first.name}@advancedbionics.com, Advanced Bionics, Hannover, Germany

Abstract

In this paper we present a method for single-channel wind noise reduction using our previously proposed diffusion-based stochastic regeneration model combining predictive and generative modelling. We introduce a non-additive speech in noise model to account for the non-linear deformation of the membrane caused by the wind flow and possible clipping. We show that our stochastic regeneration model outperforms other neural-network-based wind noise reduction methods as well as purely predictive and generative models, on a dataset using simulated and real-recorded wind noise. We further show that the proposed method generalizes well by testing on an unseen dataset with real-recorded wind noise. Audio samples, data generation scripts and code for the proposed methods can be found online¹².

1 Introduction

Wind noise captured in microphone signals is an important factor of intelligibility and quality loss in speech communications, and occurs for virtually all outdoor scenarios. Hearing-device users particularly suffer from wind noise presence, more than from other noise types [1]. Wind acoustics are highly non-stationary, especially in case of strong wind as it adopts a turbulent behaviour close to microphones. Furthermore, the corruption caused by wind noise exhibit non-linear behaviours, due to the displacement of the microphone membrane by the air flow and saturation for high wind noise levels [2]. Such non-stationarity and non-linearities make enhancing speech corrupted with wind noise a very difficult challenge [2, 3].

Several traditional enhancement solutions leverage multi-channel processing [4] and often exploit the spatial coherence structure across microphones shaped by the local turbulent flow [2, 5, 6]. Single-channel solutions include adaptive post-filtering [7] and spectral enhancement exploiting the particular spectrum of wind noise [8]. Other approaches were designed using the fact that wind noise resides mostly in low-frequency regions. These methods discard the polluted low-frequency speech information, and aim to recreate a clean version of it based on artificial bandwidth extension or synthesis techniques [9, 10].

More recently, machine learning solutions were proposed [11, 12], mostly relying on supervised predictive learning, i.e. recovering clean speech from noisy speech based on a mapping learnt by a deep neural network (DNN) during training. Generative models are a different class of machine learning techniques that learn a parameterization of the clean speech distribution and allow to generate multiple valid estimates instead of a single best estimate as for predictive approaches [13]. Such generative meth-

ods include variational auto-encoders (VAEs), normalizing flows, generative adversarial networks (GANs) and diffusion models [14]. Diffusion models were recently proposed for speech restoration tasks such as enhancement, dereverberation and bandwidth extension [15–18]. Originally intended for image generation, they showed impressive results on speech restoration, notably outperforming their predictive counterparts on speech quality [18]. In previous work [19], we proposed to combine predictive and generative modelling to leverage both the fast inference and interference removal power of predictive approaches, and the sample quality and generalization abilities of generative models. The resulting model was evaluated on additive noise and dereverberation separately.

We aim here to investigate the performance of the proposed model for wind noise reduction. We introduce a signal model approximation for speech in wind noise taking into account possible non-linearities such as membrane displacement and clipping which often occur for strong winds [2]. We show that our stochastic regeneration model is able to highly increase the quality and intelligibility of speech in wind noise. We compare to DNN-based baselines for wind noise reduction, as well as purely generative and predictive models using the same DNN architecture as the proposed method. We validate our algorithm on both the matched test split of our simulated dataset and an unseen speech in wind noise dataset using real-recorded wind noise samples.

2 Diffusion-based generative models

Diffusion models are a class of generative models that iteratively generate data from noise based on a stochastic process parameterization [14, 20]. More specifically, they use a forward diffusion process during training to progressively degrade clean data with Gaussian noise and/or other types of corruption. At inference time, a reversed version of the diffusion process generates a sample from the target data distribution given an initial Gaussian noise state.

2.1 Forward and reverse processes

The stochastic forward process $\{\mathbf{x}_\tau\}_{\tau=0}^T$ is defined as a stochastic differential equation (SDE) [20]:

$$d\mathbf{x}_\tau = \mathbf{f}(\mathbf{x}_\tau, \tau)d\tau + g(\tau)d\mathbf{w}, \quad (1)$$

where \mathbf{x}_τ is the current state of the process indexed by the continuous time step $\tau \in [0, T]$. This *diffusion time* variable τ relates to the progress of the stochastic process and should not be mistaken for our usual notion of time in time-series-like signals. The initial condition represents target clean speech $\mathbf{x}_0 = \mathbf{x}$. As our process is defined in the complex spectrogram domain, independently for each time-frequency (T-F) bin, the variables in bold are assumed to be vectors in \mathbb{C}^d containing the coefficients of the complex spectrogram— with d the product of the time and frequency dimensions— whereas variables in regular font

¹<https://uhh.de/inf-sp-storm-wind>

²This work has been funded by the Federal Ministry for Economic Affairs and Climate Action, project 01MK20012S, AP380. The authors are responsible for the content of this paper.

represent real scalar values. The stochastic process \mathbf{w} is a standard d -dimensional Brownian motion, that is, $d\mathbf{w}$ is a zero-mean Gaussian random variable with standard deviation $d\tau$ for each T-F bin. The *drift* function \mathbf{f} and *diffusion* coefficient g as well as the initial condition \mathbf{x}_0 and the final diffusion time T uniquely define the process $\{\mathbf{x}_\tau\}_{\tau=0}^T$. Under some regularity conditions on \mathbf{f} and g , the reverse process $\{\mathbf{x}_\tau\}_{\tau=T}^0$ is another diffusion process and is also the solution of a SDE [20, 21]:

$$d\mathbf{x}_\tau = [-\mathbf{f}(\mathbf{x}_\tau, \tau) + g(\tau)^2 \nabla_{\mathbf{x}_\tau} \log p_\tau(\mathbf{x}_\tau)] d\tau + g(\tau) d\bar{\mathbf{w}}, \quad (2)$$

where $d\bar{\mathbf{w}}$ is a d -dimensional Brownian motion for the time flowing in reverse and $\nabla_{\mathbf{x}_\tau} \log p_\tau(\mathbf{x}_\tau)$ is the *score function*, i.e. the gradient of the logarithmic data distribution for the current process state \mathbf{x}_τ .

In order to perform speech restoration, the generation of clean speech \mathbf{x} is conditioned on cues depending on the noisy speech \mathbf{y} . Previous diffusion-based approaches proposed to condition the process explicitly within the neural network [22] or through guided classification [23]. In [16] however, it has been proposed to include the conditioning information directly into the diffusion process by defining the forward process as the solution to the following Ornstein-Uhlenbeck SDE:

$$d\mathbf{x}_\tau = \underbrace{\gamma(\mathbf{y} - \mathbf{x}_\tau)}_{:= \mathbf{f}(\mathbf{x}_\tau, \mathbf{y})} d\tau + \underbrace{\left[\sigma_{\min} \left(\frac{\sigma_{\max}}{\sigma_{\min}} \right)^\tau \sqrt{2 \log \left(\frac{\sigma_{\max}}{\sigma_{\min}} \right)} \right]}_{:= g(\tau)} d\mathbf{w}. \quad (3)$$

The stiffness hyperparameter γ controls the decay from \mathbf{y} to \mathbf{x}_0 , and the noise extrema σ_{\min} and σ_{\max} control the noise scheduling, i.e. the amount of white Gaussian noise injected at each timestep during the forward process. Therefore, the forward process in Eq. (3), injects an infinitesimal amount of corruption $\gamma(\mathbf{y} - \mathbf{x}_t)d\tau$ to the current process state \mathbf{x}_τ , along with Gaussian noise with standard deviation $g(\tau)d\tau$. It is shown in [16] that the solution to (3) admits a complex Gaussian perturbation kernel $p(\mathbf{x}_\tau | \mathbf{x}_0, \mathbf{y})$ with mean $\boldsymbol{\mu}(\mathbf{x}_0, \mathbf{y}, \tau)$ and variance $\sigma(\tau)^2$:

$$\begin{aligned} \boldsymbol{\mu}(\mathbf{x}_0, \mathbf{y}, \tau) &= e^{-\gamma\tau} \mathbf{x}_0 + (1 - e^{-\gamma\tau}) \mathbf{y}, \quad (4) \\ \sigma(\tau)^2 &= \frac{\sigma_{\min}^2 \left(\left(\frac{\sigma_{\max}}{\sigma_{\min}} \right)^{2\tau} - e^{-2\gamma\tau} \right) \log \left(\frac{\sigma_{\max}}{\sigma_{\min}} \right)}{\gamma + \log \left(\frac{\sigma_{\max}}{\sigma_{\min}} \right)}. \quad (5) \end{aligned}$$

2.2 Score function estimator

During inference, the score function $\nabla_{\mathbf{x}_\tau} \log p(\mathbf{x}_\tau)$ is not known and must be estimated by a so-called *score model* \mathbf{s}_ϕ . Once obtained, all quantities are available for solving Eq. (2) with classical numerical methods (see Section 2.3). Given the Gaussian form of the perturbation kernel $p(\mathbf{x}_\tau | \mathbf{x}_0, \mathbf{y})$, the following *denoising score matching* objective can be used to train the score model \mathbf{s}_ϕ [24]:

$$\mathcal{J}^{(\text{DSM})}(\phi) = \mathbb{E}_{t, (\mathbf{x}_0, \mathbf{y}), \mathbf{z}, \mathbf{x}_\tau} \left[\left\| \mathbf{s}_\phi(\mathbf{x}_\tau, \mathbf{y}, \tau) + \frac{\mathbf{z}}{\sigma(\tau)} \right\|_2^2 \right]. \quad (6)$$

To optimize (6), a clean utterance \mathbf{x}_0 and noisy utterance \mathbf{y} are first picked in the training set. A diffusion time step τ is sampled uniformly in $[\tau_\epsilon, T]$ where $\tau_\epsilon > 0$ is a minimal diffusion time used to avoid numerical instabilities. Then the current process state is obtained by Gaussianity of the perturbation kernel as $\mathbf{x}_\tau = \boldsymbol{\mu}(\mathbf{x}_0, \mathbf{y}, \tau) + \sigma(\tau)\mathbf{z}$, with $\mathbf{z} \sim$

$\mathcal{N}_{\mathbb{C}}(\mathbf{z}; \mathbf{0}, \mathbf{I})$. Classical gradient descent methods are then used to tune the score model (see Section 4.2).

2.3 Inference through reverse sampling

At inference time, we sample \mathbf{x}_T , with:

$$\mathbf{x}_T \sim \mathcal{N}_{\mathbb{C}}(\mathbf{x}_T; \mathbf{y}, \sigma^2(T)\mathbf{I}). \quad (7)$$

Conditional generation is then performed by solving the reverse SDE (2) from $\tau = T$ to $\tau = 0$, where the score function is replaced by its estimator \mathbf{s}_ϕ . We use classical SDE numerical solvers [20] based on a discretization of (2) according to a uniform grid of N points on the interval $[0, T]$ (no minimal diffusion time is needed here). We will denote by G_ϕ the generative model corresponding to reverse diffusion such that the clean speech estimate is $\hat{\mathbf{x}} = \mathbf{x}_0 = G_\phi(\mathbf{y})$.

3 Stochastic regeneration model

We now revisit our **Stochastic Regeneration Model** (StoRM) combining predictive and generative modelling originally proposed in [19]. An initial predictor D_θ is used as a first stage to generate a denoised version of the sample (see Figure 1). This estimate can be polluted by residual noise and speech distortions due to the fact that predictive models trained with a mean-square error objective map noisy speech to the posterior mean $\mathbb{E}[\mathbf{x}|\mathbf{y}]$ rather than to a sample of the posterior distribution [13, 19]. A generative diffusion model G_ϕ then learns to regenerate the clean speech \mathbf{x}_0 given $D_\theta(\mathbf{y})$:

$$\hat{\mathbf{x}} = G_\phi(D_\theta(\mathbf{y})). \quad (8)$$

The inference process is shown in Figure 1. For training, we use a criterion $\mathcal{J}^{(\text{StoRM})}$ combining denoising score matching $\mathcal{J}^{(\text{DSMS})}$ (where the difference with (6) is the presence of $D_\theta(\mathbf{y})$ as extra-conditioning) and a supervised regularization term $\mathcal{J}^{(\text{Sup})}$ matching the output of the initial predictor to the target speech:

$$\begin{aligned} \mathcal{J}^{(\text{DSMS})}(\theta) &= \mathbb{E}_{\tau, (\mathbf{x}, \mathbf{y}), \mathbf{z}} \left\| \mathbf{s}_\phi(\mathbf{x}_\tau, [\mathbf{y}, D_\theta(\mathbf{y})], \tau) + \frac{\mathbf{z}}{\sigma(\tau)} \right\|_2^2, \\ \mathcal{J}^{(\text{Sup})}(\phi) &= \mathbb{E}_{(\mathbf{x}, \mathbf{y})} \|\mathbf{x} - D_\theta(\mathbf{y})\|_2^2, \quad (9) \\ \mathcal{J}^{(\text{StoRM})}(\theta, \phi) &= \mathcal{J}^{(\text{DSMS})}(\theta) + \alpha \mathcal{J}^{(\text{Sup})}(\phi), \end{aligned}$$

where a value of $\alpha = 1$ is empirically chosen. As $D_\theta(\mathbf{y})$ may not be a sufficient cue for optimal reconstruction of the target speech, we additionally provide \mathbf{y} as conditioning to the score model \mathbf{s}_ϕ by stacking it with $D_\theta(\mathbf{y})$ (see Section 4.2).

4 Experimental Setup

4.1 Data

We generate our simulated dataset using clean speech data from the WSJ0 corpus and simulated and recorded wind noise, each making up for half of the noise data. The simulated half of the noise dataset is created with the wind noise generator [25]. Wind noise with airflow speed-dependent behaviour is generated using randomized airflow profiles (see Table 1). The real-recorded other half of the noise dataset is obtained from public sources such as Freesounds

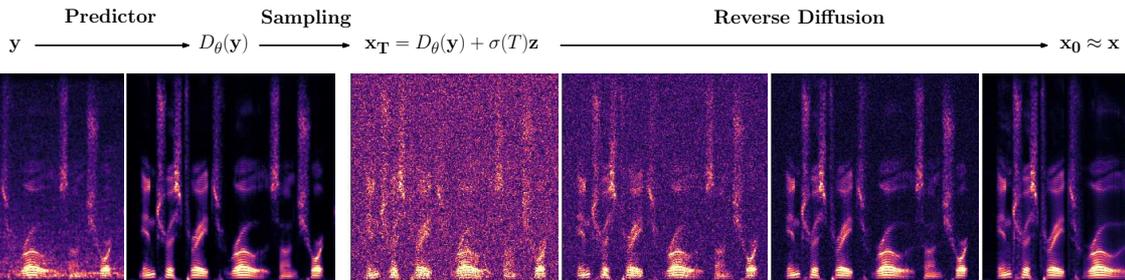


Figure 1: StoRM inference process. The predictive stage produces a denoised version $D_\theta(\mathbf{y})$. Reverse diffusion G_ϕ is then carried out by first adding Gaussian noise $\sigma(T)\mathbf{z}$ to obtain the start sample \mathbf{x}_T , and finally by solving the reverse diffusion SDE (2) to obtain the estimated clean speech \mathbf{x}_0 .

| Parameter | Unit | Distribution |
|----------------------------------|------|--------------------------|
| Number of wind gusts | | $\mathcal{U}(1, 10)$ |
| Input SNR | dB | $\mathcal{U}(-6, 14)$ |
| Compressor ratio | | $\mathcal{U}(1, 20)$ |
| Compressor sidechain input level | | $\mathcal{U}(0.8, 1.2)$ |
| Compressor attack | ms | $\mathcal{U}(5, 100)$ |
| Compressor release | ms | $\mathcal{U}(5, 500)$ |
| Clipping presence | | $\mathcal{B}(0.75)$ |
| Clipping threshold η | | $\mathcal{U}(0.85, 1.0)$ |

Table 1: Data generation parameters

(4.3 h), YouTube (0.1 h) and various open-source noise databases (1.8 h) [26–28].

We design a non-additive speech in noise model by taking into account both non-linearities caused by microphone membrane displacement and clipping in case of strong wind. First, wind noise and speech signals are mixed additively with a random SNR. Then, the membrane displacement non-linearity is simulated by using a compressor on the speech signal, sidechained by the noise signal. If the wind noise signal exceeds the compressor threshold, the speech signal is compressed by an amount determined by the compressor ratio and the magnitude of the noise signal above the compressor threshold. We sample compressor threshold, ratio, attack and release parameters to mimic various recording devices. Finally, hard-clipping is simulated by limiting the dynamic range of the noisy signal \mathbf{y} between $-\eta \max(|\mathbf{y}|)$ and $\eta \max(|\mathbf{y}|)$. We refer the reader to Table 1 for the data generation parameters. In total 25, 2.3 and 1.5 hours of noisy speech sampled at 16kHz are created for training, validation and testing respectively. We make our data generation method publicly available³.

Finally, we also use an unseen dataset using real wind noise recorded in a wind tunnel, added to German speech with a SNR in $\{0, -5, -10\}$ dB. For this data, provided by Advanced Bionics, only noisy speech without ground truth is available.

4.2 Hyperparameters and training setting

Data representation

Noisy and clean utterances are transformed using a short-time Fourier transform (STFT) with a window size of 510, a hop length of 128 and a square-root Hann window, at a sampling rate of 16kHz, as in [17, 19]. A square-root magnitude warping is used to reduce the dynamical range

of spectrograms [17]. During training, sequences of 256 STFT frames (≈ 2 s) are extracted from the full-length utterances with random offsets and normalized by the maximum absolute value of the noisy utterance.

Forward and reverse diffusion

For the proposed stochastic regeneration model, we fix the stiffness to $\gamma = 1.5$, the extremal noise levels to $\sigma_{\min} = 0.05$ and $\sigma_{\max} = 0.5$, and the extremal diffusion times to $T = 1$ and $\tau_\epsilon = 0.03$ as in [19]. $N = 20$ time steps are used for reverse diffusion using the first-order Euler-Maruyama prediction scheme, resulting in 21 neural network calls.

Network architecture

For score estimation and initial prediction, we use two copies of a lighter configuration of the NCSN++ architecture [20], which was proposed in our previous study [18] and denoted as *NCSN++M* and has roughly 27.8M parameters. For initial prediction, the noisy speech spectrogram \mathbf{y} real and imaginary channels are stacked and provided as sole input to the network D_θ , and no noise-conditioning is used. For score estimation during reverse diffusion, the noisy speech spectrogram \mathbf{y} , the initial prediction $D_\theta(\mathbf{y})$ and the current estimate \mathbf{x}_τ real and imaginary channels are stacked and fed to the network s_ϕ , and the current noise level $\sigma(\tau)$ is provided as a conditioner. The resulting approach is denoted as *StoRM*.

We also investigate using GaGNet for initial prediction [29], a state-of-the-art predictive denoising approach conducting parallel magnitude- and complex-domain enhancement in the T-F domain. We use 257 frequency bins instead of the original 161 for compatibility with NCSN++-based score estimation, increasing the network capacity to 11.6M parameters compared to the original 5.9M. The resulting approach is denoted as *StoRM-G*.

Baselines

We compare our approaches to the purely generative SGMSE+M [17] and purely predictive NCSN++M [18]. SGMSE+M uses the NCSN++M architecture for score estimation, $N = 30$ reverse time steps with a Euler-Maruyama predictor and one step of Annealed Langevin Dynamics correction with step size $r = 0.5$, resulting in 60 neural network calls. We change the stiffness to $\gamma = 2.5$ and maximal noise level to $\sigma_{\max} = 0.75$. We noticed that higher maximal noise level and stiffness were needed, as the initial mean \mathbf{y} which needs masking by the Gaussian noise $\sigma(T)\mathbf{z}$ has higher energy compared to StoRM where the initial mean is $D_\theta(\mathbf{y})$.

³<https://github.com/sp-uhh/storm>

| Method | #Params | DNSMOS | WVMOS | PESQ | ESTOI | SI-SDR |
|-----------------|---------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|----------------------------------|
| Noisy | | 3.04 ± 0.61 | 1.24 ± 2.58 | 1.70 ± 0.61 | 0.76 ± 0.19 | 4.1 ± 5.9 |
| FCN+SANM [11] | 4.3 M | 2.63 ± 0.66 | 2.17 ± 1.73 | 2.01 ± 0.57 | 0.78 ± 0.15 | 9.0 ± 4.3 |
| DBLSTM-U [12] | 73.5 M | 3.50 ± 0.72 | 3.61 ± 0.49 | 2.94 ± 0.78 | 0.90 ± 0.10 | 15.5 ± 6.5 |
| NCSN++M [18] | 27.8 M | 4.09 ± 0.39 | 3.70 ± 0.53 | 2.76 ± 0.92 | 0.92 ± 0.08 | 18.8 ± 6.2 |
| SGMSE+M [17] | 27.8 M | 4.01 ± 0.32 | 3.79 ± 0.40 | 2.83 ± 0.78 | 0.90 ± 0.10 | 16.5 ± 6.1 |
| StoRM (prop.) | 56.0 M | 4.19 ± 0.30 | 3.80 ± 0.43 | 3.02 ± 0.76 | 0.91 ± 0.08 | 17.4 ± 6.0 |
| StoRM-G (prop.) | 39.6 M | 4.19 ± 0.30 | 3.87 ± 0.41 | 3.07 ± 0.76 | 0.92 ± 0.08 | 17.6 ± 6.0 |

Table 2: Enhancement results on our simulated test set. Values indicate mean and standard deviation.

| Method | DNSMOS | WVMOS |
|-----------------|-----------------------------------|-----------------------------------|
| Noisy | 1.89 ± 0.41 | 0.08 ± 0.19 |
| FCN+SANM [11] | 1.29 ± 0.33 | 0.23 ± 0.34 |
| DBLSTM-U [12] | 1.96 ± 0.47 | 0.23 ± 0.33 |
| NCSN++M [18] | 3.34 ± 0.59 | 1.59 ± 0.55 |
| SGMSE+M [17] | 3.44 ± 0.11 | 1.52 ± 0.50 |
| StoRM (prop.) | 3.36 ± 0.44 | 1.33 ± 0.60 |
| StoRM-G (prop.) | 3.56 ± 0.42 | 1.67 ± 0.57 |

Table 3: Enhancement results on the unseen dataset using real-recorded wind noise. Values indicate mean and standard deviation.

We also report the performance of the soft audio noise masking model using fully connected networks (*FCN+SANM*) [11] and the "Unified" version of the deep bidirectional long-short term memory network approach (*DBLSTM-U*) by [12], which is the state-of-the-art DNN-based method for wind noise reduction.

Training configuration

We train the approaches NCSN++M, SGMSE+M, StoRM and StoRM-G using the Adam optimizer [30] with a learning rate of 0.0005 and an effective batch size of 16. We track an exponential moving average of the DNN weights with a decay of 0.999 [31]. We train DNNs for a maximum of 500 epochs using early stopping based on the validation loss with a patience of 10 epochs. For StoRM approaches, the initial predictor is pre-trained with a complex spectrogram mean-square error loss, then we jointly train the predictor and score network with (9) [19]. We implement FCN+SANM and DBLSTM-U using the hyperparameters and training configuration proposed by the authors.

4.3 Evaluation metrics

For instrumental evaluation of the speech enhancement and dereverberation performance with clean test data available, we use intrusive measures such as Perceptual Evaluation of Speech Quality (PESQ) [32] to assess speech quality, Extended Short-Term Objective Intelligibility (ESTOI) [33] for intelligibility and scale-invariant signal to distortion ratio (SI-SDR) [34] for wind noise and distortion removal. For reference-free assessment of speech restoration, we also use the non-intrusive DNSMOS [35] and WVMOS [36] metrics, which perform DNN-based mean opinion score estimation.

5 Results and Discussion

5.1 Simulated dataset

We report in Table 2 instrumental metrics for the proposed method and baselines on the proposed simulated test set. We observe that the FCN+SANM baseline [11] hardly improves over noisy speech, as it uses a simplistic low-capacity architecture without any sequence-modelling module. In comparison, DBLSTM-U [12] yields good results for a simple predictive approach but has a large number of parameters. As already reported in [18, 19], predictive NCSN++M yields high ESTOI and SI-SDR but mediocre quality-related metrics, due to important speech distortions. Purely generative SGMSE+M achieves marginally higher PESQ and WVMOS but lower ESTOI and SI-SDR, and produces many generative artifacts.

The proposed methods StoRM and StoRM-G highly improve speech quality, while remaining competitive with NCSN++M in terms of ESTOI and SI-SDR and using three times fewer operations than SGMSE+M. StoRM-G slightly outperforms StoRM with fewer parameters, showing the efficiency of using GaGNet as initial predictor.

5.2 Real-recorded dataset

We display in Table 3 instrumental metrics of the different baselines and proposed models on the unseen dataset using real-recorded wind noise. We show that NCSN++M generalizes well to unseen noisy data for a predictive approach, compared to the other predictive baselines. However, SGMSE+M and StoRM-G perform much better, the latter improving DNSMOS by 1.8 points.

6 Conclusions and Future Work

We propose to solve the wind noise reduction task with our previously proposed diffusion-based stochastic regeneration model, combining predictive and generative modelling. We design a speech in noise signal model which deviates from the classical additive model by introducing non-linearities to simulate membrane displacement and clipping. We show that the introduced method is able to strongly increase the quality and intelligibility of speech in wind noise. The proposed stochastic regeneration model outperforms previous DNN-based methods for wind noise reduction as well as purely predictive and generative methods in terms of instrumental metrics. In particular, it generalizes well to unseen data using real-recorded wind noise.

References

- [1] S. Kochkin, "Marketrak VIII: Consumer satisfaction with hearing aids is slowly increasing.," *The Hearing Journal*, vol. 63, pp. 19–32, 2010.
- [2] C. M. Nelke, *Wind Noise Reduction: Signal Processing Concepts*. PhD thesis, IKS RWTH Aachen, 2016.
- [3] J. A. Zakis, "Wind noise at microphones within and across hearing aids at wind speeds below and above microphone saturation," *The Journal of the Acoustical Society of America*, vol. 129, pp. 3897–3907, 06 2011.
- [4] P. Thuene and G. Enzner, "Maximum-likelihood approach to adaptive multichannel-wiener postfiltering for wind-noise reduction," in *ITG Symp. Speech Comm.*, Oct. 2016.
- [5] D. Mirabilii and E. Habets, "Spatial coherence-aware multi-channel wind noise reduction," *IEEE Trans. Audio, Speech, Language Proc.*, vol. 28, pp. 1974–1987, 2020.
- [6] S. Franz and J. Bitzer, "Multi-channel algorithms for wind noise reduction and signal compensation in binaural hearing aids," in *Int. Workshop on Acoustic Signal Enhancement*, Aug. 2010.
- [7] E. Nemer and W. Leblanc, "Single-microphone wind noise reduction by adaptive postfiltering," in *IEEE Workshop Applications Signal Proc. Audio, Acoustics (WASPAA)*, Oct. 2009.
- [8] C. M. Nelke, N. Chatlani, C. Beaugeant, and P. Vary, "Single microphone wind noise PSD estimation using signal centroids," in *IEEE Int. Conf. Acoustics, Speech, Signal Proc. (ICASSP)*, May 2014.
- [9] C. M. Nelke, N. Nawroth, M. Jeub, C. Beaugeant, and P. Vary, "Single microphone wind noise reduction using techniques of artificial bandwidth extension," in *Proc. Euro. Signal Proc. Conf. (EUSIPCO)*, Aug. 2012.
- [10] C. M. Nelke, P. A. Naylor, and P. Vary, "Corpus based reconstruction of speech degraded by wind noise," in *Proc. Euro. Signal Proc. Conf. (EUSIPCO)*, Mar. 2015.
- [11] H. Bai, F. Ge, and Y. Yan, "DNN-based speech enhancement using soft audible noise masking for wind noise reduction," *China Communications*, vol. 15, no. 9, pp. 235–243, 2018.
- [12] J. Lee, K. Kim, T. Z. Shabestary, and H.-G. Kang, "Deep bi-directional long short-term memory based speech enhancement for wind noise reduction," in *Hands-free Speech Communications and Microphone Arrays (HSCMA)*, Mar. 2017.
- [13] K. P. Murphy, *Probabilistic Machine Learning: Advanced Topics*. MIT Press, 2023.
- [14] J. Sohl-Dickstein, E. Weiss, N. Maheswaranathan, and S. Ganguli, "Deep unsupervised learning using nonequilibrium thermodynamics," in *Int. Conf. Machine Learning (ICML)*, Apr. 2015.
- [15] Y.-J. Lu, Z.-Q. Wang, S. Watanabe, A. Richard, C. Yu, and Y. Tsao, "Conditional diffusion probabilistic model for speech enhancement," in *IEEE Int. Conf. Acoustics, Speech, Signal Proc. (ICASSP)*, June 2022.
- [16] S. Welker, J. Richter, and T. Gerkmann, "Speech enhancement with score-based generative models in the complex STFT domain," in *Interspeech*, Sept. 2022.
- [17] J. Richter, S. Welker, J.-M. Lemercier, B. Lay, and T. Gerkmann, "Speech enhancement and dereverberation with diffusion-based generative models," *arXiv 2208.05830*, 2022.
- [18] J.-M. Lemercier, J. Richter, S. Welker, and T. Gerkmann, "Analysing discriminative versus diffusion generative models for speech restoration tasks," in *IEEE Int. Conf. Acoustics, Speech, Signal Proc. (ICASSP)*, June 2023.
- [19] J.-M. Lemercier, J. Richter, S. Welker, and T. Gerkmann, "StoRM: A diffusion-based stochastic regeneration model for speech enhancement and dereverberation," *arXiv 2212.11851*, 2022.
- [20] Y. Song, J. Sohl-Dickstein, D. P. Kingma, A. Kumar, S. Ermon, and B. Poole, "Score-based generative modeling through stochastic differential equations," in *Int. Conf. Learning Repr. (ICLR)*, May 2021.
- [21] B. D. Anderson, "Reverse-time diffusion equation models," *Stochastic Processes and their Applications*, vol. 12, no. 3, pp. 313–326, 1982.
- [22] N. Chen, Y. Zhang, H. Zen, R. J. Weiss, M. Norouzi, and W. Chan, "WaveGrad: Estimating gradients for waveform generation," *Int. Conf. Learning Repr. (ICLR)*, May 2021.
- [23] P. Dhariwal and A. Nichol, "Diffusion models beat GANs on image synthesis," in *Neural Information Proc. Systems (NIPS)*, vol. 34, Dec. 2021.
- [24] P. Vincent, "A connection between score matching and denoising autoencoders," *Neural Computation*, vol. 23, no. 7, pp. 1661–1674, 2011.
- [25] D. Mirabilii, A. Lodermeier, F. Czwielong, S. Becker, and E. A. Habets, "Simulating wind noise with airflow speed-dependent characteristics," in *Int. Workshop on Acoustic Signal Enhancement*, Sept. 2022.
- [26] IKS RWTH Aachen University, "The IKS wind noise database," 2023. <https://www.iks.rwth-aachen.de/forschung/tools-downloads/databases/wind-noise-database>.
- [27] Yang, "Wind noise dataset," 2023. <https://doi.org/10.5281/zenodo.6687982>.
- [28] K. Arendt, A. Szumaczuk, B. Jasik, K. Piaskowski, P. Masztalski, M. Matuszewski, K. Nowicki, and P. Zborowski, "Test dataset for separation of speech, traffic sounds, wind noise, and general sounds," 2020. <https://doi.org/10.5281/zenodo.4279220>.
- [29] A. Li, C. Zheng, L. Zhang, and X. Li, "Glance and gaze: A collaborative learning framework for single-channel speech enhancement," *Applied Acoustics*, vol. 187, p. 108499, 2022.
- [30] D. P. Kingma and J. Ba, "Adam: A method for stochastic optimization," *Int. Conf. Learning Repr. (ICLR)*, May 2015.
- [31] Y. Song and S. Ermon, "Improved techniques for training score-based generative models," in *Neural Information Proc. Systems (NIPS)*, Dec. 2020.
- [32] A. Rix, J. Beerends, M. Hollier, and A. Hekstra, "Perceptual evaluation of speech quality (PESQ) : a new method for speech quality assessment of telephone networks and codecs," in *IEEE Int. Conf. Acoustics, Speech, Signal Proc. (ICASSP)*, May 2001.
- [33] J. Jensen and C. Taal, "An algorithm for predicting the intelligibility of speech masked by modulated noise maskers," *IEEE/ACM Trans. Audio, Speech, Language Proc.*, vol. 24, no. 11, pp. 2009–2022, 2016.
- [34] J. L. Roux, S. Wisdom, H. Erdogan, and J. R. Hershey, "SDR - Half-baked or well done?," in *IEEE Int. Conf. Acoustics, Speech, Signal Proc. (ICASSP)*, May 2019.
- [35] C. K. A. Reddy, V. Gopal, and R. Cutler, "DNSMOS: A non-intrusive perceptual objective speech quality metric to evaluate noise suppressors," *arXiv 2010.15258*, 2021.
- [36] P. Andreev, A. Alanov, O. Ivanov, and D. Vetrov, "HiFi++: a unified framework for bandwidth extension and speech enhancement," in *IEEE Int. Conf. Acoustics, Speech, Signal Proc. (ICASSP)*, June 2023.