Application of a Novel Model Reduction Technique to the Assessment of Boundedness/Stability of Some Delay Time-Varying Vector Nonlinear Systems

Mark A. Pinsky

Abstract. This paper develops a new approach to the assessment of the boundedness/stability of some vector nonlinear systems with delays and variable coefficients. The approach rests on the development of scalar counterparts to the original vector systems. We show that the solutions to these scalar auxiliary nonlinear equations with delay and variable coefficients bound from the above the norms of solutions to the original equations with the matched history functions. This prompts the assessment of the boundedness/stability traits of the vector systems through the abridged evaluation of the dynamics of their scalar counterparts. The latter task is achieved in effortless simulations or through the application of simplified analytical inferences. Consequently, we convey some novel boundedness/ stability criteria and estimate the radiuses of the balls imbedded in the boundedness/stability regions. Lastly, we authenticate our inferences in representative simulations that also measure their accuracy.

Keywords. Boundedness/ Stability of nonlinear delay systems, Boundedness/stability regions, Delay Nonlinear Systems, Comparison principle, Estimation of solutions' norms, Model reduction, Variable Coefficients.

1. Introduction

The assessment of the bondedness/stability of vector nonlinear time-delay systems (VNDS) with variable coefficients is a challenging problem that is rooted in numerous vital applications. For instance, such systems frequently emerge in modeling natural phenomena in biology, medicine, economy, physics, control science, etc. Consequently, it has been encountered in a deluge number of monographs, [8], [9], [12]-

[14],[16],[18],[19],[21],23],[25],[28] and research papers, see the review papers [2],[3],[15],[20] and further references therein, which develop stability criteria for some types of system with time delay. Advancements in this area were achieved primarily through extensions of the Lyapunov methodology to systems with delays that were initially commenced by N. Krasovskii [24] and Razumikhin [33], and also through the applications of Halanay's inequality[17], see also [12], 13] and additional references therein, and Bohl-Perron theorem, [4], [5], [14] and some other techniques. The application of the former techniques to linear delay systems results in a computationally tractable method of linear matrix inequalities; see review of this methodology in [13],[15],[16],[22],[34] and more references therein. Stability of time-varying delay systems, which in some cases include time-varying delays, were considered in [5],[8], [9],[10],[26] and [37], see additional references therein. Yet, the utility of the Lyapunov methodology has become fairly arduous for time-varying nonlinear systems in finite dimensions, where its application frequently yields over conservative stability criteria. The extension of this methodology to infinite dimensional VNDS faces additional obstacles, especially for the systems coupling a number of nonlinear equations. Consequently, most of the current techniques in this area bring conservative stability criteria that fail to fitly gage the regions of stability/attraction for nonautonomous VNDS. These problems become more apparent in the applications of the Lyapunov methodology to the assessment of the boundedness of solutions to nonhomogeneous VNDS with variable coefficients that were rarely addressed theretofore, see, e.g., [1]. Still, the application of the techniques used for the analysis of the input-to-state stability has account of some of the traits in the behavior of such systems, see recent review paper [3] and additional references therein. The problems concerned with dynamic behavior of some scalar nonlinear systems with delay and time-varying coefficients were studied as well, see, e.g., [6] and [7], and additional references therein.

Lastly, we note that the study of finite-time stability, assessing the quantitative/qualitative traits of the underlined problems, has also been undertaken for delay systems, see, e.g., a recent review paper [36] and additional references therein.

This paper contributes a novel approach to the assessment of the behavior of the norms of solutions to VNDS, which rests on the development of the scalar auxiliary counterparts to such systems. This effort extends our studies that were concerned with the dynamics of similar systems in finite dimensions [29]-[32]. We show that the solutions to such auxiliary delay equations bound from the above evolution of the norms of solutions to the original VNDS with matched history functions.

Mark A. Pinsky, Department of Mathematics and Statistics, University of Nevada. Reno, Reno NV 89557, USA, email: pinsky@unr.edu.

Title abbreviation: Model Reduction Delay Systems

This prompts the evaluation of the boundedness/stability properties of nonautonomous VNDS through the assessment of dynamics of their scalar counterparts that can be triggered in effortless simulations or abridged analytical reasoning.

Consequently, we derive some novel boundedness/stability criteria and estimate the radiuses of the balls that are immersed in the boundedness/stability regions of the original systems. Lastly, we authenticate the developed approach in representative simulations that also measure the accuracy of these techniques.

This paper is organized as follows. The next section outlines our notation, some preliminary statements, and defines the underlined system. Section 3 ascribes the reduction technique and its applications to the evaluation of the boundedness/stability of some VNDS with variable coefficients. Section 4 presents a closed-form stability criterion. Section 5 discusses the applications of linearized auxiliary equations. Section 6 highlights the results of our simulations, and Section 7 concludes this study and outlines some directions for subsequent research.

2. Notation, Mathematical Preliminaries, and Governing Equation

2.1. Notation. Firstly, let us recall that symbols \mathbb{R} , $\mathbb{R}_{\geq 0}$, \mathbb{R}_{+} and \mathbb{R}^{n} stand for the sets of real, non-negative and positive real numbers, and real n-dimensional vectors, \mathbb{N} is a set of real positive integers, $\mathbb{R}^{n\times n}$ is a set of $n\times n$ -matrices, and $I\in\mathbb{R}^{n\times n}$ is the identity matrix. Next, $C([a,b];\mathbb{R}^n)$, $C([a,b];\mathbb{R}_{+})$ and $C([a,b];\mathbb{R}_{\geq 0})$ are the spaces of continuous real functions $\zeta:[a,b]\to\mathbb{R}^n$, $\zeta:[a,b]\to\mathbb{R}_{+}$ or $\zeta:[a,b]\to\mathbb{R}_{\geq 0}$, respectively, with the uniform norm $\|\zeta(t)\|:=\sup_{t\in[a,b]}|\zeta(t)|$, where $|\cdot|$ stands for the Euclidean norm of a vector or the induced norm of a matrix, and b can

be infinity. Also note that
$$|x|_{\infty} = \sup_{i=1,\dots,n} (|x_i|)$$
 and $|x|_1 = \sum_{i=1}^n |x_i|$, $\forall x \in \mathbb{R}^n$.

2.2. Preliminaries. The solutions to a scalar differential equation are subject to the comparison statements that are extended in this section on the solutions to some scalar delay equations using methods of steps and mathematical induction. For this reason, we acknowledge two pertinent comparison statements for ODEs [35].

Lemma 1. Consider a scalar equation,

$$D^{+}u = f(t,u), u(t_{0}) = u_{0}$$
 (2.1)

where D^+ is the upper righthand derivative in t, function $f \in C([t_0,\infty) \times \mathbb{R}; \mathbb{R})$ is locally Lipschitz in u, $\forall u \in J \in \mathbb{R}$. Next, we presume that (2.1) admits a unique solution $u(t,u_0) \in J$, $\forall t \in [t_0,\infty)$ and write a coupling scalar inequality,

$$D^{+}v \le f(t,v), v(t_{0}) = v_{0} \le u_{0}$$
(2.2)

Subsequently, we assume that $v(t,v_0) \in J$, $\forall t \ge t_0$, where $v(t,v_0)$ is a solution of (2.2). Then

$$v(t,v_0) \le u(t,u_0), \ \forall t \in [t_0,\infty)$$
 (2.3)

The next lemma is often derived through the application of Lemma 1 [35].

Lemma 2. Consider two scalar equations,

$$D^+u_1 = f_1(t, u_1), \ u_1(t_0) = u_{10},$$

 $D^+u_2 = f_2(t, u_2), \ u_2(t_0) = u_{20},$

where functions $f_i \in C([t_0,\infty) \times \mathbb{R};\mathbb{R})$, i=1,2 are locally Lipschitz in u_i , $\forall u_i \in J_* \subset \mathbb{R}$. Presume that both above equations admit unique solutions, $u_i(t,u_{i0}) \in J_*, \forall t \geq t_0$, i=1,2 and that $f_1(t,u) \leq f_2(t,u)$, $\forall u \in J_*, \forall t \geq t_0$ and $u_{10} \leq u_{20}$. Then $u_1(t,u_{10}) \leq u_2(t,u_{20})$, $\forall t \geq t_0$.

Subsequently, using the method of steps, we extend these statements to scalar differential inequality and differential equation with multiple variable delays $h_i(t)$ that are subject to the following conditions:

$$h_{i} \in C([t_{0}, \infty); \mathbb{R}_{+}), \quad \max_{i} \sup_{\forall t \geq t_{0}} h_{i}(t) = \overline{h} < \infty, \quad \min_{i} \inf_{\forall t \geq t_{0}} h_{i}(t) \geq \underline{h} > 0, \quad i = 1, ..., m$$

$$(2.4)$$

which ensure the application of time stepping with, e.g., step equals \underline{h} . In turn, we assume that the endpoints of the consecutive time-steps are set at $s_0 = t_0$, $s_k = t_0 + k\overline{h}$, $k \in \mathbb{N}$. This leads to

Lemma 3. Denote a scalar delay differential equation and the coupling inequality as follows:

$$D^{+}u = f\left(t, u\left(t\right), u\left(t-h_{1}\left(t\right)\right), ..., u\left(t-h_{m}\left(t\right)\right)\right), \forall t \geq t_{0}, \ u\left(t\right) = \varphi\left(t\right), \ \forall t \in \left[t_{0} - \overline{h}, t_{0}\right]$$

$$(2.5)$$

$$D^{+}v(t) \leq f(t,v(t),v(t-h_{1}(t)),...,v(t-h_{m}(t))), \forall t \geq t_{0}, v(t) = \phi(t), \forall t \in \left[t_{0} - \overline{h},t_{0}\right]$$

$$(2.6)$$

where a continuous function $f \in \mathbb{R}$ is locally Lipschitz in the second variable $\forall u \in J_{\times} \subset \mathbb{R}$ and non-decreasing in all other variables starting from the third, $\phi(t), \varphi(t) \in g \subset C([t_0 - \overline{h}, t_0]; \mathbb{R})$, and $h_i(t)$ are subject to (2.4).

Additionally, assume that equation (2.5) admits a unique solution, $u(t, \varphi) \in J_{\times}$, $\forall t \ge t_0$, $\forall \varphi \in g$. Then

$$v(t,\phi) \le u(t,\varphi), \ \forall t \in [t_0,\infty)$$
 (2.7)

where $v(t, \phi)$ is a solution to (2.6).

Proof. Let us set that $u_k(t) := u(t, \phi)$ and $v_k(t) := v(t, \phi)$, $\forall t \in [s_{k-1}, s_k]$, $k \ge 1$. Then on the first step (2.5) and (2.6) yield that

$$D^{+}u_{1} = f\left(t, u_{1}(t), \varphi(t - h_{1}(t)), ..., \varphi(t - h_{m}(t))\right) = f_{1}^{1}(t, u_{1}), \ \forall t \in [t_{0}, t_{0} + s_{1}]$$

$$D^{+}v_{1}(t) \leq f\left(t, v_{1}(t), \varphi(t - h_{1}(t)), ..., \varphi(t - h_{m}(t))\right) = f_{2}^{1}(t, v_{1}), \ \forall t \in [t_{0}, t_{0} + s_{1}]$$

$$(2.8)$$

Since $\varphi(t) \ge \varphi(t)$, $\forall t \in [t_0, t_0 + s_1]$ and f is nondecreasing in the variables that include delay, we infer that $f_1^1(t,u) \ge f_2^1(t,u)$, $\forall t \in [t_0, t_0 + s_1]$, $\forall u \in J_{\times}$. Then application of Lemma 1 to (2.8), grants that $v_1(t) \le u_1(t)$, $\forall t \in [t_0, s_1]$. Assume, in turn, that $v_k(t) \le u_k(t)$, $\forall t \in [s_{k-1}, s_k]$, k > 1. Then on the next time step, (2.5) and (2.6) can be written as follows,

$$D^{+}u_{k+1} = f\left(t, u_{k+1}(t), u_{k}(t-h_{1}(t)), ..., u_{k}(t-h_{m}(t))\right) = f_{1}^{k+1}(t, u_{k+1}), \ \forall t \in [s_{k}, s_{k+1}]$$

$$D^{+}v_{k+1}(t) \leq f\left(t, v_{k+1}(t), v_{k}(t-h_{1}(t)), ..., v_{k}(t-h_{m}(t))\right) = f_{2}^{k+1}(t, v_{k+1}), \ \forall t \in [s_{k}, s_{k+1}]$$

$$(2.9)$$

where $f_1^{k+1}(t,u) \ge f_2^{k+1}(t,u)$, $\forall t \in [s_k, s_{k+1}]$, $\forall u \in J_{\times}$ due to both the assumption on function f and the induction hypothesis. Then (2.9) implies that

$$D^{+}v_{k+1}(t) \le f(t, v_{k+1}, u_{k}(t - h_{1}(t)), ..., u_{k}(t - h_{m}(t))) = f_{1}^{k+1}(t, v_{k+1}), \forall t \in [s_{k}, s_{k+1}]$$

$$(2.10)$$

which matches the first equation (2.9) and (2.10) with (2.1) and (2.2) and prompts the application of Lemma 1 \Box In turn, the extension of Lemma 2 to scalar delay equations is enabled by

Lemma 4. Let us write two scalar equations with delay in the following form,

$$D^{+}u_{1} = f_{1}(t, u_{1}(t), u_{1}(t - h_{1}(t)), ..., u_{1}(t - h_{m}(t))), \forall t \in [t_{0}, t_{*}], u_{1}(t) = \varphi(t), \forall t \in [t_{0} - \overline{h}, t_{0}]$$

$$D^{+}u_{2} = f_{2}(t, u_{2}(t), u_{2}(t - h_{1}(t)), ..., u_{2}(t - h_{m}(t))), \forall t \in [t_{0}, t_{*}], u_{2}(t) = \varphi(t), \forall t \in [t_{0} - \overline{h}, t_{0}]$$

$$(2.11)$$

where continuous functions $f_i \in \mathbb{R}$, i = 1, 2 are locally Lipschitz in the second variables, $\forall u_i \in J_+ \subset \mathbb{R}$, i = 1, 2, $\phi(t), \phi(t) \in g \subset C([t_0 - \overline{h}, t_0]; \mathbb{R})$, and t_* can be infinity. Next, we assume that both the above equations admit the unique solutions $u_i(t, \phi) \in J_+, \forall t \in [t_0, t_*]$ and that,

$$f_{1}(t, x_{1}, ..., x_{m+1}) \leq f_{2}(t, x_{1}, ..., \overline{x}_{m+1}), x_{1} \in \mathbb{R}, x_{i} \leq \overline{x}_{i} \in \mathbb{R}, i = 2, ..., m+1, \forall t \in [t_{0}, t_{*}],$$

$$\varphi(t) \leq \phi(t), \forall t \in [t_{0} - \overline{h}, t_{0}]$$
(2.12)

Then $u_1(t,\varphi) \le u_2(t,\phi), \forall t \in [t_0,t_*]$.

Proof. The proof of this statement is analogous to the proof of the previous lemma. In fact, let us set that $u_1^k(t) := u_1(t, \varphi), \ u_2^k(t) := u_2(t, \varphi), \ \forall t \in [s_{k-1}, s_k], \ k \ge 1$. Then we write initially that

$$D^{+}u_{1}^{1} = f_{1}(t, u_{1}^{1}(t), \varphi(t - h_{1}(t)), ..., \varphi(t - h_{m}(t))) = f_{1}^{1}(t, u_{1}^{1}), \forall t \in [t_{0}, t_{0} + s_{1}],$$

$$D^{+}u_{2}^{1} = f_{2}(t, u_{2}^{1}(t), \varphi(t - h_{1}(t)), ..., \varphi(t - h_{m}(t))) = f_{2}^{1}(t, u_{2}^{1}), \forall t \in [t_{0}, t_{0} + s_{1}]$$

Consequently, (2.12) implies that $f_1^1(t,u) \le f_2^1(t,u)$, $\forall u \in J_+$, $\forall t \in [t_0,t_0+s_1]$. Then Lemma 2 yields that $u_1^1(t) \le u_2^1(t)$, $\forall t \in [t_0,t_0+s_1]$. In turn, we assume that $u_1^k(t) \le u_2^k(t)$, $\forall t \in [s_{k-1},s_k]$ and show that the latter inequality can be extended for k := k+1. For this sake we write that

$$D^{+}u_{1}^{k+1} = f_{1}\left(t, u_{1}^{k+1}\left(t\right), u_{1}^{k}\left(t-h_{1}\left(t\right)\right), ..., u_{1}^{k}\left(t-h_{m}\left(t\right)\right)\right) = f_{1}^{k+1}\left(t, u_{1}^{k+1}\right), \ \forall t \in [s_{k}, s_{k+1}],$$

$$D^{+}u_{2}^{k+1} = f_{2}\left(t, u_{2}^{k+1}\left(t\right), u_{2}^{k}\left(t-h_{1}\left(t\right)\right), ..., u_{2}^{k}\left(t-h_{m}\left(t\right)\right)\right) = f_{2}^{k+1}\left(t, u_{2}^{k+1}\right), \ \forall t \in [s_{k}, s_{k+1}]$$

$$(2.13)$$

and conclude, due to (2.12) and the induction's conjecture, that $f_1^{k+1}(t,u) \le f_2^{k+1}(t,u)$, $\forall u \in J_+$, $\forall t \in [s_k,s_{k+1}]$ which together with Lemma 2 ensures this statement \square

Remark 1. Note that Lemma 3 and Lemma 4 can be literally extended on a neutral functional differential equation under similar assumptions.

2.3 The underlined equation and the main definitions. In the sequel, we are going to study the behavior of solutions of the following vector nonlinear equation with multiple variable delays,

$$D^{+}x = A(t)x + f(t, x(t), x(t - h_{1}(t)), ..., x(t - h_{m}(t))) + F(t), \forall t \ge t_{0}, x(t) = \varphi(t), \forall t \in [t_{0} - \overline{h}, t_{0}]$$
(2.14)

where $x \in \mathbb{N} \subset \mathbb{R}^n$, $0 \in \mathbb{N}$, a function $f \in \mathbb{R}^n$ is continuous in all variables and locally Lipschitz in the second one,

$$f\left(t,0\right)=0\;,\;\varphi\left(t\right)\in G^{n}\subset C\left(\left[t_{0}-\overline{h},t_{0}\right];\mathbb{R}^{n}\right),\;\varphi\left(t_{0}\right)=x_{0}\;,\left\|\varphi\left(t\right)\right\|:=\sup\left|\varphi\left(t\right)\right|\;,\;t\in\left[t_{0}-\overline{h},t_{0}\right]\;,\;\text{functions}\;h_{i}\;\;\text{are}\;\;\text{defined by (2.4),}\;\;A\left(t\right)\in C\left(\left[t_{0},\infty\right);\mathbb{R}^{n\times n}\right)\;\text{is a continuous matrix,}\;\;F\left(t\right)=F_{0}e\left(t\right)\;,\;\;e\in C\left(\left[t_{0},\infty\right);\mathbb{R}^{n}\right)\;,\sup_{t\geq t_{0}}\left|e\left(t\right)\right|=1\;,\;\;\text{and}\;\;F_{0}\in\mathbb{R}_{\geq0}\;.$$

Furthermore, we assume that the initial problem (2.14) assumes a unique solution $\forall t \geq t_0$ and $\forall \|\varphi(t)\| \leq \overline{\phi}$.

Under our assumptions, the right side of (2.14) is a continuous vector function in all variables, which implies that a solution to this equation $x(t,t_0,\varphi(t))$ is continuously differentiable in t, $\forall t \geq t_0$ and, thus, is bounded on any finite time interval. Consequently, this paper focuses mainly on the behavior of solutions to (2.14) as $t \to \infty$.

Note that in the following we shall employ the abridged notation for the solutions to (2.14) as follows $x(t,\varphi) := x(t,t_0,\varphi)$, $\forall t \ge t_0$.

To simplify further referencing, we also acknowledge the homogeneous counterpart of (2.14),

$$D^{+}x = A(t)x + f(t, x(t), x(t - h_{1}(t)), ..., x(t - h_{m}(t))), \forall t \ge t_{0}, x(t) = \varphi(t), \forall t \in [t_{0} - \overline{h}, t_{0}]$$
(2.15)

and the following linear equation,

$$D^{+}x = A(t)x, \ \forall t \ge t_{0}, \ x(t_{0}, \varphi(t_{0})) = \varphi(t_{0}) = x_{0} \in \mathbb{R}^{n}$$
(2.16)

Subsequently, we assume that (2.15) possesses a unique solution $\forall \|\varphi(t)\| \leq \overline{\phi}$, $\forall t \geq t_0$.

As is known, the solution to the last equation can be written as $x(t) = W(t,t_0)\varphi(t_0)$, where $W(t,t_0) = w(t)w^{-1}(t_0)$ is the transition (Cauchy) matrix and w(t) is a fundamental solution matrix for (2.16). In the sequel, we shall assume that $|w(t_0)| = 1$.

Next, we present the standard definitions of the boundedness/stability of solutions to either equations (2.14) or (2.15) which will be used in the sequel of this paper, see, e.g., [23].

Definition 1. Assume that $\varphi(t) \in G^n \subset C([t_0 - \overline{h}, t_0]; \mathbb{R}^n)$ and (2.15) admits a unique solution $\forall \|\varphi(t)\| \leq \overline{\phi} > 0$. Then the trivial solution of equation (2.15) is called:

- 1) stable for the set value of t_0 if $\forall \varepsilon \in \mathbb{R}_+$, $\exists \delta_1(t_0, \varepsilon) \in \mathbb{R}_+$ such that $\forall \|\varphi\| < \delta_1(t_0, \varepsilon)$, $|x(t, t_0, \varphi)| < \varepsilon$, $\forall t \ge t_0$. Otherwise, the trivial solution is called unstable.
- 2) uniformly stable if in the above definition $\delta_1(t_0, \varepsilon) = \delta_2(\varepsilon)$.
- 3) asymptotically stable if it is stable for given value of t_0 and $\exists \delta_3(t_0) \in \mathbb{R}_+$ such that $\lim_{t \to \infty} |x(t,t_0,\varphi)| = 0$, $\forall \|\varphi\| < \delta_3(t_0)$.

- 4) uniformly asymptotically stable if it is uniformly stable and in the previous definition $\delta_3(t_0) = \delta_4 = const$.
- 5) uniformly exponentially stable if $\exists \delta_5 \in \mathbb{R}_+$ and $\exists c_i \in \mathbb{R}_+$, i = 1, 2 such that,

$$|x(t,t_0,\varphi)| \le c_1 \|\varphi\| \exp(-c_2(t-t_0)), \forall \|\varphi\| \le \delta_5, \forall t \ge t_0$$

Definition 2. Let (2.14) admits a unique solution $\forall \|\varphi(t)\| \leq \overline{\phi}$, $\varphi(t) \in G^n \subset C([t_0 - \overline{h}, t_0]; \mathbb{R}^n)$. A solution to equation (2.14) is called:

- 6) bounded for the set value t_0 if $\exists \delta_6(t_0) \in \mathbb{R}_+$, $\exists F_*(t_0) \in \mathbb{R}_{\geq 0}$ and $\exists \varepsilon_*(\delta_6, F_*) \in \mathbb{R}_+$ such that $|x(t, t_0, \varphi)| < \varepsilon_*$ $\forall t \geq t_0$, $\forall \|\varphi\| < \delta_6(t_0)$ and $\forall F_0 \leq F_*(t_0)$.
- 7) uniformly bounded if both $\delta_6(t_0) = \delta_7$ and $F_*(t_0) = \hat{F}$.

Furthermore, let $R_i \equiv \sup \delta_i$, i = 1,...,7 be the superior value of δ_i for which either the i-th condition in Definition 1, or conditions 6 or 7 in Definition 2 hold. This implies that $R_1 = R_1(t_0)$, $R_3 = R_3(t_0)$, $R_6 = R_6(t_0, F_0)$,

 $\forall F_0 \leq F_*(t_0)$ and $R_7 = R_7(F_0)$, $\forall F_0 \leq \hat{F}$. Then let $B_{R_i} := \{ \varphi \in C([t_0 - s_1, t_0], \mathbb{R}^n) : \|\varphi\| \leq R_i \}$, i = 1, ..., 7 be a ball with the radius R_i that is centered at zero. Clearly, these balls are immersed in the specified above stability /boundedness regions.

Next, we recall a definition of robust stability that was termed stability under persistent perturbations by N. Krasovskii [24], pp.161-164]. Consider a perturb equation to (2.15) in the following form,

$$\dot{x} = A(t)x + f\left(t, x, x\left(t - h_{1}(t)\right), ..., x\left(t - h_{m}(t)\right)\right) + R\left(t, x, x\left(t - h_{1}^{*}(t)\right), ..., x\left(t - h_{1}^{*}(t)\right)\right), \forall t \ge t_{0},
x(t) = \varphi(t), \forall t \in \left[t_{0} - \overline{h}, t_{0}\right]$$
(2.17)

where, in addition to the conditions set above for the components of (2.17) that appeared in (2.15), we also assume that (I) function $f\left(t,\chi_{1},...,\chi_{m+1}\right)$ is Lipschitz continuous in $\chi_{i}\in\mathbb{R}^{n}$, (II) $f\left(t,0\right)=0$, (III) $R\in\mathbb{R}^{n}$ is a continuous function but $R\left(t,0\right)$ might not be zero, and (IV) $h_{i}^{*}\in C\left([t_{0},\infty);\mathbb{R}_{+}\right)$ comply with the conditions (2.4).

Definition 3. The trivial solution to (2.15) is called robustly stable if $\forall \varepsilon \in \mathbb{R}_+$, $\exists \Delta_i (\varepsilon) \in \mathbb{R}_+$, i = 1, 2, 3 such that $|x(t,t_0,\varphi)|_{\infty} \leq \varepsilon$, $\forall t \geq t_0$ if $|R(t,\chi_1,...,\chi_{m+1})|_{\infty} < \Delta_1(\varepsilon)$, $\forall t \geq t_0$, $\forall |\chi_i|_{\infty} < \varepsilon$, i = 1,...,m+1, $||\varphi(t)|| < \Delta_2(\varepsilon)$, $|h_i(t)-h_i^*(t)| < \Delta_3(\varepsilon)$, $\forall t \geq t_0$, i = 1,...,m, where $x(t,t_0,\varphi)$ is a solution to (2.17).

Clearly, this definition commences the robust stability of (2.15) through the stability of defined above perturbed equation (2.17).

Statement (N. Krasovskii [24], p.162). Assume that conditions (I)-(IV) hold and that the trivial solution of (2.15) is uniformly asymptotically stable. Then this solution is robustly stable as well.

Lastly, we extend a basic definition of finite-time stability (FTS) that was used for ODEs [11] on the systems with delay.

Definition 4. Equation (2.14)/(2.15) is called

- a) finite-time stable (FTS) with respect to positive numbers $\alpha, \beta, T, \alpha < \beta$ if the condition $\|\varphi\| < \alpha$ implies that $|x(t,t_0,\varphi)| < \beta(\alpha,T), \forall t \in [t_0,t_0+T]$.
- b) finite-time contractively stable (FTCS) with respect to positive numbers $\alpha, \beta, \gamma, T, \alpha < \gamma$ if it is FTS with respect of α, β, T and $\exists t_1 \in (t_0, t_0 + T)$ such that $|x(t, t_0, \varphi)| < \gamma(\alpha, T), \forall t \in [t_1, t_0 + T]$.

3. Delay Auxiliary Equation

This section derives a scalar delay differential equation which prompts the estimation from the above of the time histories of the norms of solutions to some vector nonlinear systems with variable coefficients and delays.

First, using the variation of parameters, we write (2.14) as follows

$$x(t,\varphi) = w(t)w^{-1}(t_0)x_0 + w(t)\int_{t_0}^t w^{-1}(\tau)\Big(f\Big(t,x\Big(\tau\Big),x\Big(\tau-h_1\Big(\tau\Big)\Big),...,x\Big(\tau-h_m\Big(\tau\Big)\Big)\Big) + F(\tau)\Big)d\tau, \ \forall t \ge t_0,$$

$$x(t,\varphi) = \varphi(t), \ \forall t \in \left[t_0 - \overline{h},t_0\right]$$

The last equation implies that

$$\begin{aligned} \left| x(t,\varphi) \right| &= \left| w(t)w^{-1}(t_0)x_0 + w(t) \int_{t_0}^t w^{-1}(\tau) \left(f\left(t,x\left(\tau\right),x\left(\tau-h_1\left(\tau\right)\right),...,x\left(\tau-h_m\left(\tau\right)\right)\right) + F(\tau) \right) d\tau \right|, \ \forall t \geq t_0, \\ \left| x(t,\varphi) \right| &= \left| \varphi(t) \right|, \ \forall t \in \left[t_0 - \overline{h}, t_0 \right] \end{aligned} \tag{3.1}$$

Then the application of standard norm's inequalities embraces the following equation,

$$|X_{1}(t,\varphi)| = |w(t)| |w^{-1}(t_{0})\varphi(t_{0})| +$$

$$|w(t)| \int_{t_{0}}^{t} |w^{-1}(\tau)| |f(\tau,X_{1}(\tau),X_{1}(\tau-h_{1}(\tau)),...,X_{1}(\tau-h_{m}(\tau))) + F(\tau)| d\tau, \forall t \geq t_{0},$$

$$|X_{1}(t,\varphi)| = |\varphi(t)|, \forall t \in [t_{0}-\overline{h},t_{0}]$$

$$(3.2)$$

Comparing (3.1) and (3.2) yields that $|x(t,\varphi)| \le |X_1(t,\varphi)|$, $\forall t \ge t_0$, where $X_1(t) \in \mathbb{R}^n$.

To write (3.2) in a more tractable form, we introduce a nonlinear extension of the Lipschitz continuity condition as follows,

$$\left| f\left(t, \chi_{1}, ..., \chi_{m+1}\right) \right| \leq L\left(t, |\chi_{1}|, ..., |\chi_{m+1}|\right), \ \chi_{i} \in \mathbb{R}^{n}, \ i = 2, ..., m+1,
\forall \chi = \left[\chi_{1}, ..., \chi_{m+1}\right]^{T} \in \Omega \in \mathbb{R}^{n(m+1)}$$
(3.3)

where Ω is a compact subset of $\mathbb{R}^{n(m+1)}$ containing zero, $f \in C([t_0,\infty) \times \mathbb{R}^{n(m+1)};\mathbb{R}^n)$, $L \in C([t_0,\infty) \times \mathbb{R}^{m+1};\mathbb{R}_{\geq 0})$ is a scalar continuous function and L(t,0) = 0.

We illustrate in Appendix how to define such scalar functions in a close form if $f(t, \chi_1, ..., \chi_{m+1})$ is a polynomial or power series in $\chi_1, ..., \chi_{m+1}$ with, for instance, a bounded in Ω error term. In the former case $\Omega \equiv \mathbb{R}^{n(m+1)}$ and this condition is also holds if the error term is bounded in $\mathbb{R}^{n(m+1)}$. Also, L turns out to be a linear function in $|\chi_i|$ if f is a linear function in these variables.

Note that in the remainder of this paper we assume for simplicity that $\Omega = \mathbb{R}^{n(m+1)}$.

Next, the utility of (3.3) in (3.2) brings the following equation,

$$X_{2}(t,\varphi) = |w(t)| |w^{-1}(t_{0})\varphi(t_{0})| + |w(t)| \int_{t_{0}}^{t} |w^{-1}(\tau)| \Big(L\Big(\tau, X_{2}(\tau), X_{2}(\tau - h_{1}(\tau)), ..., X_{2}(\tau - h_{m}(\tau))\Big) + |F(\tau)| \Big) d\tau, \ \forall t \ge t_{0},$$

$$X_{2}(t, |\varphi|) = |\varphi|, \ \forall t \in \left[t_{0} - \overline{h}, t_{0}\right]$$
(3.4)

where $X_2(t) \in \mathbb{R}_{\geq 0}$. Hence, (3.4) implies that $|x(t,\varphi)| \leq X_2(t,|\varphi|)$, $\forall t \geq t_0$.

Next, we match (3.4) with the solution to the initial problem of the following scalar delay differential equation,

$$D^{+}X_{3} = p(t)X_{3} + c(t)\left(L(\tau, X_{3}(\tau), X_{3}(\tau - h_{1}(\tau)), ..., X_{3}(\tau - h_{m}(\tau))\right) + |F(\tau)|, \forall t \ge t_{0}$$

$$X_{3}(t, \phi) = \phi(t), \forall t \in [t_{0} - \overline{h}, t_{0}]$$

$$(3.5)$$

where, $X_3(t) \in \mathbb{R}_{\geq 0}$, $p:[t_0,\infty) \to \mathbb{R}$, $c:[t_0,\infty) \to [1,\infty]$ and $\phi(t) \in g_+ \subset C([t_0-\overline{h},t_0];\mathbb{R}_{\geq 0})$.

To define functions p(t), c(t) and $\phi(t)$, we turn (3.5) into the integral form using the variation of parameters,

$$X_{3}(t) = e^{d(t)} \left(\phi(t_{0}) + \int_{t_{0}}^{t} e^{-d(\tau)} c(\tau) q(\tau, X_{3}(\tau), X_{3}(\tau - h_{1}(\tau)), \dots, X_{3}(\tau - h_{m}(\tau)) \right) d\tau \right), \forall t \geq t_{0}$$

$$X_{3}(t) = \phi(t), \forall t \in \left[t_{0} - \overline{h}, t_{0} \right]$$

$$(3.6)$$

where,
$$d(t) = \int_{t_0}^{t} p(s) ds$$
 and $q = L(t, X_3(t), X_3(t - h_1(t)), ..., X_3(t - h_m(t))) + |F(t)|$.

To determine p(t), c(t), we are going to match the right side of (3.6) and (3.4). Matching the first additions in these formulas, i.e., $|w(t)||w^{-1}(t_0)\varphi(t_0)|$ and $e^{d(t)}\varphi(t_0)$, returns that,

$$\left| w(t) \right| = \exp\left(\int_{t_0}^t p(s) \, ds \right) \tag{3.7}$$

$$\phi(t_0) = |w^{-1}(t_0)\varphi(t_0)| \tag{3.8}$$

In turn, matching the last additions on the right side of (3.6) and (3.4), multiplying and dividing the latter function by |w(t)| and, using that $e^{-d(t)} = 1/|w(t)|$, returns,

$$\int_{t_{0}}^{t} e^{-d(\tau)} c(\tau) q(\tau, x, x(\tau - h_{1}(\tau)), ..., x(t - h_{m}(\tau))) d\tau =$$

$$\int_{t_{0}}^{t} (|w(\tau)| |w^{-1}(\tau)|) q(\tau, x, x(\tau - h_{1}(\tau)), ..., x(t - h_{m}(\tau))) / |w(\tau)| d\tau$$

The last relation yields that

$$c(t) = |w(t)| |w^{-1}(t)|$$

is the running condition number of w(t). Let us recall that $0 < |w^{-1}(t)| < \infty$, $\forall t \ge t_0$ which implies that $c(t) < \infty$, $\forall t \ge t_0$. Additionally, continuity of A(t) implies continuity of both p(t) and c(t). Lastly, from (3.7) we get the following,

$$p(t) = d\left(\ln\left|w(t)\right|\right)/dt \tag{3.9}$$

Next, matching the initial functions in (3.4) and (3.6) yields that $\phi(t) = |\varphi(t)|$, $\forall t \in [t_0 - \overline{h}, t_0]$ that together with (3.8) brings the following condition, $|w^{-1}(t_0)\varphi(t_0)| = |\varphi(t_0)|$ which implies that $w(t_0)$ is the orthonormal matrix. For instance, we can set that $w(t_0) = I$ since in this case our previous condition, i.e., $|w(t_0)| = 1$ is met.

Finally, we write (3.5) as follows.

$$D^{+}y = p(t)y + c(t) \Big(L(t, y(t), y(t - h_{1}(t)), ..., y(t - h_{m}(t))) + |F(t)| \Big)$$

$$y(t, |\varphi(t)|) = |\varphi(t)|, \ \forall t \in [t_{0} - \overline{h}, t_{0}]$$
(3.10)

where $y(t) \in \mathbb{R}_{>0}$. This prompts

Theorem 1. Assume that a function $f \in \mathbb{R}^n$ is continuous in all variables and locally Lipschitz in the second one, $f\left(t,0\right)=0$, $\varphi(t)\in G^n\subset C\left(\left[t_0-\overline{h},t_0\right];\mathbb{R}^n\right)$, scalar functions $h_i\left(t\right)$ are defined by (2.4), $A(t)\in C\left(\left[t_0,\infty\right);\mathbb{R}^{n\times n}\right)$ is a continuous matrix, $F\left(t\right)=F_0e(t)$, $e\in C\left(\left[t_0,\infty\right);\mathbb{R}^n\right)$, $\sup_{t\geq t_0}\left|e(t)\right|=1$, $F_0\in\mathbb{R}_{\geq 0}$, a scalar function $L\in\mathbb{R}_{\geq 0}$ is continuous in all variables and locally Lipschitz in the second variable, L(t,0)=0, inequality (3.3) holds with $\Omega\equiv\mathbb{R}^{n(m+1)}$ and $w(t_0)$ is an orthonormal matrix. Subsequently, we assume that equations (2.14) and (3.10) assume unique solutions $\forall \|\varphi(t)\| \leq \overline{\varphi}$, $\forall t\geq t_0$. Then

$$|x(t,\varphi)| \le y(t,|\varphi|), \ \forall t \ge t_0,$$
 (3.11)

where $x(t,\varphi)$ and $y(t,|\varphi|) \ge 0$ are solutions to (2.14) and (3.10).

Proof. In fact, it was shown previously that $|x(t,\varphi)| \le X_2(t,|\varphi|)$, $\forall t \ge t_0$. The assignment of the functions p(t), c(t) and $\phi(t)$, that is made above, embraces that $X_2(t,|\varphi|) = X_3(t,|\varphi|) = y(t,t_0,|\varphi|)$, $\forall t \ge t_0$

Remark 2. The previous inferences can literally be extended on the neutral delay equations under the matched conditions. Yet, the current paper focuses on the boundedness/ stability problems of the retarded systems. To simplify the reference, we present a homogeneous counterpart of (3.10) as follows,

$$D^{+} y = p(t) y + c(t) L(t, y(t), y(t - h_{1}(t)), ..., y(t - h_{m}(t)))$$

$$y(t, |\varphi(t)|) = |\varphi(t)|, \forall t \in [t_{0} - \overline{h}, t_{0}]$$

$$(3.12)$$

and assume that (3.12) admits a unique solution under the conditions of Theorem 1 as well.

Next, let us assume that Definitions 1 and 2 are concerned with the solutions to equations (3.12) and (3.10) and set that r_i are the superior values of δ_i , i.e., $r_i \equiv \sup \delta_i$, i = 1,...,7, for which the i-th condition in Definition 1 holds for (3.12) or the conditions 6 or 7 in Definition 2 hold for (3.10). Consequently, $r_1 = r_1(t_0)$, $r_3 = r_3(t_0)$,

$$r_{6}=r_{6}\left(t_{0},F_{o}\right),\ \forall F_{0}\leq F_{*}\left(t_{0}\right)\ \text{and}\ \ r_{7}=r_{7}\left(F_{o}\right),\ \forall F_{0}\leq\hat{F}\ .\ \text{Then let}\ \ B_{r_{i}}:=\{\varphi(t)\in C\left(\left[t_{0}-\overline{h},t_{0}\right],\mathbb{R}^{n}\right):$$

 $\|\varphi\| \le r_i$, i = 1,...,7 be the balls with radiuses r_i which is centered at the origin.

This embraces,

Theorem 2. Assume that the conditions of Theorem 1 are met and the trivial solution to equation (3.12) is either stable, uniformly stable, asymptotically stable, uniformly asymptotically stable, or exponentially stable. Then the trivial solution to equation (2.15), in turn, is stable, uniformly stable, asymptotically stable, uniformly asymptotically stable, or exponentially stable, respectively.

Furthermore, under the conditions of 1-5 of Definition 1, $B_{r_i} \subseteq B_{R_i}$, i = 1,...,5, respectively.

Proof. Both statements directly follow from the application of inequality (3.11) to the solutions to equations (2.15) and (3.12) \square

Theorem 3. Assume that the conditions of Theorem 1 are met and that the solutions to the equation (3.10) are bounded $\forall \varphi(t) : \|\varphi(t)\| \le r_i$, i = 6,7 for either the set values of t_0 and $F_0 \le F_*(t_0)$ or uniformly bounded for $F_0 \le \hat{F}$. Then the solutions to equation (2.14) with the matched history functions are also bounded or uniformly bounded for the same values of t_0 and F_0 , respectively. Furthermore, under the prior conditions $B_{r_i} \subseteq B_{R_i}$, i = 6,7.

Proof. The proof of this statement follows directly from the application of inequality (3.11) to the solutions to equation (2.14) and its scalar counterpart (3.10) \square

The key task in the estimation of values of r_i , i = 1,...,7 can be abridged through utility of the following,

Corollary 1. Assume that
$$y_1(t, |\varphi_1(t)|), |\varphi_1(t)| \equiv c \in \mathbb{R}_+, \forall t \in [t_0 - \overline{h}, t_0]$$
 and $y_2(t, |\varphi_2(t)|), |\varphi_2(t)| \leq c$, $\forall t \in [t_0 - \overline{h}, t_0]$ are the solutions to the (3.10) or (3.12) with a constant and variable history functions and the condition $L(t, \chi_1, \chi_2, \ldots, \chi_{m+1}) \leq L(t, \chi_1, \overline{\chi}_2, \ldots, \overline{x}_{m+1}), \ \chi_i \leq \overline{\chi}_i, \ i = 2, \ldots, m+1, \ \forall t \geq t_0, \ \chi_i, \overline{\chi}_i \in \mathbb{R}_{\geq 0} \text{ holds. Then } y_2(t, |\varphi_2(t)|) \leq y_1(t, |\varphi_1(t)|), \ \forall t \geq t_0.$

Proof. The proof of this statement follows from the application of Lemma 4

We illustrate in the Appendix that the latter condition can be literally assured if, say, $f(t, x_1, ..., x_{m+1})$ is a polynomial or power series in all variables starting from the second. Therefore, this condition does not alter the scope of applications of this methodology.

Thus, the above statement enables the estimation of the radiuses of the balls immersed in the regions of boundedness/stability of the original equations (2.12)/(2.14) through effortless numerical simulations of their scalar counterparts (3.10)/(3.12) with constant history functions. These tasks can be further abridged through utility of the following

Lemma 5. Assume that $y_i(t, |\varphi_i(t)|), |\varphi_i(t)| = c_i \in \mathbb{R}_{\geq 0}, \forall t \in [t_0 - \overline{h}, t_0], i = 1, 2$, are the solutions to (3.10)/(3.12) with constant history-functions and $c_1 \leq c_2$. Then $y_1(t, c_1) \leq y_2(t, c_2), \forall t \geq t_0$.

Proof. The proof of this statement follows from the assumption of uniqueness of solutions to (3.10)/(3.12) which ensures that the solution curves of a scalar delay equation do not intersect in the plane $t \times y$

Additionally, the proof of Lemma 5 is also fostered by the application of Lemma 4 under the extra assumption that $L(t, \chi_1, ..., \chi_{m+1})$ is a nondecreasing function in all variables starting from the third.

Thus, a solution to (3.10)/(3.12), $y = y(t, |\varphi(t)| \equiv c)$ with a constant history-function monotonically increases in c, $\forall t \geq t_0$ which further simplifies the simulations of the radiuses of the balls embedded in the trapping/stability regions of these equations.

In turn, the scalar auxiliary equation for the perturbed equation (2.17) can be written as follows,

$$D^{+}z = p(t)z + c(t)L(t,z(t),z(t-h_{1}(t)),...,z(t-h_{m}(t))) + L_{R}(t,z(t),z(t-h_{1}^{*}(t)),...,z(t-h_{m}^{*}(t))), z(t,|\varphi(t)|) = |\varphi(t)|, \forall t \in [t_{0}-\overline{h},t_{0}]$$
(3.13)

where $z \in \mathbb{R}_{\geq 0}$ and $L_R \in \mathbb{R}_{\geq 0}$ is a continuous function in all variables. Then the application of Definition 3 to (3.12) and (3.13) prompts

Theorem 4. Assume that Theorem 1 and conditions (I)-(IV) hold for both equations (2.17) and (3.13) and that the trivial solution to (3.12) is uniformly asymptotically stable. Then the trivial solution to (2.15) is robustly stable.

Proof. In fact, under the above conditions, the trivial solution of (3.12) is robustly stable. Then accounting of Definition 3 and the Statement yields that $z(t,|\varphi|) < \varepsilon$, $\forall t \ge t_0$, where $z(t,|\varphi|)$ is a solution to (3.13). Since (3.13) is the auxiliary equation to (2.17), (3.11), the last inequality implies that $|x(t,\varphi)| \le z(t,|\varphi|) < \varepsilon$, $\forall t \ge t_0$, where $x(t,\varphi)$

is a solution to $(2.17) \square$

Remark 4. Note that the reduction of the original VNDS to its scalar counterparts aggregates the set of parameters, history functions, and uncertainty models of these systems as well, which aids the assessment of the robustness/sensitivity of the original systems to alteration of their various components.

Lastly, we confer the abridged conditions of FTS for equations (2.14)/(2.15) as follows.

Theorem 5. Assume that:

- a) equation (3.10)/(3.12) is FTS with respect $\alpha, \beta, T \in \mathbb{R}_+$, $\alpha < \beta$. Then equations (2.14)/(2.15) is FTS with respect α, β, T as well.
- b) equation (3.10)/(3.12) is FTCS with respect to $\alpha, \beta, \gamma, T \in \mathbb{R}_+$, $\alpha < \gamma$. Then equations (2.14)/(2.15) is FTCS with respect α, β, γ, T as well.

Proof. In fact, both statements of this theorem directly follow from (3.11)

Thus, the commenced technique embraces the assessment of the boundedness/stability traits of nonautonomous VNDS which can be attained in effortless simulations of their scalar counterparts. These simulations also prompt the estimation of the radius of the ball immersed in the region of boundedness/stability of the original system. Furthermore, the solutions of the scalar auxiliary equations (3.10)/(3.12) bound from the above the time evolution of the norm of solutions to the vector systems (2.14)/(2.15) that stem from the matched history functions.

4. A Closed-Form Stability Criterion

Apparently, a criterion for boundedness/stability developed for a scalar delay equation, see, e.g., [6] and more references therein, can be frequently upscaled onto the relevant vector system using the methodology ascribed in the previous section of this paper. Yet, the further abridged versions of (3.10)/(3.12) also can be laid down by bounding from the above the right sides of these equations by time-invariant or linear functions in some neighborhoods of the origin. Such inferences are illustrated in the current and next sections.

Next, we present the following statement.

Corollary 2. Let us assume that in equations (2.15) and (3.12) $f \in C([t_0,\infty) \times \mathbb{R}^n; \mathbb{R}^n)$, $L \in C([t_0,\infty) \times \mathbb{R}_{\geq 0}; \mathbb{R}_{\geq 0})$, $\sup_{\forall t \geq t_0} L(t,y) = \hat{L}(y)$, $\sup_{\forall t \geq t_0} p(t) = \hat{p} < 0$, $\sup_{\forall t \geq t_0} c(t) = \hat{c} > 0$. Next, we assume that Theorem 1 and inequality

 $\hat{p} y + \hat{c}\hat{L}(y) < 0$, $\forall y \in (0, y_+)$, $y_+ > 0$ hold, and the conditions (I)-(IV) hold for both equations (2.17) and (3.13). Then, the trivial solution to (2.15) is robustly stable.

Proof. In fact, due to the set conditions, the trivial solution to the scalar equation (3.12) is uniformly asymptotically stable. Then the application of Theorem 4 ensures this statement \Box

5. Linearized Delay Auxiliary Equations

This section linearizes the scalar equations (3.10)/(3.12) in a neighborhood of the origin of these systems through the application of the Lipschitz-like continuity condition. This allows us to further abridge the criteria for the boundedness/stability of (3.10)/(3.12) and, in turn, of their vector counterparts.

Let us assume that

$$L(t,\chi_1,\chi_2,...,\chi_{m+1}) \le \sum_{i=1}^{m+1} \mu_i(t,\tilde{\chi})\chi_i, \ \forall |\chi| \le \tilde{\chi} > 0, \ \forall t \ge t_0$$

$$(5.1)$$

where $\chi_i \in \mathbb{R}_{\geq 0}$, $\chi = \left[\chi_1, ..., \chi_{m+1}\right]^T$ and $\mu_i \in C(\left[t_0, \infty\right) \times \mathbb{R}_{\geq 0}; \mathbb{R}_{\geq 0})$. Then the application of (5.1) to (3.10) yields the following linear and scalar equation,

$$D^{+}u = P(t)u + c(t) \left(\sum_{i=2}^{m+1} \mu_{i}(t, \tilde{\chi})u(t - h_{i}(t)) + F_{0} |e(t)| \right)$$

$$u(t, |\varphi(t)|) = |\varphi(t)|, \ \forall t \in [t_{0} - \overline{h}, t_{0}]$$

$$(5.2)$$

where $P(t) = p(t) + c(t)\mu_1(t, \tilde{\chi})$. To shorten further citations, we write also a homogeneous counterpart to (5.2),

$$D^{+}u = P(t)u + c(t)\sum_{i=2}^{m+1} \mu_{i}(t, \tilde{\chi})u(t - h_{i}(t))$$

$$u(t, |\varphi(t)|) = |\varphi(t)|, \ \forall t \in [t_{0} - \overline{h}, t_{0}]$$

$$(5.3)$$

Next, we acknowledge

Lemma 6. Assume that $\mu_i \in C([t_0,\infty) \times \mathbb{R}_{\geq 0}; \mathbb{R}_{\geq 0})$, $p(t) \in C([t_0,\infty); \mathbb{R})$, $c(t) \in C([t_0,\infty); \mathbb{R}_+)$, $\varphi \in C([t_0,\infty); \mathbb{R}^n)$, functions $h_i(t)$ comply with (2.4), equation (5.3) admits a unique solution $\forall \tilde{\chi} < \chi_* > 0$, $\forall t \geq t_0$ and $\forall \|\varphi\| \leq \hat{\varphi}$. Also assume that the trivial solution to (5.3) is stable for the set value of t_0 and $\forall \tilde{\chi} \leq \tilde{\chi}_{\max} < \chi_*$,

where $\tilde{\chi}_{\max}$ is the maximal value of $\tilde{\chi}$ for which (5.3) is stable. Then $u(t, |\varphi(t)|) < \tilde{\chi}_{\max}$, $\forall t \ge t_0$ if $\|\varphi(t)\|$ is a sufficiently small number.

Proof. In fact, Definition 1a assures this statement under the above conditions \square In turn, we convey the following,

Theorem 6. Assume that Theorem 1 and Lemma 6 hold. Then,

$$\left| x(t, |\varphi|) \right| \le y(t, |\varphi|) \le u(t, |\varphi|), \ \forall t \ge t_0 \tag{5.4}$$

Furthermore, the trivial solutions to both equations (3.12) and (2.15) are stable.

Proof. First, we show that, under the above conditions,

$$y(t,|\varphi|) < \tilde{\chi}_{\max} \tag{5.5}$$

Pretend, in contrary, that $t = t_* > t_0$ is the smallest value of t for which (5.5) turns into an equality and thus fails. Still, (5.3) holds $\forall t \in [t_0, t_*]$ which, due to Lemma 4 and Lamma 6, implies that $y(t_*, |\varphi|) \le u(t_*, |\varphi|) < \chi_{\max}$,

 $\forall t \in [t_0, t_*]$ if $\|\varphi(t)\|$ is sufficiently small. This contradiction grants that (5.5) holds $\forall t \ge t_0$ which assures (5.4) \Box

Corollary 3. Assume that the conditions of Theorem 6 are met and, in addition, the trivial solution of (5.3) is either uniformly stable, asymptotically stable, uniformly asymptotically stable, or exponentially stable. Then the trivial solutions to (3.12) and, in turn, (2.15) are uniformly stable, asymptotically stable, uniformly asymptotically stable, or exponentially stable, respectively.

Proof. In fact, inequality (5.4) holds under all the above conditions and ensures this statement \square Next, we assume that $\sup_{\forall t \ge t_0} p(t) = \hat{p} < 0$, $\sup_{\forall t \ge t_0} c(t) = \hat{c} > 0$, $\sup_{\forall t \ge t_0} \mu_i(t) = \hat{\mu}_i$ and review (5.3) as follows,

$$D^{+}U = \hat{P}U + \hat{c}\left(\sum_{i=2}^{m+1} \mu_{i}\left(\tilde{\chi}\right)U\left(t - h_{i}\left(t\right)\right)\right), \quad U\left(t, \left|\varphi(t)\right|\right) = \left|\varphi(t)\right|, \quad \forall t \in \left[t_{0} - \overline{h}, t_{0}\right]$$

$$(5.6)$$

where $\hat{P} = \hat{p} + \hat{c}\hat{\mu}_1$ and $U : C([t_0, \infty); \mathbb{R}_{\geq 0})$. This leads to,

Corollary 4. Assume that (5.6) admits a unique solution $\forall \tilde{\chi} < \chi_{\times} \leq \chi_{*}$, $\forall t \geq t_{0}$ and $\forall \|\varphi\| \leq \varphi_{\times} \leq \hat{\varphi}$, the trivial solution to (5.6) is stable for the set value of t_{0} and $\forall \tilde{\chi} \leq \tilde{\chi}_{U} \leq \tilde{\chi}_{\max}$, and $\|\varphi(t)\|$ is a sufficiently small number. Then $U(t, |\varphi(t)|) < \tilde{\chi}_{U}$, $\forall t \geq t_{0}$. Furthermore,

$$|x(t,|\varphi|)| \le y(t,|\varphi|) \le u(t,|\varphi|) \le U(t,|\varphi|), \ \forall t \ge t_0$$

and the trivial solutions to equations (5.3), (3.12) and (2.15) are stable.

Proof. The proof of this statement literally follows the proofs of Lemma 6 and Theorem 6 \square

Thus, we infer that the stability criteria for linear scalar delay equations (5.3) and (5.6) imply sufficient stability criteria of the trivial solution to a vector system (2.15). Some stability criteria for two former equations, for instance, can be found in [7], see also additional references therein. The stability criteria for (5.6) are simplified and readily known under the condition $h_i = const$, see, for instance, [13],[16], [23].

In turn, we extend this approach to convey some sufficient boundedness criteria for equation (2.14) via the analysis of solutions to the linear scalar equation (5.2). In fact, the solutions to (5.2) can be represented in the following form, see, e.g., [23], p.139,

$$u(t, |\varphi(t)|) = u_h(t, |\varphi(t)|) + F_0 u_{nh}(t, 0)$$

$$(5.7)$$

where $u_h(t,|\varphi(t)|)$ is a solution to (5.3) and $u_{nh}(t,0)$ is a solution to (5.2) with $\varphi(t) \equiv 0$ and $F_0 = 1$. In turn,

 $u_{nh}(t,0) = \int_{t_0}^{t} C(t,s)c(s)|e(s)|ds$, where C(t,s) is a Cauchy function for (5.2) which is defined as a solution to (5.3)

with the following history-function, $C(t,s) = \begin{cases} 0, t_0 - s_1 \le t < s \\ 1, t = s \end{cases}$. Thus, $C(t,s) \ge 0$ which yields that

 $u_{nh}(t,0) \ge 0, \forall t \ge t_0$. This leads to

Lemma 7. Assume that the conditions of Lemma 6 hold, (5.2) has a unique solution under the conditions of Lemma 6, $|u_{nh}(t,0)| \le \hat{u}_{nh} < \infty$, $\forall t \ge t_0$, and both F_0 and $||\varphi(t)||$ are sufficiently small values. Then

 $u(t, |\varphi(t)|) < \chi_{\max}, \ \forall t \ge t_0$, where $u(t, |\varphi(t)|)$ is a solution to (5.2).

Proof. In fact, under the above conditions, both additions on the right side of (5.7) can be made arbitrary small $\forall t \geq t_0$ by the appropriate choice of both F_0 and $\|\varphi(t)\| \square$

Next, we embrace

Theorem 7. Assume that the conditions of Theorem 1, Lemma 6 and Lemma 7 are met. Then

$$\left| x(t, |\varphi(t)|) \right| \le y(t, |\varphi(t)|) \le u(t, |\varphi(t)|), \ \forall t \ge t_0$$

$$(5.8)$$

if both F_0 and $\|\varphi(t)\|$ are sufficiently small values, where $x(t,|\varphi(t)|)$, $y(t,|\varphi(t)|)$ and $u(t,|\varphi(t)|)$ are solutions to equations (2.14), (3.10) and (5.2), respectively.

Proof. Let us show that under the above conditions $y(t, \|\varphi\|) < \chi_{\max}, \forall t \ge t_0$. Pretend, in contrary, that $t = t_* > t_0$ is the smallest value of t for which the last inequality turns into equality and, thus, fails. Still, (5.2) holds $\forall t \in [t_0, t_*]$ which, due to Lemma 4 and Lemma 7, implies that $y(t_*, |\varphi|) \le u(t_*, |\varphi|) < \chi_{\max}, \forall t \in [t_0, t_*]$ if both F_0 and $\|\varphi(t)\|$ are sufficiently small \square

Next, we note that (5.7) and (5.8) yield the following,

$$\left| x(t, |\varphi(t)|) \right| \le u_h(t, |\varphi(t)|) + F_0 u_{nh}(t, 0) \tag{5.9}$$

where, under conditions of Theorem 7, $u_{nh}(t,0) < \infty$ and $u_h(t,|\varphi(t)|)$ is a solution to (5.3) which either is bounded or approaches zero due to Theorem 6 and Corollary 3. Thus, (5.9) grants the input-to-state stability of (2.14) under rather broad conditions.

The last two sections convey further abridged auxiliary equations which embrace more conservative but simplified criteria of boundedness/stability of (2.14)/(2.15). However, the sharpest estimation of dynamics of the original

systems (2.14)/(2.15) can be obtained in effortless simulations of their scalar counterparts (3.10)/(3.12) which also authenticate our methodology and gage its accuracy.

6. Simulations

Let us assume that (2.14) takes the following form,

$$\dot{x} = (A_0(t) + A_1(t))x + \rho A_1(t)x(t-h) + f(t,x(t-h)) + F(t)$$

$$x(t) \in \mathbb{R}^2, x(t) = x_0 \equiv const, \ \forall t \in \left[-\overline{h}, 0\right]$$
(6.1)

where $f(t,x(t-h)) = b[0, x_2^3(t-h)]^T$, $F(t) = [0,F_2]$, $b,h,\overline{h},\rho \in \mathbb{R}_+$,

$$A_{0}(t) = \begin{pmatrix} \lambda(t) & 0 \\ 0 & \lambda(t) \end{pmatrix}, A_{1}(t) = \begin{pmatrix} 0 & 1 \\ -\omega(t) & -\alpha_{1} \end{pmatrix}$$

Next, we calculate functions p(t) and c(t) for the subsystem $\dot{x} = A_0(t)x$, see Section 3. Clearly, in this case,

$$w(t) = diag(\eta, \eta)$$
, where $\eta = \exp\left(\int_{t_0}^t \lambda(s)ds\right)$, which implies that $p(t) = \lambda(t)$ and $c(t) \equiv 1$. Thus, the scalar

auxiliary aquation (3.10) for (5.1) takes the following form,

$$D^{+}y = (\lambda(t) + |A_{1}(t)|)y + \rho |A_{1}(t)|y(t-h) + |b|y^{3}(t-h) + |F(t)|, y(t) \in \mathbb{R}_{\geq 0}$$

$$y(t) = |x_{0}|, \forall t \in [-h_{1}, 0]$$
(6.2)

In turn, an autonomous scalar counterpart to (6.2) can be written as follows,

$$D^{+} \hat{y} = (\hat{\lambda} + \hat{A}_{1}) \hat{y} + \rho \hat{A}_{1} \hat{y}(t - h) + |b| \hat{y}^{3}(t - h) + F_{0}, \quad \hat{y}(t) \in \mathbb{R}_{\geq 0}$$

$$\hat{y}(t) = |x_{0}|, \ \forall t \in [-h, 0]$$
(6.3)


where $\sup_{\forall t \geq t_0} \lambda\left(t\right) = \hat{\lambda} < 0$, $\sup_{\forall t \geq t_0} \left|A_1\left(t\right)\right| = \left\|A_1\left(t\right)\right\| = \hat{A}_1$. Thus, we infer that $y\left(t\right) \leq \hat{y}\left(t\right)$, $\forall t \geq 0$.

Let us recall that the stability of the linear equation $D^+\hat{y} = (\hat{\lambda} + \hat{A}_1)\hat{y} + \rho\hat{A}_1\hat{y}(t-h)$ is well studied in the space of parameters of this system, and the asymptotic stability of this equation implies the asymptotic stability of the trivial solution to the homogeneous counterpart to (6.3) if |b| is sufficiently small [23]. Furthermore, the right-hand sides of both equations (6.2) and (6.3) depend just upon $|A_1(t)|$ and \hat{A}_1 rather than $A_1(t)$.

To describe the results of simulations of equations (6.1)-(6.3), we set below that $\lambda = \lambda_0 + \lambda_+(t)$, where $\lambda_0 = -3$ and either a) $\lambda_+(t) = q \sin(dt)$, q = 0.1, d = 5 or b) $\lambda_+(t) = q \exp(-dt)$, q = 1, d = 1. Note that in the former case $\hat{\lambda} = -2.9$ whereas in the later one $\hat{\lambda} = -2$. Next, we also assume that $\omega(t) = \omega_0 + \omega_1(t)$, $\omega_1(t) = a_1 \sin(r_1 t) + a_2 \sin(r_2 t)$, where $\omega_0 = 1$, $a_1 = a_2 = 0.1$, $r_1 = 1$, $r_2 = 3.14$. Additionally, we set in our simulations that $e(t) = \begin{bmatrix} 0, \sin(r_3 t) \end{bmatrix}^T$, $r_3 = 10$; the values of other parameters are indicated below in the captions of the figures. All the simulations presented in this paper utilize the MATLAB code DDE23.

Figure 1 contrasts in solid, dashed, and dashed dotted lines the norms of solutions to (6.1), (6.2), and (6.3) that were simulated for the matched history functions. All plots demonstrate that $|x(t,x_0)| \le y(t,|x_0|) \le \hat{y}(t,|x_0|)$ on the simulated time interval which authenticate our theoretical inferences.


Furthermore, the solutions to scalar nonautonomous equation (6.2) provide fairly accurate approximations to the norms of the matched solutions to (6.1) in a wide range of parameters that were contemplated in our simulations. As expected, simulations of the autonomous equation (6.3) deliver more crude estimates. Additionally, the accuracies of the later approximations are more sensitive than the former ones to enlargements of the delay parameter h, the scale of the delay nonlinear term b and the amplitude of input F_0 . Noticeably, the accuracy of the estimates provided by (6.3) is quite sensitive to enlargement of b especially for increased values of b. Yet, the solutions to the scalar nonautonomous equation (6.2) adequately estimate the norms of solutions to (6.1) with matched history function in the wide range of parameters considered in our simulations.

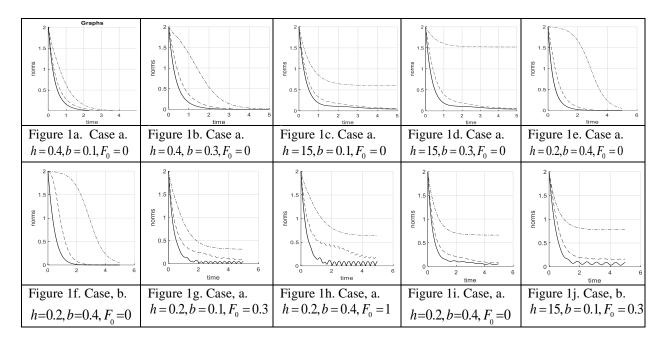


To simulate the boundaries of trapping/stability regions, we write equation (6.1) the in polar coordinates as follows,

$$x_1(t,x_0) = r(t,r_0,\varphi_0)\cos(\varphi(t,r_0,\varphi_0)), x_2(t,x_0) = r(t,r_0,\varphi_0)\sin(\varphi(t,r_0,\varphi_0))$$

Subsequently, the angle coordinate was discretized with the step equals $\pi/100$. For each angle coordinate, the radial one was sequentially altered to approximate the values located at the boundary of the region. The simulations utilized the binary search and started from a small radial value that was subsequently advanced until a rapid increase in $|x(t,x_0)|$ was numerically detected on two consecutive time-steps.

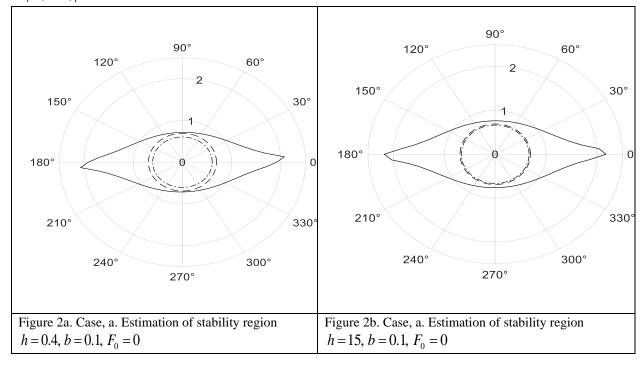

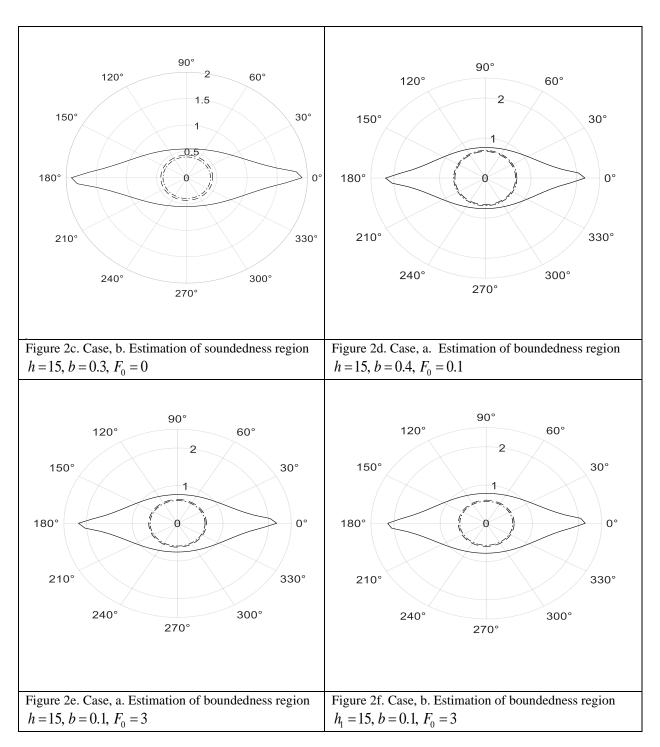

A similar approach was applied to the auxiliary scalar equations (6.2) and (6.3) to approximate the radiuses of the disks embedded in the trapping/stability regions of (6.1). The times required to estimate the radiuses of the imbedded discs by simulating (6.2) and (6.3 are practically insensitive to enlargement of the dimension of the original system and is further reduced since both $y(t,|x_0|)$ and $\hat{y}(t,|x_0|)$ monotonically increase in $|x_0|$ for $\forall t \geq t_0$. In contrast, the running time required to estimate the boundary of the trapping/stability regions increases with dimensions as m^n , where m is the number of points that were taken to discretize a phase-space variable and n is the number of these variables.

Figure 2 shows in solid, dashed and dashed dotted lines the boundaries of the trapping ($F_0 \neq 0$) or stability ($F_0 = 0$) regions that were obtained in simulations of equations (6.1), (6.2), and (6.3), respectively, for the various sets of parameters listed in the captions of the figure. Note that the curves on these figures are plotted in polar coordinates where instead of radius vectors we plot the natural logarithm of this variable for every displayed curve.

The simulations of equations (6.2) and (6.3) are used merely to estimate the radiuses of the relevant disks immersed in the trapping/stability regions of (6.1). Notably, both estimates are close to each other in all figures and fairly match the shortest but protracted dimensions of trapping/stability regions. The accuracies of the estimates of the radiuses of imbedded discs are rather insensitive to the enlargement of delay parameter h, amplitude of the input F_0 as well as the scale of nonlinear component b. Lastly, the layouts of the curves on all plots in Figure 2 comply with our theoretical inferences.

Yet, such effortless estimations of the radiuses of the balls immersed in boundedness/stability regions of vector nonlinear systems with delay and variable coefficients as well as the estimation of time evolution of the norms of solutions to such systems shall be particularly invaluable in the applications, especially in ones where the history function of a given system is obscured but the range of variation of its superior norm can be fairly gaged.

7. Conclusion

This paper conveys a novel approach that develops scalar counterparts to a broad class of vector nonlinear systems with variable coefficients and multiple varying delays. The solutions to such scalar auxiliary equations bound from the above the norms of solutions to the original equations with matched history functions. This prompts the assessment of the boundedness/stability traits of the vector delay equations through the analysis of solutions to their scalar counterparts. Concurrently, the attained approach aggregates the parameters, history functions, and models of uncertainties, which simplifies assessment of robustness properties of the original systems.

We show that the application of the Lipschitz-like condition yields further simplified upper bounds for the solutions to the auxiliary scalar equations. Consequently, we derived some novel boundedness/stability criteria, which can be accessed in effortless simulations or abridged analytical reasoning and estimated the radiuses of the balls imbedded in boundedness/stability regions of the original vector systems.

Our results are authenticated in representative simulations which show that the solutions to the scalar auxiliary equations approximate the norms of solutions to the original vector systems with fair accuracy if the latter are stemmed from the central parts of the boundedness/stability regions. In turn, we demonstrated that the radius of the ball immersed in the stability region of the test system is estimated with a relatively small error by our approach.

Our forthcoming efforts shall be focused on extending the scope of applications of this methodology as well as on the development of efficient recursive approximations to the boundaries of the trapping/stability regions and the bilateral solution bounds for the norms of solutions to vector nonlinear systems with delay.

Appendix. Let us show how to derive inequality (3.3) using a simple example, which can be naturally extended to more complex cases. Assume that $x = [x_1 \ x_2]^T$ and a vector-function f is defined, e.g., as follows,

$$f = \begin{bmatrix} a_1(t)x_1^3x_2^2(t-h_1) & a_2(t)x_2^3(t-h_2) \end{bmatrix}^T \text{ . Then } |f|_2 \leq |f|_1 \leq |a_1| |x_1^3| |x_2^2(t-h_1)| + |a_2| |x_2^3(t-h_2)| \\ \leq |a_1| |x(t)|^3 |x(t-h_1)|^2 + |a_2| |x(t-h_2)|^3 \text{ , where we use that } |x_i^n| \leq |x|^n \text{ , } |x_i^n(t-h)| \leq |x(t-h)|^n \text{ , } i = 1, 2, n \in \mathbb{N} \text{ . Clearly, this inference can be extended to the power series and some rational functions under the pertained conditions.}$$

Acknowledgement. The code for simulations discussed in Section 6 was developed by Stive Koblik

Data sharing is not applicable to this article as no datasets were generated or analyzed during the current study.

The author declares that he has no conflict of interest.

References

- [1] Afuwape, A., & Omeike, M. (2008) On the stability and boundedness of solutions of a kind of third-order delay differential equations. Appl. Math. Comput., 200(1), 444-451.
- [2] Andreev, A.S., Sedova, N.O. (2019) The method of Lyapunov-Razumikhin in stability analysis of systems with delay. Automation and Remote Control, 80, No. 7, 1185-1229.
- [3] Antoine Challet, et al. (2023) The ISS framework for time-delay systems: Survey. Mathematics of Control, Signal and Systems, 35, 237-306.

- [4] Azbelov N.V., Simonov P.M. (2003) Stability of Differential Equations With Aftereffect. Series: Stability and Control: Theory, Method and Applications, 20. London UK: Taylor & Francis
- [5] Beresansky, L. et al. (2023) A simple test for a uniform exponential stability for a lihear delay vector differential equations. IEEE Trans Atom Control, 67(3), 1537-2022.
- [6] Beresansky, L; Braverman, E;. (2015) Stability conditions for a scalar delay differential equation with nondelay term. Applied Mathematics and Computation, 250, 157-164.
- [7] Beresansky, L; Braverman, E;. (2020) Solutions estimate for linear differential equations with delay. Appl Math &Comput, 372, 1-10.
- [8] Briat, C. (2015). Linear parameter-varying and time-delay systems: analysis, observation, filtering & control. Berlin: Springer.
- [9] Burton, T. (1985) Stability and periodic solution of ordinary and functional differential equations. Cambridge: Academic Press.
- [10] Cocane, F., Conter, F., & Germani, A. (2016) Memoryless approach to the LQ problems with variable input delay. IEEE Trans Atom Control, 61(1) 216-221.
- [11] Dorato, P. (2006) An overview of finite-time stability. In Memini L., Zaccarian L., Abdallah C.T. (eds) Current Trends in Nonlinear Systems and Control. System & Control: Foundation & Application, 185-194.
- [12] Erneux, T. (2009) Applied delay differential equations. Berlin: Springer.
- [13] Fridman. (2014) Introduction in time-delay systems: Analysis and Control. (Series: Systems and Control: Foundation and Applications). Basil, Switzerland: Burkhauser.
- [14] Gil`, M. (2013) Stability of Vector Differential Delay Equations. (Series: Frontiers in Mathematics). Basel, Switzerland: Birkhauser.
- [15] Gu, K., & Niculesku, S. (2003) Survey on recent results in the stability and control time-delay systems. J. Dyn. Sys., Meas./ Control, 125(2), 158-165.
- [16] Gu, K., Kharitonov, V.L., Chen, J. (2003) Stability of Time-Delay Systems (Series: Control Engineering). Boston, MA, USA: Birkhauser.
- [17] Halanay A. (1966) Differential equations; stability, oscillations, time lags. Cambridge: Academic Press.
- [18] Hale, J., Lunel, S.M.V. (1993) Introduction to Functional Differential Equations (Series: Applied Mathematical Sciences) (Vol. 99) New York, NY, USA: Springer-Verlag.
- [19] Karafylis, I., Jiang, Z-P. (2011) Stability and stabilization of nonlinear systems. Communications and control engineering series. Lodon: Springer-Verlag.
- [20] Karafyllis I., Malisoff M., Mazenc F., Pepe P. (2016) Stabilization of nonlinear delay systems: a tutorial on recent results. ADD, 4(In: Karafyllis I., Malisoff M., Mazenc F., Pepe P. (eds) Chapter Recent reults on nonlinear delay control Systems: in honor of Miroslav Krstic).
- [21] Kharitonov, V. I. (2013) Time-Delay Systems, Lyapunov Functions and Matrices {Series: Control Engineering}. New YorkBirkhauser, NY, USA.
- [22] Kolmanovskii, V., & Richard, J.-P. (1999) Stability of some linear systems with delays. IEEE Trans. Autom. Control, 44(5), 984-989.
- [23] Kolmanovskii, V., Myshkis, A., (1999) Introductions to the Theory and Applications of Functional-Differential Equations (Series: Mathematics and Its Applications (Vol. 463). Dordrecht, Netherlands: Luwer.
- [24] Krasobskii, N. (1963) Problems of the Theory of Stbility of Motion. Redwood City: Stanford Univ Press.
- [25] Liao, X., Wang, L., Yu, P. (2007) Stability of Dynamical Systems (monograph Series on Nonlinear Science and Complexity). Amcterdam, Netherlads: Elsevier.
- [26] Mazenc F., Malisoff M. (2017) Extensions of Razumikhin's Theorem and Lyapunov-Krasovskii Functional Constructions for Time-Varying Systems with Delay. Automatica, 78, 1-13.
- [27] Mazenc F., Malisovf M., Krstic M. (2022) Vector extensions of Halanay's inequality. IEEE Trans Autom Control, 67(3), 1453-1459.
- [28] Michiels, W., Niculescu, S.I. (2014) Stability and stabilization of time-delay systems: an eigenvalue-based approach. Philadelphia: SIAM-Advences in Design and Control.
- [29] Pinsky, M. (2021) Successive estimations of bilateral bounds and trapping/stability regions of solution to some nonlinear nonautonomous systems. Nonlinear Dynamics, 103, 517-539.
- [30] Pinsky, M. (2022) Stability and Boundedness of solutions to some multidimensional nonautonomous nonlinear systems. Retrieved from Mathematical Problems in engineering: https://doi.org/10.1155/2022/5098677
- [31] Pinsky, M. (2023) The optimal dichotomy of temporal scales and boundedness/stability of some multidimensional time-varying nonlinear systems. Mathematics of control, systems and signals, 35, 125-158.
- [32] Pinsky, M. (2024) Effective estimation of trapping/stability regions and bilateral solutions' bounds for some multidimensional nonlinear systems with time-varying coefficients. To appear in Journal of Nonlinear Science, 24 pages.
- [33] Razumikhin, B. (1988) The Stability of Hereditary Systems. Moscow: Nauka.
- [34] Seuret, A., & Gouaisbaut, F. (2015) Hierarchy of LMI conditions for the stability analysis of time-delay systems. Systems and Control Letters, 81, 1-7.

- [35] Xu, H. (2020) Finite-time stability analysis: A tutorial Survey. J. of Complexity, 2020(Article ID 1941636),
- 12.
 [36] Walter, W. (1998) Ordinary differential equations. Springer, NY, NY.
 [37] Zhou B., Egorov A.V. (2016) Razumikhin and Krasovskii Stability Theorems for Time-Varying Time-Delay Systems. Automatica, 71, 281-291.