

# The Design and Implementation of a High-Performance Log-Structured RAID System for ZNS SSDs \*

Jinhong Li<sup>1</sup>, Qiuping Wang<sup>1</sup>, Shujie Han<sup>2</sup>, Patrick P. C. Lee<sup>1</sup>  
<sup>1</sup>The Chinese University of Hong Kong <sup>2</sup>Peking University

## Abstract

Zoned Namespace (ZNS) defines a new abstraction for host software to flexibly manage storage in flash-based SSDs as append-only zones. It also provides a Zone Append primitive to further boost the write performance of ZNS SSDs by exploiting intra-zone parallelism. However, making Zone Append effective for reliable and scalable storage, in the form of a RAID array of multiple ZNS SSDs, is non-trivial since Zone Append offloads address management to ZNS SSDs and requires hosts to dedicatedly manage RAID stripes across multiple drives. We propose ZapRAID, a high-performance log-structured RAID system for ZNS SSDs by carefully exploiting Zone Append to achieve high write parallelism and lightweight stripe management. ZapRAID adopts a group-based data layout with a coarse-grained ordering across multiple groups of stripes, such that it can use small-size metadata for stripe management on a per-group basis under Zone Append. It further adopts hybrid data management to simultaneously achieve intra-zone and inter-zone parallelism through a careful combination of both Zone Append and Zone Write primitives. We evaluate ZapRAID using microbenchmarks, trace-driven experiments, and real-application experiments. Our evaluation results show that ZapRAID achieves high write throughput and maintains high performance in normal reads, degraded reads, crash recovery, and full-drive recovery.

## 1 Introduction

Flash-based solid-state drives (SSDs) have been widely deployed as they have better performance and reliability than hard-disk drives (HDDs). Conventional SSDs expose a block interface, implemented inside the flash translation layer (FTL), to a host for accessing flash storage. However, such a block interface also introduces costly internal flash management operations (e.g., device-level garbage collection and address translation) that lead to unpredictable I/O performance [31] and reduced flash endurance [19]. The recently proposed NVMe Zoned Namespace (ZNS) interface [14, 19] abstracts flash-based SSDs as append-only *zones*, such that the FTL and its costly operations are eliminated and the storage management is now shifted to the host. Compared with conventional SSDs, ZNS SSDs are shown to achieve higher write throughput, lower tail read latencies, and less device-level DRAM usage [19].

ZNS SSDs support two write primitives, namely *Zone Write* and *Zone Append*, where *Zone Append* provides opportunities for further performance gains by exploiting intra-zone parallelism. Specifically, a ZNS SSD tracks per-zone write pointers, such that any write to a zone must specify the same offset indicated by the write pointer. *Zone Write* requires the host to specify the block address when writing a block as in conventional SSDs. This provides backward compatibility with existing applications. However, in order to match the offset of a *Zone Write* with the on-device write pointer of a zone, the host can only issue one request to each zone at a time, thereby limiting intra-zone parallelism. In contrast, *Zone Append* eliminates

---

\*An earlier version of this article appeared in [67]. In this extended version, we enhance ZapRAID to simultaneously achieve intra-zone and inter-zone parallelism through a careful combination of *Zone Append* and *Zone Write*. We also include new experiments, including microbenchmarks, trace-driven experiments, and real-application experiments, to study more performance aspects of ZapRAID.

the need of the host to specify block addresses in writes by fully offloading the address management to ZNS SSDs. In Zone Append, the host only specifies the zone to which a write is issued, and the ZNS SSD returns the address to the host upon the write completion. Thus, the host can issue multiple Zone Append commands within one zone to exploit the intra-zone parallelism for improved write performance.

Despite the performance gains from Zone Append, its offloading of address management to ZNS SSDs implies that the host not only cannot directly specify the block addresses of writes in a zone, but it also cannot control the ordering of writes in concurrent Zone Append commands. This creates new challenges to storage system designs that require host-level address management, particularly when applying Redundant Array of Independent Disks (RAID) [60] to form an array of multiple ZNS SSDs for reliable and scalable storage. Specifically, in a traditional RAID array, a RAID controller runs atop multiple drives and organizes data in *stripes*, each of which encodes a set of data blocks into parity blocks and distributes the data and parity blocks across drives. For efficient data repair, the RAID controller statically assigns the same block address in each drive for the blocks of the same stripe, so that the repair of any lost block can directly retrieve the available data and parity blocks of the same stripe from other drives for decoding. However, under Zone Append, it is infeasible for the RAID controller to manage block addresses in a zone; instead, the RAID controller needs to maintain dedicated address mapping information to specify the block locations for each stripe, which unavoidably incurs performance penalties to stripe management.

We present ZapRAID, a high-performance RAID system for ZNS SSDs by carefully exploiting Zone Append to achieve high write performance via intra-zone parallelism; in the meantime, ZapRAID supports lightweight stripe management in terms of: (i) querying stripe metadata during degraded reads, crash recovery, and full-drive recovery, (ii) memory usage for indexing, and (iii) persistent storage for metadata. ZapRAID builds on log-structured RAID (Log-RAID) [25, 28, 34, 41], which issues sequential writes to a RAID array, and extends Log-RAID with a novel *group-based data layout*. Specifically, ZapRAID partitions stripes into stripe groups and issues Zone Append to the stripes within the same stripe group for high write performance. The group-based data layout organizes stripes with a coarse-grained ordering and enables ZapRAID to manage stripes efficiently on a per-group basis.

We observe that Zone Append effectively exploits intra-zone parallelism when a workload is dominated by small writes and the writes are issued to a single zone of a ZNS SSD at a time, while Zone Write is beneficial when a workload is dominated by large writes or when the writes are concurrently issued to multiple zones of a ZNS SSD (in which Zone Write exploits better inter-zone parallelism for large writes). To this end, ZapRAID adopts *hybrid data management* to manage small and large writes across multiple zones in a ZNS SSD, so as to simultaneously achieve intra-zone and inter-zone parallelism through a careful combination of both Zone Append and Zone Write primitives.

In summary, we make the following contributions:

- We conduct a measurement study to carefully examine the trade-off between Zone Append and Zone Write on a ZNS SSD (§2.2).
- We design ZapRAID, a high-performance Log-RAID system for ZNS SSDs. ZapRAID builds on two core ideas: (i) a group-based data layout under Zone Append (§3.2) and (ii) hybrid data management (§3.3) under a combination of Zone Append and Zone Write. ZapRAID further addresses reliability in terms of metadata persistence and crash consistency (§3.4).
- We prototype ZapRAID with the Storage Performance Development Kit (SPDK) [10], such that ZapRAID can parallelize its internal operations with multiple SPDK threads.
- We evaluate our ZapRAID prototype on real ZNS SSD devices using microbenchmarks, trace-driven experiments, and real-application experiments. When writes are issued to a single zone per ZNS SSD, ZapRAID increases the write throughput by up to 77.2% and reduces the tail latency by up to 36.4% compared with the exclusive use of Zone Write, and also scales to high write throughput under FEMU emulation [49]. When writes are issued to multiple zones per ZNS SSD, ZapRAID always maintains the highest throughput and lowest tail latency compared with the exclusive use of either Zone Append or

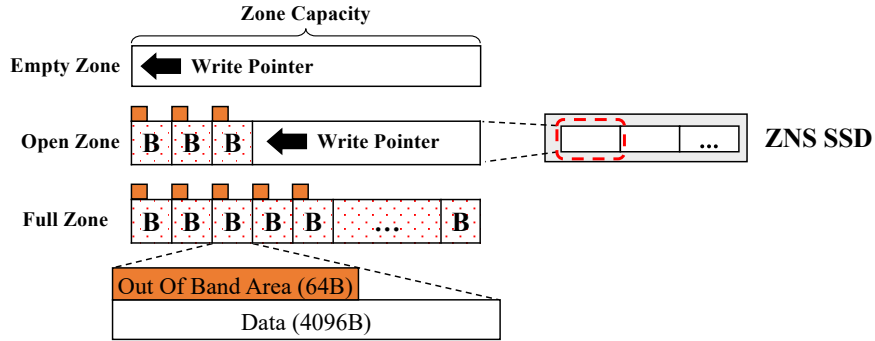


Figure 1: Architecture of a ZNS SSD based on the Western Digital Ultrastar DC ZN540 model [13].

Zone Write. Furthermore, ZapRAID maintains high performance in normal reads, degraded reads, crash recovery, and full-drive recovery.

We make the source code available on <https://github.com/adslabcuhk/zapraid> for review.

## 2 Background and Motivation

We provide the basics of ZNS (§2.1) and study the trade-off between Zone Write and Zone Append (§2.2). We also review the background of Log-RAID and state the challenges of deploying Log-RAID on ZNS SSDs (§2.3).

### 2.1 Zoned Namespace (ZNS)

The Zoned Namespace (ZNS) interface [14, 19] is a new NVMe Command Set [4] that exposes flash-based SSD internals to the host for host-level storage management. Figure 1 shows the architecture of a ZNS SSD based on the Western Digital Ultrastar DC ZN540 model, which we use in this paper and also previous studies (e.g., [18, 42, 65]). The ZNS interface abstracts a ZNS SSD as append-only *zones*, each of which has a maximum size called the *zone capacity*. Each zone organizes data in logical blocks (or *blocks* in short in this paper), and each block is mapped to a physical flash page. Each flash page also has an out-of-band area for metadata storage (of size tens of bytes) located alongside the page content. Note that the out-of-band area is also available in general NVMe SSDs, and its space is not included in the total zone capacity. In this paper, we assume that the block size is 4 KiB and the out-of-band area size is 64 bytes, both of which can be configured in the ZN540 model when a ZNS SSD is formatted.

Within a zone, the blocks can be randomly read, but must be sequentially written; meanwhile, multiple zones can be read/written concurrently. Specifically, a ZNS SSD maintains a per-zone *write pointer* that specifies the offset of the next write. It mandates that any new write to a zone must be issued to the offset referenced by the write pointer. Upon the completion of each write request, the write pointer is incremented by the number of written blocks.

Each zone in a ZNS SSD is associated with a *state*. An *empty* zone means that the zone has not been written any block. Once a block is written to an empty zone, the zone becomes an *open* zone and can accept new writes before it is full. Typically, the number of open zones in a ZNS SSD is bounded. Once the number of blocks written to a zone reaches the zone capacity, the zone becomes a *full* zone. The host can also explicitly *finish* an open zone to turn it into a full zone. To overwrite the data in a zone, the host must first explicitly *reset* the zone to erase any data in a block and rewind the write pointer to the beginning of the zone, and the zone becomes an empty zone after reset.

### 2.2 Zone Write versus Zone Append

Recall from §1 that ZNS provides the Zone Write and Zone Append primitives for a host to issue writes to a zone. Their key difference is that Zone Write requires the host to issue writes serially and specify the offset

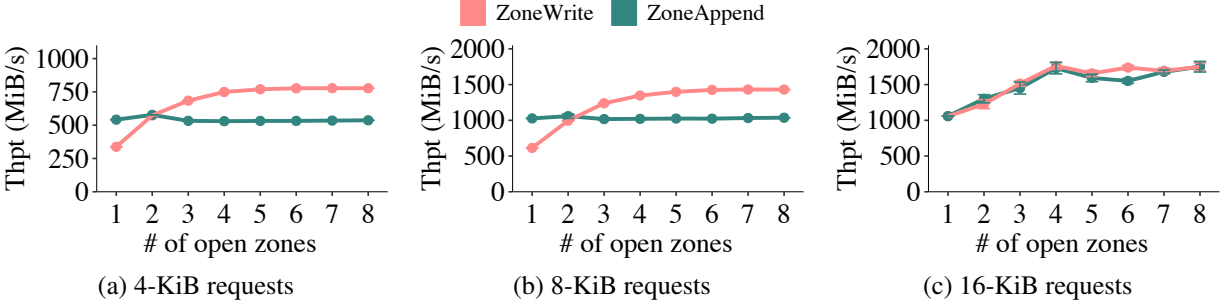


Figure 2: Write throughput of Zone Write and Zone Append versus the number of open zones under various request sizes.

in each write, while Zone Append offloads address assignment to ZNS SSDs and enables the host to issue concurrent writes that exploit intra-zone parallelism. Note that ZNS can only have one outstanding Zone Write command issued to a zone at a time, and the host cannot execute new Zone Write or Zone Append commands in the same zone if there exists any outstanding Zone Write command that is being executed; otherwise, the new commands may modify the write pointer that is being updated by the outstanding Zone Write command.

We conduct evaluation on a single ZN540 ZNS SSD [13] in our testbed (see §5.1 for testbed details) to show how Zone Append improves write performance over Zone Write. We issue write requests of 4 KiB, 8 KiB, and 16 KiB to the ZNS SSD. We also vary the number of open zones in the ZNS SSD. We write a total of 512 GiB of data and measure the write throughput. We report the average throughput results over five runs, with the error bars showing the 95% confidence intervals under the Student’s t-distribution (note that some error bars may be invisible due to small derivations). Figure 2 shows the write throughput results.

**Single-zone writes.** We first consider the case when the number of open zones is one. In this case, we issue writes to a single zone at a time; if the zone is full, we issue writes to a different zone. Zone Write achieves a write throughput of 337.6 MiB/s, 613.6 MiB/s, and 1,050.0 MiB/s for 4-KiB, 8-KiB, and 16-KiB requests, respectively. Recall that a ZNS SSD can have only one outstanding Zone Write at any time. We find that the write throughput of Zone Write cannot further increase even if we issue multiple concurrent write requests of Zone Write. In contrast, Zone Append achieves a write throughput of 541.5 MiB/s, 1,026.6 MiB/s, and 1,050.1 MiB/s for 4-KiB, 8-KiB, and 16-KiB requests, respectively with four concurrent write requests of Zone Append<sup>1</sup>. This shows that Zone Append can increase the write throughput via intra-zone parallelism.

Note that in this single-zone experiment, even if we issue more than four concurrent write requests, the write throughput of Zone Append for 4-KiB and 8-KiB requests does not further increase as it already saturates intra-zone parallelism for this specific ZN540 model. Also, Zone Write already achieves the maximum write throughput of a zone in ZN540 for 16-KiB requests, so Zone Append does not see more growth.

**Multi-zone writes.** We further consider the case when the number of open zones is larger than one, so as to examine how *inter-zone* parallelism affects the effectiveness of Zone Write and Zone Append. We create multiple open zones and issue writes to the open zones in parallel. We set the number of concurrent write requests for each open zone as one and four for Zone Write and Zone Append, respectively, based on the previous results in the single-zone experiment. From Figure 2, we observe that the write throughput of Zone Write is generally higher when there are more open zones (e.g., its write throughput reaches 777.1 MiB/s under six open zones for 4-KiB write requests (Figure 2(a))). On the other hand, Zone Append can only achieve a maximum write throughput of 577.5 MiB/s under two open zones for 4-KiB requests (Figure 2(a)).

<sup>1</sup>The ZN540 specification [13] states that the random write throughput can reach 2,000 MiB/s. This number corresponds to the best-case performance and is obtained when large requests (128 KiB) are issued to all open zones.

A possible reason is that the current firmware implementation of Zone Append is more computationally intensive when writes are issued to more open zones in the ZN540 model, so Zone Append has even lower write throughput than Zone Write under a larger number of open zones due to the limited computational power in existing hardware. We conjecture that such a limitation can be addressed in future ZNS SSD models. When the request size is 8 KiB (Figure 2(b)), Zone Write can scale to 1,430.7 MiB/s under eight open zones, while Zone Append can only achieve a maximum write throughput of 1,058.6 MiB/s under two open zones. When the request size is 16 KiB (Figure 2(c)), Zone Write and Zone Append have very small performance differences (e.g., up to around 1,750 MiB/s under eight open zones), implying large writes can effectively exploit inter-zone parallelism in both Zone Write and Zone Append.

**Main observations.** We observe that for small writes (e.g., of size 4 KiB or 8 KiB), Zone Append achieves higher write throughput than Zone Write in the single-zone setting by exploiting intra-zone parallelism, while Zone Write scales better and achieves higher write throughput than Zone Append when the number of open zones increases by better exploiting inter-zone parallelism. For large writes (e.g., of size 16 KiB), both Zone Write and Zone Append have similar write throughput for different numbers of open zones. A RAID system based on ZNS SSDs should adequately combine Zone Append and Zone Write to accommodate the scenarios with different numbers of open zones. Even though Zone Append only shows high performance when write requests are issued to a single zone, it is still beneficial for scenarios where shared storage systems need performance isolation [23, 32, 38]. Specifically, since a zone is typically mapped to only a subset of physical flash channels or chips [17], a shared storage system based on ZNS SSDs should allocate only a limited number of open zones to applications that do not have high write bandwidth demands. This isolates the write traffic of the applications to a subset of flash channels and limits their impact on other co-located applications. Thus, Zone Append can help such applications achieve high write performance through intra-zone parallelism and sustain the bursts of a large number of write requests if necessary, even with only a single zone per ZNS SSD being used.

Also, a RAID system based on ZNS SSDs should accommodate different request sizes. Workloads with mixed request sizes are common in practice; for example, practical cloud block storage workloads have 60% of write requests that are at most 4 KiB and 25% of write requests that are at least 16 KiB [51].

### 2.3 Log-structured RAID (Log-RAID)

RAID [60] forms an array of storage drives to improve capacity, performance, and fault tolerance in storage. We focus on parity-based RAID, which organizes the RAID storage space in units of *stripes*. Each stripe contains multiple *chunks* that span across all drives (one chunk per drive), where each chunk contains a fixed number of contiguous blocks. A  $(k + m)$ -RAID array forms a stripe with  $k + m$  chunks by encoding a set of  $k$  data chunks into  $m$  parity chunks, such that any  $k$  out of the  $k + m$  chunks of the same stripe can decode the  $k$  data chunks. It distributes the  $k + m$  chunks of each stripe across  $k + m$  drives, so as to provide fault tolerance against any  $m$  failed drives. To make data repair efficient, RAID performs *static mapping*, which aligns each data or parity chunk of the same stripe at the same offset of a drive. Thus, when recovering any lost chunk, the RAID controller can deterministically retrieve  $k$  available chunks of the same stripe at the same offset from other drives for decoding.

Traditional RAID is designed for HDDs [60], which adopt in-place updates to overwrite blocks. In contrast, SSDs adopt out-of-place updates. Small random writes to SSDs are shown to trigger frequent device-level garbage collection that degrades both I/O performance and flash endurance [24, 39, 57]. Parity-based RAID is even more vulnerable to small random writes, which trigger parity updates that further aggravate performance and endurance degradations. Thus, some studies [25, 28, 34, 41] propose Log-RAID, which applies the log-structured file system design [64] to SSD RAID by issuing sequential host-level writes.

Log-RAID manages stripes in append-only *segments*. Each segment holds a number of stripes (up to some pre-specified capacity) and is mapped to  $k + m$  fixed-size contiguous areas that reside in  $k + m$  drives (one contiguous area per drive), so as to provide fault tolerance against any  $m$  failed drives. A segment is *open*

if it does not reach its capacity and hence can accept new writes. Log-RAID aggregates newly written chunks as new stripes. It writes the new  $k + m$  chunks of each stripe to the same offset of the  $k + m$  contiguous areas in an append-only manner, such that  $k + m$  chunks of the same stripe are aligned at the same offset of the  $k + m$  contiguous areas (i.e., static mapping). If an open segment reaches its full capacity, Log-RAID seals it into a *sealed* segment, and creates a new open segment from the free contiguous areas in the underlying drives.

By writing blocks as new stripes in an append-only manner, Log-RAID needs to perform garbage collection to reclaim the space from stale blocks. When garbage collection is triggered (say, when the available space drops below some threshold), Log-RAID selects a sealed segment by some policy (e.g., using a greedy algorithm to select the one with the most fraction of stale blocks), rewrites all non-stale blocks into a new open segment, and releases the space of the selected sealed segment for reuse.

Unlike traditional RAID, Log-RAID necessitates dedicated in-memory data structures for stripe management. Specifically, it keeps a *segment table* to map each segment to its corresponding  $k + m$  contiguous areas. It also keeps an *address table* to map each block address (identified by the application) to the corresponding segment, drive, and offset within the contiguous areas. To repair a lost block, Log-RAID first identifies the segment and drive in which the lost block resides from the address table. It then identifies the contiguous areas of the other drives for the segment from the segment table. It retrieves  $k$  available chunks at the same offset in other contiguous areas to decode the lost chunk (as in the static mapping in traditional RAID), and finally recovers the lost block.

Log-RAID is a natural fit for ZNS SSDs by mapping each contiguous area of a drive to a zone, which organizes writes in an append-only manner. However, applying Zone Append in Log-RAID is non-trivial. Since Zone Append offloads address management to ZNS SSDs, the chunks of the same stripe may now be written to different offsets within the zones. To repair any lost block, we can no longer directly retrieve the available blocks from the same offset of other zones based on static mapping; instead, we need to keep track of the offsets of the chunks of the same stripe. How to efficiently manage chunk locations when Zone Append is used in Log-RAID for ZNS SSDs is an important design issue.

### 3 ZapRAID Design

ZapRAID is an extended Log-RAID design for ZNS SSD arrays with three key design goals: (i) *high performance*, i.e., ZapRAID achieves high throughput and low latency via a combination of Zone Append and Zone Write; (ii) *lightweight stripe management*, i.e., ZapRAID keeps both low memory usage for index structures and low storage overhead for metadata persistence, while supporting fast metadata queries for locating the chunks of a stripe; and (iii) *reliability*, i.e., ZapRAID protects data and metadata against failures.

ZapRAID achieves the above goals with two main designs. The first design is a *group-based data layout*. Specifically, when ZapRAID uses Zone Append for intra-zone parallelism, it maintains a coarse-grained ordering of stripes by organizing stripes in *stripe groups*, such that it issues Zone Append for the stripes on a per-group basis, so as to efficiently manage stripes for each stripe group instead of in a system-wide manner. It further enforces reliability by maintaining consistency for stripes and index structures during crash recovery. The second design is *hybrid data management*. ZapRAID serves the write requests of small and large sizes using different segments, such that a segment is configured with a small (resp. large) chunk size to serve small (resp. large) writes. This allows ZapRAID to serve small writes with low latencies and maintain high overall write throughput. Also, by managing segments in a hybrid manner, ZapRAID can further apply Zone Append and Zone Write for different segments to achieve intra-zone and inter-zone parallelism, respectively.

#### 3.1 Design Overview

**Architecture.** We first introduce the architecture of ZapRAID and show how it augments Log-RAID on an array of multiple ZNS SSDs, as shown in Figure 3. ZapRAID exposes a block-level *volume* that supports



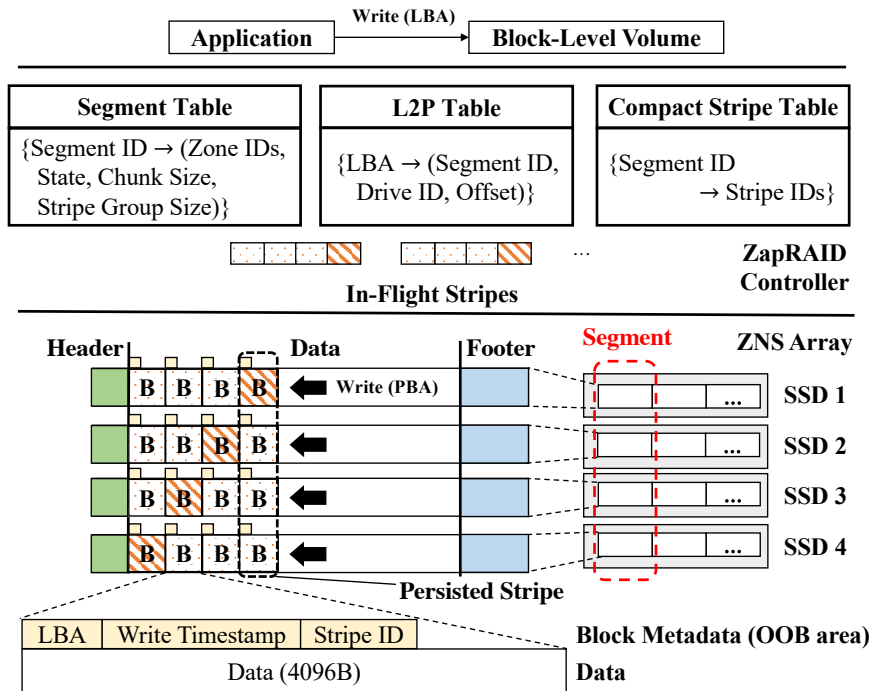


Figure 3: ZapRAID architecture. Here, we show a (3+1)-RAID-5 array and the layout of a segment of four zones, where the parity chunks are rotated across the drives.

random reads/writes. We assume that the block size is 4 KiB. A user application can issue reads/writes of an arbitrary number of blocks, each of which is identified by a logical block address (LBA). Each drive corresponds to a ZNS SSD, and ZapRAID maps each contiguous area of a drive under Log-RAID to a zone, which only allows sequential writes. Let  $Z$  be the total number of zones in a drive, so there are  $Z$  segments in a ZNS SSD array. For example, a 4-TiB ZN540 ZNS SSD [13] configures  $Z = 3,690$  zones. Each of the drives, segments, zones, and stripes is associated with an identifier (ID).

**Segment organization.** Each segment corresponds to  $k + m$  zones in  $k + m$  drives. In ZapRAID, each segment comprises three regions that span across  $k + m$  drives: the *header region* and the *footer region* for keeping metadata for crash consistency (§3.4), and the *data region* for storing data and parity chunks. Specifically, the header region stores the zone IDs of all zones from the  $k + m$  drives in the segment, the chunk size, the stripe group size (defined in §3.2), and the RAID scheme (e.g., RAID-5/RAID-6,  $k$ , and  $m$ ). The footer region keeps the *block metadata*, including the LBA, write timestamp, and stripe ID of each block in the data region.

All three regions have pre-specified sizes. The header region contains exactly one stripe of  $k + m$  chunks, each of which resides at the beginning of a zone. The data region contains a fixed number of stripes, denoted by  $S$ , following the header region. For each segment, each chunk contains a fixed number of blocks, denoted by  $C$ , so the number of blocks in the data region is  $S \cdot C$ . Suppose that the LBA size is 8 bytes, the write timestamp size is 8 bytes, the stripe ID size is 4 bytes, and the block size is 4 KiB. Thus, each block in the footer region can store the block metadata of  $\lfloor \frac{4096}{20} \rfloor = 204$  blocks, so the footer region occupies  $\lceil \frac{S \cdot C}{204} \rceil$  blocks following the data region. For example, the size of a zone in a ZN540 ZNS SSD [13] is 1,077 MiB (or equivalently, 275,712 blocks). If the chunk size is 4 KiB (i.e.,  $C = 1$ ), then the header, data, and footer regions occupy 1 block, 274,366 blocks, and 1,345 blocks in a zone, respectively.

When ZapRAID creates a new open segment across  $k + m$  drives, it first writes the header region. It then writes the stripes to the data region. Depending on the RAID scheme, the parity chunks of all stripes may reside in a fixed drive (for RAID-4) or be rotated across the drives (for RAID-5 and RAID-6) (e.g., see the

RAID-5 example in Figure 3). When the data region reaches its pre-specified size, ZapRAID writes the block metadata of all blocks in the segment to the footer region. Finally, it seals the segment.

**Block metadata.** ZapRAID stores the block metadata for each block in the out-of-band area of the corresponding flash page (§2.1) for persistence. Each block in a data chunk has its LBA, write timestamp, and stripe ID as its block metadata. ZapRAID provides fault tolerance for the block metadata: for LBAs and write timestamps, ZapRAID generates parity-based redundancy for them from all blocks of the data chunks in the same stripe and stores the parity results in the block metadata of the blocks of the parity chunks, while for stripe IDs, ZapRAID replicates them into all the data and parity chunks in the same stripe.

Recall that the footer region also stores the block metadata (i.e., the LBA, write timestamp, and stripe ID) for all blocks in the segment, so ZapRAID keeps two copies of block metadata (i.e., in the out-of-band area of each flash page and the footer region). We argue that both copies are necessary and serve different purposes: the block metadata in the out-of-band area associated with each block provides persistence for block writes, while the block metadata in the footer region provides fast crash recovery (§3.4).

**In-memory items.** ZapRAID keeps a number of in-memory *in-flight stripes* for newly written blocks. Each in-flight stripe is kept in memory until all of its  $k$  data chunks and  $m$  parity chunks are formed and persisted. To maintain durability, ZapRAID acknowledges the writes of an in-flight stripe only after the whole in-flight stripe is persisted (note that acknowledging the write of each block can lead to data loss if a drive storing an acknowledged block fails but the parity chunks are yet generated).

ZapRAID also maintains three in-memory index structures: (i) the *segment table*, which maps each segment ID to its corresponding  $k + m$  zones (identified by the zone IDs in the respective  $k + m$  drives), segment state, chunk size, and stripe group size; (ii) the *logical-to-physical (L2P) table*, which maps the LBA of each block issued by an application to the *physical block address (PBA)* (i.e., the segment ID, the drive ID, and the offset in the respective zone); and (iii) the *compact stripe table*, which maps each segment ID to the stripe IDs of all chunks in the segment. Both the segment table and L2P table are similarly found in Log-RAID. The compact stripe table is newly introduced to ZapRAID since Zone Append can make the chunks of the same stripe reside at different offsets across the drives (§2.3). We show how the compact stripe table is designed and how we reduce its size via the group-based data layout in §3.2. Note that ZapRAID ensures fault tolerance for the index structures by persisting the segment-to-zones mappings in the segment table into the header region of each segment and persisting the LBAs, write timestamps, and stripe IDs as block metadata into the out-of-band area associated with each block.

**Offloading L2P table entries to ZNS SSDs.** The L2P table incurs large memory footprints if it keeps all entries in memory. For example, our current implementation supports a RAID array of four 4-TiB ZN540 ZNS SSDs (i.e., a total capacity of 16 TiB) and uses a 4-byte L2P entry for each 4-KiB block. Thus, the total memory size of the L2P table is 16 GiB. Such large L2P table footprints are common in all Log-RAID designs [25, 28, 34, 41]. Some Log-RAID designs keep part of the L2P table entries on disk to mitigate the memory overhead [25, 28].

ZapRAID by default keeps the whole L2P table in memory, yet it also supports the offloading of part of the L2P table entries to ZNS SSDs. It uses the CLOCK algorithm [29] to evict the non-recently used L2P entries to SSDs. Specifically, it divides the L2P table entries into multiple groups, each of which has 1,024 contiguous entries that can be fit into a 4-KiB block (assuming that each entry is of size four bytes). It maintains an in-memory bitmap, in which each bit tracks if the corresponding entry group has been accessed, and a pointer that references the entry group to be considered. It sets the tracked bit to one if any entry in the corresponding entry group has been accessed. Suppose that the L2P table size reaches the memory size limit. ZapRAID then searches for an entry group to evict, starting from the one referenced by the pointer. If the tracked bit of an entry group is one, ZapRAID resets the tracked bit to zero, moves the pointer to the next entry group, and continues the search; otherwise, if the tracked bit of the entry group is zero, ZapRAID selects the entry group to evict, moves the pointer to the next entry group, and stops the search.



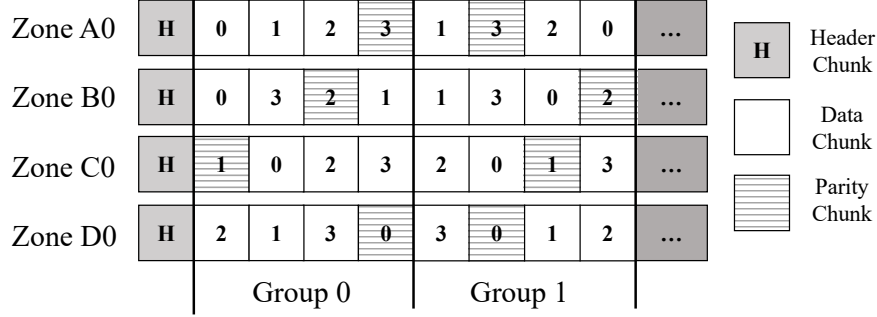


Figure 4: Group-based data layout of a (3+1)-RAID-5 array, where  $G = 4$ . Each chunk is labeled with its stripe ID in the group, while the chunks with the same stripe ID in the same stripe group form a stripe.

ZapRAID maps the entry group into a 4-KiB *mapping block*. It writes the mapping block together with other user-written blocks, so as to avoid consuming additional open zone resources. It maintains a separate in-memory mapping table to record the PBA of each on-SSD mapping block. Note that the size of the in-memory mapping table is much smaller as each of its entries can track 1,024 L2P table entries (e.g., in our case, the size of the in-memory mapping table is 16 MiB for a RAID array of four 4-TiB ZN540 ZNS SSDs). It also keeps the LBA of the first entry of the mapping block in the LBA field of the block metadata for crash recovery (§3.4).

It is important to distinguish between the mapping blocks and user-written blocks during the crash recovery of the L2P table (§3.4). Thus, ZapRAID marks the least significant bit of the LBA field in the block metadata as one for a mapping block. It is feasible since the LBA field of a user-written block is currently aligned at multiples of 4 KiB and its 12 least significant bits are all zeros.

### 3.2 Group-Based Data Layout

ZapRAID exploits Zone Append for intra-zone parallelism, yet it needs to track the offsets of the chunks of the same stripe under Zone Append. Thus, ZapRAID adopts a *group-based data layout* to organize the stripes of a segment with a coarse-grained ordering for low stripe management overhead. Specifically, for a segment where Zone Append is issued, ZapRAID partitions a fixed number of contiguous stripes, denoted by  $G$ , within the segment into *stripe groups*, where  $G$  is a configurable parameter. For each stripe group, it first issues Zone Append for all stripes within the same stripe group, such that all chunks of each stripe must reside in the same stripe group but may reside in different offsets within the stripe group. Each stripe group is in the same offset ranges across all zones, so the offset ranges of its blocks can be identified via static mapping. Most importantly, ZapRAID only needs to track a small number of stripes within each stripe group, so it can use fewer bits for the metadata information to save significant memory usage. Note that we treat  $G = 1$  as a special case in which each stripe group issues Zone Write instead of Zone Append for all stripes.

Figure 4 depicts one segment with  $G = 4$  stripes per stripe group in a (3+1)-RAID-5 array. Within the segment, the data region comprises a fixed number of stripe groups, each of which further comprises a fixed number of stripes. In general, the number of stripe groups in a segment is determined by both  $S$  (i.e., the number of stripes in the segment) and  $G$ . Each stripe in a stripe group is associated with a unique stripe ID, which can be viewed as a sequence number of when the stripe is generated. Due to Zone Append, the chunks of the same stripe may reside in different offsets, as shown in Figure 4.

ZapRAID tracks the stripe IDs of all stripe groups in the compact stripe table. Specifically, for each segment where Zone Append is issued, the compact stripe table stores a two-dimensional  $(k + m) \times S$  matrix, in which each entry stores the stripe ID of each chunk in the segment. In the matrix, the  $i$ -th row corresponds to the zone of the  $i$ -th drive of the RAID array, and the  $j$ -th column corresponds to the  $j$ -th chunk in the segment. Given the LBA of a block, ZapRAID identifies the PBA from the L2P table, calculates the physical location of the chunk based on the PBA, and retrieves the stripe ID from the compact stripe table.

**Trade-off analysis.** The choice of  $G$  determines the trade-off between the degree of intra-zone parallelism via Zone Append and the stripe management overhead. A larger  $G$  allows more stripes to be issued via Zone Append in parallel, but it also increases the stripe management overhead. In the extremes, when  $G = 1$ , all stripes are issued via Zone Write; when  $G = S$ , there is only one stripe group in each segment (i.e., the group-based data layout is disabled for Zone Append).

We analyze the stripe management overhead in two aspects: the maximum memory usage and query overhead of the compact stripe table. For the maximum memory usage, each stripe ID is represented in  $\lceil \log_2 G \rceil$  bits. Thus, the maximum memory size of the compact stripe table is  $(k + m) \cdot S \cdot Z \lceil \log_2 G \rceil$  bits. For the query overhead, we measure the number of entries in the compact stripe table being accessed during a degraded read (§3.5), which is  $k \cdot G$ . With a proper choice of  $G$ , ZapRAID can achieve high write performance via Zone Append, while limiting the memory usage and query overhead of the compact stripe table. For example, we consider a (3+1)-RAID-5 array of four 4-TiB ZN540 ZNS SSDs and a chunk size of 4 KiB, where  $S = 274,160$  and  $Z = 3,690$  (§3.1). We set  $G = 256$ , our default setting in the implementation. The maximum memory size of the compact stripe table is 3.77 GiB; the query overhead is to access 768 entries, which translates to only around  $1 \mu s$  from our evaluation.

In contrast, the case of  $G = S$  translates to 19 bits per stripe ID and hence 8.95 GiB of memory for the compact stripe table. Also, its high query overhead significantly increases the degraded read latency (§5.2).

Our prototype rounds up the length of a stripe ID to the nearest byte and represents a stripe ID in  $\lceil \lceil \log_2 G \rceil / 8 \rceil$  bytes. Representing stripe IDs in units of bytes, instead of bits, simplifies data alignment without compromising our conclusion.

### 3.3 Hybrid Data Management

If an application can write data to multiple open zones in a ZNS SSD, ZapRAID can create multiple open segments across the open zones and combine Zone Append and Zone Write to achieve both intra-zone and inter-zone parallelism. Recall that Zone Write achieves higher write throughput than Zone Append under multiple open zones (i.e., higher inter-zone parallelism) and maintains high write throughput for large writes. Unlike Zone Append, Zone Write can maintain static mappings in Log-RAID and hence does not require the compact stripe table for stripe management. Thus, the core idea of ZapRAID is to reserve an open segment for small writes to exploit intra-zone parallelism based on Zone Append, while favoring Zone Write for large writes to exploit inter-zone parallelism.

To this end, ZapRAID adopts *hybrid data management*. It classifies the open segments into two types, namely *small-chunk segments* and *large-chunk segments*, to serve small and large writes, respectively. It applies Zone Append to one of the small-chunk segments based on the group-based data layout (§3.2), and applies Zone Write to the remaining small-chunk segments and all large-chunk segments.

**Segment management.** Figure 5 shows how ZapRAID manages multiple open small-chunk and large-chunk segments. Let  $N_s$  and  $N_l$  be the numbers of open small-chunk segments and open large-chunk segments, respectively (i.e., the total number of open zones in each ZNS SSD is  $N_s + N_l$ ). Also, let  $C_s$  and  $C_l$  be the sizes of a small chunk and a large chunk, respectively. All of  $N_s$ ,  $N_l$ ,  $C_s$ , and  $C_l$  are configurable parameters. For example, we can set  $C_s = 8$  KiB for the small chunk size and  $C_l = 16$  KiB for the large chunk size. We can also set  $N_s > 1$  and  $N_l > 1$  to accommodate the real-world workloads that are mixed with small and large writes (e.g., in cloud block storage [51]).

To determine if a write request is issued to a small-chunk or large-chunk segment, ZapRAID examines whether the size of the write request is smaller than  $C_l$ . If so, ZapRAID assigns the write request to a small-chunk segment; otherwise, it assigns the write request to a large-chunk segment. Also, during garbage collection (§4), the rewritten data is written to a large-chunk segment to mitigate I/O overhead.

**Choosing segments from in-flight stripes.** ZapRAID maintains in-flight stripes separately for small and large chunks. It assigns new written blocks to an in-flight stripe for either small or large chunks based on the

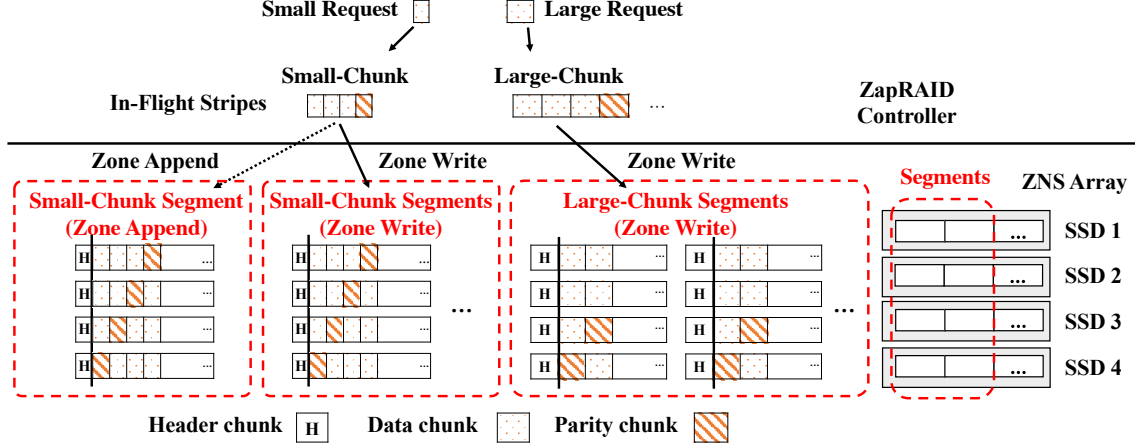


Figure 5: Hybrid data management of a (3+1)-RAID-5 array with multiple open segments.

write request size (see above). When an in-flight stripe is formed, ZapRAID forwards the in-flight stripe to an open segment. Specifically, if the in-flight stripe holds large chunks, ZapRAID selects an open large-chunk segment (out of the  $N_l$ ) in a round-robin manner and writes the in-flight stripe to the selected segment via Zone Write. On the other hand, if the in-flight stripe holds small chunks, ZapRAID further considers two cases of  $N_s$ . If  $N_s = 1$ , it writes the in-flight stripe to the only open small-chunk segment via Zone Append. If  $N_s > 1$ , it selects an idle small-chunk segment (out of the  $N_s - 1$ ) in a round-robin manner and writes the in-flight stripe to the selected segment via Zone Write; however, if there is no idle small-chunk segment, ZapRAID selects the only small-chunk segment reserved for Zone Append and writes the in-flight stripe to the segment via Zone Append.

### 3.4 Crash Consistency

We show how ZapRAID maintains consistency after a system crash, in the order of recovering the consistent states of the segment table, stripes, L2P table, and compact stripe table (for Zone Append only).

**Recovery of the segment table.** ZapRAID first identifies the open and sealed segments in the system, so as to recover the segment table. Specifically, for each ZNS SSD, ZapRAID checks the states of all zones. If a zone is open or full, ZapRAID retrieves its first block, which belongs to the header region of a segment (§3.1). ZapRAID then reconstructs the segment table with the information of all possible segments based on the first blocks of all open and full zones.

ZapRAID further checks the validity of each segment. There are two possible cases:

- Case 1: the write pointers of all the zones in the segment are equal to or exceed the header region size. In this case, the segment is a valid segment.
- Case 2: the write pointers of some zones are zero. This happens when ZapRAID either has created the segment but has only issued writes to some zones, or has reclaimed the segment and has reset some zones. In either case, ZapRAID simply resets all zones and discards the segment.

For each valid segment, if the write pointers of all zones are equal to the zone capacity, it is a sealed segment; otherwise, it is an open segment. In particular, if the data region of an open segment reaches its maximum size but the segment is not yet sealed, ZapRAID will retrieve all blocks from the data region to reconstruct the block metadata. It then writes the footer region and seals the segment.

**Recovery of stripes.** ZapRAID needs to recover the consistent states of all stripes by ensuring that each stripe has persisted  $k$  data chunks and  $m$  parity chunks. Specifically, ZapRAID examines whether each in-flight stripe has all its  $k + m$  chunks persisted. Under the group-based data layout (note that  $G = 1$  means the use of Zone Write), ZapRAID ensures that only the stripes in the latest stripe group of an open segment can be the in-flight stripes. It retrieves all the chunks in the latest stripe group and examines the stripe IDs in

their block metadata. ZapRAID discards all partially persisted stripes with fewer than  $k + m$  persisted chunks. Recall that ZapRAID acknowledges the writes of an in-flight stripe only after persisting all  $k + m$  chunks of the stripe (§3.1), so discarding the partially persisted stripes does not incur data loss. Since ZNS SSDs cannot perform in-place writes to replace the partially persisted chunks, ZapRAID rewrites all fully persisted stripes in the segment to a new segment and reclaims the old segment.

**Recovery of the L2P table and the compact stripe table.** After ensuring the consistency of all stripes, ZapRAID recovers the L2P table and the compact stripe table (the latter is for segments that use Zone Append). Recall that for each sealed segment, ZapRAID stores the block metadata (i.e., the LBA, write timestamp, and stripe ID) of all blocks in the segment in the footer region, while for each open segment, ZapRAID also stores the block metadata in the out-of-band area associated with each block. To recover the L2P table and the compact stripe table, ZapRAID first retrieves the footer regions of all sealed segments and the data regions of all open segments. It examines all the block metadata and reconstructs the LBA-to-PBA mappings in the L2P table and the stripe IDs in the compact stripe table. For the L2P table, if multiple blocks have the same LBAs, ZapRAID keeps the one with the latest write timestamp.

To recover the L2P table when it is offloaded to ZNS SSDs (§3.1), ZapRAID extends the above recovery steps for the L2P table as follows. During crash recovery, ZapRAID examines the block metadata of each block and determines if the block is a user-written block or a mapping block (based on the least significant bit of the LBA). If the block is a user-written block, ZapRAID reconstructs the LBA-to-PBA mapping in the L2P table as described above; if the block is a mapping block, since the LBA in the block metadata refers to the LBA of its first L2P table entry, ZapRAID records the LBA-to-PBA mapping of the mapping block in a temporary in-memory table (if there exist multiple mapping blocks with the same LBA, only the one with the latest write timestamp is kept). ZapRAID then examines the reconstructed L2P table and removes any entry group that has a mapping block whose latest write timestamp is no smaller than that of any L2P table entry in the entry group (i.e., the mapping block has the latest L2P entries). Finally, ZapRAID reconstructs the in-memory bitmap and the in-memory mapping table for the on-SSD mapping blocks.

### 3.5 Complete Workflows

We explain the complete workflows of writes, normal reads, degraded reads, and full-drive recovery of ZapRAID.

**Writes.** To issue a write request (identified by an LBA), ZapRAID checks whether the write request is a small or large one based on the write size, and writes accordingly the data to an in-flight stripe in memory for small chunks or large chunks (§3.3). If a new data chunk is available, ZapRAID issues a Zone Append or Zone Write command to write the chunk and block metadata based on the chunk's position in the stripe and the RAID scheme. When an in-flight stripe contains  $k$  data chunks, ZapRAID encodes them to generate  $m$  parity chunks and their block metadata. It then issues a Zone Append or Zone Write command for each of the parity chunks to its respective zone. Only after all the chunks of a stripe are persisted, ZapRAID updates the L2P table with the corresponding LBAs and PBAs as well as acknowledges the completion of the write requests; the in-flight stripe is also released from memory. If there are insufficient data chunks to form a full stripe after a small timeout since the stripe is created (currently set as  $100 \mu s$  in our prototype, which is close to the median write latency of 16-KiB chunks (§5.2)), ZapRAID fills the remaining stripe with zero blocks and invalid LBAs.

ZapRAID needs to handle two specific cases during writes. First, if the written stripe is the first stripe in a stripe group, ZapRAID should ensure that all the stripes in the previous stripe group are completely persisted; if the stripe group is also the first one of a segment, the header region of the segment should be completely persisted. Second, if the stripe group is also the last one in the data region, ZapRAID writes the block metadata of all blocks in the segment into the footer region. It also creates a new open segment and writes the segment information to the header region, so that the new open segment can serve new writes.

**Reads.** To read a block (identified by an LBA), ZapRAID queries the L2P table for its PBA (i.e., the segment ID, the drive ID, and the offset in the respective zone). Given the segment ID and drive ID, ZapRAID locates the zone from the segment table and retrieves the block from the specified offset of the zone.

**Degraded reads.** Suppose that ZapRAID performs a degraded read to a lost block. Based on the PBA of the requested block, ZapRAID checks whether the segment applies Zone Append or Zone Write. For Zone Append, ZapRAID queries the compact stripe table to find out the stripe ID of the requested block. Since all available chunks of the same stripe must reside in the same stripe group under the group-based data layout, ZapRAID searches for the offsets of the  $k$  available chunks in the stripe group from the compact stripe table; note that the search is efficient due to the limited group size (§5.2). It then reads the available chunks from the other zones, decodes the lost chunk, and retrieves the requested block. For Zone Write, ZapRAID reads the available chunks from other zones at the same offset to recover the chunk and hence the requested block.

**Full-drive recovery.** When a drive fails, ZapRAID recovers the lost data into a new drive. It first identifies the segments that contain the lost zones in the failed drive by examining the segment-to-zones mappings in the header regions of all stored segments. For each lost zone, ZapRAID retrieves all available zones in the same segment from other available drives into memory, and reconstructs the stripe groups that cover the lost zone. It examines the block metadata of the available chunks and identifies the chunks from the same stripe. It then decodes the lost chunks for each stripe independently. After repairing all the stripes in a segment, ZapRAID writes the recovered zone to the new drive.

## 4 Implementation

We prototype ZapRAID as a user-space block device module in C++ with around 9.7 KLoC based on the Storage Performance Development Kit (SPDK) [8], which provides a set of C libraries for high-performance I/Os. Our prototype decomposes request handling into seven tasks, namely *dispatch*, *device I/O*, *completion*, *indexing*, *encoding*, *segment state tracking*, and *cleaning*.

**Dispatch task.** The dispatch task is responsible for processing write requests and updating the header and footer regions. For write requests, the dispatch task assigns the written blocks to segments and submits the I/O events for the written blocks to the device I/O task. If a block fills a stripe in a segment, the dispatch task also sends a parity generation event to the encoding task, which computes parity chunks and submits the I/O events for the parity chunks to the device I/O task. Recall that the writes of the first stripe of a stripe group need to wait for the previous stripe group to be completely persisted (§3.5); in this case, the dispatch task will suspend the request and retry later until the segment state is updated by the segment state tracking task (see below).

For read requests, the dispatch task first sends an L2P table query event to the indexing task, which asynchronously notifies the dispatch task to issue the read requests upon retrieving PBAs for the requested blocks. The dispatch task then submits the I/O events to the device I/O task to retrieve the requested blocks from storage.

**Device I/O task.** The device I/O task is responsible for submitting block I/O requests to the drives. It receives I/O events from other tasks and submits the corresponding I/O requests to the drives. It is also responsible for checking the completion of each block I/O request from the drives and notifying the completion task (see below).

**Completion task.** The completion task tracks the completion state of each I/O request. It receives the notification of completion of a block I/O event from the device I/O task. If all the I/O events for a request are completed, the completion task notifies the upper-layer application. The application can register a callback function for each request. For write requests, the completion task first sends an L2P table update event to the indexing task, which triggers the callback function after updating the L2P table. For read requests, the completion task directly triggers the callback function.



If a block is lost or unavailable during a read request, the completion task issues a degraded read to the block. It examines the compact stripe table to identify the PBAs of the available blocks of the same stripe. It then sends the I/O events to the device I/O task to retrieve the available blocks. After all available blocks are retrieved, the completion task decodes the lost block and marks the read request as completed.

**Indexing task.** The indexing task is responsible for the L2P table maintenance. It receives L2P table query events from the dispatch task and returns the PBAs of requested blocks for read requests. It also receives L2P table update events from the completion task and the cleaning task. If an L2P table update event is from the completion task, it acknowledges the write requests to the application on behalf of the completion task after the L2P table is updated. In addition, the indexing task is responsible for the offloading of L2P table entries if the L2P table size reaches the memory size limit (§3.1).

**Encoding task.** The encoding task is responsible for parity generation. When it receives a notification from the dispatch task that a stripe has  $k$  data chunks, it generates parity chunks. It then submits I/O events for the parity chunks to the device I/O task. We handle parity chunk generation outside of the normal I/O requests to mitigate interference on normal I/O requests.

**Segment state tracking task.** The segment state tracking task examines whether the system needs to write the header region or the footer region of a segment, or whether it has persisted all stripes in a stripe group (§3.5). It periodically (every  $1 \mu\text{s}$  in our prototype) examines the segment states. When the segment state needs to be updated, it also sends the corresponding I/O events to the device I/O task.

**Cleaning task.** The cleaning task is responsible for reclaiming the space of stale blocks. It periodically (every  $1 \mu\text{s}$  in our prototype) examines the available space and triggers garbage collection if the available space drops below a threshold. It selects one sealed segment that has the most stale blocks and rewrites its valid blocks by submitting block I/O events to the device I/O task. Currently, our prototype tracks the validity of all blocks (including both user-written blocks and mapping blocks) for each segment via an in-memory bitmap (whose content can also be derived from both the L2P table for user-written blocks and the LBA-to-PBA table for mapping blocks) and collects the LBAs of valid blocks from the block metadata. When all rewrites are completed, the dispatch task sends the LBAs of all rewritten blocks, along with their old and new PBAs, to the indexing task for updating the L2P table.

**Thread assignment.** We assign the seven tasks to SPDK threads, which exchange events via `spdk_thread_send_msg` and event polling. Currently, we co-locate the dispatch task, completion task, segment state tracking task, and cleaning task in the main SPDK thread. We also assign the device I/O task, indexing task, and encoding task separately to three different SPDK threads for parallelism, such that our prototype can saturate the write bandwidth of our testbed.

## 5 Evaluation

We evaluate ZapRAID through microbenchmarks, trace-driven experiments, and real-application experiments.

### 5.1 Methodology

We use a server that runs Ubuntu 22.04 LTS with Linux kernel 5.15. It has a 16-core Intel Xeon Silver 4215 2.5 GHz CPU and 96 GiB DRAM. It is attached with four 4-TiB Western Digital Ultrastar DC ZN540 ZNS SSDs [13]. Each SSD has 3,690 zones, with a zone capacity of 1,077 MiB each. We format each SSD with a logical block size of 4 KiB and a block metadata size (in the out-of-band area) of 64 bytes. By default, we focus on (3+1)-RAID-5, yet we also consider other RAID schemes and a larger-scale emulated ZNS SSD array based on FEMU [49] (§5.2).

We mainly consider two baselines: *ZoneWrite-Only* and *ZoneAppend-Only*. *ZoneWrite-Only* always uses Zone Write for all writes (i.e.,  $G = 1$ ), while *ZoneAppend-Only* always uses Zone Append for all writes and does not employ a group-based data layout (i.e.,  $G = S$ ) (§3.2). We also compare ZapRAID with a simplified

version of RAIZN [42], which we implement as a user-space block device based on SPDK (referred to as *RAIZN-SPDK*) for single-segment writes. Note that the open-source version of RAIZN [5] is currently implemented as a kernel device mapper, so we re-implement RAIZN as a user-space block device for fair comparisons with ZapRAID.

For each experiment, we report the average results over five runs and include the 95% confidence intervals based on Student’s t-distribution (note that some confidence intervals may be invisible due to negligible deviations across runs).

## 5.2 Microbenchmarks

We examine the performance of ZapRAID in writes, normal reads, degraded reads, crash recovery, and full-drive recovery. In our default setup, we configure the logical space capacity as 200 GiB and set  $G = 256$  for ZapRAID in its group-based data layout. We focus on one open segment with various chunk sizes. We do not consider garbage collection (by limiting the total write size to be less than the logical space capacity) and keep the L2P table entirely in memory. Note that we also consider various group sizes (Exp#3), crash recovery and full-drive recovery performance with different logical space capacities (Exp#5), multiple open segments (Exp#7), the overhead of garbage collection (Exp#8), and the overhead of L2P table offloading (Exp#9).

**Exp#1 (Write performance).** We first evaluate the write performance of ZapRAID on a single open segment. We use Flexible IO Tester (FIO) (v3.35) [1] to generate a write-only workload that issues random writes of 64 GiB of data. We set the queue depth as 64 to saturate the system parallelism (Exp#6). We compare ZapRAID with RAIZN-SPDK, ZoneWrite-Only, and ZoneAppend-Only.

First, we issue write requests of 4 KiB, 8 KiB, and 16 KiB, where the request size is the same as the chunk size. Figures 6(a)-6(c) show the throughput as well as the median and 95th-percentile latencies. Compared with ZoneWrite-Only, for 4-KiB and 8-KiB writes, ZapRAID achieves 72.8% and 77.2% higher write throughput, 43.8% and 44.5% lower median latency, and 36.4% and 34.1% lower 95th-percentile latency, respectively. This shows that ZapRAID improves the write performance by exploiting the intra-zone parallelism using Zone Append for small writes. On the other hand, for 16-KiB writes, ZapRAID has similar write throughput and median latency, but its 95th-percentile latency is  $3.80\times$  compared with that of ZoneWrite-Only. A possible reason is that Zone Append has high computational overhead in the ZNS SSD firmware, which incurs higher delays in processing individual Zone Append commands.

Note that in Figure 6(a), the throughput of 4-KiB writes under ZoneWrite-Only (910.8 MiB/s) is higher than that reported in our conference paper [67] (662.4 MiB/s). The reason is that we now optimize the implementation of ZoneWrite-Only by parallelizing the RAID operations (e.g., parity computations and stripe metadata updates) of the current stripe and the writes of the next stripe (as opposed to serially executing the operations). Now, the throughput is close to  $3\times$  the write throughput of Zone Write to an open zone (337.6 MiB/s in §2.1). This implies that the main bottleneck of ZoneWrite-Only lies in I/Os rather than computations.

Compared with ZoneAppend-Only, ZapRAID achieves similar throughput and latencies for all write sizes, even though ZapRAID needs to wait for the completion of all Zone Append commands in a stripe group before issuing the writes for the next stripe group. Note that ZapRAID has much less memory usage (§3.2) and much lower degraded read latency (Exp#3) than ZoneAppend-Only.

Compared with RAIZN-SPDK, all other three schemes show much higher performance on a single segment. The reasons are two-fold. First, RAIZN does not support Zone Append for intra-zone parallelism. Second, it uses partial parity updates to acknowledge individual write requests instead of issuing full-stripe writes as in the other three schemes. This limits the concurrency of write requests and hence the overall write performance.

We also issue write requests of a fixed size of 4 KiB, while varying the chunk size, to show the impact of the chunk size on write performance. Figures 6(d)-6(f) show the results. ZapRAID still maintains the

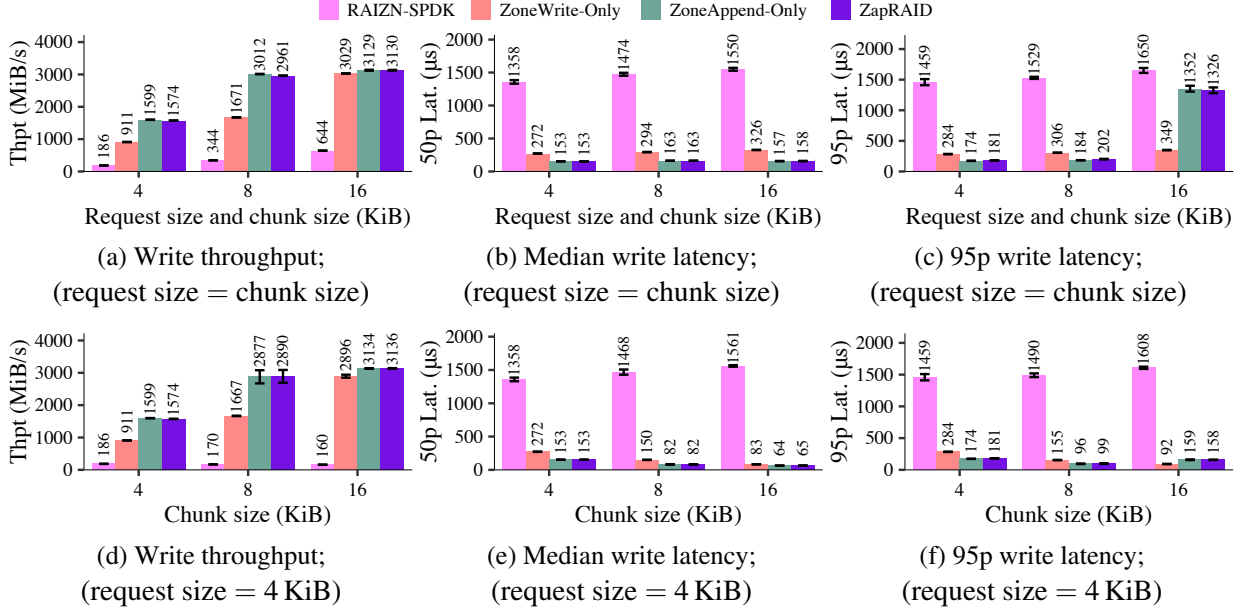


Figure 6: Exp#1 (Write performance on a single open segment). We show the results when the request size is equal to the chunk size (figures (a)-(c)) and when the request size is fixed as 4 KiB (figures (d)-(f)).

high throughput and low median latencies for various chunk sizes, but its 95th-percentile latency for 16-KiB chunks is 50.7% higher than that for 8-KiB chunks. Similar results also appear in ZoneAppend-Only. The result indicates that Zone Append is mainly beneficial for small writes. It also justifies why we choose Zone Write over Zone Append in hybrid data management (§3.3).

**Exp#2 (Normal and degraded read performance).** We compare the performance of both normal reads and degraded reads in Log-RAID and ZapRAID. We vary the chunk size and set the read size to be the same as the chunk size. For each chunk size, we first fill up the 200-GiB logical address space to ensure that every logical block being read is indeed physically stored. We then use FIO to generate a read-only workload that issues random reads to 16 GiB of data using the `randread` option in FIO. We set the queue depth as one, so as to focus on the performance of individual read requests and exclude the interference among requests. We consider three cases: normal reads (NR), degraded reads under the static mapping in Log-RAID (DR-Log-RAID) (§2.3), and degraded reads under the group-based data layout in ZapRAID (DR-ZapRAID). Note that both Log-RAID and ZapRAID have the same workflow for normal reads. To evaluate degraded reads, we fail a drive and issue reads to the lost blocks of the failed drive.

Figure 7 shows the throughput as well as the median and 95th-percentile latencies for different read sizes (i.e., chunk sizes). All three read operations have less than 6% difference. The degraded reads of both Log-RAID and ZapRAID have slightly worse performance than the normal reads, since both systems retrieve multiple available chunks in parallel for decoding. Also, ZapRAID achieves comparable performance to Log-RAID, which uses static mapping.

**Exp#3 (Impact of stripe group size).** We study the impact of the stripe group size  $G$  on the write and read performance in ZapRAID. We vary  $G$  from 4 to 4,096. For both writes and reads, we vary the chunk size and set the request size to be the same as the chunk size.

Figure 8 shows the write throughput and the median degraded read latency of ZapRAID versus  $G$ . The write throughput of ZapRAID increases with  $G$  for  $G \leq 256$  and remains stable for  $G \geq 256$  under 4-KiB and 8-KiB requests, while it remains almost unchanged under 16-KiB requests. The write throughput reaches 1,574.2 MiB/s and 2,961.2 MiB/s for  $G = 256$  under the chunk size of 4 KiB and 8 KiB ( $1.43\times$  and  $1.59\times$  the write throughput for  $G = 4$ ), respectively. Thus, ZapRAID can better exploit the intra-zone parallelism

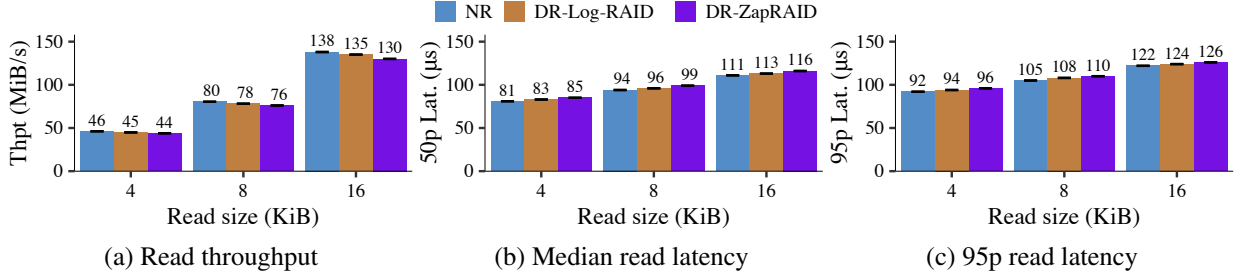


Figure 7: Exp#2 (Normal and degraded read performance). We consider normal reads (NR), degraded reads under static mapping in Log-RAID (DR-Log-RAID), and degraded reads under the group-based data layout in ZapRAID (DR-ZapRAID).

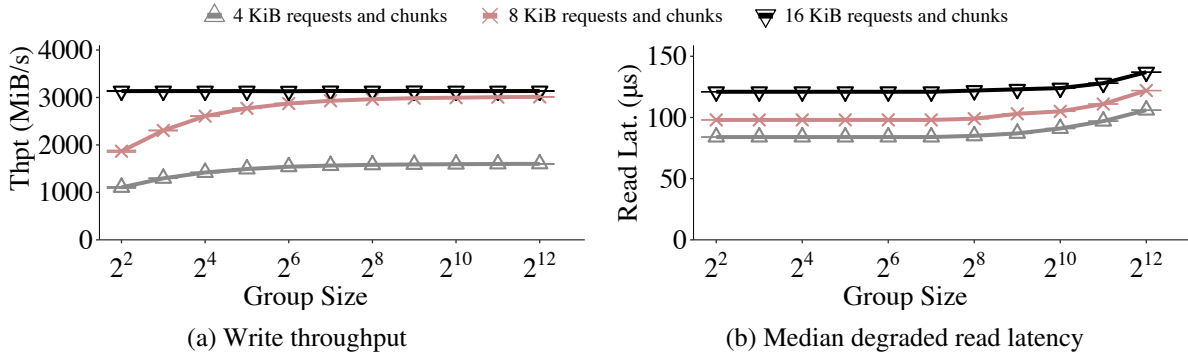


Figure 8: Exp#3 (Impact of stripe group size).

through Zone Append as  $G$  increases, but the parallelism saturates when  $G$  becomes sufficiently large. For 16-KiB chunks, the intra-zone parallelism brought by Zone Append is limited and already saturates when  $G$  is small. For the degraded read latency, when  $G$  is small, the query overhead of the compact stripe table is negligible (around 1  $\mu$ s based on our measurement). However, as  $G$  continues to increase, the query overhead becomes non-negligible. For example, the degraded read latency for  $G = 4,096$  increases by 13.2-24.7% compared with that for  $G = 256$ . In addition to I/O performance, a large  $G$  also increases the memory usage of the compact stripe table (§3.2). Thus, we choose  $G = 256$  as our default setting.

We also examine the degraded read latency of ZoneAppend-Only (not shown in the figure). We find that its median degraded latency is 1.84 ms (i.e., 21.6 $\times$  compared with ZapRAID for  $G = 256$ ). Thus, ZoneAppend-Only not only incurs high memory usage (§3.2), but also has poor degraded read performance due to its high query overhead to the compact stripe table.

**Exp#4 (Impact of RAID schemes).** ZapRAID supports various RAID schemes. We configure RAID-0, RAID-01, RAID-4, RAID-5, and RAID-6 on the four ZNS SSDs (e.g.,  $k = 2$  and  $m = 2$  in RAID-6). Here, we compare ZapRAID and ZoneWrite-Only. We fix the request size to be the same as the chunk size and vary the chunk size with a queue depth of 64.

Figure 9 depicts the results. ZapRAID increases the write throughput of ZoneWrite-Only by 71.5-72.1%, 75.8-76.4%, and 5.3-5.7% for 4-KiB, 8-KiB, and 16-KiB chunks, respectively. The difference in the write throughput among the RAID schemes is due to the different number of data chunks in each stripe (i.e., four, two, three, three, and two for RAID-0, RAID-01, RAID-4, RAID-5, and RAID-6, respectively). The results show that ZapRAID consistently increases the write throughput of ZoneWrite-Only under different RAID schemes.

**Exp#5 (Recovery performance).** We evaluate the recovery performance of ZapRAID in two aspects: recovery from a system crash (§3.4) and recovery from a full-drive failure (§3.5). We sequentially write data to ZapRAID configured with a fixed size of logical space (varying from 100 GiB to 1,000 GiB), mimic each

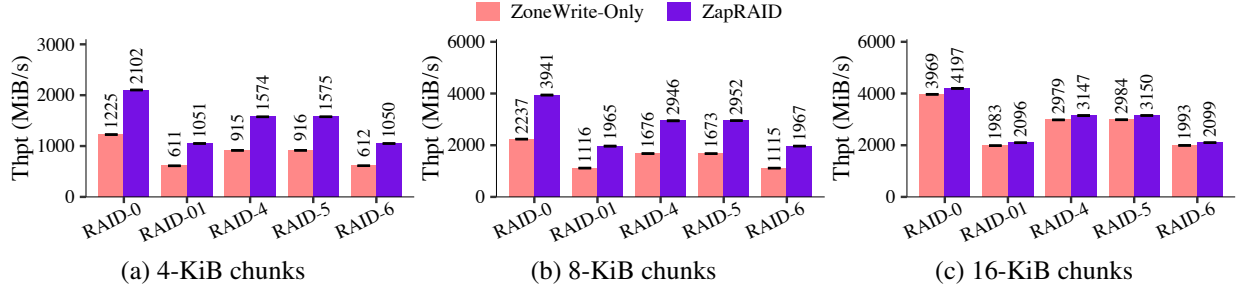


Figure 9: Exp#4 (Impact of RAID schemes).

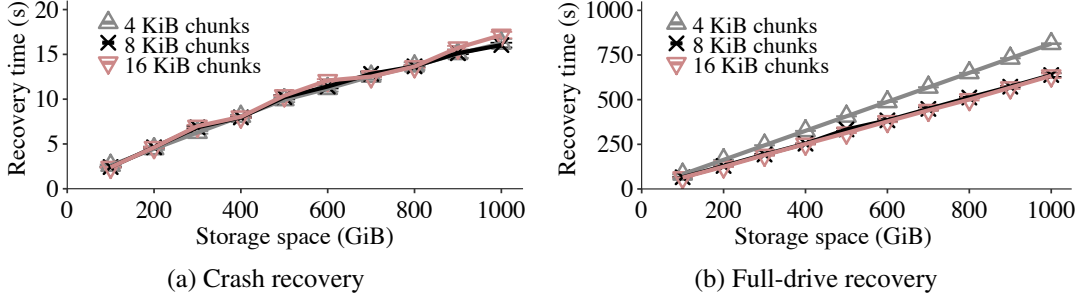


Figure 10: Exp#5 (Recovery performance).

type of failure, and repeat the recovery procedure for five runs.

We first evaluate the crash recovery time of ZapRAID. We crash ZapRAID and rebuild it from the currently stored data in the drives. We report the average recovery time (i.e., the time spent on performing all recovery operations in §3.4). Figure 10(a) depicts the results for different chunk sizes. For the 100-GiB storage space, ZapRAID takes 2.38-2.60 s to recover the system state. The recovery time increases linearly with the logical space size. The reason is that for larger logical space, ZapRAID needs to recover the system state from more sealed segments by reading their footer regions. For example, for the 1,000-GiB storage space, the recovery time increases to 15.92-16.22 s. Nevertheless, the recovery overhead is limited. For example, for 4-KiB chunks, we only need to pay an additional  $(16.22 - 2.60)/(10 - 1) = 1.51$  s for recovering the system state from each 100 GiB of additional logical space. Also, the crash recovery time remains almost the same for different chunk sizes, since most of the time is spent on reading the footer regions with a large read size, independent of the chunk size.

We next evaluate the full-drive recovery time of ZapRAID. We erase all data in one drive and recover the lost data in the same drive. We report the average recovery time as the total time spent on reading available data from existing drives, reconstructing the stripes, and writing the recovered data to the new drive. Figure 10(b) shows the results for different chunk sizes. The full-drive recovery time is proportional to the logical space size. For example, for 4-KiB chunks, ZapRAID takes 81.9 s and 813.2 s to recover the lost data for the 100-GiB and 1,000-GiB storage space, respectively. On average, for each 100-GiB storage space, ZapRAID spends  $813.2/10 = 81.3$  s to recover the lost data. Note that the recovery time is smaller for larger chunk sizes since ZapRAID can write recovered data with a larger write size. For example, for 8-KiB and 16-KiB chunks, the recovery time is reduced by 18.1-22.2% and 22.1-23.8% compared with 4-KiB chunks, respectively.

**Exp#6 (Scalability).** We examine the scalability of ZapRAID by evaluating its write performance under different values of queue depth and showing how it saturates the system parallelism with a high queue depth. We consider both real and FEMU-emulated [49] ZNS SSDs.

We first vary the queue depth in our testbed with the real ZNS SSDs. We use the write-only workload, vary the chunk size, and set the write size to be the same as the chunk size. We set the minimum queue depth



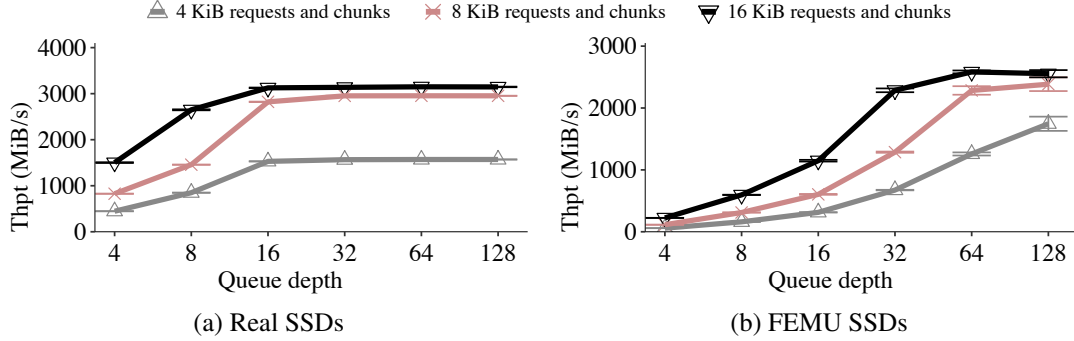


Figure 11: Exp#6 (Scalability).

as four to evaluate ZapRAID under concurrent writes.

Figure 11(a) depicts the results. ZapRAID increases the write throughput when the queue depth increases. It saturates the system parallelism when the queue depth is 16, in which the throughput gain is  $3.52\times$ ,  $3.57\times$ , and  $2.08\times$  compared with when the queue depth is four for 4-KiB, 8-KiB, and 16-KiB chunks, respectively. Note that we set the queue depth for all microbenchmark experiments as 64 to further increase the throughput for multiple open segments (Exp#7).

Our current testbed has limited parallelism as it only has four real ZNS SSDs. To examine the scalability of ZapRAID with a higher degree of parallelism, we have also built an emulated ZNS SSD array with FEMU [49]. We set up a (6+1)-RAID-5 array on seven FEMU SSDs, using  $4\times 128$ -GiB Intel Optane Persistent Memory Modules [2] in Memory Mode as the emulated persistent storage backend. Each FEMU SSD is configured with four channels with four chips each. Each chip has 64 flash blocks with 4,096 4-KiB flash pages each. Each zone spans 16 chips, meaning that I/Os can be issued to up to 16 chips in parallel. We configure the page write latency as  $140\ \mu\text{s}$  [50] and do not emulate write buffers in SSDs that can reduce write latency. The page write latency translates to the write throughput of 27.9 MiB/s per chip, or equivalently, 446.4 MiB/s per zone if the parallelism is fully exploited. Since the FEMU SSD does not support flash-level page metadata, we store the page metadata in an in-memory array. We configure seven FEMU SSDs in a FEMU virtual machine, installed with Ubuntu 22.04, 32-GiB memory, and 12 vCPUs. We export the ZapRAID prototype as a block device with 64 GiB of logical space. We use FIO to write 64 GiB of data with a block size of 4 KiB to ZapRAID in the virtual machine for various chunk sizes and queue depths.

Figure 11(b) shows the results. When the queue depth is four, the write throughput for 4-KiB, 8-KiB, and 16-KiB chunks are 58.3 MiB/s, 114.0 MiB/s, and 224.2 MiB/s, respectively. As the queue depth increases, the write throughput of ZapRAID increases and achieves 1,745.5 MiB/s, 2,384.6 MiB/s, and 2,554.2 MiB/s (i.e.,  $29.9\times$ ,  $20.9\times$ , and  $11.4\times$  compared with the queue depth of four), respectively when the queue depth is 128.

**Exp#7 (Multiple open segments).** We evaluate the write performance ZapRAID on multiple open segments based on hybrid data management (§3.3) by varying the numbers of small-chunk and large-chunk segments (i.e.,  $N_s$  and  $N_l$ , respectively). We fix  $C_s = 8$  KiB,  $C_l = 16$  KiB, and the number of open segments as four. We consider different combinations of  $N_s$  and  $N_l$ , such that  $N_s + N_l = 4$ . Note that if  $N_s = 0$  (resp.  $N_l = 0$ ), the small chunks (resp. the large chunks) are issued to large-chunk (resp. small-chunk) segments.

We consider four workloads. The first three workloads issue 4-KiB, 8-KiB, and 16-KiB writes via FIO, respectively. Note that these workloads do not use all open segments since they write 4-KiB or 8-KiB requests to small-chunk segments only and 16-KiB requests to large-chunk segments only. The fourth workload consists of a mixture of 75% 4-KiB writes and 25% 16-KiB writes by setting the `bssplit` parameter in FIO, based on the observation that 25% of write requests in real-world cloud block storage workloads are at least 16 KiB and most of the write requests are smaller than 4 KiB [51]. We set the total write size of each workload as 64 GiB.

Figures 12(a)-12(d) show the throughput results. ZoneWrite-Only and ZoneAppend-Only cannot always

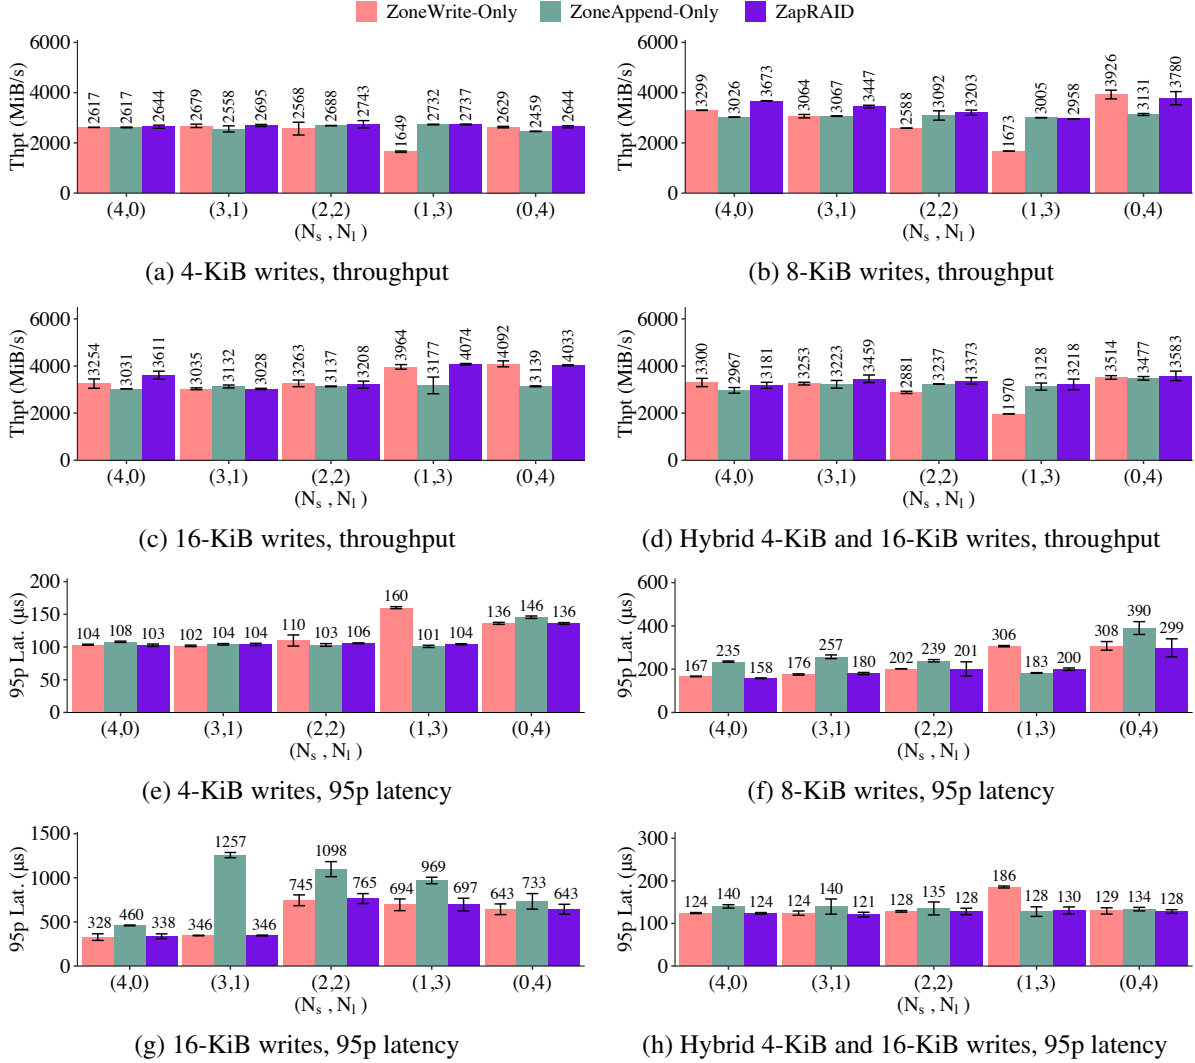


Figure 12: Exp#7 (Impact of  $N_s$  and  $N_l$ ). We show the throughput (figures (a)-(d)) and 95th-percentile latencies (figures (e)-(h)) under four open segments.

achieve the highest throughput in all cases. For example, ZoneAppend-Only has 65.7% higher throughput than ZoneWrite-Only for 4-KiB writes and  $N_s = 1$  due to better intra-zone parallelism under small writes (Figure 12(a)), but ZoneWrite-Only has 27.2% higher throughput than ZoneAppend-Only for 16-KiB writes and  $N_s = 1$  (Figure 12(c)). On the other hand, ZapRAID achieves the highest throughput, or similar throughput to the best scheme, in all cases by carefully combining Zone Append and Zone Write.

Note that while ZoneAppend-Only can issue 16-KiB writes to multiple large-chunk segments, it cannot achieve higher throughput as  $N_l$  increases, which may be inconsistent with the findings in Figure 2 (§2.1). One possible reason is that the computational overhead of the firmware for Zone Append becomes heavier and has higher fluctuations when we issue writes via Zone Append to multiple drives, and the performance is bottlenecked by the current slowest drive. Note that Zone Write also has a similar problem, but is less severe than Zone Append. Such performance fluctuations are also observed in prior work [35, 72].

Figures 12(e)-12(h) show the 95th-percentile latency results. Overall, ZapRAID maintains low 95th-percentile latencies in all cases. For 4-KiB writes (Figure 12(e)) and hybrid 4-KiB and 16-KiB writes (Figure 12(h)), all three schemes have similar latencies except for  $(N_s, N_l) = (1, 3)$ , ZoneWrite-Only has a significantly high latency since the 4-KiB writes are issued to the only small-chunk segment and ZoneWrite-

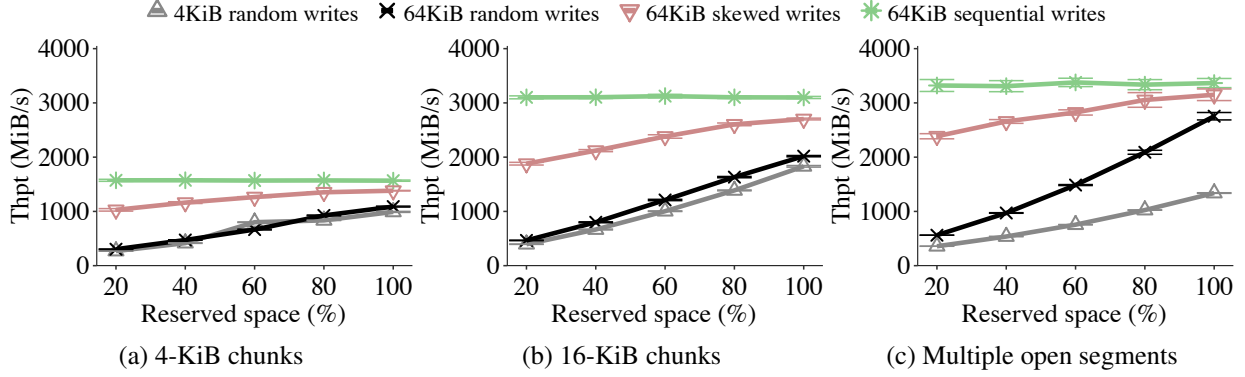


Figure 13: Exp#8 (Overhead of garbage collection).

Only has limited intra-zone parallelism.

For 8-KiB writes (Figure 12(f)), ZapRAID and ZoneWrite-Only have similar 95th-percentile latencies, while ZapRAID has 15.9-32.7% lower 95th-percentile latencies than ZoneAppend-Only for  $(N_s, N_l) = (4, 0)$ ,  $(3, 1)$ , and  $(2, 2)$  by better exploiting inter-zone parallelism through both Zone Append and Zone Write. For  $(N_s, N_l) = (1, 3)$ , ZapRAID has a slightly higher 95th-percentile latency than ZoneAppend-Only (by 9.4%) due to the overhead of group-based data layout.

For 16-KiB writes (Figure 12(g)), ZapRAID and ZoneWrite-Only have consistently lower 95th-percentile latencies than ZoneAppend-Only. We observe that the 95th-percentile latency of ZoneAppend-Only grows sharply by 173.3% from  $(N_s, N_l) = (4, 0)$  to  $(N_s, N_l) = (3, 1)$  since the 16-KiB writes are issued to the only open large-chunk segment for  $N_l = 1$  while they are issued to four open small-chunk segments for  $N_l = 0$ . The 95th-percentile latency of issuing 16-KiB writes to a single large-chunk segment is much higher (see also Figure 6(c) in Exp#1). As  $N_l$  further increases from one to four, the 95th-percentile latency of ZoneAppend-Only drops by 58.3% as there are more open large-chunk segments and a higher degree of inter-zone parallelism. We also observe that the 95th-percentile latencies of ZapRAID and ZoneWrite-Only increase by 121.1% and 115.3%, respectively from  $(N_s, N_l) = (3, 1)$  to  $(N_s, N_l) = (2, 2)$ . The reason is that the Zone Write command on one open segment has low on-SSD computational overhead as it only handles one outstanding write request. The overhead grows when it issues multiple outstanding write requests to different open segments. Similar to ZoneAppend-Only, their 95th-percentile latencies drop as  $N_l$  increases from two to four due to a higher degree of inter-zone parallelism.

**Exp#8 (Overhead of garbage collection in ZapRAID).** We evaluate the impact of garbage collection on ZapRAID with different reserved space sizes. We issue writes to 200 GiB of data, with a total of 1 TiB of write traffic. We vary the physical space capacity of ZapRAID from 240 GiB to 400 GiB, meaning that the reserved space for garbage collection varies between 20% and 100%. We consider four write workloads, including 4-KiB (uniform) random writes, 64-KiB (uniform) random writes, 64-KiB skewed writes, and 64-KiB sequential writes. We consider 64-KiB writes to examine the overhead of garbage collection caused by much larger writes. For 64-KiB skewed writes, we consider a Zipfian distribution with a skewness factor of 0.99. We consider three settings: (i) a single open segment with 4-KiB chunks, (ii) a single open segment with 16-KiB chunks, and (iii) four open segments with  $(N_s, N_l) = (2, 2)$ ,  $C_s = 8$  KiB, and  $C_l = 16$  KiB.

Figure 13 shows the results. As expected, the write throughput increases (i.e., the garbage collection overhead is less) with more reserved space and with more skewed or sequential workloads. Since real-world workloads are often skewed in practice (e.g., block storage [70] and key-value [16, 22] workloads), we expect that the garbage collection overhead is acceptable in ZapRAID. Note that the write throughput under multiple open segments (Figure 13(c)) is higher than under single open segments (Figures 13(a) and 13(b)), meaning that the garbage collection overhead can be reduced via inter-zone parallelism.

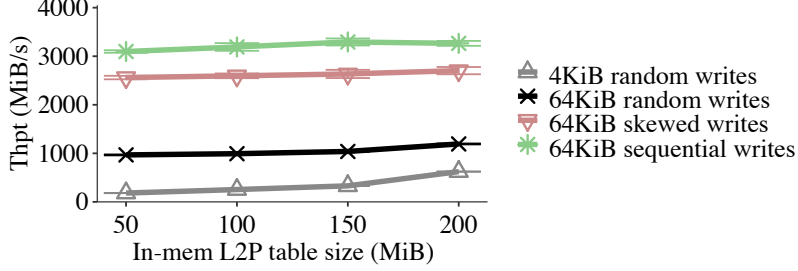


Figure 14: Exp#9 (Overhead of L2P table offloading).

**Exp#9 (Overhead of L2P table offloading).** We evaluate the overhead of offloading the L2P table entries to ZNS SSDs (§3.1). We consider the same four write workloads as in Exp#8 and focus on the setting of  $(N_s, N_l) = (2, 2)$  with four open segments. We set the physical space capacity as 300 GiB and issue writes to 200 GiB of data (i.e., the reserved space is 50%). We vary the maximum memory size allocated for the in-memory L2P table from 50 MiB to 200 MiB. Recall that each L2P table entry has a size of four bytes for each 4-KiB block (§3.1). Thus, the in-memory L2P table can store the entries from 50 GiB to 200 GiB of data. Note that when the in-memory L2P table is allocated with 200 MiB, it can keep all L2P table entries in memory (i.e., no offloading).

Figure 14 shows the results. When the in-memory L2P table has less than 200 MiB of memory space, it needs to offload some entries onto the SSD. For 4-KiB and 64-KiB random writes, a 100-MiB L2P table has lower throughput than a 200-MiB L2P table by 59.2% and 16.8%, respectively. The reason for such high throughput drops is that under uniform random writes, the chance of not caching an L2P table entry is higher. Nevertheless, larger writes have lower degradations since ZapRAID groups the L2P table entries into mapping blocks and there will be less I/O overhead of reading L2P table entries from ZNS SSDs. For 64-KiB skewed writes, a 100-MiB L2P table only has slightly lower throughput than a 200-MiB L2P table by 4.0%, meaning that the offloading overhead becomes insignificant in skewed workloads. For 64-KiB sequential writes, a 100-MiB L2P table only has slightly lower throughput than a 200-MiB L2P table by 3.6%.

### 5.3 Trace-Driven Experiments

We evaluate via trace-driven evaluation ZapRAID on real-world cloud block storage workloads using the block I/O traces from Alibaba Cloud [51]. We configure the logical space capacity as 500 GiB. Our evaluation considers four settings of open segments: (i) a single open segment with a chunk size of 4 KiB, (ii) a single open segment with a chunk size of 16 KiB, (iii) four open segments with  $(N_s, N_l) = (2, 2)$ , and (iv) four open segments with  $(N_s, N_l) = (1, 3)$ ; for (iii) and (iv), we set  $C_s = 8$  KiB and  $C_l = 16$  KiB.

**Exp#10 (Cloud block storage workloads).** The original Alibaba Cloud traces cover 1,000 volumes [51]. We identify that 684 out of the 1,000 volumes have more than 60% of small write requests of no more than 4 KiB and more than 25% of large write requests of at least 16 KiB (§2.2). Among the 684 volumes, we choose 20 of them whose amounts of write traffic range between 200 GiB and 240 GiB. Note that the selected 20 volumes are dominated by writes: in 18 out of 20 volumes, more than 88.3% of requests are writes, while in all volumes, more than 67.0% of requests are writes. We conduct our evaluation over five runs; in each run, we evaluate the average throughput and 95th-percentile latency of all read and write operations when running each scheme over the 20 selected volumes.

Figures 15(a) and 15(b) show the throughput results. For a single open segment with 4-KiB and 16-KiB chunks (Figure 15(a)), the throughput of ZapRAID is 69.4% and 6.4% higher than that of ZoneWrite-Only, respectively, and is close to that of ZoneAppend-Only; the findings are consistent with those in Exp#1. For multiple open segments, the findings are also consistent with those in Figure 12(d) of Exp#7. For  $(N_s, N_l) = (2, 2)$ , all three schemes have similar throughput, while for  $(N_s, N_l) = (1, 3)$ , ZapRAID has 25.3% higher throughput than ZoneWrite-Only and similar throughput to ZoneAppend-Only.

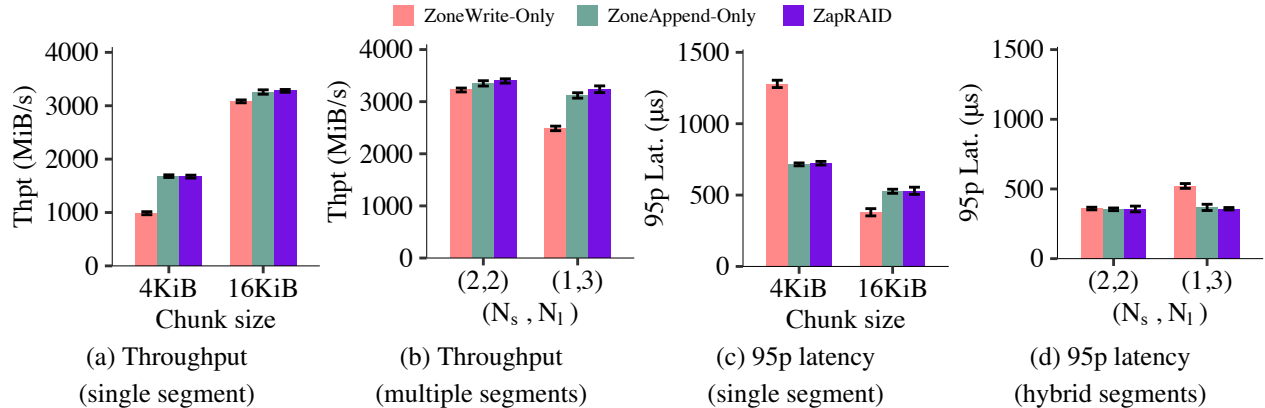


Figure 15: Exp#10 (Cloud block storage workloads).

Figures 15(c) and 15(d) show the 95th-percentile latencies, in which the trends are also consistent with Exp#1 and Exp#7, respectively. For a single open segment with 4-KiB and 16-KiB chunks (Figure 15(c)), ZapRAID has 56.6% lower and 39.6% higher 95th-percentile latencies than ZoneWrite-Only under the chunk sizes of 4 KiB and 16 KiB, respectively, and comparable 95th-percentile latencies with ZoneAppend-Only. For multiple open segments (Figure 15(d)), all three schemes have similar latencies for  $(N_s, N_l) = (2, 2)$ , while ZoneWrite-Only has a higher 95th-percentile latency for  $(N_s, N_l) = (1, 3)$  as its performance is bottlenecked by the small writes that are forwarded to the only small-chunk open segment.

#### 5.4 Real-Application Experiments

We finally evaluate ZapRAID when it hosts real applications. To host Linux applications, we export our prototype as an NVMe-over-Fabrics (NVMe-oF) target with TCP transport [9] and deploy the NVMe-oF host in the same testbed machine, so that our ZapRAID prototype serves as a Linux block device. We allocate the block device with a logical space capacity of 1 TiB, format the block device as an EXT4 file system, and run different types of applications atop the file system. As in §5.3, we consider the four settings of open segments. Note that the amount of write traffic may exceed the logical space capacity. Thus, we reserve an additional 25% of the physical space capacity for garbage collection.

**Exp#11 (File writes).** We evaluate ZapRAID in large file writes using Sysbench (v1.0.20) [11] to generate file write patterns. We first generate 128 800-MiB files (i.e., 100 GiB of data), and then use Sysbench to continuously issue 64-KiB write requests to the files for 10 minutes. We use one thread and issue writes in asynchronous mode with direct I/O. We issue `fsync` at the end of each experimental run.

Figure 16 shows the write throughput results. For a single open segment (Figure 16(a)), the performance findings are similar to those in Exp#1, meaning that the file write workload can also benefit from the use of intra-zone parallelism in ZapRAID. Compared with ZoneWrite-Only, ZapRAID achieves 76.9% and 15.3% higher write throughput for 4-KiB and 16-KiB chunks, respectively. ZapRAID also achieves similar write throughput as ZoneAppend-Only. For multiple open segments (Figure 16(b)), all three schemes show similar write throughput for  $(N_s, N_l) = (2, 2)$  and ZapRAID shows 16.3% higher throughput than ZoneAppend-Only for  $(N_s, N_l) = (1, 3)$ ; the findings are similar to those in Exp#7 under large writes (Figure 12(c)).

**Exp#12 (Relational databases).** We evaluate ZapRAID when it hosts MySQL (v8.0.30) [3], which acts as a relational database, and run the TPC-C benchmark [12]. We modify some configurations of MySQL for better performance. Specifically, we set the maximum binary log size as 2 GiB and the buffer pool size as 32 GiB. We also configure MySQL to flush the transaction log once per second and use direct I/O in flushing. We first load 1,000 TPC-C warehouses to MySQL, with a total of around 100 GiB data, and then run the TPC-C benchmark for one hour with 32 connections.

Figure 17 depicts the throughput, in the number of transactions per second (TPS). For a single open



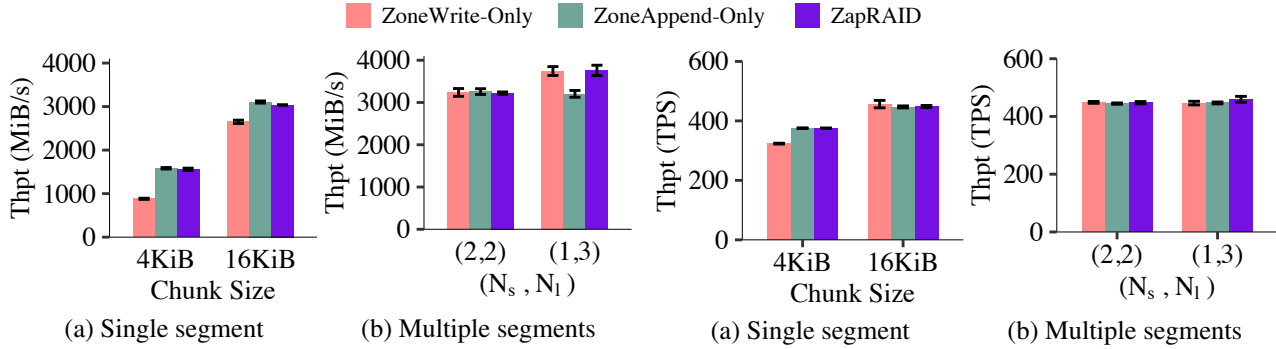


Figure 16: Exp#11 (File writes).

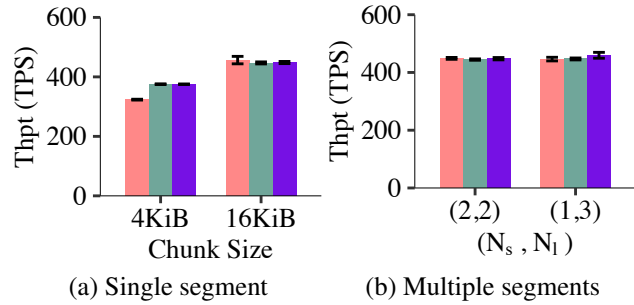


Figure 17: Exp#12 (Relational databases).

segment with 4-KiB chunks (Figure 17(a)), ZapRAID shows 16.0% higher write throughput than ZoneWrite-Only and has similar throughput compared with ZoneAppend-Only. The improvement over ZoneWrite-Only is limited as the workload does not generate a sufficient number of concurrent write requests. For other settings of open segments, all three schemes have similar performance.

## 6 Related Work

**SSD RAID.** SSD RAID has been extensively studied in the literature. Some studies follow traditional disk-based RAID (with in-place updates) [60] and focus on reducing read tail latencies [31], improving parity update performance [27, 33, 35, 40, 52], optimizing garbage collection [43, 44, 69], making I/O performance predictable [50], and enhancing the scalability of Linux software RAID [68, 71]. To improve scalability, some studies organize RAID by distributing the controller function to multiple nodes [21] and further reducing the network traffic under disaggregated storage [66]. In this work, we focus on Log-RAID architectures, which have been extensively studied for SSD RAID to improve both write performance and flash endurance. SOFA [25] places the FTL in the RAID controller for efficient data management. Purity [28] manages both indexing and data storage under Log-RAID, and supports compression and deduplication. SALSA [34] implements a general translation layer for SSDs and Shingled Magnetic Recording (SMR) disks. SWAN [41] proposes spatial data separation to reduce garbage collection interference. Recent studies also apply RAID on Key-Value SSDs (KVSSDs) [54, 61, 63] and open-channel SSDs [53]. ZapRAID targets RAID for ZNS SSDs and particularly exploits Zone Append for high performance.

**Storage systems for ZNS SSDs.** Several studies explore new storage system designs for ZNS SSDs. Bjorling *et al.* [19] adapt F2FS [45] and RocksDB [6] for ZNS SSDs, and show that the adapted systems have lower I/O amplification and higher performance than conventional SSDs. Other studies focus on the performance and management aspects of ZNS SSDs. Examples include improving the performance of log-structured merge-tree stores [59] for ZNS SSDs [37, 47, 48], optimizing host-level garbage collection [20, 26, 30, 65], proposing new ZNS interfaces for efficient zone management [30, 55, 58], enabling ZNS SSDs for swap storage [18], designing new I/O scheduling for improved intra-zone parallelism [17], extending Zone Append for sub-block data appends [62], and ensuring crash consistency on F2FS backed by ZNS SSDs [46].

While the above studies focus on a single ZNS SSD, RAIZN [42] exposes a ZNS SSD array as a single ZNS interface to applications, and focuses on fault tolerance, correctness, and crash consistency. In contrast, ZapRAID focuses on exploiting Zone Append for high performance.

**Interfaces for offloading address management.** While our work focuses on the Zone Append interface, some studies propose new storage interfaces that offload address management from applications to storage devices as in Zone Append. Examples include range writes [15] and Direct File System [36] for file system management, nameless writes [73] and software-enabled flash [7] for flash-based SSDs, as well as ZEA [56] for host-managed shingled magnetic recording drives. We conjecture that ZapRAID, which builds on Zone

Append, can also build on the above interfaces to improve RAID performance, and we pose this issue as future work.

## 7 Conclusion

ZapRAID is a high-performance Log-RAID system for ZNS SSDs to support scalable and reliable storage, with the design goals of high performance, lightweight stripe management, and reliability in mind. We propose the following key design elements: (i) a group-based data layout under Zone Append to effectively exploit intra-zone parallelism while mitigating the stripe management overhead; (ii) hybrid data management to carefully combine Zone Append and Zone Write to achieve intra-zone and inter-zone parallelism; (iii) the crash consistency mechanisms to enforce high reliability. Our prototype evaluation on real ZNS SSDs and FEMU emulation shows that ZapRAID achieves high write throughput and maintains efficiency in degraded reads, crash recovery, and full-drive recovery.

## References

- [1] Fio - Flexible I/O Tester Synthetic Benchmark. <http://git.kernel.dk/?p=fio.git>.
- [2] Intel Optane 128 GiB DC Persistent Memory 100 Series for HPE. <https://ark.intel.com/content/www/us/en/ark/products/190348/intel-optane-persistent-memory-128gb-module.html>.
- [3] MySQL. <https://www.mysql.com/>.
- [4] NVMe command set specifications. <https://nvmexpress.org/developers/nvme-command-set-specifications/>.
- [5] Raizn. <https://github.com/ZonedStorage/RAIZN-release>.
- [6] RocksDB. <https://github.com/facebook/rocksdb>.
- [7] Software-Enabled Flash. <https://softwareenabledflash.org/>.
- [8] SPDK block device layer programming guide. [https://spdk.io/doc/bdev\\_pg.html](https://spdk.io/doc/bdev_pg.html).
- [9] SPDK: NVMe over Fabrics Target. <https://spdk.io/doc/nvmf.html>.
- [10] Storage Performance Development Kit (SPDK). <https://spdk.io/>.
- [11] sysbench. <https://github.com/akopytov/sysbench>.
- [12] tpcc-mysql. <https://github.com/Percona-Lab/tpcc-mysql>.
- [13] Western Digital Ultrastar DC ZN540. <https://www.westerndigital.com/products/internal-drives/data-center-drives/ultrastar-dc-zn540-nvme-ssd>.
- [14] Zoned Storage Website. <https://zonedstorage.io>.
- [15] Ashok Anand, Sayandeep Sen, Andrew Krioukov, Florentina I. Popovici, Aditya Akella, Andrea C. Arpaci-Dusseau, Remzi H. Arpaci-Dusseau, and Suman Banerjee. Avoiding file system micromanagement with range writes. In *Proceedings of the 8th USENIX Conference on Operating Systems Design and Implementation (OSDI'08)*, pages 161--176, December 2008.
- [16] Berk Atikoglu, Yuehai Xu, Eitan Frachtenberg, Song Jiang, and Mike Paleczny. Workload analysis of a large-scale key-value store. In *Proc. of ACM SIGMETRICS*, pages 53--64, London, England, UK, June 2012.
- [17] Hanyeoreum Bae, Jiseon Kim, Miryeong Kwon, and Myoungsoo Jung. What you can't forget: Exploiting parallelism for zoned namespaces. In *Proceedings of the 14th ACM Workshop on Hot Topics in Storage and File Systems (HotStorage'22)*, pages 79--85, June 2022.

- [18] Shai Bergman, Niklas Cassel, Matias Bjørling, and Mark Silberstein. ZNSwap: un-Block your swap. In *Proceedings of the USENIX Annual Technical Conference (USENIX ATC'22)*, pages 1--18, July 2022.
- [19] Matias Bjørling, Abutalib Aghayev, Hans Holmberg, Aravind Ramesh, Damien Le Moal, Gregory R. Ganger, and George Amvrosiadis. ZNS: Avoiding the block interface tax for flash-based SSDs. In *Proceedings of the USENIX Annual Technical Conference (USENIX ATC'21)*, pages 689--703, July 2021.
- [20] Sungjin Byeon, Joseph Ro, Safdar Jamil, Jeong-Uk Kang, and Youngjae Kim. A free-space adaptive runtime zone-reset algorithm for enhanced ZNS efficiency. In *Proceedings of the 15th ACM Workshop on Hot Topics in Storage and File Systems (HotStorage'23)*, pages 109--115, July 2023.
- [21] Pei Cao, Swee Boon Lim, Shivakumar Venkataraman, and John Wilkes. The TickerTAIP parallel RAID architecture. In *Proceedings of the 20th Annual International Symposium on Computer Architecture (ISCA'93)*, pages 52--63, May 1993.
- [22] Zhichao Cao, Siying Dong, and Sagar Vemuri. Characterizing, modeling, and benchmarking RocksDB key-value workloads at facebook. In *Proc. of USENIX FAST*, pages 209--223, Santa Clara, CA, USA, February 2020.
- [23] Da-Wei Chang, Hsin-Hung Chen, and Wei-Jian Su. VSSD: performance isolation in a solid-state drive. *ACM Transactions on Design Automation of Electronic Systems*, 20(4):51:1--51:33, September 2015.
- [24] Feng Chen, David A. Koufaty, and Xiaodong Zhang. Understanding intrinsic characteristics and system implications of flash memory based solid state drives. *ACM SIGMETRICS Performance Evaluation Review*, 37(1):181--192, June 2009.
- [25] Tzi-cker Chiueh, Weafon Tsao, Hou-Chiang Sun, Ting-Fang Chien, An-Nan Chang, and Cheng-Ding Chen. Software orchestrated flash array. In *Proceedings of International Conference on Systems and Storage (SYSTOR'14)*, pages 1--11, June 2014.
- [26] Gunhee Choi, Kwanghee Lee, Myunghoon Oh, Jongmoo Choi, Jhuyeong Jhin, and Yongseok Oh. A new LSM-style garbage collection scheme for ZNS SSDs. In *Proceedings of the 12th USENIX Workshop on Hot Topics in Storage and File Systems (HotStorage'20)*, pages 1--6, July 2020.
- [27] Ching-Che Chung and Hao-Hsiang Hsu. Partial parity cache and data cache management method to improve the performance of an SSD-based RAID. *IEEE Transactions on Very Large Scale Integration (VLSI) Systems*, 22(7):1470--1480, August 2014.
- [28] John Colgrove, John D Davis, John Hayes, Ethan L Miller, Cary Sandvig, Russell Sears, Ari Tamches, Neil Vachharajani, and Feng Wang. Purity: Building fast, highly-available enterprise flash storage from commodity components. In *Proceedings of the 2015 ACM SIGMOD International Conference on Management of Data (SIGMOD'15)*, pages 1683--1694, May 2015.
- [29] F. J. Corbato. A paging experiment with the multics system. *MIT Project MAC Report*, 1968.
- [30] Kyuhwa Han, Hyunho Gwak, Dongkun Shin, and Joo-Young Hwang. ZNS+: Advanced zoned namespace interface for supporting in-storage zone compaction. In *Proceedings of the 15th USENIX Conference on Operating Systems Design and Implementation (OSDI'21)*, pages 147--162, July 2021.
- [31] Mingzhe Hao, Gokul Soundararajan, Deepak Kenchammana-Hosekote, Andrew A Chien, and Haryadi S Gunawi. The tail at store: A revelation from millions of hours of disk and SSD deployments. In *Proceedings of the 14th USENIX Conference on File and Storage Technologies (FAST'16)*, pages 263--276, February 2016.
- [32] Jian Huang, Anirudh Badam, Laura Caulfield, Suman Nath, Sudipta Sengupta, Bikash Sharma, and Moinuddin K. Qureshi. FlashBlox: Achieving both performance isolation and uniform lifetime for

- virtualized SSDs. In *Proceedings of the 15th USENIX Conference on File and Storage Technologies (FAST'17)*, pages 375--390, February 2017.
- [33] Soojun Im and Dongkun Shin. Flash-aware RAID techniques for dependable and high-performance flash memory SSD. *IEEE Transactions on Computers*, 60(1):80--92, January 2011.
- [34] Nikolas Ioannou, Kornilios Kourtis, and Ioannis Koltsidas. Elevating commodity storage with the SALSA host translation layer. In *Proceedings of 2018 IEEE 26th International Symposium on Modeling, Analysis, and Simulation of Computer and Telecommunication Systems (MASCOTS'18)*, pages 277--292, September 2018.
- [35] Tianyang Jiang, Guangyan Zhang, Zican Huang, Xiaosong Ma, Junyu Wei, Zhiyue Li, and Weimin Zheng. FusionRAID: Achieving consistent low latency for commodity SSD arrays. In *Proceedings of the 19th USENIX Conference on File and Storage Technologies (FAST'21)*, pages 355--370, February 2021.
- [36] William K. Josephson, Lars Ailo Bongo, David Flynn, and Kai Li. DFS: A file system for virtualized flash storage. In *Proceedings of the 8th USENIX Conference on File and Storage Technologies (FAST'10)*, pages 1--15, February 2010.
- [37] Jeeyoon Jung and Dongkun Shin. Lifetime-leveling LSM-tree compaction for ZNS SSD. In *Proceedings of the 14th ACM Workshop on Hot Topics in Storage and File Systems (HotStorage'22)*, pages 100--105, June 2022.
- [38] Bryan Suk Kim. Utilitarian performance isolation in shared SSDs. In *Proceedings of the 10th USENIX Workshop on Hot Topics in Storage and File Systems (HotStorage'18)*, pages 1--6, July 2018.
- [39] Hyojun Kim and Seongjun Ahn. BPLRU: A buffer management scheme for improving random writes in flash storage. In *Proceedings of the 6th USENIX Conference on File and Storage Technologies (FAST'08)*, pages 1--14, February 2008.
- [40] Jaeho Kim, Jongmin Lee, Jongmoo Choi, Donghee Lee, and Sam H. Noh. Improving SSD reliability with RAID via elastic striping and anywhere parity. In *Proceedings of the 2013 43rd Annual IEEE/IFIP International Conference on Dependable Systems and Networks (DSN'13)*, pages 1--12, June 2013.
- [41] Jaeho Kim, Kwanghyun Lim, Youngdon Jung, Sungjin Lee, Changwoo Min, and Sam H Noh. Alleviating garbage collection interference through spatial separation in all flash arrays. In *Proceedings of the USENIX Annual Technical Conference (USENIX ATC'19)*, pages 799--812, July 2019.
- [42] Thomas Kim, Jekyeom Jeon, Nikhil Arora, Huaicheng Li, Michael Kaminsky, David Andersen, Gregory R. Ganger, George Amvrosiadis, and Matias Bjørling. RAIZN: Redundant array of independent zoned namespaces. In *Proceedings of the 28th ACM International Conference on Architectural Support for Programming Languages and Operating Systems (ASPLOS'23)*, Volume 2, pages 660--673, January 2023.
- [43] Youngjae Kim, Junghee Lee, Sarp Oral, David A. Dillow, Feiyi Wang, and Galen M. Shipman. Coordinating garbage collection for arrays of solid-state drives. *IEEE Transactions on Computers*, 63(4):888--901, 2012.
- [44] Youngjae Kim, Sarp Oral, Galen M. Shipman, Junghee Lee, David A. Dillow, and Feiyi Wang. Harmonia: A globally coordinated garbage collector for arrays of solid-state drives. In *Proceedings of the 2011 IEEE 27th Symposium on Mass Storage Systems and Technologies (MSST'11)*, pages 1--12, May 2011.
- [45] Changman Lee, Dongho Sim, Joo Young Hwang, and Sangyeun Cho. F2FS: A new file system for flash storage. In *Proceedings of the 13th USENIX Conference on File and Storage Technologies (FAST'15)*, pages 273--286, February 2015.

- [46] Euidong Lee, Ikjoon Son, and Jin-Soo Kim. An efficient order-preserving recovery for F2FS with ZNS SSD. In *Proceedings of the 15th ACM Workshop on Hot Topics in Storage and File Systems (HotStorage'23)*, pages 116--122, July 2023.
- [47] Hee-Rock Lee, Chang-Gyu Lee, Seungjin Lee, and Youngjae Kim. Compaction-aware zone allocation for LSM based key-value store on ZNS SSDs. In *Proceedings of the 14th ACM Workshop on Hot Topics in Storage and File Systems (HotStorage'22)*, pages 93--99, June 2022.
- [48] Jongsung Lee, Donguk Kim, and Jae W. Lee. WALTZ: Leveraging zone append to tighten the tail latency of LSM tree on ZNS SSD. In *Proceedings of the VLDB Endowment*, pages 2884--2896, August 2023.
- [49] Huaicheng Li, Mingzhe Hao, Michael Hao Tong, Swaminathan Sundararaman, Matias Bjørling, and Haryadi S. Gunawi. The CASE of FEMU: Cheap, accurate, scalable and extensible flash emulator. In *Proceedings of the 16th USENIX Conference on File and Storage Technologies (FAST'18)*, pages 83--90, February 2018.
- [50] Huaicheng Li, Martin L Putra, Ronald Shi, Xing Lin, Gregory R Ganger, and Haryadi S Gunawi. IODA: A host/device co-design for strong predictability contract on modern flash storage. In *Proceedings of the ACM SIGOPS 28th Symposium on Operating Systems Principles (SOSP'21)*, pages 263--279, October 2021.
- [51] Jinhong Li, Qiuping Wang, Patrick P. C. Lee, and Chao Shi. An in-depth analysis of cloud block storage workloads in large scale production. In *Proceedings of the 2020 IEEE International Symposium on Workload Characterization (IISWC'20)*, pages 37--47, October 2020.
- [52] Yongkun Li, Helen HW Chan, Patrick PC Lee, and Yinlong Xu. Elastic parity logging for SSD RAID arrays. In *Proceedings of the 2016 46th Annual IEEE/IFIP International Conference on Dependable Systems and Networks (DSN'16)*, pages 49--60, June 2016.
- [53] Teng Ma, Zhitao Li, and Ning Liu. Log-ROC: Log structured RAID on open-channel SSD. In *Proceedings of the 2022 IEEE 40th International Conference on Computer Design (ICCD)*, pages 332--335, October 2022.
- [54] Umesh Maheshwari. StripeFinder: Erasure coding of small objects over Key-Value storage devices (an uphill battle). In *Proceedings of the 12th USENIX Workshop on Hot Topics in Storage and File Systems (HotStorage'20)*, pages 1--7, July 2020.
- [55] Umesh Maheshwari. From blocks to rocks: A natural extension of zoned namespaces. In *Proceedings of the 13th ACM Workshop on Hot Topics in Storage and File Systems (HotStorage'21)*, pages 21--27, July 2021.
- [56] Adam Manzanares, Noah Watkins, Cyril Guyot, Damien Le Moal, Carlos Maltzahn, and Zvonimir Bandic. Zea, A data management approach for SMR. In *Proceedings of the 8th USENIX Workshop on Hot Topics in Storage and File Systems (HotStorage'16)*, pages 1--5, June 2016.
- [57] Changwoo Min, Kangnyeon Kim, Hyunjin Cho, Sang-Won Lee, and Young Ik Eom. SFS: Random write considered harmful in solid state drives. In *Proceedings of the 10th USENIX Conference on File and Storage Technologies (FAST'12)*, pages 1--16, February 2012.
- [58] Jaehong Min, Chenxingyu Zhao, Ming Liu, and Arvind Krishnamurthy. eZNS: An elastic zoned namespace for commodity ZNS SSDs. In *Proceedings of the 17th USENIX Conference on Operating Systems Design and Implementation (OSDI'23)*, pages 461--477, July 2023.
- [59] Patrick O'Neil, Edward Cheng, Dieter Gawlick, and Elizabeth O'Neil. The log-structured merge-tree (LSM-tree). *Acta Informatica*, 33(4):351--385, 1996.



- [60] David A. Patterson, Garth A. Gibson, and Randy H. Katz. A case for redundant arrays of inexpensive disks (RAID). In *Proceedings of the 1988 ACM SIGMOD International Conference on Management of Data (SIGMOD'88)*, pages 109--116, June 1988.
- [61] Rekha Pitchumani and Yang-Suk Kee. Hybrid data reliability for emerging key-value storage devices. In *Proceedings of the 18th USENIX Conference on File and Storage Technologies (FAST'20)*, pages 309--322, February 2020.
- [62] Devashish R Purandare, Peter Wilcox, Heiner Litz, and Shel Finkelstein. Append is near: Log-based data management on ZNS SSDs. In *Proceedings of the 12th Annual Conference on Innovative Data Systems Research (CIDR'22)*, pages 1--10, January 2022.
- [63] Mian Qin, A. L. Narasimha Reddy, Paul V. Gratz, Rekha Pitchumani, and Yang-Seok Ki. KVRAID: high performance, write efficient, update friendly erasure coding scheme for KV-SSDs. In *Proceedings of the 14th ACM International Conference on Systems and Storage (SYSTOR'21)*, pages 1--12, June 2021.
- [64] Mendel Rosenblum and John K Ousterhout. The design and implementation of a log-structured file system. *ACM Transactions on Computer Systems (TOCS)*, 10(1):26--52, 1992.
- [65] Dongjoo Seo, Ping-Xiang Chen, Huaicheng Li, Matias Bjørling, and Nikil Dutt. Is garbage collection overhead gone? case study of F2FS on ZNS SSDs. In *Proceedings of the 15th ACM Workshop on Hot Topics in Storage and File Systems (HotStorage'23)*, pages 102--108, July 2023.
- [66] Junyi Shu, Ruidong Zhu, Yun Ma, Gang Huang, Hong Mei, Xuanzhe Liu, and Xin Jin. Disaggregated RAID storage in modern datacenters. In *Proceedings of the 28th ACM International Conference on Architectural Support for Programming Languages and Operating Systems (ASPLOS'23), Volume 2*, pages 147--163, January 2023.
- [67] Qiuping Wang and Patrick P. C. Lee. ZapRAID: Enabling high-performance RAID for ZNS SSDs via zone append. In *Proceedings of the 14th ACM SIGOPS Asia-Pacific Workshop on Systems (APSys'23)*, pages 24--29, August 2023.
- [68] Shucheng Wang, Qiang Cao, Ziyi Lu, Hong Jiang, Jie Yao, and Yuanyuan Dong. StRAID: Stripe-threaded architecture for parity-based RAIDs with ultra-fast SSDs. In *Proceedings of the USENIX Annual Technical Conference (USENIX ATC'22)*, pages 915--932, July 2022.
- [69] Suzhen Wu, Weidong Zhu, Guixin Liu, Hong Jiang, and Bo Mao. GC-aware request steering with improved performance and reliability for SSD-based RAIDs. In *Proceedings of the 2018 IEEE International Parallel and Distributed Processing Symposium (IPDPS'18)*, pages 296--305, May 2018.
- [70] Yue Yang and Jianwen Zhu. Write skew and zipf distribution: Evidence and implications. *ACM Transactions on Storage*, 2016.
- [71] Shushu Yi, Yanning Yang, Yunxiao Tang, Zixuan Zhou, Junzhe Li, Chen Yue, Myoungsoo Jung, and Jie Zhang. ScalaRAID: optimizing linux software RAID system for next-generation storage. In *Proceedings of the 14th ACM Workshop on Hot Topics in Storage and File Systems (HotStorage'22)*, pages 119--125, June 2022.
- [72] Guangyan Zhang, Zican Huang, Xiaosong Ma, Songlin Yang, Zhufan Wang, and Weimin Zheng. RAID+: Deterministic and balanced data distribution for large disk enclosures. In *Proc. of USENIX FAST*, 2018.
- [73] Yiying Zhang, Leo Prasath Arulraj, Andrea C Arpaci-Dusseau, and Remzi H Arpaci-Dusseau. De-indirection for flash-based SSDs with nameless writes. In *Proceedings of the 10th USENIX Conference on File and Storage Technologies (FAST'12)*, pages 1--16, February 2012.