

Multi-axis inertial sensing with 2D arrays of matter waves

K. Stolzenberg, C. Struckmann, S. Bode, R. Li, A. Herbst,
V. Vollenkemper, D. Thomas, E. M. Rasel, N. Gaaloul, and D. Schlippert*
*Leibniz Universität Hannover, Institut für Quantenoptik,
Welfengarten 1, 30167 Hannover, Germany*
(Dated: July 23, 2024)

Atom interferometry is an exquisite measurement technique sensitive to inertial forces. However, it is commonly limited to a single sensitive axis, allowing high-precision multi-dimensional sensing only through subsequent or post-corrected measurements. We report on a novel method for simultaneous multi-axis inertial sensing based on correlated light-pulse atom interferometers in 2D array arrangements of Bose-Einstein Condensates (BEC). Deploying a scalable 3×3 BEC array spanning 1.6 mm^2 created using time-averaged optical potentials, we perform measurements of linear acceleration induced by gravity and simultaneously demonstrate sensitivity to angular velocity and acceleration of a rotating reference mirror, as well as gravity gradients and higher-order derivatives. Our work enables simple, high-precision multi-axis inertial sensing compatible with high rotation rates, e.g., for inertial navigation in dynamic environments. We finally envision further applications of our method, e.g., 3D in-situ measurements and reconstruction of laser beam intensities and wave fronts.

Introduction - Quantum sensors based on light-pulse atom interferometry [1] provide a highly sensitive and long-term stable measurement tool for inertial forces [2], such as linear accelerations [3], gravity gradients and curvature [4–6], or rotation rates [7–10]. However, conventional atom interferometers feature only one sensitive axis, yielding intertwined information about one acceleration and one rotation component. To resolve individual inertial quantities, correlation with another simultaneous interferometer or external inertial sensor is necessary [11–14]. Point-source atom interferometers expand the dimensionality of the inertial observables by exploiting the 2D surface of the thermal ensemble or Bose-Einstein condensate (BEC), enabling the simultaneous measurement of two rotation axes [16, 17]. However, they require clouds with large spatial extent and are thus limited to operate with thermal ensembles in compact setups. The limited sensitivity scaling and dynamic range can be enhanced by considering BECs, providing a coherent source over short and long time scales [18]. 1D arrays of BECs have been introduced in magnetic lattices [19] and optical tweezers [20] for atom interferometry, e.g., by exploiting the tunneling effect [21]. Very recently, 2D arrays of BECs have been used to study collapse dynamics [22].

In this Letter, we report on the operation of correlated light-pulse atom interferometers with 2D BEC arrays and measure multiple inertial observables in a single realization of the experiment. The 2D BEC array with scalable dimensionality and spacing of up to 3×3 across 1.6 mm^2 (Fig. 1) is created using the exquisite trap control granted by time-averaged optical potentials [23–25] in a crossed optical dipole trap (ODT). By using each array site as a source for a Mach-Zehnder type atom interferometer (MZAI) in which double-Bragg diffraction [26] coherently splits, redirects, and recombines matter waves, we realize nine strongly correlated 1D linear acceleration measurements. Combinations of two or more 1D linear accelera-

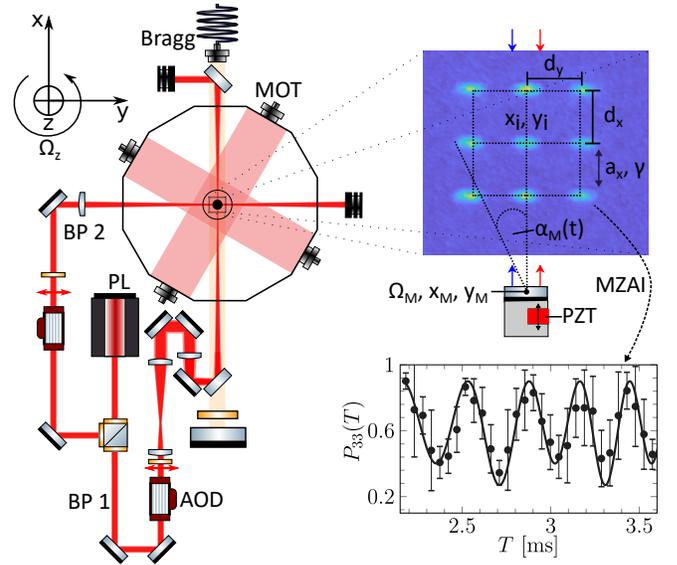


FIG. 1. **Experimental setup:** Left: Top view highlighting the optical dipole trap (ODT) setup. z is aligned in direction of gravity g . The two dipole trap beams (BP1/2) intersect at an angle of approximately 90° . The two 2D acousto-optical deflectors (AOD) in the beam paths allow for dynamically deflecting the laser beams, establishing a 2D array of potential wells. The Bragg beam is aligned with BP1 and split at a dichroic mirror. Top right: Absorption image of a 3×3 array and illustration of the piezo (PZT), allowing to tilt the reference mirror by an angle $\alpha_M(t)$. Bottom right: Typical fringe measurement (dots) by scanning the evolution time T for a single ensemble. Due to induced tilts of the reference mirror and free fall through the Bragg beam, the beam splitter's efficiency is not ideal, resulting in the beating of the fringe contrast as predicted by a double-Bragg-diffraction ab-initio theory [15].

tion measurements separated by a scalable baseline give

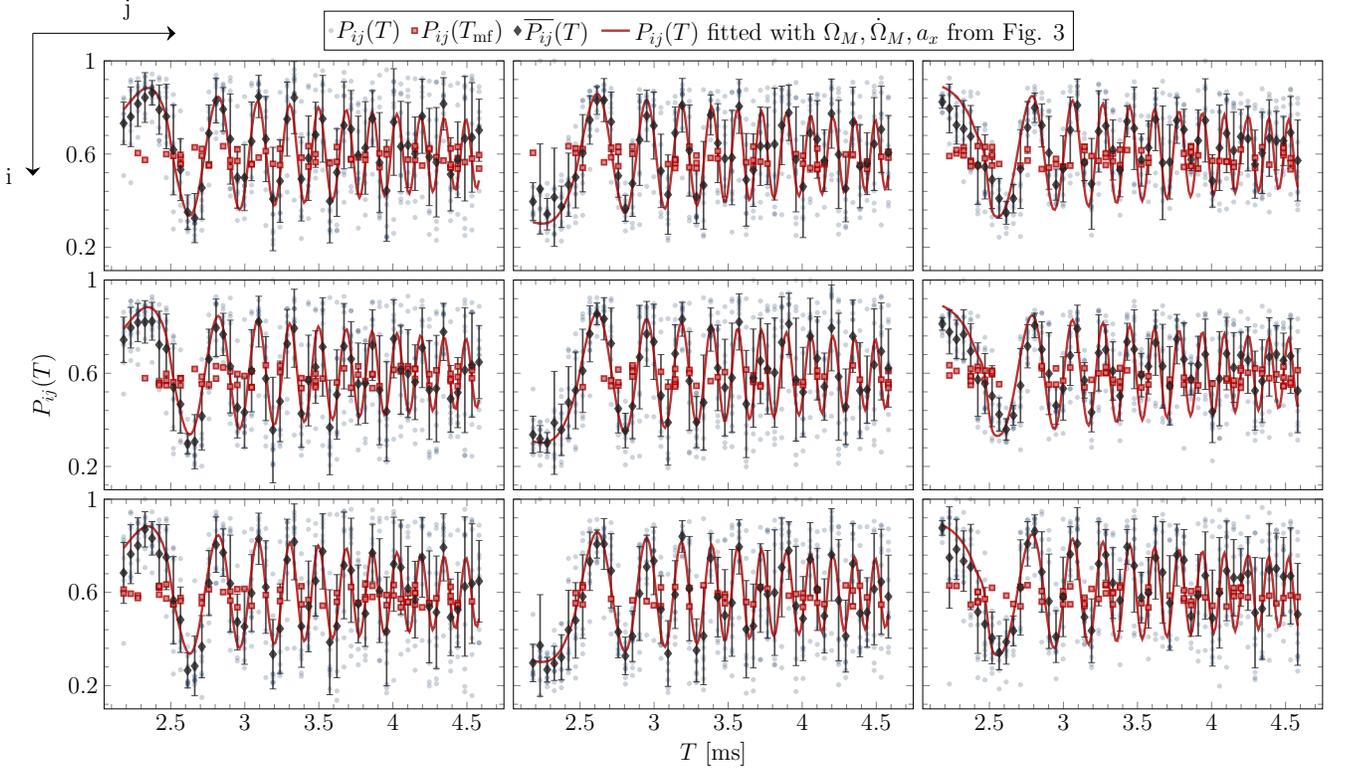


FIG. 2. **Evolution time scans of a 3×3 -array with the induced tilting of the retro reflection mirror:** Fringes obtained for the 9 simultaneous atom interferometers for $T = 2.182 - 4.582$ ms. Light blue circles $P_{ij}(T)$ show the outcome of each of the 510 measurements per interferometer. The average of the data $\overline{P_{ij}}(T)$ for the 10 successive experiment runs are depicted with black diamonds. Red squares mark the mid-fringe data points $P_{ij}(T_{mf})$. The inertial observables ($a_x, \Omega_M, \dot{\Omega}_M$) were differentially deduced (Fig. 3) and fitted with an exponential contrast loss and offset phase shown as red line.

rise to common mode rejection and sensitivity to gravity gradients and higher derivatives as well as to angular velocity and acceleration, similar to inertial-stabilized platforms [27] or as proposed for combining multiple multi-axis atom interferometers [28].

To fully characterize the motion of a moving body, an inertial measurement unit (IMU) must capture the acceleration and rotation along three perpendicular directions. We envision applications of our method in compact inertial sensors for dynamic environments [11, 29] by extending the array in the z -axis. A $2 \times 2 \times 2$ tensor would

enable usage as a 6D-quantum IMU, by subsequently applying atom optics from x , y and z -direction.

Phase sensitivity - The phase response of each of the single atom interferometers of the array is subject to all inertial forces acting on the reference mirror. Rotational effects induce phase shifts scaling with the initial kinematics of the BECs with respect to the reference mirror and thus, are of special interest here. Generally, considering all three possible axes, we can write the phase signal in terms of the linear acceleration vector \mathbf{a} , linear acceleration gradient tensor $\hat{\Gamma}$, angular velocity tensor $\hat{\Omega}$ and angular acceleration tensor $\dot{\hat{\Omega}}$,

$$\mathbf{a} = \begin{pmatrix} a_x \\ a_y \\ a_z \end{pmatrix}, \hat{\Gamma} = \begin{pmatrix} \frac{\partial a_x}{\partial x} & \frac{\partial a_x}{\partial y} & \frac{\partial a_x}{\partial z} \\ \frac{\partial a_y}{\partial x} & \frac{\partial a_y}{\partial y} & \frac{\partial a_y}{\partial z} \\ \frac{\partial a_z}{\partial x} & \frac{\partial a_z}{\partial y} & \frac{\partial a_z}{\partial z} \end{pmatrix}, (\hat{\Omega})^2 = \begin{pmatrix} -\Omega_x^2 - \Omega_z^2 & \Omega_x \Omega_y & \Omega_x \Omega_z \\ \Omega_x \Omega_y & -\Omega_x^2 - \Omega_z^2 & \Omega_y \Omega_z \\ \Omega_x \Omega_z & \Omega_y \Omega_z & -\Omega_x^2 - \Omega_y^2 \end{pmatrix}, \dot{\hat{\Omega}} = \begin{pmatrix} 0 & -\dot{\Omega}_z & \dot{\Omega}_y \\ \dot{\Omega}_z & 0 & -\dot{\Omega}_x \\ -\dot{\Omega}_y & \dot{\Omega}_x & 0 \end{pmatrix} \begin{matrix} k_{\text{eff},x} \\ k_{\text{eff},y} \\ k_{\text{eff},z} \end{matrix}. \quad (1)$$

For an arbitrarily oriented sensitive axis, defined by

$\mathbf{k}_{\text{eff}} = (k_{\text{eff},x}, k_{\text{eff},y}, k_{\text{eff},z})^T$, we find with the approach

demonstrated in Refs. [28, 30, 31],

$$\phi_{ijk} = 2T^2 \mathbf{k}_{\text{eff}} \cdot [\mathbf{a} + (\hat{\Gamma} - \dot{\hat{\Omega}} - (\hat{\Omega})^2) \cdot (\mathbf{r}_{ijk} - \mathbf{r}_M)], \quad (2)$$

where rotations of $\hat{\Gamma}$ and initial velocities were neglected. The indices $i, j, k \in \mathbb{N}$ label the position in the 3D BEC array. $\mathbf{r}_{ijk} = (x_{ijk}, y_{ijk}, z_{ijk})^T$ and $\mathbf{r}_M = (x_M, y_M, z_M)^T$ denote the initial positions of the BECs and the mirror's rotation center, respectively. The various components of the tensors are directly related to the experimental setup required for their measurement. Row-wise components can be measured by choosing different sensitive axes ($k_{\text{eff},x}, k_{\text{eff},y}, k_{\text{eff},z}$), whereas measuring column-wise components relies on the differential positions available from the BEC array ($\Delta x, \Delta y, \Delta z$). Notably, a conventional atom interferometer with a stationary initial BEC is only able to detect the diagonal elements. Utilizing the spatial extent of a BEC is possible but offers very limited sensitivity due to the relatively small area covered [32]. The inertial quantities under consideration here are marked in red in eq. (1). Our setup comprises an interferometer beam aligned with the x -axis ($k_{\text{eff},x}$) and a 2D BEC array oriented in the x - y -plane ($\Delta x, \Delta y$), allowing the measurement of a_x , $(\partial_x a_x + \Omega_y^2 + \Omega_z^2)\Delta x$ and $(\partial_y a_x - \Omega_x \Omega_y + \dot{\Omega}_z)\Delta y$. Here, we consider rotations with constant angular acceleration $\dot{\Omega}_M$ around the z -axis (Fig. 1), $\alpha_M(t) = \alpha_{M,0} + \Omega_M(t-T) + \frac{1}{2}\dot{\Omega}_M(t-T)^2$, where Ω_M is the angular velocity, sampled around the temporal center of the atom interferometer sequence corresponding to the interrogation time T . Furthermore, we align the sensitive axis perpendicular to the gravitational acceleration g up to a slight tilt θ_g , inducing a small linear acceleration $a_{x,ij} = g \sin(\theta_g)$. The leading order atom interferometer phase signal is

$$\phi_{ij} = 2k_{\text{eff}}T^2[a_{x,ij} + (y_{ij} - y_M)\dot{\Omega}_M + 2(x_{ij} - x_M)(\Omega_M^2 + \frac{7}{2}\dot{\Omega}_M^2T^2)], \quad (3)$$

including a higher order term accounting for high angular accelerations. We further neglected phase shifts induced by gravity gradients and Earth's rotation rate due to the limited interrogation times $T < 5$ ms. As the rotation rate appears squared in the phase, we are restricted to measuring the absolute value of the rotation rate, $|\Omega_M|$. In a full 3D setup, the sign ambiguity can be resolved by considering the relationships between Ω and $\dot{\Omega}$ [33]. Alternatively, a linear relation in the phase could be achieved by considering correlations between two BECs initialized with different velocities [34]. For simplicity, we will omit the absolute value notation in the following discussion.

Rotation measurement - For demonstration and characterization of our sensor, we initialize a 3×3 array with spatial separation of $(d_x, d_y) = (1.0, 0.435)$ mm, negligible initial velocity and in the $|F=1, m_F=0\rangle$ state. A detailed description of the production, state

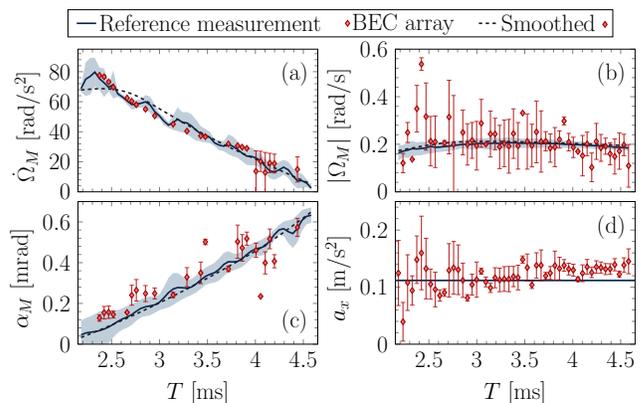


FIG. 3. Result of fitting the relative populations compared to a direct measurement. By taking the column-wise and row-wise differences of the phases at the mid fringe, the angular acceleration $\dot{\Omega}_M$ and angular velocity Ω_M are obtained in (a) and (b), respectively. Further, this allows the reconstruction of the mirror's angle α_M up to constant offset in (c). Fitting an angle α_M defined by a spline interpolation between 5 equidistant points to match the measured Ω_M and $\dot{\Omega}_M$ smooths the measurement points (dashed lines). The results obtained from the differential atom interferometric measurements (red diamonds) are compared to a direct measurement of the mirror's rotation (solid blue line). Using these rotational observables, the linear acceleration can be isolated from the phase, eq. (3). Note that this requires a preceding calibration of the mirror's rotation center with respect to the BEC array's center, $x_M = 0.25$ m and $y_M = 1.2$ mm. The remaining linear acceleration obtained from the fringes (red diamonds), Fig. 2, is depicted in (d) together with the average acceleration measured without rotations (solid blue line).

preparation, and transport of the BEC array, as well as the interferometry setup, is provided in the supplemental material [34] (see also references [35–39] therein). We subsequently release the BECs from the crossed ODT and apply the first interferometer pulse after 1 ms of free fall. We scan the interrogation time T from 2.182 ms to 4.582 ms in 50 equidistant steps to obtain the atom interferometer phase $\phi_{ij}(T)$ in post processing (cf. eq. (3)). The experiment was calibrated and analyzed alongside a sophisticated ab-initio theoretical model, which was further simplified to highlight key figures of merit relevant to this study [15]. The signal under consideration is the normalized population, $P_{ij} = N_{ij, \pm \hbar k_{\text{eff}}} / N_{ij, \text{tot}}$, of the $\pm \hbar k_{\text{eff}}$ states which is of the form,

$$P_{ij}(T) = P_{ij,0} + \frac{1}{2}C_{ij} \times \sin(\phi_{ij}(T) + \phi_0), \quad (4)$$

where $P_{ij,0}$ denotes a population offset, C_{ij} the contrast of the interferometer and ϕ_0 a constant phase offset (cf. Fig. 2). We furthermore induce a site-dependent phase shift by applying an angular velocity of $\Omega_M \sim 0.2$ rad s $^{-1}$ and angular acceleration of $\dot{\Omega}_M \sim 40$ rad s $^{-2}$ to the retro-reflecting mirror throughout the interferometer sequence using a piezo tip-tilt stage (cf. Fig. 3 (c)).

We focus on interrogation times T_{mf} around the midfringe positions, $|\sin(\phi_{ij}(T_{\text{mf}}) + \phi_0)| \leq 0.05$ rad, where the relative population can be assumed to be directly proportional to the phase shift, $P_{ij}(T_{\text{mf}}) \approx P_{ij,0} + \frac{1}{2}C_{ij} \times (\phi_{ij}(T_{\text{mf}}) + \phi_0 + 2\pi n)$, $n \in \mathbb{N}$. For these times T_{mf} , the angular velocity and angular acceleration can be directly obtained from the row-wise and column-wise differences of the phases: $\Omega_M^2(T_{\text{mf}}) = (\phi_{i+1,j} - \phi_{i,j}) / (4k_{\text{eff}}d_x T_{\text{mf}}^2)$ and $\dot{\Omega}_M(T_{\text{mf}}) = (\phi_{i,j+1} - \phi_{i,j}) / (2k_{\text{eff}}d_y T_{\text{mf}}^2)$. For large $\dot{\Omega}_M$, the second order term $\propto \dot{\Omega}_M^2 T^4$ needs to be taken into account and subtracted from the Ω_M^2 . Notably, this is based on single measurements, utilizing common-mode noise rejection. Subsequently, $\Omega_M(t)$ and $\dot{\Omega}_M(T)$ are averaged over individual measurements. Furthermore, we constrain the temporal change of the angular velocity, $\Omega_M^2(T) \approx (\alpha_M^2(0) - 2\alpha_M^2(T) + \alpha_M^2(2T)) / (2T^2)$ to be consistent with the angular acceleration, $\dot{\Omega}_M(T) \approx (\alpha_M(0) - 2\alpha_M(T) + \alpha_M(2T)) / T^2$, using the discrete samples of the mirror angle $\alpha_M(t)$ at times 0, T and $2T$. To further smooth the measurement results, we fit $\alpha_M(t)$ using spline interpolation between 5 equidistant points to match the measured Ω_M and $\dot{\Omega}_M$ at the corresponding times. The time series of $\dot{\Omega}_M(T)$, $\Omega_M(T)$ and $\alpha_M(T)$ are summarized in Fig. 3.

We observe good qualitative agreement between the results obtained from fitting the interferometer phases and a direct measurement of the mirror's rotation obtained from deflection measurements. The extraction of the linear acceleration from the dataset requires an estimate of x_M and y_M , achievable by performing preceding calibration experiments using known mirror rotations or an additional imaging system. Here, we measure $x_M = 0.25$ m and calibrate $y_M = 1.2$ mm using the classical measurement. Similarly, the linear acceleration $a_{x,ij}$ is determined by subtracting the rotation-induced accelerations from the total phase. This phase is derived by considering small time windows of constant accelerations, which are swept over the signal (see Fig. A6 and Fig. A7 in supplemental material [34]). The resulting linear acceleration is shown in Fig. 3. We find good consistency with a preceding atom interferometric measurement of just the residual linear acceleration (see Fig. A5 in supplemental material [34]). These measurements additionally incorporate a beating pattern, resulting from an imperfect beam-splitting pulse, as predicted by the double-Bragg-diffraction ab-initio theory [15]. Deviations from the preceding measurement can be explained by a slight tilt of the mirror's rotational axis with respect to gravity.

Finally, using eq. (4) we convert the total phase shift $\phi_{ij}(T)$ to relative populations $P_{ij}(T)$, fitting the contrast C_{ij} , population offset $P_{ij,0}$ and show the results along side with the experimental data in Fig. 2.

Performance assessment - We assess the sensor's sensitivity two-fold. On one hand, the uncertainty of linear acceleration measurements relies on the analysis of the

individual sensitivities per array site. On the other hand, gradiometric and gyroscopic measurements are based on differential signals between individual BECs and benefit from common-mode rejection, thus only involving position-dependent noise sources. The sensor's fundamental sensitivity limit to an acceleration a is given by $\delta a_{ij}^{\text{SN}} = \delta \phi_{ij}^{\text{SN}} / (2k_{\text{eff}}T^2)$ where $\delta \phi_{ij}^{\text{SN}} = 1 / (C_{ij}\sqrt{N_{ij}})$ is the quantum projection noise floor. Here, C_{ij} denotes the contrast and N_{ij} the atom number of the (i, j) atom interferometer. For our experiment with $N_{ij} = 10^4$, $C_{ij} = 0.6$ and $2T = 6$ ms, we find $\delta a_{ij}^{\text{SN}} = 6 \times 10^{-5} \text{ m s}^{-2}$, while all measurements are dominated by vibration noise estimated at a level of $\sim 1 \times 10^{-4} \text{ m s}^{-2}$. In contrast, vibrational noise is suppressed in the differential measurement of linear acceleration gradients or rotation rates, but requires the precise knowledge of the BECs' differential initial kinematics. For convenience, we define the pair-wise sensitivity limit, $\delta \phi_j^{\text{SN}} = \sqrt{\sum_i (\delta \phi_{ij}^{\text{SN}})^2}$ with i (j) labeling rows (columns). The shot noise limited sensitivity for acceleration gradients γ is given by $\delta \gamma_j^{\text{SN}} = \delta \phi_j^{\text{SN}} / (2d_x k_{\text{eff}}T^2) = 6.1 \times 10^{-2} \text{ s}^{-2}$. To first order in T^2 , the angular velocity Ω and acceleration $\dot{\Omega}$ can be inferred by correlating phase measurements of BECs distributed along or transversely to the beam direction. The sensitivity limits are $\delta \Omega_j^{\text{SN}} = \delta \phi_j^{\text{SN}} / (8d_x \Omega k_{\text{eff}}T^2)$ and $\delta \dot{\Omega}_i^{\text{SN}} = \delta \phi_i^{\text{SN}} / (2d_y k_{\text{eff}}T^2)$, respectively. Here, we find $\delta \Omega_j^{\text{SN}} = 1.5 \times 10^{-2} \text{ rad}^2 \text{ s}^{-2} / \Omega$ and $\delta \dot{\Omega}_i^{\text{SN}} = 1.4 \times 10^{-1} \text{ rad s}^{-2}$. For the considered angular velocity of $\Omega \sim 0.2 \text{ rad s}^{-1}$, this yields $\delta \Omega_j^{\text{SN}} = 76 \text{ mrad s}^{-1}$.

Conventional atom interferometers are commonly limited to low rotation rates due to a diminishing contrast, $C \propto \exp(\sigma_v k_{\text{eff}}T^2\Omega)$, scaling with the expansion velocity σ_v , as the two branches of the interferometer no longer close in phase space [40]. Thus, sensors based on thermal ensembles are limited to rotation rates $\Omega \sim 100 \text{ mrad s}^{-1}$ and require rotation compensation [11, 41]. The quantum sensor demonstrated here is highly sensitive at even large rotation rates, due to the favorable $\propto \Omega^2$ scaling and the low expansion velocities of the BECs. For the comparably high angular velocities of $\Omega \sim 200 \text{ mrad s}^{-1}$ considered in the presented measurements we achieve a contrast of ~ 0.6 . We estimate it to drop below 0.4 for rotation rates higher than 500 mrad s^{-1} , yielding a fundamental sensitivity of $\delta \Omega_j^{\text{SN}} = 31 \text{ mrad s}^{-1}$ for this rotation rate at ensemble temperatures of 9 nK. Further collimation of the BECs can push this limit orders of magnitude further [42].

Conclusion and outlook - We have demonstrated a novel approach to multi-axis inertial sensing by using a 2D BEC array as input for MZAI to realise an inertial measurement of up to 3 quantities simultaneously. By differential readout of the simultaneous interferometers at midfringe row- and column wise, we were able to measure the linear acceleration, angular velocity, and angular acceleration of the reference mirror. The method's

overall sensitivity to inertial effects is solely limited by technical constraints, such as vibration isolation levels, short baselines, and the orientation control of the sensitive axis. The interrogation time in the present experiment is bounded to a few milliseconds as the BECs fall out of the horizontal atom optics light field due to gravity. However, if we consider modified parameters, such as $T = 10$ ms, $C_{ij} = 1$, $N_{ij} = 10^5$, $d_x = 4$ mm and 1 nK ensemble temperature, the fundamental sensitivity limit $\delta\Omega_j^{\text{SN}}$ would improve to 1×10^{-4} rad s $^{-1}$ at a rotation rate of $\Omega = 0.5$ rad s $^{-1}$, showing the potential of the method for inertial sensing in dynamic environments. We furthermore envision improved sensitivities using guided matter waves [7, 43]. Moreover, our method would greatly benefit from operation in long-baseline interferometers [44–46], where interrogation times on the order of seconds are accessible, thus enabling differential measurements of Earth’s rotation. Ultimately, if such a device is embarked on a satellite, new avenues in space quantum gravimetry, Earth observation or inertial navigation will be open benefiting a wide spectrum of end users [47, 48]. It is worth pointing out that the continuous scalability of array spacings will enable detailed studies of systematic effects and scale factor calibrations. Finally, we anticipate exciting applications of our method for in-situ characterization of electromagnetic fields. Since each BEC effectively measures a local projection of the wave vector onto the gravitational acceleration, it becomes possible to systematically study wave front aberrations with high spatial resolution. Likewise, by observing Rabi oscillations and step-wise translating the array, a full three-dimensional reconstruction of the light field may be realized.

Acknowledgements - We thank G. Müller, B. Piest and C. Schubert for valuable discussions. This work is funded by the Federal Ministry of Education and Research (BMBF) through the funding program Photonics Research Germany under contract number 13N14875 and the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation): Project-ID 274200144 - SFB 1227 DQ-mat (projects A05 and B07), Project-ID 434617780 - SFB 1464 TerraQ (project A02), through the QuantERA 2021 co-funded project No. 499225223 (SQUEIS) and Germany’s Excellence Strategy - EXC-2123 QuantumFrontiers - Project-ID 390837967 and the German Space Agency at the German Aerospace Center (Deutsche Raumfahrtagentur im Deutschen Zentrum für Luft- und Raumfahrt, DLR) with funds provided by the German Federal Ministry of Economic Affairs and Climate Action due to an enactment of the German Bundestag under Grants No. 50WM2263A (CARIOQA-GE) and No. 50WM2253A (AI-Quadrat).

-
- * schlippert@iqo.uni-hannover.de
- [1] M. Kasevich and S. Chu, *Phys. Rev. Lett.* **67**, 181 (1991).
 - [2] R. Geiger, V. Ménoret, G. Stern, N. Zahzam, P. Cheinet, B. Battelier, A. Villing, F. Moron, M. Lours, Y. Bidel, A. Bresson, A. Landragin, and P. Bouyer, *Nature Communications* **2** (2011), 10.1038/ncomms1479.
 - [3] A. Peters, K. Y. Chung, and S. Chu, *Metrologia* **38**, 25 (2001).
 - [4] J. M. McGuirk, G. T. Foster, J. B. Fixler, M. J. Snadden, and M. A. Kasevich, *Physical Review A* **65** (2002), 10.1103/physreva.65.033608, publisher: American Physical Society (APS).
 - [5] G. Rosi, L. Cacciapuoti, F. Sorrentino, M. Menchetti, M. Prevedelli, and G. Tino, *Physical Review Letters* **114**, 013001 (2015), publisher: American Physical Society.
 - [6] P. Asenbaum, C. Overstreet, T. Kovachy, D. Brown, J. Hogan, and M. Kasevich, *Phys. Rev. Lett.* **118**, 183602 (2017).
 - [7] K. A. Krzyzanowska, J. Ferreras, C. Ryu, E. C. Samson, and M. G. Boshier, *Phys. Rev. A* **108**, 043305 (2023).
 - [8] R. Gautier, M. Guessoum, L. A. Sidorenkov, Q. Bouton, A. Landragin, and R. Geiger, *Science Advances* **8**, eabn8009 (2022).
 - [9] P. Berg, S. Abend, G. Tackmann, C. Schubert, E. Giese, W. P. Schleich, F. A. Narducci, W. Ertmer, and E. M. Rasel, *Phys. Rev. Lett.* **114**, 063002 (2015), publisher: American Physical Society.
 - [10] J. K. Stockton, K. Takase, and M. A. Kasevich, *Physical Review Letters* **107**, 133001 (2011), publisher: American Physical Society.
 - [11] Q. d’Armagnac de Castanet, C. D. Cognets, R. Arguet, S. Templier, V. Jarlaud, V. Ménoret, B. Desruelle, P. Bouyer, and B. Battelier, “Atom interferometry at arbitrary orientations and rotation rates,” (2024), arXiv:2402.18988 [physics.atom-ph].
 - [12] B. Canuel, F. Leduc, D. Holleville, A. Gauguier, J. Fils, A. Virdis, A. Clairon, N. Dimarcq, C. J. Bordé, A. Landragin, and P. Bouyer, *Phys. Rev. Lett.* **97**, 010402 (2006), publisher: American Physical Society.
 - [13] B. Barrett, P. Cheiney, B. Battelier, F. Napolitano, and P. Bouyer, *Phys. Rev. Lett.* **122**, 043604 (2019), publisher: American Physical Society.
 - [14] M. Gersemann, M. Gebbe, S. Abend, C. Schubert, and E. M. Rasel, *The European Physical Journal D* **74**, 203 (2020).
 - [15] R. Li, V. J. Martínez-Lahuerta, S. Seckmeyer, K. Hammerer, and N. Gaaloul, “Robust double bragg diffraction via detuning control,” (2024), arXiv:2407.04754 [quant-ph].
 - [16] S. M. Dickerson, J. M. Hogan, A. Sugarbaker, D. M. S. Johnson, and M. A. Kasevich, *Physical Review Letters* **111** (2013), 10.1103/physrevlett.111.083001.
 - [17] Y.-J. Chen, A. Hansen, G. W. Hoth, E. Ivanov, B. Pelle, J. Kitching, and E. A. Donley, *Phys. Rev. Appl.* **12**, 014019 (2019).
 - [18] C. Deppner, W. Herr, M. Cornelius, P. Stromberger, T. Sterneke, C. Grzeschik, A. Grote, J. Rudolph, S. Herrmann, M. Krutzik, A. Wenzlawski, R. Corgier, E. Charon, D. Guéry-Odelin, N. Gaaloul, C. Lämmerzahl, A. Peters, P. Windpassinger, and E. M. Rasel, *Phys.*

- Rev. Lett. **127**, 100401 (2021).
- [19] S. Jose, P. Surendran, Y. Wang, I. Herrera, L. Krzemien, S. Whitlock, R. McLean, A. Sidorov, and P. Hanaford, *Physical Review A* **89** (2014), 10.1103/physreva.89.051602.
- [20] K. Gosar, V. P. Jevšenak, T. Mežnaršič, D. Babič, I. Poberaj, E. Zupanič, and P. Jeglič, *Physical Review A* **106** (2022), 10.1103/physreva.106.022604.
- [21] J. Nemirovsky, R. Weill, I. Meltzer, and Y. Sagi, *Physical Review Research* **5**, 043300 (2023).
- [22] Y. Huang, S. Nagata, J. Jachinowski, J. Hu, and C. Chin, arXiv preprint arXiv:2404.14142 (2024).
- [23] R. Roy, A. Green, R. Bowler, and S. Gupta, *Phys. Rev. A* **93**, 043403 (2016).
- [24] G. Condon, M. Rabault, B. Barrett, L. Chichet, R. Arguel, H. Eneriz-Imaz, D. Naik, A. Bertoldi, B. Battelier, P. Bouyer, and A. Landragin, *Physical Review Letters* **123** (2019), 10.1103/physrevlett.123.240402.
- [25] A. Herbst, T. Estrampes, H. Albers, V. Vollenkemper, K. Stolzenberg, S. Bode, E. Charron, E. M. Rasel, N. Gaaloul, and D. Schlippert, *Phys. Rev. Res.* **6**, 013139 (2024).
- [26] H. Ahlers *et al.*, *Phys. Rev. Lett.* **116**, 173601 (2016).
- [27] A. Wanner, G. Bergmann, A. Bertolini, T. Fricke, H. Lück, C. M. Mow-Lowry, K. A. Strain, S. Göfler, and K. Danzmann, *Classical and Quantum Gravity* **29**, 245007 (2012), publisher: IOP Publishing.
- [28] N. Shettell and R. Dumke, “Emulating an Atomic Gyroscope with Multiple Accelerometers,” (2023), arXiv:2301.11155 [physics].
- [29] P. Cheiney, L. Fouché, S. Templier, F. Napolitano, B. Battelier, P. Bouyer, and B. Barrett, *Physical Review Applied* **10**, 034030 (2018), publisher: American Physical Society.
- [30] Q. Beaufiles, J. Lefebve, J. G. Baptista, R. Piccon, V. Cambier, L. A. Sidorenkov, C. Fallet, T. Lévêque, S. Merlet, and F. Pereira Dos Santos, *npj Microgravity* **9**, 53 (2023).
- [31] C. Struckmann, R. Corgier, S. Loriani, G. Kleinsteinberg, N. Gox, E. Giese, G. Métris, N. Gaaloul, and P. Wolf, *Phys. Rev. D* **109**, 064010 (2024).
- [32] S. M. Dickerson, J. M. Hogan, A. Sugarbaker, D. M. S. Johnson, and M. A. Kasevich, *Physical Review Letters* **111**, 083001 (2013), publisher: American Physical Society.
- [33] T. R. Williams, D. W. Raboud, and K. R. Fyfe, *Journal of Dynamic Systems, Measurement, and Control* **135**, 021016 (2013).
- [34] See Supplemental Material at [URL will be inserted by publisher] for details on the production, state preparation and transport of the 2D BEC array, theoretical prediction of the atom interferometer phase shift and phase estimation for time dependent scale factors.
- [35] E. Torrontegui, S. Ibáñez, X. Chen, A. Ruschhaupt, D. Guéry-Odelin, and J. G. Muga, *Phys. Rev. A* **83**, 013415 (2011).
- [36] E. Giese, A. Roura, G. Tackmann, E. M. Rasel, and W. P. Schleich, *Phys. Rev. A* **88**, 053608 (2013).
- [37] J. Küber, F. Schmaltz, and G. Birkel, “Experimental realization of double bragg diffraction: robust beamsplitters, mirrors, and interferometers for bose-einstein condensates,” (2016), arXiv:1603.08826 [cond-mat.quant-gas].
- [38] H.-R. Noh, S. E. Park, L. Z. Li, J.-D. Park, and C.-H. Cho, *Opt. Express* **19**, 23444 (2011).
- [39] R. H. Parker, C. Yu, B. Estey, W. Zhong, E. Huang, and H. Müller, *Phys. Rev. A* **94**, 053618 (2016).
- [40] A. Roura, W. Zeller, and W. Schleich, *New J. Phys.* **16**, 123012 (2014).
- [41] T. Sato, N. Nishimura, N. Kaku, S. Otabe, T. Kawasaki, T. Hosoya, and M. Kozuma, arXiv preprint arXiv:2407.05696 (2024).
- [42] A. Herbst, T. Estrampes, H. Albers, R. Courcier, K. Stolzenberg, S. Bode, E. Charron, E. M. Rasel, N. Gaaloul, and D. Schlippert, *Communications Physics* **7**, 13786 (2024).
- [43] G. McDonald, C. Kuhn, S. Bennetts, J. Debs, K. Hardman, J. Close, and N. Robins, *Eur. Phys. Lett.* **105**, 63001 (2014).
- [44] C. Overstreet, P. Asenbaum, J. Curti, M. Kim, and M. A. Kasevich, *Science* **375**, 226 (2022), publisher: American Association for the Advancement of Science.
- [45] D. Schlippert, C. Meiners, R. Rengelink, C. Schubert, D. Tell, É. Wodey, K. Zipfel, W. Ertmer, and E. Rasel, in *CPT and Lorentz Symmetry* (WORLD SCIENTIFIC, 2021).
- [46] L. Zhou, S.-T. Yan, Y.-H. Ji, C. He, J.-J. Jiang, Z. Hou, R.-D. Xu, Q. Wang, Z.-X. Li, D.-F. Gao, M. Liu, W.-T. Ni, J. Wang, and M.-S. Zhan, *Frontiers in Physics* **10** (2022).
- [47] T. Lévêque, C. Fallet, J. Lefebve, A. Piquereau, A. Gauguet, B. Battelier, P. Bouyer, N. Gaaloul, M. Lachmann, B. Piest, E. Rasel, J. Müller, C. Schubert, Q. Beaufiles, and F. P. D. Santos, “Carioqa: Definition of a quantum pathfinder mission,” (2022), arXiv:2211.01215 [physics.atom-ph].
- [48] H. Ahlers, L. Badurina, A. Bassi, B. Battelier, Q. Beaufiles, K. Bongs, P. Bouyer, C. Braxmaier, O. Buchmueller, M. Carlesso, E. Charron, M. L. Chiofalo, R. Corgier, S. Donadi, F. Droz, R. Ecoffet, J. Ellis, F. Estève, N. Gaaloul, D. Gerardi, E. Giese, J. Grosse, A. Hees, T. Hensel, W. Herr, P. Jetzer, G. Kleinsteinberg, C. Klempt, S. Lecomte, L. Lopes, S. Loriani, G. Métris, T. Martin, V. Martín, G. Müller, M. Nofrarias, F. P. D. Santos, E. M. Rasel, A. Robert, N. Saks, M. Salter, D. Schlippert, C. Schubert, T. Schuldt, C. F. Sopena, C. Struckmann, G. M. Tino, T. Valenzuela, W. von Klitzing, L. Wörner, P. Wolf, N. Yu, and M. Zelan, “STE-QUEST: Space Time Explorer and QUantum Equivalence principle Space Test,” (2022), arXiv:2211.15412 [gr-qc, physics:hep-ex, physics:hep-ph, physics:physics, physics:quant-ph].

SUPPLEMENTAL MATERIAL: MULTI-AXIS INERTIAL SENSING WITH 2D ARRAYS OF MATTER WAVES

Optical dipole trap

Key feature of the experimental setup is the ODT setup. The BEC array is created in a sectional plane of both ODT beams in x/y-direction (Fig. 1 in the main text). The beam is collimated and split into two beam paths (BP1/2 in Fig. 1). The two beams differ in power and beam waist in the center of the experimental chamber - BP1 has a power of 3.5 W and a beam waist of 22 μm . BP2 has 30 W of power and a beam waist of 80 μm . One 2D-acousto optical deflector (AOD) (DTSXY-400) per beam path enables control of the position, amplitude and number of modes in the crossed ODT. The AODs are supplied with signals generated by a software defined radio (SDR) in the horizontal directions. The software to drive the SDR is custom made and tailored to the experiment. By applying simultaneously multiple frequency ramps to the AODs distinct harmonic wells in the form of a 2D array can be created.

Hybrid trap & Optical evaporation

Starting point of the production of the 2D BEC array is a precooled ensemble of $\sim 1 \times 10^9$ ^{87}Rb atoms with a temperature of 560 μK in a magnetic trap. Using a microwave (MW) knife [1] the atoms are evaporatively cooled and after 1.05 s of evaporation a temperature of 150 μK is reached. At this point the ODT is switched on with maximum power.

After another 800 ms the magnetic field gradient is decreased to 78 G cm^{-1} and further MW knife evaporation yields an ensemble consisting of $1 - 1.5 \times 10^8$ atoms at a temperature of 50 μK . The atoms transferred into the crossed ODT are now cooled to BEC by optical evaporation. This is done by using three modes in each of the two beam paths. They have a spatial position of -511.2, -319.5, -127.8 μm in x and -97, 48.5, 194 μm in y towards the camera taking absorption images in z -direction, coaligned with gravity. After 2.55 s of all optical evaporation the cooling sequence is completed. Powers in the ODT beams were exponentially ramped down to 85 mW (BP1) and 437 mW (BP2). The atom number in the resulting 3×3 2D BEC array is $\sim 3 \times 10^5$. The BEC grid has spatial separation of $(d_x, d_y) = (191, 48.5) \mu\text{m}$ in the x / y - plane.

State preparation & Optical transport

For transferring the ensembles in the $|F = 1, m_F = 0\rangle$ state a sequence of Rabi- π pulses of the MW is used.

Active magnetic field stabilisation in z -direction compensates for earth's magnetic field and lifts the degeneracy of the hyperfine levels with $B_z = 3.69 \text{ G}$. The state preparation has an efficiency of > 0.95 and remaining atoms in the magnetic sensitive states are removed by switching on the magnetic field for one second.

For transporting the ensembles, sigmoidal frequency

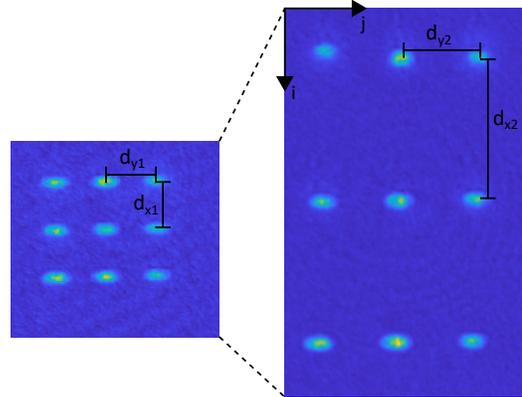


FIG. A4. **Absorption images prior to and after the transport ramp.** The distances $d_{x1/y1}$ are increased to $d_{x2/y2}$ after applying the sigmoidal frequency ramps shown in A5. The Bose-Einstein condensates of the array are labeled using (i, j) for the condensate in the i th row and j th column.

ramps are applied to the AODs [35], effectively stretching the array. The final positions of the BECs is set to -660.3, -21.3, -617.7 μm in x - and -242.5, 48.5, 339.5 μm in y -direction. In Fig. A4 absorption images before and after the transport are shown and in Fig. A5 a) the trajectories of the BECs in the x/y -direction are displayed. The resulting 3×3 -grid has a spacing of $(d_x, d_y) = (0.6, 0.3) \text{ mm}$, a bit smaller than the array used in the main body of the paper. However, the position separation of the BECs in the array is on the order of approximately 1 mm and can be extended to $(d_x, d_y) = (1.0, 0.435) \text{ mm}$. It is primarily limited by the sectional plane of the two intersecting light fields of the crossed ODT and their Rayleigh range. In Fig. A5 b) the atom number of each BEC is shown for a transportation time of 400 ms. The efficiencies E_{ij} of the transport ramps range from .6 to .95 depending on the transported distance (Fig. A5 c)).

We observe differing trapping frequencies which can be explained by different amplitudes of the RF-signal supplying the AOD and a tilt in the sectional plane of the two laser beams. The trap frequency measurement yields following values for the trap frequencies in $x / y / z$ [Hz]: 93.7, 100.1, 104.4, 115.1, 122.5, 126.8, 128.9, 136.9, 139.6 / 17.6, 24.8, 28.6, 24.7, 28.6, 30.3, 23.3, 28.6, 30.5 / 176.9, 170.4, 176.2, 149.0, 157.9, 165.3, 138.5, -, - for the BECs 1 - 9. For the measurement of the trap frequency in z -

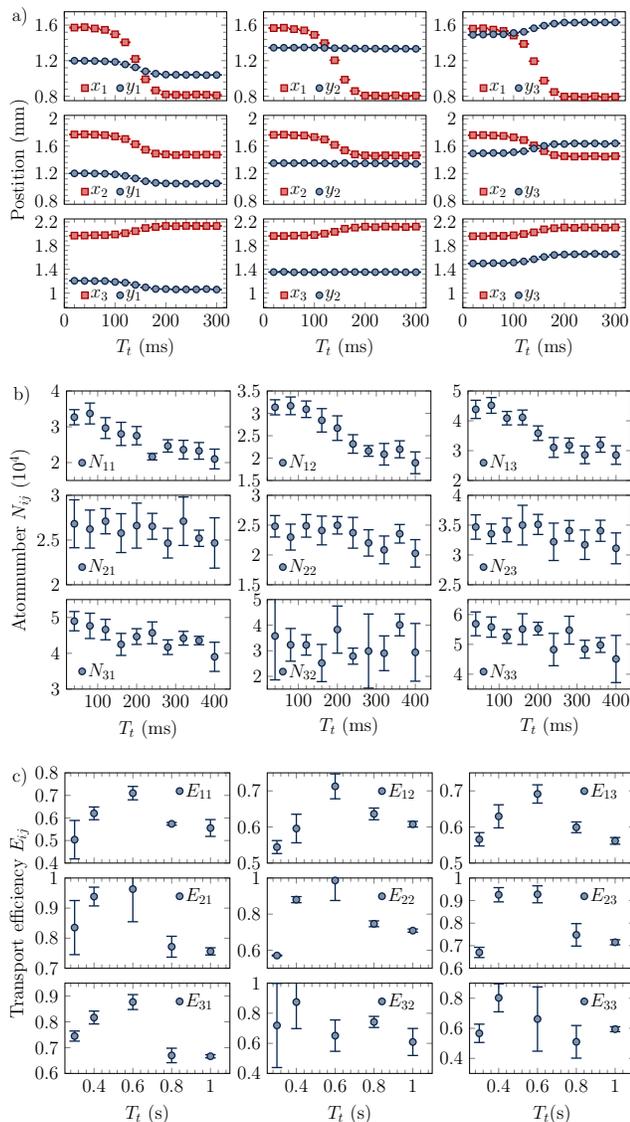


FIG. A5. **Characterisation of a transport ramp for the 3×3 -array.** **a)** Trajectories for the 9 BECs moving in x/y -direction (red/blue). The resulting grid has a spacing of $(d_x, d_y) = (0.6, 0.3)$ mm. **b)** Atom numbers in the BECs for a 400 ms transport ramp. **c)** Efficiencies of the transport, meaning the atom number at the start of the ramp divided by the atom number at the end of the transport ramp.

direction fluorescence detection was used such that not all nine ensembles were sufficiently resolved. This is why ensemble (3, 2) and (3, 3) are missing. The effective temperatures of the samples ranges from 6 - 9 nK in x, z -direction. The now well separated BEC grid can be used for atom interferometry.

Interferometry setup & Bragg diffraction

The light pulses to drive the $\pi/2$ - and π -pulses of the interferometer are double-Bragg diffraction pulses [36, 37]. We use a frequency doubled Lumibird Keopsys CEFL-KILO MOPA (BL) with output power of 200 mW for interferometry and for referencing the cooling and re-pump laser that are used for the cooling steps prior to the ODT. The BL is locked to the ^{85}Rb cooling transition via modulation transfer spectroscopy [38].

A total of 120 mW is contributed to the system and first

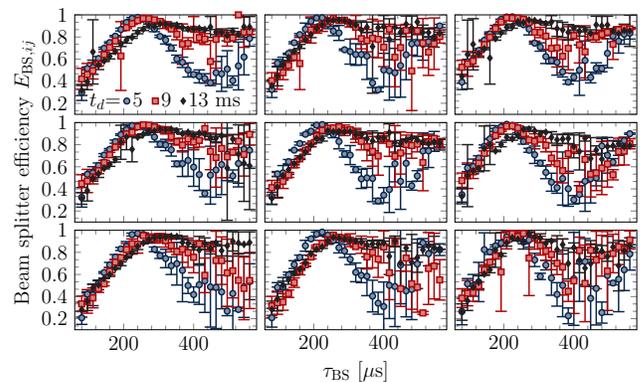


FIG. A6. **Rabi oscillations of the double Bragg diffraction.** The oscillations were measured by scanning the pulse duration τ_{BS} for different pre-tof durations t_d . Since the atoms fall through the Bragg beam with a diameter of 8 mm $1/e^2$ the oscillation retards and the efficiency drops as t_d increases. The array had dimensions of $(d_x, d_y) = (660, 290)$ μm .

split at a polarisation beam splitter (PBS). Both beams are thereafter diffracted with two AOMs driven at 200 and 200.015 MHz and the first orders are recombined at a second PBS to overlap them and ensure orthogonal polarisations. Before transferring them into a fiber leading to the experiment, they are directed through another AOM for switching. The RF-signal supplied into this AOM has a gaussian amplitude envelope, for optimal efficiencies of the Bragg-pulses [39]. A total of 12 mW in both beams is transferred to the experimental chamber.

The beam is collimated to 8 mm $1/e^2$ beam diameter and coaligned with BP1 of the ODT. Before and after passing through the chamber a dichroic mirror is used to separate ODT and Bragg beam. The Bragg beam is passing a $\lambda/4$ -plate and is retro reflected at a mirror, rotating the polarity of both back reflected beam components by $\pi/2$. This enables Double-Bragg driven atom interferometry with momentum transfer $\pm \hbar k_{\text{eff}}$. The beam splitter/mirror pulse has an efficiency of .95/.80 (Fig. A6 depicting Rabi-oscillations of the beam splitter).

The retro reflection mirror is glued to a 3D-printed mount housing a Thorlabs APF503 piezo (red box in Fig. 1

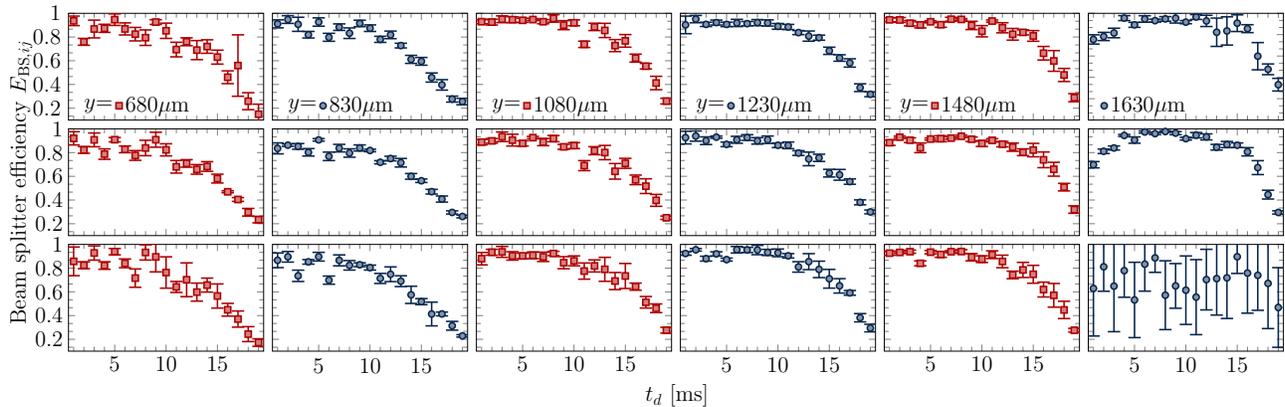


FIG. A7. **Pulse efficiency for different y-positions.** By shifting the array by $150 \mu\text{m}$ and scanning the initial time-of-flight t_d the splitting efficiency was mapped transversal to the Bragg-beam. The efficiency drops from right to left, meaning that the Bragg-beams center is slightly shifted to the right, regarding the 2D BEC array.

in the main text). By applying suitable voltage ramps during the interferometry sequence, the mirror can be tilted in x-direction resulting in an effective rotation of the mirror around the z-axis. The mirror is moreover tilted in z-Axis by an angle $\theta_g < 3^\circ$ to induce accelerations $a_x = g \times \sin \theta_g$, with the gravitational acceleration g . The interferometry pulses are applied after transport and another 1 s of wait time, to calm down any excitations induced by the transport. The ODT beams are switched off and the atoms are free falling in z-direction. After an initial time-of-flight (pre-tof) t_d we apply the first interferometry pulse, starting the interferometer sequence. Since the laser light used for the Bragg-transitions is a gaussian profile with a $1/e^2$ diameter of 8 mm, collimated with a telescope before passing the experimental chamber, the intensity of the gaussian profile can be sampled with the 2D array. This is due to the Rabi-frequency being proportional to $\sqrt{I_1 I_2}$ of the two components of the light field. For characterising the beam splitter, two measurements were made: In the first (Fig. A6) the pulse duration τ_{BS} was scanned for different pre-tofs $t_d = 5, 9, 13$ ms, resulting in a retardation and lower amplitude of the Rabi-frequency for longer t_d durations. The second measurement was taken for optimal pulse duration τ_{BS} , but the pre-tof t_d was scanned. The 2D array was shifted for the second run of the experiment by $150 \mu\text{m}$ in y-direction indicated by the two colors blue/red in Fig. A7. A rise of efficiency from small to big y-values indicates that the Bragg-beam's center is located at the rightmost column of the measurement or even further to the right. However, the Bragg-beam could not be moved further to the left, due to clipping at the 1'-dichroic mirror separating Bragg- and dipole trap beam.

Calibration measurement without induced rotation

In a first step, we perform a calibration measurement without rotating the mirror to identify residual accelerations, e.g., due to a tilt of the sensitive axis with respect to gravity. Note that this is not necessary to extract the linear acceleration from the rotation measurement. For a non-rotating mirror, the phase shift simplifies to $\phi_{ij}|_{\alpha=0} = 2k_{\text{eff}}T^2 a_{x,ij}$. A fit of the associated fringes $P_{ij}|_{\alpha=0}$ has shown $\phi_0 = 0.4\pi$ and $a_{x,ij} = \{0.1111(7), 0.1113(6), 0.1109(6), 0.1109(7), 0.1117(6), 0.1111(6), 0.1112(7), 0.1119(6), 0.1107(6)\} \text{ m s}^{-2}$ for the 9 interferometers top left to bottom right (Fig. A8). Due

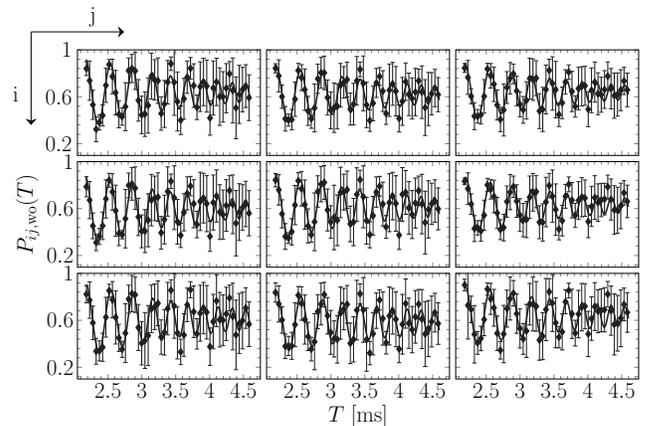


FIG. A8. **Calibration measurement without induced rotations.** Fringes obtained for the 9 simultaneous atom interferometers for $T = 2.182 - 4.582$ ms.

to the fact that the Bragg pulses were optimised for a rotating mirror deflecting the beam by ~ 1 mm, the fringe scans with no mirror rotation incorporate an additional

frequency $\propto a_{x,ij}/2$ leading to alternating visibility with each oscillation. This is owed to an unfavorable efficiency of the beam splitting pulses, as theoretically confirmed by Ref. [15]. Moreover, the differential linear acceleration between two BECs of the grid was measured to be non-zero and can be explained by a position fluctuation of the wave vector's projection onto gravity. Interestingly, this suggests a direct measurement of the Bragg beam's wavefront.

Theoretical prediction of the atom interferometer phase shift

Rotations of the atom interferometer directly couple into the phase shift scaling with the initial kinematics of the atoms. To derive the exact phase shift induced by a certain external rotation, we follow the approach presented in Refs. [11, 30, 31]. First, we derive the laser phase ϕ_L at a time t with the atoms located at position $(x(t), y(t))$ and velocity $(v_x(t), v_y(t))$ from geometric considerations. We find

$$\phi_L(t) = k_{\text{eff}} \cos(\alpha_I(t) - \alpha_M(t)) [(x_M - x(t) \cos(\alpha_M(t)) - (y_m + y(t)) \sin(\alpha_M(t)) + d_M] \quad (\text{E1})$$

where $\alpha_I(t)$ and $\alpha_M(t)$ denote the angle of the laser and the mirror with respect to the x -axis (Fig. 1 in the main text). The mirror is assumed to have a thickness of d_M with its center of rotation given by (x_M, y_M) . In the following, we will assume that the laser is aligned with the x -axis, $\alpha_I(t) = 0$. For small mirror angles the laser phase simplifies to

$$\phi_L = k_{\text{eff}} [(d_M + x_M - x(t)) + (y_M - y(t)) \alpha_M(t) + (x(t) - x_M - \frac{d_M}{2}) \alpha_M(t)^2 + \mathcal{O}(\alpha_M(t)^2)]. \quad (\text{E2})$$

The atom interferometric measurement samples this laser phase at times $t = 0, T, 2T$ where T is the interrogation time. The resulting MZAI phase shift is obtained via

$$\phi = (\phi_L(0)|_{\text{up}} + \phi_L(0)|_{\text{low}}) - 2(\phi_L(T)|_{\text{up}} + \phi_L(T)|_{\text{low}}) + (\phi_L(2T)|_{\text{up}} + \phi_L(2T)|_{\text{low}}), \quad (\text{E3})$$

where up and low denote the upper and lower trajectory of the MZAI separated by $2\hbar k_{\text{eff}}$. Assuming only a linear acceleration along x acting on the atoms yields

$$x(t)|_{\text{up}} = \tilde{x}(t) + \begin{cases} \frac{\hbar k_{\text{eff}}}{m} t, & 0 \leq t < T, \\ \frac{\hbar k_{\text{eff}}}{m} (2T - t), & T < t \leq 2T, \end{cases} \quad (\text{E4})$$

$$x(t)|_{\text{low}} = \tilde{x}(t) - \begin{cases} \frac{\hbar k_{\text{eff}}}{m} t, & 0 \leq t < T, \\ \frac{\hbar k_{\text{eff}}}{m} (t - 2T), & T < t \leq 2T, \end{cases} \quad (\text{E5})$$

where $\tilde{x}(t) = x_0 + v_{x,0}t + \frac{1}{2}a_x t^2$ and $y(t) = y_0 + v_{y,0}t$. Inserting the laser phase into the atom interferometer phase, eq. (E3), results in

$$\begin{aligned} \phi &= 2k_{\text{eff}} [x(0) - 2x(T) + x(2T) \\ &\quad - (\hat{y}(0)\alpha_M(0) - 2\hat{y}(T)\alpha_M(T) + \hat{y}(2T)\alpha_M(2T)) \\ &\quad + \hat{x}(0)\alpha_M(0)^2 - 2\hat{x}(T)\alpha_M(T)^2 + \hat{x}(2T)\alpha_M(2T)^2 \\ &\quad + \mathcal{O}(\alpha_M(t)^2)]. \end{aligned} \quad (\text{E6})$$

where $\hat{x}(t) = x(t) - x_M - \frac{d_M}{2}$ and $\hat{y}(t) = y_M - y(t)$. This expression can be further simplified by expanding the mirror angle around the temporal center of the atom interferometer, $\alpha_M(t) = \alpha_{M,0} + \Omega_M(t-T) + \frac{1}{2}\dot{\Omega}_M(t-T)^2$. The first term of eq. (E6) gives the usual acceleration signal $x(0) - 2x(T) + x(2T) = a_x T^2$ by inserting the MZAI trajectories, eqs. (E4) and (E5). The second term results in an angular acceleration dependency using $\alpha_M(0) - 2\alpha_M(T) + \alpha_M(2T) = \dot{\Omega}_M T^2 + \mathcal{O}(T^3)$. Similarly, the third expression results in an angular velocity dependency via $\alpha_M(0)^2 - 2\alpha_M(T)^2 + \alpha_M(2T)^2 = 2\Omega^2 T^2 + \mathcal{O}(T^3)$. Thus, the full atom interferometer phase shift is given by

$$\begin{aligned} \phi &= -2k_{\text{eff}} T^2 [a_x + 2v_{y,0}\Omega_M + (y_0 - y_M + v_{y,0}T)\dot{\Omega}_M \\ &\quad - 2(x_0 - x_M - \frac{d_M}{2} + v_{x,0}T)\Omega_M^2 \\ &\quad + \mathcal{O}(T^2)]. \end{aligned} \quad (\text{E7})$$

From the phase shift it is clear, that the linear acceleration a_x induces a common position and velocity independent phase shift. The phase shift induced by the mirror's angular velocity, Ω_M , scales with the initial velocity in y -direction and its square is also scaling with the BEC's initial x -position (relative to the mirror's center of rotation). The angular acceleration induces a phase shift scaling with the BEC's initial y -position. Thus, all three inertial observables - a_x , Ω_M and $\dot{\Omega}_M$ - can be obtained from a single measurement by exploiting the correlations between at least three BECs of different x and y positions.

Phase estimation for time dependent scale factors

After incorporating mirror rotations, we expect signals $P_{ij}(T)$ where the phase consists of offset accelerations a_x and time-dependent accelerations $\propto \Omega_M^2(T), \dot{\Omega}_M(T)$ as described by eq. (2) in the main text. To extract the time-varying phase from $P_{ij}(T)$, we consider small intervals of 500 μs , centered around its mean time t , where the frequency of the fringe is assumed to be constant. An example of this method is depicted in A9. By moving this interval over the whole dataset, we receive local estimations of the acceleration signal at the time t , $a_{ij}(t) = \phi_{ij}(t)/(2k_{\text{eff}}t^2)$. The correct continuous phase from the set of partially constant accelerations can be constructed by integrating over temporal acceleration

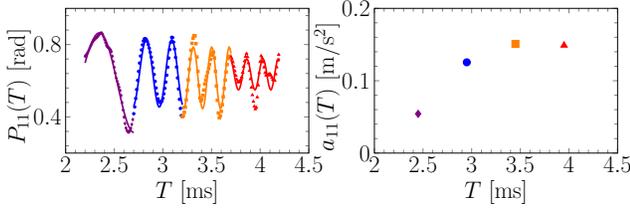


FIG. A9. **Principle of extracting the time dependent acceleration $a_{ij}(T)$.** Mean time dependent frequency $a_{11}(T)$ for a sample fringe of the interferometer array, in particular $P_{11}(T)$. It is extracted by fitting the frequency of 500 μs intervals of the averaged and interpolated fringes.

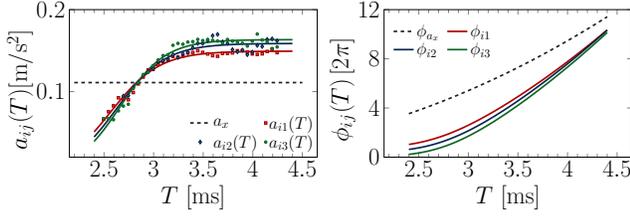


FIG. A10. **Phase estimations $\phi_{ij}(T)$ for integrating the columnwise averaged $a_{ij}(T)$.** The method shown in A9 was applied to all nine fringes of the array. By taking the mean of each column the trajectories of the $a_{ij}(T)$ were obtained. By integrating the trajectories using E8, the columnwise phases $\phi_{ij}(T)$ are calculated. The dashed black line indicates a constant acceleration left and the quadratic evolution of the phase of the interferometers right.

changes:

$$\phi_{ij}(t) = \phi_{ij,0} + 2k_{\text{eff}} \int_0^t [2a_{ij}(\tau)\tau + a'_{ij}(\tau)\tau^2]d\tau. \quad (\text{E8})$$

The phase offset $\phi_{ij,0}$ can be determined by calibration measurements or by performing the scan for small T as $\lim_{T \rightarrow 0} \phi_{ij}(T) = \phi_{ij,0}$. Due to the very small acceleration signal induced by the angular velocity, it is not visible in the phase using this method (Fig. (2) in the main text). Thus, we assume the phase to be the same along the rows. The column-wise phase and the corresponding acceleration is depicted in Fig. A10. The acceleration induced by the angular velocity and angular acceleration can be extracted from the mid fringe positions. The acceleration induced by a non-zero projection of the sensitive axis with respect to gravity could in principle also be inferred from the central fringes. However, this requires the additional knowledge of the phase offset ϕ_0 . Here, we can fit the phase offset to the fringes depicted in Fig. 2 in the main text and extract the linear acceleration from the phase by subtracting rotational induced accelerations (Fig. 3 in the main text).