

A Mathematical Description of the Quasi-Periodically Developed Heat Transfer Regime in Channels with Arrays of Periodic Solid Structures

G. Buckinx^{1, 2, a)}

¹⁾*VITO, Boeretang 200, 2400 Mol, Belgium*

²⁾*EnergyVille, Thor Park, 3600 Genk, Belgium*

(Dated: 26 March 2024)

In this article, we present the governing equations for the temperature field upstream and downstream of the periodically developed flow region in channels with arrays of periodic solid structures. From the ansatz that the temperature field in this region is determined by exponentially decaying modes, just like the quasi-developed flow field, we arrive at an eigenvalue problem which governs the allowed temperature modes. This eigenvalue problem is virtually identical to the one for periodically developed heat transfer in isothermal solids, except that the conjugate heat transfer in the solid is effectively taken into account.

Key words: Asymptotic expansions, Developing Temperature, Entrance Flow, Eigenvalue Problem, Laminar Flow, Periodically Developed Heat Transfer, Stationary Perturbations

^{a)}Electronic mail: geert.buckinx@vito.be.

I. INTRODUCTION

Laminar developed flow and heat transfer in channels with a constant cross section have been well studied in the literature. The notion of *developed flow* refers to the observation that certain flow features in a channel with a constant cross section typically become invariant after a certain distance from the channel inlet. In particular, the velocity profile and pressure gradient no longer evolve along the main flow direction, once the flow is developed. Likewise, also the temperature field in such a developed flow will evolve towards a certain profile whose shape is similar at any cross section perpendicular to the main flow direction. In that case one speaks of a *developed heat transfer regime* in the channel. A necessary condition for this regime to occur, is that the channel walls are either subject to a constant temperature or a constant heat flux, although some other specific types of boundary conditions are allowed as well.

For channels with a circular cross section, the developed flow solution corresponds to a parabolic velocity profile, as known since the works of Hagen and Poiseuille⁵³. Developed flow solutions for channels with a rectangular, triangular, or elliptical cross section were presented already near the end of the 19th century by Boussinesq, J.⁴ and Proudman, J.⁴². The first solutions for the developed temperature profiles in laminar channel flows were derived soon after in the works by Nusselt, W.³⁵ and Graetz, L.^{19,20}, who considered the heat transfer in a circular pipe at a constant wall temperature. Since these seminal works, a great body of works have treated the developed flow and heat transfer regimes for different fluids and channel geometries. A systematic overview of many analytical results on the topic can be found in the somewhat outdated, but still very relevant book by Shah, R. K. and London, A. L.⁵⁰.

Next to the developed regimes, various researchers have investigated the developing flow and temperature field near the inlet of channels. Most of the available work has focused on (two-dimensional) developing flows in channels with a constant cross section, like parallel-plate channels and circular pipes. Hereto several mathematical approaches have been employed. For instance, Chen¹¹ adopted an integral method, in which the channel is divided into a boundary layer near the channel wall and an inviscid core. That way, boundary-layer theory⁴⁸ could be applied to solve the developing flow profile. A second method relies on a linearization of the Navier-Stokes equations, as first explored by Langhaar²⁷ and Sparrow et al.⁵². In this method, the advection by transversal velocity components is usually neglected, so that the linearized problem can be solved analytically in the form of an infinite series. Another approach makes use of matched

asymptotic expansions to determine first the flow solution immediately upstream of the developed region, which we call the *quasi-developed* flow field. This quasi-developed solution is then coupled to a second solution for the perturbed boundary-layer flow equations which apply near the channel inlet^{23,47}. A distinctive feature of quasi-developed flow is the appearance of exponentially decaying velocity and pressure modes along the main flow direction, which are governed by an eigenvalue problem similar to the Orr-Sommerfeld equation. These modes have been thoroughly investigated for quasi-developed flow between parallel plates^{5,32,45,46,62}. Experimental evidence of their existence was further provided by Asai and Floryan². Yet, detailed experimental work on laminar flow development in channels has remained rather limited¹. A more common approach to analyze developing flow is through direct numerical simulation of the entire channel flow, from the inlet to the outlet. This approach has been adopted by e.g. Ferreira et al.¹⁶, Gessner and Emery¹⁸, Patankar and Spalding³⁸, Sadri⁴⁵.

The first solutions for the developing temperature field in channels of a constant cross section can be traced back to the seminal works of Nusselt, W.³⁵ and Graetz, L.^{19,20}. These solutions are valid under the assumption that the flow field is laminar and (practically) fully developed, while the channel wall is subject to a constant temperature, a constant heat flux, or a temperature proportional to heat flux. Therefore, the problem of determining the developing temperature field for a developed flow is still called the *Graetz-Nusselt problem*. As the Graetz-Nusselt problem was originally solved by means of separation of variables and Sturm-Liouville theory, the original series solutions for the temperature field necessitated the evaluation of many terms to obtain a good accuracy near the channel inlet. For that reason, L  v  que²⁸ introduced an additional similarity transformation for the temperature field, which we now know as the *L  v  que approach*. Over the years, many variants of the classical Graetz-Nusselt problem have been studied. Papoutsakis et al. were the first to study its extensions by including the effect of axial conduction in the fluid, as well as conjugate heat transfer within the solid^{36,37}. Their series solution for the temperature field was constructed in terms of the eigenfunctions of a self-adjoint operator for the Graetz-Nusselt problem, after introducing a suitable change of variables for the temperature. This formalism based on a self-adjoint operator was further applied by Weigand et al. to solve the extended Graetz problem for additional boundary conditions, as well as turbulent flows, taking axial wall conduction into account^{56–59}. More recent works have addressed generalizations of the Graetz-Nusselt problem towards non-axisymmetric geometries and arbitrary velocity profiles on both infinite and finite domains^{14,41}. Apart from the preceding analytical approaches, also numerical approaches based

on finite-difference, finite-element or finite-volume discretisation have been employed to study the developing temperature field in channels. These numerical methods have been pioneered by e.g. Grigull and Tratz²¹, Hwang and Fan²², Montgomery and Wibulswas³⁰, Montgomery and Wibulswas³¹. They have been the most effective means so far to study simultaneously developing flow and heat transfer^{33,34}. Nevertheless, significant experimental work on the developing heat transfer regimes has been performed today^{3,12,13}.

A generalization of the former developed flow and heat transfer regimes are the so-called *periodically developed* flow and heat transfer regimes, which arise in channels whose cross section varies periodically along the main flow direction. Such channels are omnipresent in compact heat transfer devices, which typically contain arrays of hundreds of solid structures in a periodic configuration to enhance the heat transfer^{24,50}. Besides, they have seen recent application in microfluidic devices and ordered microporous materials, which often operate under laminar flow conditions^{25,26,29,51,63}. The first mathematical descriptions of the periodically developed regimes were formulated by Patankar et al.^{39,40}. According to these descriptions, periodically developed flow is driven by a constant mean pressure gradient and a periodic pressure field. Furthermore, the periodically developed temperature field has a periodic-linear profile in the case of a periodic heat flux, and a periodic-exponential profile in the case of a constant solid temperature. In our previous works, we have shown that the constant pressure gradient in the periodically developed regime can also be defined as the gradient of a macro-scale pressure, which is obtained by repeated volume-averaging of the original pressure field⁷. That way, there exists a consistent link with the volume-averaged models for flow through porous media^{60,61}. In addition, we have shown that Patankar's description of the developed heat transfer regime in isothermal solids can be reformulated as a periodic eigenvalue problem. The smallest eigenvalue solving this eigenproblem corresponds to the decay rate of the true macro-scale temperature in the channel, which can again be recovered by repeated volume-averaging of the original temperature field^{8,9}. Therefore, we can obtain theoretical consistency with the volume-averaged models for heat transfer in porous media^{43,44}.

Whereas the literature on periodically developed flow and heat transfer is well established, very limited theoretical work seems to be available on the developing regimes in channels with arrays of periodic solid structures. As a matter of fact, we are only aware of our previous works on the quasi-periodically developed flow regime^{6,10,54}. This regime is a generalization of the quasi-developed regime in channels with a constant cross section, as it is characterized by streamwise periodic

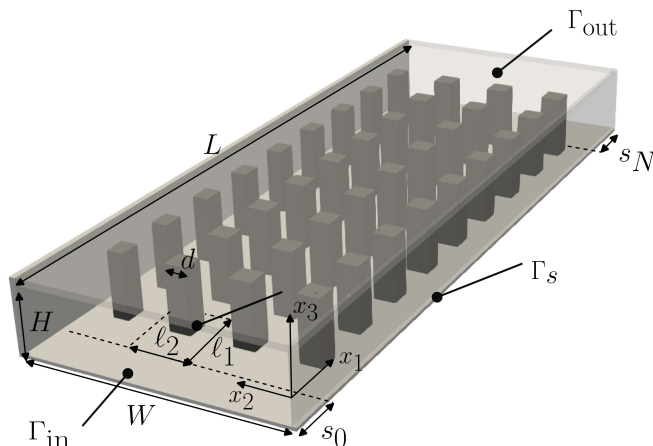


FIG. 1. A channel consisting of $N_1 \times N_2$ identical unit cells, each containing a solid square cylinder of diameter d , at streamwise distance ℓ_1 and a transversal distance distance ℓ_2 from each other.

velocity and pressure modes decaying exponentially along the main flow direction. The occurrence of this regime was recently proven for Stokes flow in the work by Feppon¹⁵, who recognized these modes as *boundary-layer terms*, and connected their description to formal homogenization methods for periodic media based on two-scale asymptotics.

Given the former state of the art, the present work aims to give a first mathematical description of the developing temperature field in the region of quasi-periodically developed flow. The remainder of this work is organized as follows. We first set out the general problem statement in section 2. Subsequently, in section 3, we extend the known descriptions for the periodically developed heat regime transfer by including the conjugate heat transfer in the solid. In section 4, we propose the governing equations for the temperature field in the quasi-periodically developed regime under a constant wall temperature, as well as a constant heat flux at the channel walls. Finally, we comment on the significance of these equations, particular for the macro-scale modelling approaches presented by Buckinx and Baelmans^{8,9}.

II. PROBLEM STATEMENT

We consider a channel Ω composed of an array of $N_1 \times N_2$ identical units of fluid material (Ω_f) and solid material (Ω_s) separated by a fluid-solid interface Γ_{fs} , as shown in Figure 1. Because the solid material distribution represented by the indicator function $\gamma_s(\mathbf{x})$ is spatially periodic within

the array, we have at any position \mathbf{x} sufficiently far from the channel boundaries

$$\gamma_s(\mathbf{x}) = \gamma_s(\mathbf{x} + \mathbf{l}_j) \quad \text{for } j \in \{1, 2\}, \quad (1)$$

where $\gamma_s(\mathbf{x}) = 1 \leftrightarrow \mathbf{x} \in \Omega_s$ and $\gamma_s(\mathbf{x}) = 0 \leftrightarrow \mathbf{x} \notin \Omega_s$. The lattice vectors $\mathbf{l}_j \triangleq \ell_j \mathbf{e}_j$ are by definition parallel to the unit vectors \mathbf{e}_1 and \mathbf{e}_2 along the main flow direction and transversal direction, respectively. So, if we make use of the coordinate frame in Figure 1, a row of the array corresponds to all positions $x_1 \triangleq \mathbf{x} \cdot \mathbf{e}_1 \in [s_0 + i\ell_1, s_0 + (i-1)\ell_1]$ for some integer $i \in (0, N_1)$. Here, s_0 denotes the distance between the array of unit cells and the channel inlet according to Figure 1. Similarly, s_N denotes the distance between the array and channel outlet.

To determine the temperature distribution T in the channel, we rely on the following energy conservation equations for the fluid and solid material:

$$\rho_f c_f \mathbf{u}_f \cdot \nabla T_f = k_f \nabla^2 T_f \quad \text{in } \Omega_f, \quad (2a)$$

$$0 = k_s \nabla^2 T_s \quad \text{in } \Omega_s. \quad (2b)$$

The temperature distribution is defined here as $T = T_f$ in Ω_f and $T = T_s$ in Ω_s , while the velocity distribution of the fluid in the channel is defined as $\mathbf{u} = \mathbf{u}_f$ in Ω_f and $\mathbf{u} = 0$ in Ω_s . The constant material properties ρ_f , c_f and k_f denote the density, heat capacity and thermal conductivity of the fluid, while k_s denotes the thermal conductivity of the solid.

The temperature distribution in the channel is assumed to satisfy the following boundary conditions at the channel boundary $\Gamma \triangleq \partial\Omega$. At the channel inlet Γ_{in} , the inlet temperature profile T_{in} is given. At the channel outlet Γ_{out} , a zero-heat-flux condition is presumed. For the fluid, we have thus

$$T_f(\mathbf{x}) = T_{\text{in}}(\mathbf{x}) \quad \text{on } \Gamma_{\text{in}}, \quad (3a)$$

$$-\mathbf{n} \cdot k_f \nabla T_f = 0 \quad \text{on } \Gamma_{\text{out}}, \quad (3b)$$

where the normal vector \mathbf{n} at the boundary Γ points outward of Ω . At the remaining channel boundaries formed by solid walls, i.e. $\Gamma_s \triangleq \Gamma \setminus (\Gamma_{\text{in}} \cup \Gamma_{\text{out}})$, we consider two sets of boundary conditions. The first set corresponds to the case where part of the channel walls are maintained at a constant solid temperature \bar{T}_s , while the remaining part of the channel walls is thermally insulated:

$$T_s(\mathbf{x}) = \bar{T}_s \quad \text{on } \Gamma_D \subset \Gamma_s, \quad (4a)$$

$$-\mathbf{n} \cdot k_s \nabla T_s = 0 \quad \text{on } \Gamma_s \setminus \Gamma_D. \quad (4b)$$

The second set of boundary conditions corresponds to the case where there is a constant heat flux q_s at a certain part of the channel walls, while the remaining part of the channel walls is thermally insulated:

$$-\mathbf{n} \cdot k_s \nabla T_s = q_s \quad \text{on } \Gamma_N \subset \Gamma_s, \quad (5a)$$

$$-\mathbf{n} \cdot k_s \nabla T_s = 0 \quad \text{on } \Gamma_s \setminus \Gamma_N. \quad (5b)$$

At the fluid-solid interface Γ_{fs} , we assume the continuity of the temperature field and the heat flux to adequately model the steady conjugate heat transfer between the fluid and solid:

$$\begin{aligned} T_f &= T_s & \text{on } \Gamma_{fs}, \\ -\mathbf{n}_{fs} \cdot k_f \nabla T_f &= -\mathbf{n}_{fs} \cdot k_s \nabla T_s & \text{on } \Gamma_{fs}. \end{aligned} \quad (6)$$

The normal \mathbf{n}_{fs} at Γ_{fs} is here directed from the fluid into the solid domain.

As a result of the periodic distribution of solid material (1) in the channel, typically a (quasi-) periodically flow field will be established in the channel, provided that the flow remains steady and laminar, and the channel is sufficiently long. At least, this requires that all other fluid properties, like the dynamic viscosity μ_f can be considered constant as well. As shown in^{6,10}, the quasi-periodically developed field consists of a periodic velocity field \mathbf{u}_f^* , on which an exponentially decaying mode with a periodic amplitude U_f is superposed:

$$\mathbf{u}_f(\mathbf{x}) = \mathbf{u}_f^*(\mathbf{x}) + U_f(\mathbf{x}) \exp(\boldsymbol{\lambda}_U \cdot \mathbf{x}), \quad (7)$$

with $\mathbf{u}_f^*(\mathbf{x}) = \mathbf{u}_f^*(\mathbf{x} + \mathbf{l}_1)$ and $U_f(\mathbf{x}) = U_f(\mathbf{x} + \mathbf{l}_1)$. The eigenvector $\boldsymbol{\lambda}_U$ is parallel to the main flow direction \mathbf{e}_1 , and its sign is such that $\boldsymbol{\lambda}_U \cdot \mathbf{e}_1 < 0$. Although the periodically developed flow field \mathbf{u}_f^* will also display transversal periodicity at a certain distance from the channel's side walls if the channel is wide enough, i.e. $\mathbf{u}_f^*(\mathbf{x}) = \mathbf{u}_f^*(\mathbf{x} + \mathbf{l}_2)$, the mode amplitude U_f will generally exhibit only streamwise periodicity along the periodicity vector \mathbf{l}_1 .

The subject of the present work is to describe the temperature field T according to the boundary-value problem (2) within the region of quasi-periodically developed flow, hence where the velocity field satisfies the asymptotic form (7).

III. DESCRIPTION OF PERIODICALLY DEVELOPED HEAT TRANSFER

If we substitute the first term of the asymptotic form for the velocity field (7), i.e. $\mathbf{u}_f = \mathbf{u}_f^*$, in the energy conservation equations (2), we retrieve the (partially) known solutions for temperature distribution in the periodically developed region, which we denote by T_{dev} .

A. Constant Wall Temperature

When a constant wall temperature \bar{T}_s and a zero heat flux apply to certain parts of the channel walls, as specified by the boundary conditions (4), the periodically developed temperature distribution is of the form

$$T_{\text{dev}}(\mathbf{x}) = \bar{T}_s + \theta(\mathbf{x}) \exp(\boldsymbol{\lambda}_\theta \cdot \mathbf{x}), \quad (8)$$

as demonstrated in⁸. In this form, the mode amplitude θ is streamwise periodic, just like the developed flow field \mathbf{u}_f^* , so $\theta(\mathbf{x}) = \theta(\mathbf{x} + \mathbf{l}_1)$. If the developed flow field \mathbf{u}_f^* is also transversally periodic, we have in addition $\theta(\mathbf{x}) = \theta(\mathbf{x} + \mathbf{l}_2)$. Further, the eigenvector $\boldsymbol{\lambda}_\theta$ has only a component along the main flow direction. Consequently, the developed solution T_{dev} for the boundary conditions (4) is completely determined by the following eigenvalue problem:

$$\rho_f c_f \mathbf{u}_f^* \cdot (\nabla \theta_f + \boldsymbol{\lambda}_T \theta_f) = \nabla \cdot k_f \nabla \theta_f + 2k_f \nabla \theta_f \cdot \boldsymbol{\lambda}_\theta + k_f \boldsymbol{\lambda}_\theta \cdot \boldsymbol{\lambda}_\theta \theta_f \quad \text{in } \Omega_f, \quad (9a)$$

$$0 = \nabla \cdot k_s \nabla \theta_s + 2k_s \nabla \theta_s \cdot \boldsymbol{\lambda}_\theta + k_s \boldsymbol{\lambda}_\theta \cdot \boldsymbol{\lambda}_\theta \theta_s \quad \text{in } \Omega_s, \quad (9b)$$

$$\theta_s = 0 \quad \text{on } \Gamma_D \quad (9c)$$

$$-\mathbf{n}_s \cdot k_s (\nabla \theta_s + \boldsymbol{\lambda}_\theta \theta_s) = 0 \quad \text{on } \Gamma_s \setminus \Gamma_D, \quad (9d)$$

$$-\mathbf{n}_{f_s} \cdot k_f (\nabla \theta_f + \boldsymbol{\lambda}_\theta \theta_f) = -\mathbf{n}_{f_s} \cdot k_s (\nabla \theta_s + \boldsymbol{\lambda}_\theta \theta_s) \quad \text{on } \Gamma_{f_s}, \quad (9e)$$

$$\theta_f = \theta_s \quad \text{on } \Gamma_{f_s}, \quad (9f)$$

$$\rho_f c_f \langle \mathbf{u}^* \theta \rangle \cdot \boldsymbol{\lambda}_\theta = \langle k \nabla \theta \rangle \cdot \boldsymbol{\lambda}_\theta + \langle k \theta \rangle \boldsymbol{\lambda}_\theta \cdot \boldsymbol{\lambda}_\theta, \quad (9g)$$

$$\langle \mathbf{u}^* \rangle \times \boldsymbol{\lambda}_\theta = 0, \quad (9h)$$

$$\theta_f(\mathbf{x}) = \theta_f(\mathbf{x} + \mathbf{l}_j), \quad (9i)$$

$$\theta_s(\mathbf{x}) = \theta_s(\mathbf{x} + \mathbf{l}_j), \quad (9j)$$

$$\langle \theta \rangle = \theta_0. \quad (9k)$$

This quadratic eigenvalue problem has been obtained by substituting the form (8) into the original energy conservation equations (2) and boundary conditions (4) and (6). In the specific case where the entire solid temperature is uniform, i.e. $T_s = \bar{T}_s$, it reduces to the eigenvalue problem presented in⁸. As such, the present problem is a generalization of the former towards the situation where conjugate heat transfer occurs. Based on physical considerations, of all its possible solutions $(\boldsymbol{\lambda}_\theta, \theta)$ only the one whose eigenvector has the smallest real negative component along the main flow direction is of interest, so $\boldsymbol{\lambda}_\theta \cdot \mathbf{e}_1 < 0$ ⁸.

Due to the streamwise periodicity conditions (9i), the eigenvalue problem (8) needs to be solved on just a single row of the array. When there is also transversal periodicity, it can even be solved on a single unit cell of the array. Therefore, the overall energy balance (9g) has been obtained by volume-averaging the energy conservation laws (2) over the row (or unit cell) of the array, via the volume-averaging operator $\langle \cdot \rangle$. We clarify that the thermal conductivity k which appears within the volume-averaging operator $\langle \cdot \rangle$ in (9g), should be interpreted as a distribution, so $k = k_f$ in Ω_f and $k = k_s$ in Ω_s . Further, we have assumed that the main flow direction is given by the direction of the volume-averaged velocity distribution $\langle \mathbf{u}^* \rangle$ according to equation (9h), thus $\langle \mathbf{u}^* \rangle = \|\langle \mathbf{u}^* \rangle\| \mathbf{e}_1$. In order to find a unique solution for the mode amplitude θ , its volume-averaged value θ_0 over the row (or unit cell) of the array has been imposed, in accordance with (9k). In practice, this value is not known since it depends on the specific inlet conditions (3). Hence, it must be estimated or modelled if the absolute temperature level in the channel is of interest.

B. Constant Wall Heat Flux

When a constant heat flux q_s and a zero heat flux apply to certain parts of the channel walls, as specified by the boundary conditions (5), the periodically developed temperature distribution T_{dev} has a different form:

$$T_{\text{dev}}(\mathbf{x}) = \nabla T_{\text{dev}} \cdot \mathbf{x} + T^*(\mathbf{x}), \quad (10)$$

as shown in⁹. The former solution consists of a first contribution which varies linearly over space with a constant temperature gradient ∇T_{dev} along the main flow direction, and a second contribution T^* which inherits the streamwise (and transversal) periodicity of the developed flow field: $T^*(\mathbf{x}) = T^*(\mathbf{x} + \mathbf{l}_j)$. Both contributions are governed by the following periodic temperature problem, which can be solved on a row or unit cell of the array, depending on whether the former

periodicity condition for T^* holds for $j = 1$ or $j \in \{1, 2\}$:

$$\rho_f c_f \mathbf{u}_f^* \cdot (\nabla T_f^* + \nabla T_{\text{dev}}) = \nabla \cdot k_f \nabla T_f^* \quad \text{in } \Omega_f, \quad (11a)$$

$$0 = \nabla \cdot k_s \nabla T_s^* \quad \text{in } \Omega_s, \quad (11b)$$

$$T^*(\mathbf{x}) = T^*(\mathbf{x} + \mathbf{l}_j), \quad (11c)$$

$$-\mathbf{n} \cdot k_s (\nabla T_s^* + \nabla T_{\text{dev}}) = q_s \quad \text{on } \Gamma_N, \quad (11d)$$

$$-\mathbf{n} \cdot k_s (\nabla T_s^* + \nabla T_{\text{dev}}) = 0 \quad \text{on } \Gamma_s \setminus \Gamma_N, \quad (11e)$$

$$\rho_f c_f \langle \mathbf{u}^* \rangle \cdot \nabla T_{\text{dev}} = \langle q_s \delta_N \rangle, \quad (11f)$$

$$\langle \mathbf{u}^* \rangle \times \nabla T_{\text{dev}} = 0, \quad (11g)$$

$$\langle T^* \rangle = T_0^*. \quad (11h)$$

This periodic temperature problem follows straightforward from the original energy conservation equations (2) and boundary conditions (4) and (6), after substitution of (10). In absence of channel walls, it becomes equivalent to the periodic temperature problem presented in⁹. We have assumed that the direction of the mean temperature gradient ∇T_{dev} is parallel to the main flow direction as well the direction of the volume-averaged velocity over the row (or unit cell) of the array. To formulate the overall energy balance over the row (or unit cell) of the array (11f), we have relied on the Dirac indicator δ_N associated with the surface Γ_N , as defined in the works by Gagnon¹⁷, Schwartz⁴⁹. Again, the constant T_0^* which determines the volume-averaged value of the periodic temperature part T^* , is not known in practice. Therefore, it must be modeled somehow, if the absolute temperature level in the channel is of interest.

IV. DESCRIPTION OF QUASI-PERIODICALLY DEVELOPED HEAT TRANSFER

To construct a solution for the temperature distribution in the region where the flow is quasi-periodically developed, we propose the following ansatz

$$T = T_{\text{dev}} + \Theta \exp(\boldsymbol{\lambda}_\Theta \cdot \mathbf{x}) \quad (12)$$

with $\Theta \ll T_{\text{dev}}$. This means that we restrict our description to small (exponentially decaying) perturbations upstream or downstream of the periodically developed region, in analogy to the asymptotic velocity form (7).

When the constant-wall-temperature conditions (4) apply, we then find that the amplitude and

decay rate (Θ, λ_Θ) of the former temperature perturbation must satisfy the same eigenvalue problem as the solution pair (θ, λ_θ) to (8):

$$\rho_f c_f \mathbf{u}_f^* \cdot (\nabla \Theta_f + \lambda_\Theta \Theta_f) = \nabla \cdot k_f \nabla \Theta_f + 2k_f \nabla \Theta_f \cdot \lambda_\Theta + k_f \lambda_\Theta \cdot \lambda_\Theta \Theta_f \quad \text{in } \Omega_f, \quad (13a)$$

$$0 = \nabla \cdot k_s \nabla \Theta_s + 2k_s \nabla \Theta_s \cdot \lambda_\Theta + k_s \lambda_\Theta \cdot \lambda_\Theta \Theta_s \quad \text{in } \Omega_s, \quad (13b)$$

$$\Theta_s = 0 \quad \text{on } \Gamma_D \quad (13c)$$

$$-\mathbf{n}_s \cdot k_s (\nabla \Theta_s + \lambda_\Theta \Theta_s) = 0 \quad \text{on } \Gamma_s \setminus \Gamma_D, \quad (13d)$$

$$-\mathbf{n}_{fs} \cdot k_f (\nabla \Theta_f + \lambda_\Theta \Theta_f) = -\mathbf{n}_{fs} \cdot k_s (\nabla \Theta_s + \lambda_\Theta \Theta_s) \quad \text{on } \Gamma_{fs}, \quad (13e)$$

$$\Theta_f = \Theta_s \quad \text{on } \Gamma_{fs}, \quad (13f)$$

$$\rho_f c_f \langle \mathbf{u}^* \Theta \rangle \cdot \lambda_\Theta = \langle k \nabla \Theta \rangle \cdot \lambda_\Theta + \langle k \Theta \rangle \lambda_\Theta \cdot \lambda_\Theta, \quad (13g)$$

$$\langle \mathbf{u}^* \rangle \times \lambda_\Theta = 0, \quad (13h)$$

$$\Theta_f(\mathbf{x}) = \Theta_f(\mathbf{x} + \mathbf{l}_j), \quad (13i)$$

$$\Theta_s(\mathbf{x}) = \Theta_s(\mathbf{x} + \mathbf{l}_j), \quad (13j)$$

$$\langle \Theta \rangle = \Theta_0. \quad (13k)$$

This follows directly from the linearity of the energy conservation equations (8) and the fact that we may neglect the advection of thermal energy by the small velocity mode to obtain an asymptotic approximation for the temperature distribution: $U_f \exp(\lambda_U \cdot \mathbf{x}) \cdot \nabla T_{\text{dev}} \ll \mathbf{u}_f^* \cdot \nabla (\Theta \exp(\lambda_\Theta \cdot \mathbf{x}))$. The implication is that λ_Θ thus corresponds to the eigenvector solution to (8) whose magnitude is second smallest after λ_θ .

In general, the mode amplitude Θ in the quasi-developed region will display only streamwise periodicity, even where the velocity field \mathbf{u}_f^* is both streamwise and transversally periodic. Therefore, the eigenvalue problem for (Θ, λ_Θ) should be solved on an entire row of the array, for some prescribed temperature perturbation size Θ_0 . As the latter depends again on the specific inlet conditions for the velocity and temperature field in the channel, we can in practice reconstruct the temperature field in the quasi-developed region only up to the two unknown constants θ_0 and Θ_0 .

Also when the constant-heat-flux conditions (5) apply, the temperature mode and its eigenvalue (Θ, λ_Θ) in the quasi-developed region will satisfy nearly the same eigenvalue problem (8) as the temperature modes for an isothermal wall. However, the Dirichlet boundary condition (13c) should be replaced by a Neumann boundary condition. So instead of the boundary conditions (13c) and

(13d), we then have

$$-\mathbf{n}_s \cdot k_s (\nabla \Theta_s + \lambda_\Theta \Theta_s) = 0 \quad \text{on } \Gamma_s. \quad (14)$$

V. DISCUSSION

At this point, the eigenvalue problem (13) only tells us what kind of exponential temperature perturbations, or modes, are allowed by the energy conservation equations (8). In itself, it does not give any indication whether these allowed modes will effectively occur, and if so, how important they are. After all, the underlying ansatz (12) might be only valid over a very short distance upstream (or downstream) of the periodically developed region, depending on the actual inlet and outlet conditions (3). For that reason, the onset of the quasi-developed temperature modes (12) requires further empirical evidence by performing full-scale (DNS) simulations of the developing temperature and flow fields. In our subsequent work⁵⁵, such empirical evidence will be provided in particular for mini and micro channels channels containing arrays of periodic offset-strip fins. There, we will also show that the eigenvalue solutions to (13) can explain the validity of the existing macro-scale models for developed heat transfer, at least for a constant-heat-flux condition. In the near future, the present work will be extended by including a numerical study on the onset of the quasi-periodically developed heat transfer regimes in channels with arrays of square cylinders, as considered in the works^{6,10}.

VI. ACKNOWLEDGEMENTS

The work presented in this paper was partly funded by the Research Foundation — Flanders (FWO) through the post-doctoral project grant 12Y2919N of G. Buckinx.

REFERENCES

- T. Ahmad and I. Hassan. Experimental analysis of microchannel entrance length characteristics using microparticle image velocimetry. *J. Fluids Eng.*, 132(4), 2010.
- M. Asai and J. M. Floryan. Certain aspects of channel entrance flow. *Phys. Fluids*, 16(4):1160–1163, 04 2004. ISSN 1070-6631. doi:10.1063/1.1649340. URL <https://doi.org/10.1063/1.1649340>.
- G. Barozzi and G. Pagliarini. Experimental investigation of coupled conduction and laminar convection in a circular tube. *Int. J. Heat Mass Transf.*, 27(12):2321–2329, 1984. ISSN 0017-9310. doi:[https://doi.org/10.1016/0017-9310\(84\)90090-5](https://doi.org/10.1016/0017-9310(84)90090-5).
- Boussinesq, J. Mémoire sur l'influence des Frottements dans les Mouvements Réguliers des Fluids. *J. Math. Pures Appl.*, 13(2):377–424, 1868.
- A. Brandt and J. Gillis. Asymptotic approach to hartmann-poiseuille flows. *J. Comp. Phys.*, 3(4): 523–538, 1969.
- G. Buckinx. A macro-scale description of quasi-periodically-developed flow, 2022.
- G. Buckinx and M. Baelmans. Multi-scale modelling of flow in periodic solid structures through spatial averaging. *J. Comp. Phys.*, 291:34–51, 2015a.
- G. Buckinx and M. Baelmans. Macro-scale heat transfer in periodically developed flow through isothermal solids. *J. Fluid Mech.*, 780:274–298, 2015b.
- G. Buckinx and M. Baelmans. Macro-scale conjugate heat transfer in periodically developed flow through solid structures. *J. Fluid Mech.*, 804:298–322, 2016.
- G. Buckinx and A. Vangeffelen. Quasi-periodically developed flow in channels with arrays of in-line square cylinders, 2023.
- R.-Y. Chen. Flow in the Entrance Region at Low Reynolds Numbers. *J. Fluids Eng.*, 95(1):153–158, 03 1973. ISSN 0098-2202. doi:10.1115/1.3446948. URL <https://doi.org/10.1115/1.3446948>.
- M. Everts and J. Meyer. Laminar hydrodynamic and thermal entrance lengths for simultaneously hydrodynamically and thermally developing forced and mixed convective flows in horizontal tubes. *Experimental Thermal and Fluid Science*, 118:110153, 2020. ISSN 0894-1777. doi:<https://doi.org/10.1016/j.expthermflusci.2020.110153>.
- M. Everts, M. Mahdavi, J. Meyer, and M. Sharifpur. Development of the hydrodynamic and thermal boundary layers of forced convective laminar flow through a horizontal tube

with a constant heat flux. *Int. J. Therm. Sci.*, 186:108098, 2023. ISSN 1290-0729. doi:
<https://doi.org/10.1016/j.ijthermalsci.2022.108098>.

J. Fehrenbach, F. de Gournay, C. Pierre, and F. Plouraboué. The generalized graetz problem in finite domains. *SIAM J. Appl. Math.*, 72(1):99–123, 2012. doi:10.1137/11082542X.

F. Feppon. Asymptotic expansions of Stokes flows in finite periodic channels, Feb. 2024. URL
<https://hal.science/hal-04443652>.

G. Ferreira, A. Sucena, L. Ferrás, F. Pinho, and A. Afonso. Hydrodynamic entrance length for laminar flow in microchannels with rectangular cross section. *Fluids*, 6(7):240, 2021.

R. Gagnon. Distribution theory of vector fields. *Am. J. Phys.*, 38(7):879–891, 1970.

F. Gessner and A. Emery. The Numerical Prediction of Developing Turbulent Flow in Rectangular Ducts. *J. Fluids Eng.*, 103(3):445–453, 09 1981. ISSN 0098-2202. doi:10.1115/1.3240811.

Graetz, L. Über die Wärmeleitungsfähigkeit von Flüssigkeiten. *Ann. Phys.*, 254(1):79–94, 1882.

Graetz, L. Über die Wärmeleitungsfähigkeit von Flüssigkeiten. *Ann. Phys.*, 261(7):337–357, 1885.

U. Grigull and H. Tratz. Thermischer einlauf in ausgebildeter laminarer rohrströmung. *Int. J. Heat Mass Transf.*, 8(5):669–678, 1965.

C.-L. Hwang and L.-T. Fan. Finite difference analysis of forced-convection heat transfer in entrance region of a flat rectangular duct. *Appl. Sci. Res.*, 13(1):401–422, 1964.

A. Kapila, G. Ludford, and V. Olunloyo. Entry flow in a channel. part 3. inlet in a uniform stream. *J. Fluid Mech.*, 57(4):769–784, 1973.

Kays, W.M. and London, A.L. *Compact Heat Exchangers. Vol. 3rd*. Krieger Publishing Company, 1984.

A. Koşar and Y. Peles. Micro Scale pin fin Heat Sinks–Parametric Performance Evaluation Study. *IEEE Trans Compon Packaging Manuf Technol*, 30(4):855–865, 2007.

A. Koşar, C. Mishra, and Y. Peles. Laminar Flow Across a Bank of Low Aspect Ratio Micro Pin Fins. *J. Fluids Eng.*, 127(3):419–430, 2005.

H. L. Langhaar. Steady Flow in the Transition Length of a Straight Tube. *J. Appl. Mech.*, 9(2):A55–A58, 03 1942. ISSN 0021-8936. doi:10.1115/1.4009183. URL
<https://doi.org/10.1115/1.4009183>.

A. L ev eque. *Les lois de la transmission de chaleur par convection. Annales des Mines, Memoires, Series 12*. Dunod, 1928.

- A. Mohammadi and A. Koşar. Review on Heat and Fluid Flow in Micro Pin Fin Heat Sinks under Single-phase and Two-phase Flow Conditions. *Nanoscale Microscale Thermophys. Eng.*, 22(3): 153–197, 2018.
- S. Montgomery and P. Wibulsvas. Laminar flow heat-transfer in ducts of rectangular cross-section. In *International Heat Transfer Conference Digital Library*, pages 104–112. Begel House Inc., 1966.
- S. Montgomery and P. Wibulswas. Laminar flow heat transfer for simultaneously developing velocity and temperature profiles in ducts of rectangular cross section. *Appl. Sci. Res.*, 18(1): 247–259, 1968.
- P. Nachtsheim. *An initial value method for the numerical treatment of the Orr-Sommerfeld equation for the case of plane Poiseuille flow*. National Aeronautics and Space Administration, 1964.
- T. Nguyen. Laminar heat transfer for thermally developing flow in ducts. *Int. J. Heat Mass Transf.*, 35(7):1733–1741, 1992. ISSN 0017-9310. doi:[https://doi.org/10.1016/0017-9310\(92\)90143-G](https://doi.org/10.1016/0017-9310(92)90143-G).
- T. Nguyen. Incremental heat transfer number in the entry region of circular tubes. *Int. J. Heat Mass Transf.*, 36(14):3659–3662, 1993.
- Nusselt, W. Die Abhängigkeit der Wärmeübergangszahl von der Rohrlänge. *Z. Verein. Deutsch. Ing.*, 54(28):1154–1158, 1910.
- E. Papoutsakis and D. Ramkrishna. Conjugated graetz problems—i: General formalism and a class of solid-fluid problems. *Chem. Eng. Sci.*, 36(8):1381–1391, 1981. ISSN 0009-2509. doi:[https://doi.org/10.1016/0009-2509\(81\)80172-8](https://doi.org/10.1016/0009-2509(81)80172-8).
- E. Papoutsakis, D. Ramkrishna, and H. Lim. The extended graetz problem with dirichlet wall boundary conditions. *Appl. Sci. Res.*, 36:13–34, 1980.
- S. Patankar and D. B. Spalding. A calculation procedure for heat, mass and momentum transfer in three-dimensional parabolic flows. In *Numerical prediction of flow, heat transfer, turbulence and combustion*, pages 54–73. Elsevier, 1983.
- S. Patankar, C. Liu, and E. Sparrow. Fully Developed Flow and Heat Transfer in Ducts Having Streamwise-Periodic Variations of Cross-Sectional Area. *J. Heat Transf.*, 99(2):180–186, 1977.
- S. Patankar, C. Liu, and E. Sparrow. The periodic thermally developed regime in ducts with streamwise periodic wall temperature or heat flux. *Int. J. Heat Mass Transf.*, 21(5):557–566, 1978. ISSN 0017-9310. doi:[https://doi.org/10.1016/0017-9310\(78\)90052-2](https://doi.org/10.1016/0017-9310(78)90052-2).
- C. Pierre and F. Plouraboué. Numerical analysis of a new mixed formulation for eigenvalue convection-diffusion problems. *SIAM J. Appl. Math.*, 70(3):658–676, 2009. doi:

10.1137/080736442.

Proudman, J. Notes on the motion of viscous liquids in channels. *London Edinburgh Philos. Mag. & J. Sci.*, 28(163):30–36, 1914.

M. Quintard and S. Whitaker. *Theoretical analysis of transport in porous media. Handbook of Heat Transfer in Porous Media (Eds. Vadai, K., Hadim, H.A.)*. Marcel Dekker, New York, 2000.

M. Quintard, M. Kaviany, and S. Whitaker. Two-medium treatment of heat transfer in porous media: numerical results for effective properties. *Adv. Water Resour.*, 20(2-3):77–94, 1997. ISSN 03091708.

R. Sadri. *Channel entrance flow (Ph.D. thesis)*. Faculty of Graduate Studies, University of Western Ontario, 1997.

R. Sadri and J. Floryan. Accurate evaluation of the loss coefficient and the entrance length of the inlet region of a channel. *J. Fluids Eng.*, 124(3):685–693, 2002.

H. Schlichting. Laminare kanaleinlaufstömung. *Z. Angew. Math. Mech.*, 14:368–373, 1934.

H. Schlichting. *Boundary layer theory, 7th ed.* McGraw-Hill: New York, 1997.

L. Schwartz. *Théorie des distributions*. Hermann: Paris, 1966.

Shah, R. K. and London, A. L. *Laminar Flow Forced Convection in Ducts: A Source Book for Compact Heat Exchanger Analytical Data*. Academic Press, Inc., New York, 1978.

A. Siu-Ho, W. Qu, and F. Pfefferkorn. Experimental Study of Pressure Drop and Heat Transfer in a Single-Phase Micropin-Fin Heat Sink. *J. Electron. Packag.*, 129(4):479–487, 2007.

E. Sparrow, S. Lin, and T. Lundgren. Flow development in the hydrodynamic entrance region of tubes and ducts. *Phys. Fluids*, 7(3):338–347, 1964.

S. Suter and R. Skalak. The history of poiseuille’s law. *Annu. Rev. Fluid Mech.*, 25:1–19, 1993.

A. Vangeffelen, G. Buckinx, C. De Servi, M. R. Vetrano, and M. Baelmans. Developed and quasi-developed macro-scale flow in micro- and mini-channels with arrays of offset strip fins. *Phys. Fluids*, 35(7):073611, 07 2023. ISSN 1070-6631. doi:10.1063/5.0156697. URL <https://doi.org/10.1063/5.0156697>.

A. Vangeffelen, G. Buckinx, C. De Servi, M. R. Vetrano, and M. Baelmans. Developed and quasi-developed macro-scale heat transfer in micro- and mini-channels with arrays of offset strip fins subject to a uniform heat flux (in preparation), 2024.

B. Weigand. An exact analytical solution for the extended turbulent graetz problem with dirichlet wall boundary conditions for pipe and channel flows. *Int. J. Heat Mass Transf.*, 39(8):1625–1637, 1996. ISSN 0017-9310. doi:[https://doi.org/10.1016/0017-9310\(95\)00266-9](https://doi.org/10.1016/0017-9310(95)00266-9).

- B. Weigand and G. Gassner. The effect of wall conduction for the extended graetz problem for laminar and turbulent channel flows. *Int. J. Heat Mass Transf.*, 50(5):1097–1105, 2007. ISSN 0017-9310. doi:<https://doi.org/10.1016/j.ijheatmasstransfer.2006.06.047>.
- B. Weigand and D. Lauffer. The extended graetz problem with piecewise constant wall temperature for pipe and channel flows. *Int. J. Heat Mass Transf.*, 47(24):5303–5312, 2004. ISSN 0017-9310. doi:<https://doi.org/10.1016/j.ijheatmasstransfer.2004.06.027>.
- B. Weigand, M. Kanzamar, and H. Beer. The extended graetz problem with piecewise constant wall heat flux for pipe and channel flows. *Int. J. Heat Mass Transf.*, 44(20):3941–3952, 2001. ISSN 0017-9310. doi:[https://doi.org/10.1016/S0017-9310\(01\)00014-X](https://doi.org/10.1016/S0017-9310(01)00014-X).
- S. Whitaker. Flow in porous media I: A theoretical derivation of Darcy’s law. *Transp. Porous Media*, 1(1):3–25, 1986.
- S. Whitaker. The Forchheimer equation: A theoretical development. *Transp. Porous Media*, 25(1):27–61, 1996.
- S. Wilson. The development of poiseuille flow. *J. Fluid Mech.*, 38(4):793–806, 1969.
- M. Zargartalebi, A. Benneker, and J. Azaiez. The impact of heterogeneous pin based micro-structures on flow dynamics and heat transfer in micro-scale heat exchangers. *Phys. Fluids*, 32(5): 1070–6631, 2020.