Development of large-volume $^{130}\text{TeO}_2$ bolometers for the CROSS 2β decay search experiment

F.T. Avignone III,^a A.S. Barabash,^b V. Berest,^c L. Bergé,^d J.M. Calvo-Mozota,^{e,f,g} P. Carniti,^{h,i} M. Chapellier,^d I. Dafinei,^j F.A. Danevich,^{k,l} L. Dumoulin,^d F. Ferella,^m F. Ferri,^c A. Gallas,^d A. Giuliani,^d C. Gotti,^h P. Gras,^c A. lanni,^m L. Imbert,^d H. Khalife,^c V.V. Kobychev,^k S.I. Konovalov,^b P. Loaiza,^d P. de Marcillac,^d S. Marnieros,^d C.A. Marrache-Kikuchi,^d M. Martinez,^{n,o} S. Nisi,^m C. Nones,^c E. Olivieri,^d A. Ortiz de Solórzano,ⁿ Y. Peinaud,^d G. Pessina,^h D.V. Poda,^d Ph. Rosier,^d J.A. Scarpaci,^d V.I. Tretyak,^{k,m} V.I. Umatov,^b M.M. Zarytskyy,^k and A. Zolotarova^c

E-mail: andrea.giuliani@ijclab.in2p3.fr, denys.poda@ijclab.in2p3.fr

^aDepartment of Physics and Astronomy, University of South Carolina, Columbia, 29208 South Carolina, USA

^bNational Research Center Kurchatov Institute, Kurchatov Complex of Theoretical and Experimental Physics, 117218 Moscow, Russia

^cIRFU, CEA, Université Paris-Saclay, 91191 Saclay, France

^d Université Paris-Saclay, CNRS/IN2P3, IJCLab, 91405 Orsay, France

^eLaboratorio Subterráneo de Canfranc, 22880 Canfranc-Estación, Spain

^f Escuela Superior de Ingeniería, Ciencia y Tecnología, Universidad Internacional de Valencia – VIU, 46002 Valencia, Spain

^gEscuela Superior de Ingeniería y Tecnología, Universidad Internacional de La Rioja, 26006 Logroño, Spain

^hINFN Sezione di Milano-Bicocca, I-20126 Milan, Italy

ⁱUniversità di Milano-Bicocca, I-20126 Milan, Italy

^jINFN Sezione di Roma, I-00185 Rome, Italy

^kInstitute for Nuclear Research of NASU, 03028 Kyiv, Ukraine

¹INFN Sezione di Roma Tor Vergata, I-00133 Rome, Italy

^mINFN Laboratori Nazionali del Gran Sasso, I-67100 Assergi (AQ), Italy

ⁿCentro de Astropartículas y Física de Altas Energías, Universidad de Zaragoza, 50009 Zaragoza, Spain

^oARAID Fundación Agencia Aragonesa para la Investigación y el Desarrollo, 50018 Zaragoza, Spain

ABSTRACT: We report on the development of thermal detectors based on large-size tellurium dioxide crystals ($45 \times 45 \times 45$ mm), containing tellurium enriched in 130 Te to about 91%, for the CROSS double-beta decay experiment. A powder used for the crystals growth was additionally purified by the directional solidification method, resulting in the reduction of the concentration of impurities by a factor 10, to a few ppm of the total concentration of residual elements (the main impurity is Fe). The purest part of the ingot (the first \sim 200 mm, about 80% of the total length of the cylindrical part of the ingot) was determined by scanning segregation profiles of impurities and used for the ¹³⁰TeO₂ powder production with no evidence of re-contamination. The crystal growth was verified with precursors produced from powder with natural Te isotopic composition, and two small-size (20×20) × 10 mm) samples were tested at a sea-level laboratory showing high bolometric and spectrometric performance together with acceptable ²¹⁰Po content (below 10 mBq/kg). This growth method was then applied for the production of six large cubic ¹³⁰TeO₂ crystals and 4 of them were taken randomly to be characterized at the Canfranc underground laboratory, in the CROSS-dedicated lowbackground cryogenic facility. Two $^{130}\text{TeO}_2$ samples were coated with a thin, O(100 nm), metal film in form of Al layer (on 4 sides) or AlPd grid (on a single side) to investigate the possibility to tag surface events by pulse-shape discrimination. Similarly to the small natural precursors, largevolume ¹³⁰TeO₂ bolometers show high performance and even better internal purity (²¹⁰Po activity ~ 1 mBq/kg, while activities of ²²⁸Th and ²²⁶Ra are below 0.01 mBq/kg), satisfying requirements for the CROSS and, potentially, next-generation experiments.

Keywords: Cryogenic detectors, Hybrid detectors, Calorimeters, Double-beta decay detectors, Photon detectors for UV, visible and IR photons (solid-state), X-ray detectors, Materials for solid-state detectors

ArXiv ePrint: 2406.01444

Contents

1	Introduction	1
2	Development of TeO ₂ crystals from ¹³⁰ Te-enriched tellurium	3
	2.1 Initial ¹³⁰ Te-enriched material	3
	2.2 Purification by the solidification method	4
	2.3 Conversion to ¹³⁰ TeO ₂ powder	6
	2.4 Crystal growth	6
3	Operation of TeO ₂ -based low-temperature detectors	7
	3.1 Above-ground test of small-size natural precursors	7
	3.2 Underground test of large-size ¹³⁰ Te-enriched crystals	11
4	Conclusions	16

1 Introduction

The search and investigation of spontaneous nuclear transitions like double-beta (2β) processes, which are expected to occur rarely or even to be forbidden according to the Standard Model (SM) of particle physics, have represented a great interest for nuclear and particle physics until recently [1–4]. The mostly searched 2β processes (driven by high transition energy and a relatively large presence in nature of the isotopes of interest [5]) are decays in which two electrons appear in the final state accompanied or not with the emission of two anti-neutrinos, corresponding to two-neutrino (2ν) and neutrinoless (0ν) 2β decays respectively. The former process has been detected for a dozen nuclei with half-lives of 10^{18} – 10^{24} yr [6], while the latter one remains unobserved and the most stringent half-life limits reach 10^{24} – 10^{26} yr level [2]. The observation of $0\nu2\beta$ decay would help to scrutinize many open questions of particle physics such as the lepton-number conservation, the absolute value of neutrino mass and its origin (Majorana or Dirac particle), the admixture of right-handed currents in weak interactions, the existence of majorons and bosonic neutrinos, the imbalance between matter and anti-matter (via leptogenesis) and other effects beyond the SM [2].

Among the candidates studied, 130 Te stands out as one of the few extensively researched 2β -active isotopes, thanks to: i) a relatively high transition energy ($Q_{2\beta} = 2527$ keV [7]); ii) a considerable presence in natural tellurium ($\delta = 34\%$ [8]); iii) the possibility to grow large-volume, high-quality, and radiopure tellurium dioxide (TeO₂) crystals, i.e. a dielectric material with a high tellurium content suitable for the use in low-temperature detectors of rare events [9–12]. Thanks to the above-listed features, TeO₂ is among a few materials with the longest history of applications to 2β searches. Indeed, initial attempts were made in the early 1990s using small samples. Subsequently, these efforts were expanded to larger arrays in experiments such as MiDBD, Cuoricino, and CUORE-0. Currently, this research has reached its pinnacle with the CUORE ton-scale experiment [13],

which is operating at the Gran Sasso underground laboratory (LNGS) in Italy. (The evolution of TeO₂-based bolometric 2β search experiments is overviewed in [14].)

All past and present TeO₂-based 2β experiments exploited and currently used crystals with natural Te content, with the exception of two samples enriched in 130 Te used in addition to natural ones in the MiDBD [15] and Cuoricino [16] experiments. Due to poor performance and radiopurity of enriched samples compared to natural crystals, as well as taking into account the still high natural isotopic abundance of 130 Te, 130 Te-enriched crystals were abandoned from the CUORE program. However, the interest in 130 TeO₂ has raised again in view of the CUORE upgrade [17], particularly in the CUPID program [18, 19]. Two new enriched samples have been produced and tested at LNGS showing high performance and low radioactivity [20]. Due to challenging particle identification with TeO₂ bolometers [21], mainly exploiting the detection of γ (β)-induced Cherenkov radiation proposed in [22], and difficulties in further reduction of γ background in the CUORE cryostat, CUPID has selected lithium molybdate (Li₂MoO₄) scintillating crystals [23]. This compound allows for a more efficient scintillation-assisted particle identification and a lower γ background, by moving the region of interest ($Q_{2\beta}$ of 100 Mo is 3034 keV [7]) above the end-point of the most intense natural γ radioactivity (2615 keV γ of 208 Tl from the 232 Th family).

Nevertheless, 130 Te remains one of a few 2β -active isotopes highly suitable for multi-isotope bolometric study [24]. Furthermore, TeO₂ material has a few advantages compared with Li₂MoO₄: i) higher detection efficiency for the same volume (higher density and effective atomic number); ii) no hygroscopic properties; iii) two orders of magnitude longer half-life of the ordinary $2\nu 2\beta$ decay, which makes the background contribution from random coincidences of the associated events negligible for 130 Te-enriched thermal detectors, whereas this is the major component of background expected in CUPID with 100 Mo-enriched scintillating bolometers [25]. Taking into account the possibility to improve the present, already extremely low, γ background in CUORE by even more careful selection of external screens with lower contamination and/or by applying innovative techniques for active suppression of backgrounds induced by γ (e.g. proposed by BINGO [26]) and α (e.g. by detection of $\gamma(\beta)$ -induced Cherenkov radiation from TeO₂ [22]), the choice of 130 TeO₂ for future high-sensitivity $^{2}\beta$ searches is still attractive and viable.

With this in mind, TeO_2 together with Li_2MoO_4 detector materials have been chosen for the implementation of the CROSS program on the development of metal-coated bolometers with the capability of pulse-shape discrimination between bulk and near surface interactions [27, 28]. The validation of the CROSS technology for active rejection of surface-originated α and β backgrounds is planned to be realized in a small-scale demonstrator with tens of $Li_2^{100}MoO_4$ and a few $^{130}TeO_2$ bolometers. For the sake of completeness, we refer to early attempts in the development of active background rejection for bolometric 2β detectors, including TeO_2 , which are summarized in [21] and we underline a couple of currently ongoing projects on this topic. As in CROSS, TeO_2 and Li_2MoO_4 are both included in the BINGO project, which is developing an innovative detector assembly system with high-performance bolometric photodetectors and a cryogenic active veto based on bismuth germanate crystals with bolometric photodetection [26]. Recently, the BINGO detector system with the polyamide wire serving to hold a similar size Li_2MoO_4 crystal (twice lighter than TeO_2) have been tested underground in the CROSS cryostat and good detector performance has been reported [29]. Also, the idea of scintillating polymer-based holder allowing active background rejection of radioactivity induced by close materials of the detector structure has been proposed

Table 1. ICP-MS-detected impurities in samples which were produced during an R&D on purification of the ¹³⁰Te-enriched material. We quote results for initial (as-purchased) raw material, after purification (average for pure section of the ingot produced by solidification, see text), and after the conversion to a ¹³⁰TeO₂ powder. Uncertainties are at 20% level. No results are given for cases when the signal is below the detection limit (including the following elements: Ag, As, B, Bi, Cd, Co, Mo, P, Sb, Se, and V).

Element	Concentration (ppm) of element in ¹³⁰ Te-enriched samples					
	Raw material After solidificat		¹³⁰ TeO ₂ powder			
Al	0.6		0.4			
Ca	1.0	0.3	0.3			
Cr	0.6	0.2	0.5			
Cu	2.8		0.3			
Fe	8.6	1.8	1.7			
K	0.4					
Li	0.1					
Mg	2.5	0.2				
Mn	0.1					
Na	0.4		0.2			
Ni	1.4	0.1	0.3			
Si	2.7		1.6			
Sn			0.2			
Ti	0.1					
Zn	3.1	0.5	0.2			
Total	24.6	3.1	5.7			

[30]. First prototypes with small and large TeO₂ bolometers were tested in such a 3D-printed detector holder [30, 31], as a part of R&D for next-generation 2β experiments with this detector material.

Therefore, interest in TeO₂ low-temperature detectors is still high for 2β search applications. With this aim, we report on the development of large-volume ¹³⁰TeO₂ crystals for the CROSS experiment. We present then the first results of bolometric measurements both with newly developed small-size natural crystals and large-size ¹³⁰Te-enriched crystals, operated in dilution refrigerators of above-ground and underground laboratories respectively.

2 Development of TeO₂ crystals from ¹³⁰Te-enriched tellurium

2.1 Initial ¹³⁰Te-enriched material

The initial tellurium powder enriched in ¹³⁰Te isotope to around 93% (provided by the University of South Carolina) was assayed as received from the customer for impurities and oxygen content. Using the inductively coupled plasma mass-spectrometry (ICP-MS), the total concentration of impurities excluding oxygen was measured at 25 ppm; with the duplicate sample, a consistent result of 27 ppm was obtained. The detected impurities are listed in table 1. The oxygen content is found on the level of 2%.

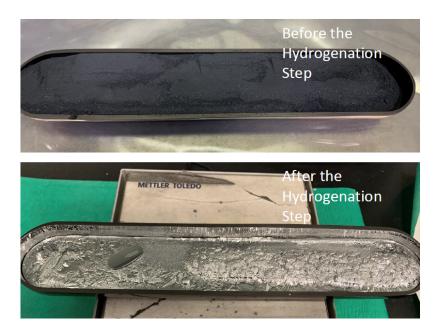


Figure 1. View of a ¹³⁰Te-enriched sample before (top) and after (bottom) the hydrogenation step. A 1 kg load of the material is used for this demonstration test.

2.2 Purification by the solidification method

The purification of the enriched material has been performed in Canada (5N company, Garand, Montreal, Quebec). At the initial step — hydrogenation process [32] — a deoxidized ingot was produced from the tellurium oxide powder. The material was remelted under a stream of hydrogen to obtain a solid ingot, as illustrated in figure 1.

Then the directional solidification method [33] was applied. The tellurium ingot from the hydrogenation step was remelted under a partial atmosphere of hydrogen and solidified directionally to get impurity segregation and to obtain a material with a 5N purity. After the process, the ingot was cut at 6 positions over the length, as shown in figure 2, and each position was sampled in the center and on the surface of the ingot. Each sample from the different positions in the ingot was assayed to get segregation profiles, showing signals of impurities above the detection limit at positions of 180–210 mm. This is illustrated in figure 3 for the main impurity (Fe) of the ¹³⁰Te-enriched material; the segregation profiles of other impurities show the same trend. Therefore, the impure section above 180 mm was removed, while the rest of the ingot was ground and the powder was homogenized for a final sampling. The final assay of the purified tellurium, done using ICP-MS measurements, is presented in table 1. The total impurity in the ¹³⁰Te-enriched powder is detected at 3 ppm, showing no hint of a re-contamination of the material to be used for the crystal growth.

For the first run of purification a yield of 68% was achieved. This figure has been improved to $\sim\!80\%$ in the following batch (of 7 kg) with further improvement of the deoxidation step and a better definition of the impure section after the directional solidification. A further purification of the rejected material is considered later in the program.

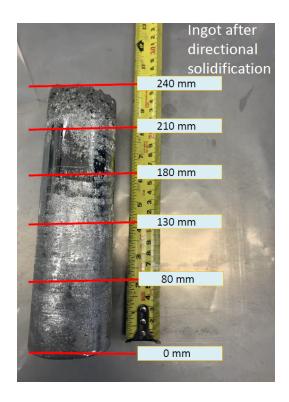


Figure 2. View of the ¹³⁰Te-enriched tellurium ingot produced by the directional solidification method. Red lines show the positions of the probes (in the center and on the surface) used in the study of segregation profiles of the detected impurities, exploited to define the poorest part of the present ingot (below 180 mm, see details in text).

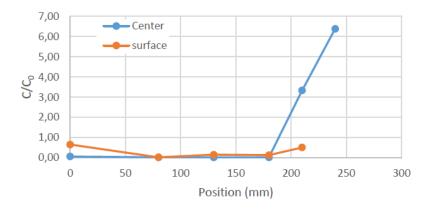


Figure 3. Segregation profile of iron (the main impurity) in samples taken from the center (blue) and on the surface (orange) of the ¹³⁰Te-enriched tellurium ingot produced by the directional solidification.



Figure 4. TeO₂ powder made of highly purified tellurium enriched in ¹³⁰Te to 93%.

2.3 Conversion to ¹³⁰TeO₂ powder

Tellurium oxidation assay was also performed by the 5N company using the material purified via the directional solidification and following a standard process. A 200 g load of tellurium was ground into a powder to carry out the oxidation test. The obtained TeO_2 powder was found visually white (see in figure 4) and differential scanning calorimetry assay revealed no unoxidized tellurium (detection limit was 100 ppm). A particles size distribution analysis was performed on the final powder using laser scattering particle size analyzer (Horiba, LA-950); the mean particle size is measured as 43 μ m. Impurity levels investigated with ICP-MS are presented in table 1. The total level of impurities is low and meets the objective of 10 ppm limit. The main impurities are iron at 1.7 ppm and silicon at 1.6 ppm.

Thus, all the purified material has been oxidized using the standard process. The yield is close to 80% and the total purification factor is about 10, with a residual average impurity concentration of 1.4 ppm in the final purified ¹³⁰TeO₂ powder.

2.4 Crystal growth

We identified a company in the US, Gooch & Housego (Clevelend, Ohio), for the Czochralski growth of large-volume (about 90 cm^3) 130 Te-enriched TeO₂ crystals to be included in the CROSS demonstrator. In order to validate the crystal growth process, two natural TeO₂ samples (4 cm^3 each) were produced by this company from non-purified materials and tested as Cherenkov-radiation-emitting bolometers in Orsay to demonstrate acceptable bolometric performance and the level of internal 210 Pb contamination (less than 10 mBq/kg), as detailed in the next section. After the validation of the TeO₂ crystal producer, we proceeded with the growth of 130 Te-enriched crystals and six 130 TeO₂ samples $45 \times 45 \times 45$ mm each were fabricated using purified starting materials.

In order to investigate the isotopic composition of Te in the grown $^{130}\text{TeO}_2$ crystals, we took fragments (about 80 mg in total) of crystals coming from different locations in the ingot, dissolved them in a mixture of HCl and HNO₃ acids, and carried out the ICP-MS measurement in isotopic mode. The results on the Te isotopic concentration in the ^{130}Te -enriched crystals are given in table 2. The enrichment in the isotope tellurium-130 is found at \sim 91%, which is still very high compared to the enrichment of the initial powder (\sim 93%). Thus, the adoption of the Czochralski technique

(i.e. a small seed) avoids an important dilution of the enriched material in the growth seed. This result would be impossible using the Bridgman method, e.g. employed for the production of the natural TeO₂ crystals for the CUORE experiment, as in this case the seed is very large and dominate the final crystal composition. This result is innovative and very important for future bolometric 2β decay search experiments based on enriched tellurium.

Table 2. ICP-MS-measured isotopic composition of tellurium in ¹³⁰Te-enriched crystals developed in the present work. Isotopic abundance of natural tellurium is given for comparison.


Te isotopes	Isotopic abundance (%) in tellurium samples			
	Enriched in ¹³⁰ Te	Natural Te [8]		
¹²⁰ Te	0.00020(4)	0.0009(1)		
¹²² Te	0.0038(8)	0.0255(12)		
¹²³ Te	0.013(3)	0.0089(3)		
¹²⁴ Te	0.072(15)	0.0474(14)		
¹²⁵ Te	0.11(3)	0.0707(15)		
¹²⁶ Te	0.30(5)	0.1884(25)		
¹²⁸ Te	8.1(2)	0.3174(8)		
¹³⁰ Te	91.4(5)	0.3408(62)		

3 Operation of TeO₂-based low-temperature detectors

3.1 Above-ground test of small-size natural precursors

In order to validate the selected producer of ¹³⁰TeO₂ crystals for CROSS, we carried out a low-temperature characterization of two TeO₂ small-size samples (20 × 20 × 10 mm, 24 g each), grown from high-purity powder with natural Te isotopic composition (without the additional purification foreseen in CROSS). The detector construction was carried out in the same way as CROSS prototypes used in studies of metal-coated bolometers [27]. Specifically, each crystal was equipped with a temperature sensor (NTD-Ge, neutron-transmutation-doped Ge [34]) and a heater (heavily doped Si chip [35]); both elements were glued with a bi-component epoxy (Araldite®) on a 20 × 20-mm side of a TeO₂ crystal. The crystals were mounted on a Cu plate with the help of two Cu rods and PTFE (polytetrafluoroethylene) spacers. The assembly was secured by nuts. To provide electrical connections, we wire-bonded sensors and heaters with Au wires to the gold-plated-on-Kapton contacts. The assembled TeO₂ bolometric module is shown in figure 5 (Left). The lateral part of the assembly was covered by a Cu cylinder; the internal side of this screen and the Cu plate facing TeO₂ crystals were covered by a reflective film (VikuitiTM).

On the top of the TeO₂ assembly we placed a low-threshold optical bolometer [37] to attempt to detect the tiny Cherenkov radiation induced by β / γ / μ interactions in the TeO₂ bolometers [38], thus allowing for selection and study of α events. This photodetector (NTLLD2 in [37]) was made of an electronic grade pure Ge slab (\oslash 44 × 0.18 mm) and instrumented with a smaller size NTD-Ge sensor epoxy-glued on the wafer surface. The Ge wafer was coated by a 70-nm SiO layer to reduce the reflectivity of the surface and thus to improve photon collection. A set of aluminum

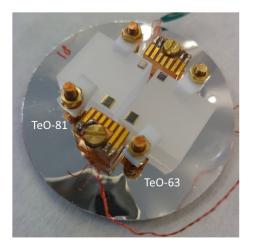




Figure 5. Bolometers based on two $20 \times 20 \times 10$ -mm TeO₂ crystals (Left) and a $\oslash 44$ -mm Ge slab with a 0.2 mm thickness (Right, from [36]), used in the present work for the detection of Cherenkov radiation induced by particle interactions in the TeO₂ thermal detectors.

concentric electrodes were deposited on the Ge surface and interconnected with Al wires, allowing to apply a voltage bias and to amplify thermal signals exploiting the Neganov-Trofimov-Luke effect in semiconductors [39, 40]. The Ge slab was kept in a Cu housing with the help of sapphire balls (\emptyset 1.5 mm) and polypropylene supporting elements; the NTD-Ge sensor was polarized through Au bonding wires. The mounted optical bolometer is depicted in figure 5 (Right). The photodetector was facing the TeO₂ crystals by the side carrying the Al electrodes (to get more efficient amplification of photon-induced thermal signals), while the opposite side was facing another bolometer (ZnO). Its recently published characterization [36] contains more details on the experiment and results of the light detector performance, which are only briefly described below.

The fully assembled device was tested with the help of a pulse-tube-based dilution refrigerator [41] placed at IJCLab (Orsay, France) inside a 10-cm-thick lead shielding. The detector module was spring-suspended inside the cryostat, having a flexible thermal link to the coldest part of the unit to mitigate vibrational noise induced by the pulse tube and pumps [42]. The detectors were cooled down to 15 mK. The NTD-Ge sensors were polarized with O(1 nA) currents to get working resistances below 10 M Ω , in compliance with the electronics used (e.g. the set of the load resistances) and to avoid a large contribution of the Johnson noise. The continuous streams of data were acquired by 16-bit National Instruments cards (NI USB-6218 BNC) with a sampling rate of 5 kS/s; an anti-aliasing Bessel filter with a cut-off frequency of 675 Hz was used in the readout. The data processing was realized using an optimum filter technique [43] implemented in a MATLAB-based application [44] with data-driven templates of signal and noise of the detectors used to construct the transfer function of the filter.

Measurements were carried out with a 232 Th calibration source for 24 h and without the use of additional radioactive sources; the nominally background data were taken for a total of 166 hours. Due to a comparatively high environmental γ -radioactivity (mainly from decays of the 226 Ra sub-chain [45]), and thanks to high spectroscopic properties of the TeO₂ bolometers, background data can be easily calibrated because of the presence of many sharp peaks in a wide energy range as

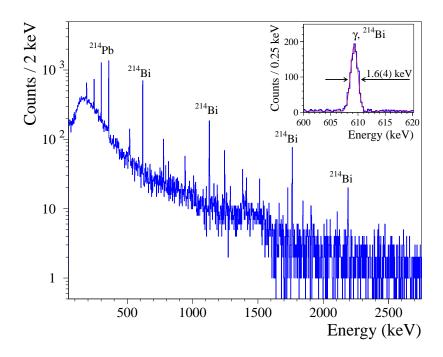


Figure 6. A partial energy spectrum measured by a 24-g TeO₂ bolometer in a low-temperature test (15 mK; 96 h of data taking) in an above-ground laboratory. The most intense γ peaks, corresponding to ²¹⁴Pb and ²¹⁴Bi, are labeled. A 609-keV peak of ²¹⁴Bi together with a fit to a Gaussian plus a flat background component are shown in the Inset. The energy resolution of the peak is measured as 1.6(4) keV FWHM.

Table 3. Performance of two 24-g TeO₂ bolometers and a Ge light detector exploiting the signal amplification based on the Neganov-Trofimov-Luke effect (60 V bias on Al electrode). We report the working point of the NTD thermistor (resistance R_{NTD} at a given current I_{NTD}), pulse-shape time constants (rise- and decaytime parameters, τ_r and τ_d), detector sensitivity represented by the signal voltage amplitude per unit of the deposited energy (A_s ; estimated with 609-keV γ quanta), and RMS baseline width (RMS_{noise}).

Detector	R_{NTD}	I_{NTD}	$ au_r$	$ au_d$	A_{s}	RMS_{noise}
ID	$(M\Omega)$	(nA)	(ms)	(ms)	$(\mu V/\text{keV})$	(keV)
TeO-63	8.8	1.3	12.7	67	0.47	0.59
TeO-81	5.0	1.5	12.4	61	0.22	0.25
LD-NTL [36]	4.2	1.3	1.3	11	38	0.017

seen in figure 6. We observed that both TeO_2 thermal detectors show excellent energy resolution, comparable to results achieved with bare (i.e. non-coated) samples of the same-size used in the CROSS program [27, 46]. The detectors are characterized by high sensitivity defined as the voltage signal per unit of deposited energy (0.2–0.5 μ V/keV) and a low noise represented by the baseline width at the optimum filter output (0.25–0.60 eV RMS). As for the time properties of the thermal response, both TeO_2 bolometers show typically slow signals with the ascending part of about 12 ms and with the descending part about 60 ms. The performances of the TeO_2 thermal detectors are summarized in table 3.

During the TeO₂ detector calibrations we kept the Al electrodes of the Ge bolometer unpolarized, thus allowing the detection of Te X-rays induced by environmental radioactivity in the crystals,

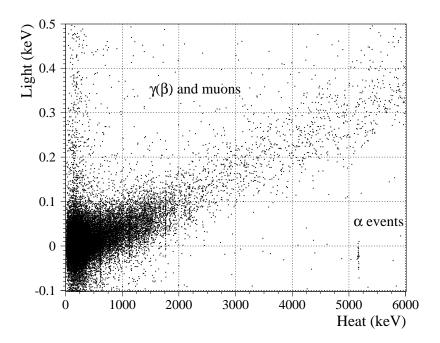


Figure 7. Light signals detected by the Ge optical bolometer versus heat signals measured by the 24-g TeO₂ bolometer (TeO-81) over 96 h of exposure to natural radioactivity at a sea-level laboratory. The major part of events below ~2.6 MeV corresponds to $\gamma(\beta)$ interactions in the crystal medium, while muon-induced events represent dominant contribution above this energy. A structure of high-energy TeO₂-detected events which exhibit no light signal correspond to α decays of ²¹⁰Po inside the TeO₂ detector medium, indicating an internal contamination by ²¹⁰Po(²¹⁰Pb). The energy scale of the detector, calibrated using 609-keV γ quanta of ²¹⁴Bi, exhibits an evident non-linearity, which results to a few % miscalibration of the 5407-keV α peak of ²¹⁰Po (see discussion in Sec. 3.2).

which was used to calibrate the maximum distribution of the muon-induced events [36]. Knowing the energy scale of the Ge bolometer, we found a factor ~10 improvement of the signal-to-noise ratio by applying a 60 V bias on the Al electrode, resulting to a high performance reported in table 3 and in [36].

Thanks to the low noise achieved with the Ge bolometer, we were able to detect the TeO₂-emitted Cherenkov light, providing highly efficient particle identification as illustrated in figure 7. As one can see in figure 7, most of the events populate a band including β -, γ - and μ -induced interactions, which are associated with a registered Cherenkov light of the order of 40 eV per MeV energy deposited in the TeO₂ bolometer. The population of α events, which do not produce the Cherenkov radiation (due to kinematic energy threshold of 400 MeV), is also observed in the data (see figure 7). Moreover, these α -events have even negative values of light signals due to a small cross-talk, also seen in the data for heater-induced events (not shown in figure 7).

The observed α events are mainly ascribed to decays of 210 Po ($Q_{\alpha} = 5407.5$ keV, $T_{1/2} = 138.376$ d) from 210 Po/ 210 Pb contaminations in the crystal bulk corresponding to an activity of 2.8(4) mBq/kg and 9.1(8) mBq/kg in the samples TeO-63 and TeO-81 respectively. The 210 Po α activity is typical for different scintillators [47] and mostly related to the 210 Pb content in materials. In case of TeO₂ crystals, the chemical affinity between Te and Po could result to a less efficient segregation of Po isotopes, including 210 Po, during the TeO₂ powder purification and crystal growth.

It is worth noting that we detected only tens of 210 Po events, while the presence of other α -active radionuclides from U/Th chains is not evident, and thus their activities are expected to be at least an order of magnitude lower. Therefore, one can conclude that the radiopurity of both samples is very high, especially keeping in mind that the starting material did not pass an extra purification.


Accordingly, the results of the low-temperature test presented above prove high bolometric and spectrometric properties together with a low level of radioactive contamination of the ${\rm TeO_2}$ crystals, and validate the crystal producer for the development of the ${}^{130}{\rm Te}$ -enriched crystals for the CROSS experiment.

3.2 Underground test of large-size ¹³⁰Te-enriched crystals

To test the newly developed ¹³⁰Te-enriched crystals as bolometers, we took randomly four of the six cubic samples (45 mm side each) produced for the CROSS project. Two chosen samples (TeO-20 and TeO-24) were used uncoated, while the other two crystals were metal-coated as follows: i) four-side coated with a 200 nm Al layer (TeO-Al); ii) one-side coated with an AlPd bi-layer, 100 nm / 10 nm, in the form of a grid (TeO-AlPd). Each crystal was equipped with an NTD-Ge thermistor and a Si:P heater, coupled with UV-curable (PERMABOND 620) and epoxy (Araldite® Rapid) glue respectively. The samples were assembled in the Cu structure with 3D-printed PLA (polylactic acid) spacers — the holder Slim version designed for the CROSS experiment [48]— fasting two crystals per floor. In addition, a thin Ge bolometer $(45 \times 45 \times 0.3 \text{ mm})$ has been mounted on each TeO₂ crystal to detect Cherenkov radiation. All Ge slabs were SiO-coated (70 nm) to reduce the reflectivity of the surface. A set of Al concentric electrodes, not optimized for the adopted squared geometry of the light detectors, was deposited following the procedure described in [37]. The purpose of the electrodes is to amplify the thermal signal via the Neganov-Trofimov-Luke effect, as used in the above presented measurements (see section 3.1). In total, the tower was composed of 5 floors; the rest of the array was made of six Li₂MoO₄-based bolometers and the same type of Ge light detectors attached to them [49]. The part of the tower containing the ¹³⁰TeO₂ bolometers and construction elements of the detector structure are depicted in figure 8.

The detector array was installed inside a low-background facility with a pulse-tube-based dilution refrigerator, built in the Canfranc underground laboratory (Spain) for the CROSS experiment [50, 51]. In order to mitigate the vibrational noise induced by the pulse tube cryocooler, and to gain space of the available experimental volume, the set-up was recently upgraded with a pendulum-like detector suspension with three magnetic dampers installed at the 1 K stage [52]. Thanks to the underground location of the facility and to massive external and internal shields, the background level from natural radioactivity is well reduced providing suitable conditions for characterisation of large-volume low-temperature detectors [52, 53]. After reaching a base temperature of around 12 mK, we carried out the characterization of the bolometers at warmer temperatures (17, 22, and 27 mK) regulated on the detector plate. The detector array was controlled and read-out using room-temperature electronics [54, 55]. The amplified voltage output of the NTD-Ge thermistors was digitized in continuous streams by a 24-bit ADC with a sampling rate of 2 or 10 kHz; the cut-off frequency of the active Bessel filter was set as 0.3 or 2.5 kHz respectively. The optimum-filter-based data processing was done with the same tool, and in a similar way, as described above (section 3.1).

At low temperature, we lost no contacts but we faced an issue with the readout of a single ¹³⁰TeO₂ channel (TeO-24), therefore we grounded it during the experiment. A similar issue

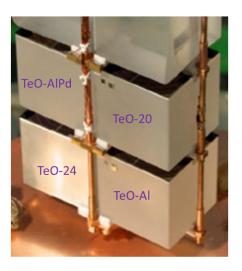

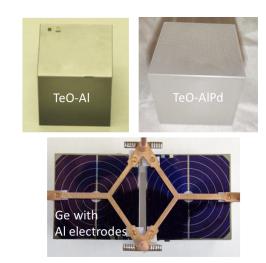


Figure 8. Fragment of a 5-floor array of dual-readout bolometers showing the last two floors with large-volume ¹³⁰TeO₂ bolometers (Left). Two ¹³⁰TeO₂ crystals are coated with Al film on 4 sides and AlPd grid on a single side respectively (Right top). Thin square-shaped Ge bolometers with concentric Al electrodes (light detectors with Neganov-Trofimov-Luke effect signal amplification) are placed above the ¹³⁰TeO₂ thermal detectors (Right bottom).

happened for another channel (TeO-Al) after the electronics upgrade ¹, thus we were not able to study this detector at the warmest temperature (27 mK).

After the characterization of the NTD-Ge sensors at the coldest detector plate temperature chosen (17 mK), we found that, for the optimal working point in terms of highest detector sensitivity, the measured resistances of the thermistors are too high — $O(100 \text{ M}\Omega)$ — for the optimal operation of the existing electronics. This is due to the significantly higher stress of the sensor coupled with UV-cured glue with respect to that observed for lithium molybdates [48]. Therefore, we characterized ¹³⁰TeO₂ bolometers also at higher detector plate temperatures and polarized NTD-Ge with stronger currents reducing the resistances to a few-tens $M\Omega$. The detectors show a rather high sensitivity at 17 mK, O(100 nV/keV), which is reduced by a factor 10 at subsequent operation at warmer temperatures. It is worth emphasizing a comparatively small reduction (a factor of 2) in sensitivity of the metal-coated crystals (irrespective of single or 4-side coating with either a grid or a layer) with respect to the bare sample, in contrast to observations with Li₂MoO₄ crystals [46]. A drastic decrease in the sensitivity at warmer working temperatures has a minor impact on the measured baseline noise after optimum filtering, which is around 2-5 keV RMS, similar to what was reported for Li₂MoO₄-based bolometers tested in this set-up in the same / similar detector structure [48]. It is worth noting the quite long thermal signals of the ¹³⁰TeO₂ bolometers (figure 9) exhibiting a few seconds long descending part of the signals, similar to early reported response for such detector material, which are more than a factor 5 longer than the signals of the reference $\text{Li}_2^{100}\text{MoO}_4$ bolometers [48]. At the same time, the internal $2\nu2\beta$ -decay activity of ^{130}Te in the enriched crystals is about two orders of magnitude lower than in the case of ¹⁰⁰Mo (due to the difference in the half-lives, e.g. see recent results in [56] and [57] respectively), thus it does not

¹Currently, 11 over 14 front-end boxes and twelve 12-channel DAQ boards have been installed.

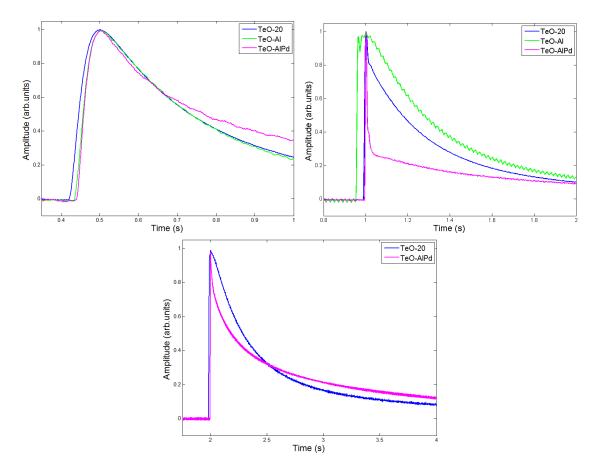


Figure 9. Fragments of average signals of ¹³⁰TeO₂ bolometers operated at a detector plate temperature of 17 mK (top left), 22 mK (top right), and 27 mK (bottom).

represent a notable background in form of pile-ups in contrast with the behaviour of 100 Mo-enriched bolometers [25]. The performance of 130 TeO₂ thermal detectors is summarized in table 4.

Detectors calibration and characterization is done with the help of a 232 Th source, inserted inside the lead shielding. Coincidences between 130 TeO₂ detectors and corresponding Ge bolometers have been established according to time properties (rise time) of their thermal signals. An example of a two-dimensional distribution of the amplitudes of the detected events is illustrated in figure 10. A band of events with a light signal amplitude clearly depending on the heat energy — appreciable in figure 10 — corresponds to $\gamma(\beta)$ interactions in the 130 TeO₂ absorber resulting to the emission of Cherenkov radiation. Clusters of high-energy particles with no detectable light signals correspond to events induced by α decays; a possible tiny scintillation of the TeO₂ material is not observed for α -particles as the conditions of light collection are not favorable due to the absence of a reflective film around the crystal. This is also the main reason for only partial discrimination between α and $\gamma(\beta)$ populations². We notice in fact that a much better discrimination was obtained with a

²The impact of a single-side grid coating on the photon absorption and thus on photon output from the crystal is expected to be negligibly low, as can be concluded from studies of metal-coated lithium molybdate scintillating bolometers [27, 28]. On the contrary, the 4-side Al coating can lead to the efficient absorption of photons by the film resulting to a poor light output, as observed for lithium molybdate crystals [58].

Table 4. Performance of 130 Te-enriched TeO₂ bolometers (0.55 kg each) at different temperatures of the detector plate (T_{plate}). For each working point of the NTD thermistor (resistance R_{NTD} at a given current I_{NTD}), we report the pulse-shape time constants (τ_r and τ_d), the detector sensitivity (A_s ; evaluated with 2615 keV γ quanta), and the RMS baseline width (RMS_{noise}).

Channel	T_{plate}	R_{NTD}	I_{NTD}	$ au_r$	$ au_d$	A_s	RMS_{noise}
	(mK)	$(M\Omega)$	(nA)	(ms)	(ms)	(nV/keV)	(keV)
TeO-20	17	180	0.10	45	370	250	3.0
	22	26	0.55	7.0	360	38	2.7
	27	7.0	3.0	6.0	400	9	2.4
TeO-Al	17	180	0.10	37	420	137	2.9
	22	25	0.55	8.0	420	18	3.6
TeO-AlPd	17	170	0.10	36	600	101	4.7
	22	6.4	1.0	3.4	24	12	8.7
	27	3.0	3.0	3.0	550	7	4.6

device consisting of an even larger (50-mm cube) crystal placed inside a holder with a reflective foil [38], characterized by a similar-performance but smaller light detector. The discrimination will be improved by using an optimized geometry of the Al electrode with a better Ge-wafer surface coverage, which will allow us to improve the amplification by a factor 2 [49]. Moreover, a further enhancement in the NTL gain can be achieved by facing grids to the crystal surface and by applying a twice higher electrode bias [49].

The ¹³⁰TeO₂ bolometers were operated at a higher temperature — regulated at 27 mK — where the performance is expected to be better considering the high NTD resistances. In these conditions, we performed a relatively long measurement (116 h) without the external 232 Th γ source, attempting to probe the radiopurity level of the samples. In the case of the TeO-Al sample, we used such type of "background" data collected at 17 mK with a similar duration (168 h), realized 7.5 months before the measurement at the warmest working point. The energy spectra of the three investigated detectors showing the region of interest for γ , β , and α spectroscopy are depicted in figure 11. The experiment was not supplied by the air flow with low radon content, thus the presented data exhibit a significant γ background induced by radioactive daughters (mainly ²¹⁴Bi) of radon decay, as demonstrated in [53]. In the α region, we observed only a single peak-like structure corresponding to the internal ²¹⁰Po contamination, while a nearby peak, shifted by 100 keV to lower energies is traced to surface pollution of detector materials by ²¹⁰Po (²¹⁰Pb). In addition, as already mentioned above, data of TeO-AlPd and TeO-Al detectors exhibit two broad peaks from an external α source used to irradiate the crystal. It is interesting to note that the energy of the "bulk" ²¹⁰Po peak, calibrated by 2614.5 keV γ quanta, is found about 3% higher than the nominal value (5407.5 keV) for all data and crystals, except 17 mK measurements with the TeO-20 detector showing a $\sim 1\%$ deficit in the estimated energy. The observed miscalibration of the 210 Po α peak is similar to early reported data of TeO₂ bolometers (e.g. a quenching factor of ~1.02 [38, 59] and ~0.99 [60]) and it can be explained by non-linearity of the bolometric response, as demonstrated in [60], where the quenching factor 1.0076(5) was measured for the 2.3 MeV α peak of ¹⁴⁷Sm. This comparison additionally shows a strong impact of measurements and data analysis on the estimate of quenching

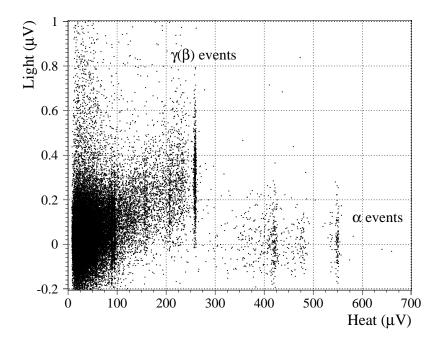


Figure 10. Distribution of 130 TeO₂-detected heat signals (TeO-AlPd) in coincidences with photon signals of the accompanied Ge bolometer (placed above the crystal) measured over 84-h 232 Th calibration in the CROSS set-up at the LSC (Spain). The light detector was operational in the NTL amplification mode (50 V bias was applied on the Al electrode) allowing to reduce the baseline noise to ten(s) eV RMS. The population of $\gamma(\beta)$ events is mainly induced by γ s from the external 232 Th source, while α particles detected are originated to either external U α source used (more broad distributions) or to internal contamination of the crystal (mainly by 210 Po).

factors for alpha particles and nuclear recoils, similarly to such studies with other detector materials [61, 62].

The activity of ²¹⁰Po detected in the ¹³⁰Te-enriched crystals, as shown in figure 11, is 1.6(1), 0.8(1), and 2.5(1) mBq/kg for the sample TeO-20, TeO-AlPd, and TeO-Al respectively. This is a conservative estimate of the ²¹⁰Po bulk contamination, because it includes a contribution of the crystal surface radioactivity, while a comprehensive background model is needed to scrutinize the bulk and surface components, e.g. as done in [63]. For the same reference date (Nov. 2023) of the TeO-20 and TeO-AlPd samples, corresponding to the end of the experiment described here, the ²¹⁰Po activity in the TeO-Al crystal is expected at 0.8 mBq/kg. At the beginning of the experiment (Mar. 2023), the ²¹⁰Po activity in TeO-20 and TeO-AlPd, estimated from the same 168-h-long dataset, is 4.5(1) and 2.4(1) mBg/kg respectively, in agreement with the expectations based on 27 mK data (Nov. 2023). Thus, the ²¹⁰Po content is a few times lower than that in the precursor samples with natural Te isotopic abundance. This confirms the efficiency of the additional purification applied in the process of the ¹³⁰TeO₂ crystal development. Taking into account that the ²²⁸Th (5520 keV) and ²²⁰Rn (5590 keV) peaks are below the detection limit, we can conclude that the activity of ²²⁸Th and ²²⁶Ra in the crystal bulk is expected to be at least two orders of magnitude lower than the observed ²¹⁰Po content. Altogether, this proves a high internal radiopurity of the ¹³⁰TeO₂ crystals developed for the CROSS experiment, which can also comply demands of next-generation experiments.

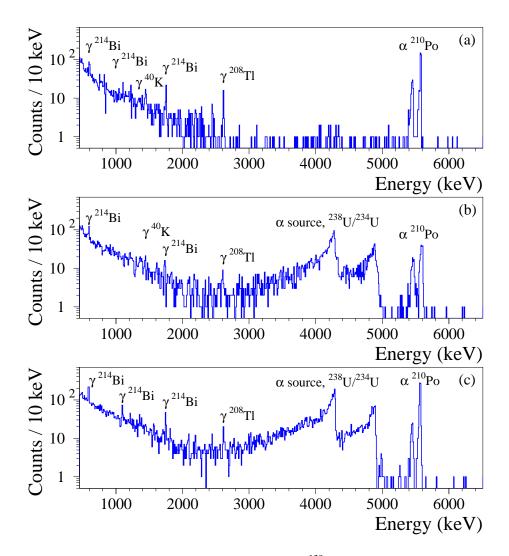


Figure 11. Energy spectra of events detected by the 0.55-kg 130 TeO₂ bolometers TeO-20 (a), TeO-AlPd (b), and TeO-Al (c). Both metal-coated bolometers were additionally irradiated by a close α source of 238 U/ 234 U. The data were acquired in the CROSS set-up at the Canfranc underground laboratory in the following conditions: (a) and (b) correspond to measurements at 27 mK over 116 h (reference date is Nov. 2023); (c) represents a 168-h-long dataset collected at 17 mK (reference date is Mar. 2023). The origin of the most intense γ and α peaks observed in the spectra is labeled.

4 Conclusions

In the framework of the CROSS project, we developed a production chain of tellurium dioxide crystals from highly purified ¹³⁰Te-enriched powder (with 93% of ¹³⁰Te in the isotopic composition of Te). The directional solidification method has been used for the additional purification of the powder, reducing the concentration of impurities by a factor 10, down to a few ppm level in total. The purest part of the ingot is determined by the segregation profiles of impurities (surface / bulk of the ingot); the yield is around 80%. The capability of the selected crystal-growth company (using Czochralski method) to supply high quality TeO₂ samples with the required internal radiopurity (e.g. below 10 mBq/kg activity of ²¹⁰Po) has been validated by the bolometric results obtained above

ground with two small-size samples ($20 \times 20 \times 10$ mm), produced from a powder with natural Te isotopic abundance and no additional purification. After that, we proceeded with the fabrication of six large $^{130}\text{TeO}_2$ crystals with the size of $45 \times 45 \times 45$ mm and a mass of 0.55 kg each. The isotopic abundance of ^{130}Te remains very high in the crystals ($\sim 91\%$) thanks to the adopted Czochralski technique (with a small seed), avoiding a significant dilution of the ^{130}Te -enriched material in the growth seed.

Four over six 130 TeO₂ samples have been operated as thermal detectors in the CROSS low-background set-up at the Canfranc underground laboratory (Spain), using a newly developed detector structure for the CROSS experiment. Half of the samples tested were coated with either Al film (on 4 sides) or with AlPd grid (on 1 side). The detectors show high bolometric and spectrometric performance, as well as a low internal contamination by α -active radionuclides from U/Th chains. The only detected contamination is ascribed to 210 Po with an activity of around 1 mBq/kg (reference date is Nov. 2023), which is a few times lower than in precursors with natural Te composition and no additional purification. Activities of the most harmful radionuclides for double-beta decay search experiments, 228 Th and 226 Ra from 232 Th/ 238 U families, are expected to be at least two orders of magnitude lower than that of 210 Po (i.e. below $\sim 10~\mu$ Bq/kg). A high radiopurity level of newly developed large-volume 130 TeO₂ crystals fully satisfies the CROSS demands and, potentially, requirements of next-generation experiments.

Acknowledgments

This work is supported by the European Commission (Project CROSS, Grant No. ERC-2016-ADG, ID 742345), by the Agence Nationale de la Recherche (ANR France; Project CUPID-1, ANR-21-CE31-0014), and US National Science Foundation (NS 1614611). We acknowledge also the support of the P2IO LabEx (ANR-10-LABX0038) in the framework "Investissements d'Avenir" (ANR-11-IDEX-0003-01 – Project "BSM-nu") managed by ANR, France. This work was also supported by the National Research Foundation of Ukraine under Grant No. 2023.03/0213 and by the National Academy of Sciences of Ukraine in the framework of the project "Development of bolometric experiments for the search for double beta decay", the grant number 0121U111684. Russian and Ukrainian scientists have given and give crucial contributions to CROSS. For this reason, the CROSS collaboration is particularly sensitive to the current situation in Ukraine. The position of the collaboration leadership on this matter, approved by majority, is expressed at https://a2c.ijclab.in2p3.fr/en/a2c-home-en/assd-home-en/assd-cross/.

References

- [1] J.J. Gómez-Cadenas, J. Martín-Albo, J. Menéndez, M. Mezzetto, F. Monrabal and M. Sorel, *The search for neutrinoless double-beta decay*, *La Rivista del Nuovo Cimento* **46** (2023) 619.
- [2] M. Agostini, G. Benato, J.A. Detwiler, J. Menéndez and F. Vissani, *Toward the discovery of matter creation with neutrinoless double-beta decay*, *Rev. Mod. Phys.* **95** (2023) 025002 [2202.01787].
- [3] R.L. Workman et al., The Review of Particle Physics, Prog. Theor. Exp. Phys. 2022 (2022) 083C01.
- [4] A. Giuliani, J.J. Gomez Cadenas, S. Pascoli, E. Previtali, R. Saakyan, K. Schaeffner et al., *Double beta decay APPEC committee report*, 1910.04688v2.

- [5] V.I. Tretyak and Y.G. Zdesenko, *Tables of double beta decay data an update*, *At. Data Nucl. Data Tables* **80** (2002) 83.
- [6] A.S. Barabash, *Precise Half-Life Values for Two-Neutrino Double-β Decay: 2020 Review, Universe* **6** (2020) 159.
- [7] M. Wang, W.J. Huang, F.G. Kondev, G. Audi and S. Naim, *The AME2020 atomic mass evaluation* (II). Tables, graphs and references, Chinese Phys. C 45 (2021) 030003.
- [8] J. Meija et al., Isotopic compositions of the elements 2013 (IUPAC Technical Report), Pure Appl. Chem. 88 (2016) 293.
- [9] Y. Chu, Y. Li, Z. Ge, G. Wu and H. Wang, Growth of the high quality and large size paratellurite single crystals, J. Cryst. Growth 295 (2006) 158.
- [10] M. Barucci, C. Brofferio, A. Giuliani, E. Gottardi, I. Peroni and G. Ventura, *Measurement of low temperature specific heat of crystalline TeO*₂ *for the optimization of bolometric detectors, J. Low Temp. Phys.* **123** (2001) 303.
- [11] CUORE collaboration, CUORE crystal validation runs: Results on radioactive contamination and extrapolation to CUORE background, Astropart. Phys. 35 (2012) 839.
- [12] CUORE collaboration, *Study of rare nuclear processes with CUORE, Int. J. Mod. Phys. A* **33** (2018) 1843002.
- [13] CUORE collaboration, CUORE opens the door to tonne-scale cryogenics experiments, Prog. Part. Nucl. Phys. 122 (2022) 103902.
- [14] C. Brofferio and S. Dell'Oro, *The saga of neutrinoless double beta decay search with TeO*₂ thermal detectors, Rev. Sci. Instrum. **89** (2018) 121502.
- [15] S. Pirro et al., Present status of MI-BETA cryogenic experiment and preliminary results for CUORICINO, Nucl. Instrum. Meth. A 444 (2000) 71.
- [16] A. Bryant, *A Search for Neutrinoless Double Beta Decay of* ¹³⁰*Te*, Ph.D. thesis, University of California, Berkeley, U.S., Spring, 2010.
- [17] CUORE collaboration, Exploring the Neutrinoless Double Beta Decay in the Inverted Neutrino Hierarchy with Bolometric Detectors, Eur. Phys. J. C 74 (2014) 3096.
- [18] CUPID collaboration, CUPID: CUORE (Cryogenic Underground Observatory for Rare Events) Upgrade with Particle IDentification, (2015) [1504.03599].
- [19] CUPID collaboration, *R&D towards CUPID (CUORE Upgrade with Particle IDentification)*, (2015) [1504.03612].
- [20] D.R. Artusa et al., Enriched TeO₂ bolometers with active particle discrimination: towards the CUPID experiment, Phys. Lett. B **767** (2017) 321.
- [21] D. Poda and A. Giuliani, Low background techniques in bolometers for double-beta decay search, Int. J. Mod. Phys. A 32 (2017) 1743012.
- [22] T. Tabarelli de Fatis, Cerenkov emission as a positive tag of double beta decays in bolometric experiments, Eur. Phys. J. C 65 (2010) 359.
- [23] CUPID collaboration, CUPID pre-CDR, (2019) [1907.09376].
- [24] A. Giuliani, F.A. Danevich and V.I. Tretyak, *A multi-isotope* 0ν2β bolometric experiment, Eur. Phys. J. C 78 (2018) 272.

- [25] D.M. Chernyak et al., Random coincidence of 2ν2β decay events as a background source in bolometric 0ν2β decay experiments, Eur. Phys. J. C 72 (2012) 1989.
- [26] A. Armatol, *Innovative methods for background rejection in next-generation neutrinoless double beta decay bolometric experiments*, Ph.D. thesis, Université Paris-Saclay, Orsay, France, September, 2023.
- [27] I.C. Bandac et al., The $0v2\beta$ -decay CROSS experiment: preliminary results and prospects, JHEP **01** (2020) 018.
- [28] I.C. Bandac et al., *Phonon-mediated crystal detectors with metallic film coating capable of rejecting* α *and* β *events induced by surface radioactivity, Appl. Phys. Lett.* **118** (2021) 184105.
- [29] A. Armatol et al., *Double beta decay APPEC committee report*, *Nucl. Instrum. Meth. A* (2024) [2402.12262].
- [30] M. Biassoni et al., Towards the development of a polymer-based assembly for cryogenic detectors for neutrino-less double beta decay, Eur. Phys. J. Plus 138 (2023) 384.
- [31] M. Biassoni et al., An acrylic assembly for low-temperature detectors, Eur. Phys. J. Plus 136 (2021) 986.
- [32] K. Mimura and M. Isshiki, *Hydrogen plasma arc melting*, in *Purification Process and Characterization of Ultra High Purity Metals: Application of Basic Science to Metallurgical Processing*, pp. 181–202, Springer (2002).
- [33] T. Kekesi and M. Isshiki, Principles of metal purification and purity evaluation, in Purification Process and Characterization of Ultra High Purity Metals: Application of Basic Science to Metallurgical Processing, pp. 39–69, Springer (2002).
- [34] E.E. Haller, Advanced far-infrared detectors, Infrared Phys. Techn. 35 (1994) 127.
- [35] E. Andreotti et al., *Production, characterization and selection of the heating elements for the response stabilization of the CUORE bolometers, Nucl. Instrum. Meth. A* **664** (2012) 161.
- [36] A. Armatol et al., ZnO-based scintillating bolometers: New prospects to study double beta decay of ⁶⁴Zn, JINST **18** (2023) P06026.
- [37] V. Novati et al., Charge-to-heat transducers exploiting the Neganov-Trofimov-Luke effect for light detection in rare-event searches, Nucl. Instrum. Meth. A **940** (2019) 320.
- [38] L. Bergé et al., Complete event-by-event $\alpha/\gamma(\beta)$ separation in a full-size TeO_2 CUORE bolometer by Neganov-Luke-magnified light detection, Phys. Rev. C 97 (2018) 032501.
- [39] B. Neganov and V. Trofimov, USSR patent no 1037771, Otkrytia i Izobreteniya 146 (1985) 215.
- [40] P.N. Luke, Voltage-assisted calorimetric ionization detector, J. Appl. Phys. 64 (1988) 6858.
- [41] M. Mancuso et al., An experimental study of antireflective coatings in Ge light detectors for scintillating bolometers, EPJ Web Conf. 65 (2014) 04003.
- [42] E. Olivieri et al., Vibrations on pulse tube based Dry Dilution Refrigerators for low noise measurements, Nucl. Instrum. Meth. A 858 (2017) 73.
- [43] E. Gatti and P. Manfredi, *Processing the signals from solid-state detectors in elementary-particle physics, Riv. Nuovo Cim.* **9** (1986) 1.
- [44] M. Mancuso, Development and optimization of scintillating bolometers and innovative light detectors for the search for neutrinoless double beta decay, Ph.D. thesis, Université Paris-Sud, Orsay, France, February, 2016.

- [45] T.B. Bekker et al., Aboveground test of an advanced Li₂MoO₄ scintillating bolometer to search for neutrinoless double beta decay of ¹⁰⁰Mo, Astropart. Phys. **72** (2016) 38.
- [46] H. Khalife, CROSS and CUPID-Mo: future strategies and new results in bolometric search for $0\nu\beta\beta$, Ph.D. thesis, Université Paris-Saclay, Orsay, France, January, 2021.
- [47] F.A. Danevich and V.I. Tretyak, *Radioactive contamination of scintillators*, *Int. J. Mod. Phys. A* **33** (2018) 1843007.
- [48] D. Auguste et al., A novel mechanical design of a bolometric array for the CROSS double-beta decay experiment, submitted to JINST (2024) [2405.18980].
- [49] D. Auguste et al., Light detectors with thermal signal amplification for CROSS and CUPID $\beta\beta$ decay search experiments, to be submitted to JINST (2024).
- [50] CROSS collaboration, *The new CROSS Cryogenic Underground (C2U) facility: an overview*, in *XXIX International (online) Conference on Neutrino Physics and Astrophysics (Neutrino 2020), June 22 July 02*, 2020, 2020, https://indico.fnal.gov/event/19348/contributions/186315/.
- [51] A. Armatol et al., A CUPID Li₂¹⁰⁰MoO₄ scintillating bolometer tested in the CROSS underground facility, JINST **16** (2021) P02037.
- [52] A. Ahmine et al., Test of $^{116}CdWO_4$ and Li_2MoO_4 scintillating bolometers in the CROSS underground facility with upgraded detector suspension, JINST **18** (2023) P12004.
- [53] I. Bandac et al., $Li_2^{100\text{depl}}MoO_4$ scintillating bolometers for rare-event search experiments, Sensors 23 (2023) 5465.
- [54] P. Carniti, C. Gotti and G. Pessina, High-Resolution Digitization System for the CROSS Experiment, J. Low Temp. Phys. 199 (2020) 833.
- [55] P. Carniti, C. Gotti and G. Pessina, *High resolution filtering and digitization system for cryogenic bolometric detectors*, *Nucl. Instrum. Meth. A* **1045** (2023) 167658.
- [56] CUORE collaboration, *Measurement of the* 2νββ Decay Half-Life of ¹³⁰Te with CUORE, Phys. Rev. Lett. **126** (2021) 171801.
- [57] C. Augier et al., Measurement of the 2νββ Decay Rate and Spectral Shape of ¹⁰⁰Mo from the CUPID-Mo Experiment, Phys. Rev. Lett. **131** (2023) 162501.
- [58] K. Alfonso et al., Twelve-crystal prototype of Li₂MoO₄ scintillating bolometers for CUPID and CROSS experiments, JINST **18** (2023) P06018 [2304.04611].
- [59] A. Alessandrello et al., *The thermal detection efficiency for recoils induced by low energy nuclear reactions, neutrinos or weakly intercating massive particles, Phys. Lett. B* **408** (1997) 465.
- [60] F. Bellini et al., Response of a TeO₂ bolometer to α particles, JINST 5 (2010) P12005.
- [61] V.I. Tretyak, Semi-empirical calculation of quenching factors for ions in scintillators, Astropart. Phys. 33 (2010) 40.
- [62] V.I. Tretyak, Semi-empirical calculation of quenching factors for scintillators: new results, EPJ Web Conf. 65 (2014) 02002.
- [63] CUORE collaboration, Measurement of the two-neutrino double-beta decay half-life of ¹³⁰Te with the CUORE-0 experiment, Eur. Phys. J. C 77 (2017) 13.