

GOOSE: Goal-Conditioned Reinforcement Learning for Safety-Critical Scenario Generation

Joshua Ransiek¹, Johannes Plaum², Jacob Langner¹ and Eric Sax³

Abstract—Scenario-based testing is considered state-of-the-art for verifying and validating Advanced Driver Assistance Systems (ADASs) and Automated Driving Systems (ADSs). However, the practical application of scenario-based testing requires an efficient method to generate or collect the scenarios that are needed for the safety assessment. In this paper, we propose Goal-conditioned Scenario Generation (GOOSE), a goal-conditioned reinforcement learning (RL) approach that automatically generates safety-critical scenarios to challenge ADASs or ADSs (Fig. 1). In order to simultaneously set up and optimize scenarios, we propose to control vehicle trajectories at the scenario level. Each step in the RL framework corresponds to a scenario simulation. We use Non-Uniform Rational B-Splines (NURBS) for trajectory modeling. To guide the goal-conditioned agent, we formulate test-specific, constraint-based goals inspired by the OpenScenario Domain Specific Language (DSL). Through experiments conducted on multiple pre-crash scenarios derived from UN Regulation No. 157 for Active Lane Keeping Systems (ALKS), we demonstrate the effectiveness of GOOSE in generating scenarios that lead to safety-critical events.

I. INTRODUCTION

Scenario generation is one of the essential steps in scenario-based testing and, therefore an important part of the verification and validation of ADASs and ADSs. The core principle in scenario-based testing is to use scenarios with a predefined starting parameterization which are then simulated using the System under Test (SUT) in a closed-loop simulation [1]. This approach differs from distance-based or statistical testing, which relies on the vehicle driving on the road to encounter a sufficient number of critical and non-critical situations to perform safety assessments. According to [2], most scenario acquisition methods require predefined base scenarios that can be altered. This implies, dangerous and critical situations have to be known before the testing phase. Nevertheless, not all critical scenarios needed for safety assessment may be known initially, which is why the ISO 21448 standard explicitly demands to minimize the risk of unknown critical scenarios [3]. Scenario generation without the boundaries of a base scenario tries to address this problem.

Current practices for scenario generation in the scenario-based testing predominantly rely on engineers or involve a semi-automated process. In the semi-automated approach, a human operator specifies the number of actors, their initial

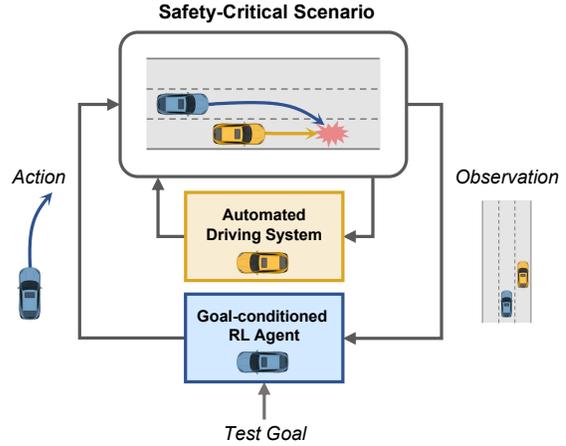


Fig. 1. The Pipeline for safety-critical scenario generation using a goal-conditioned RL agent. The agent (blue) attempts to increase the criticality of the simulated scenario by modifying the adversarial vehicle’s trajectory, while the ego vehicle (yellow) is trying to maintain a safe state.

positions, and predetermined trajectories, while their speeds are selected from a range of options. Human involvement can be time-consuming and may lead to critical scenarios being overlooked. To address this challenge, researchers are actively exploring the use of agents in simulations to create collisions or exhibit adversarial behavior. However, these agents often require training to maneuver vehicles effectively, and the generated scenarios may surpass the system’s capabilities, resulting in unrealistic situations.

In this paper, we present a comprehensive approach to scenario generation, **Goal-conditioned Scenario Generation (GOOSE)**, for testing of ADAS and ADS. Our contributions consist of the following: 1) an application of a goal-conditioned RL approach using a constrained-based goal selection strategy for scenario generation, 2) the utilization of NURBS for efficient trajectory modeling and action space reduction of the goal conditioned policy, and 3) experimental results on a selection of pre-crash scenarios show that GOOSE is capable of generating safety-critical scenarios.

II. RELATED WORK

A. Reinforcement Learning for Software Testing

Designing automated tests using RL agents heavily focus on exploring new states by interacting with the software. [4] employ RL agents to identify bugs in games. Similarly, [5] use a state-counting method to encourage exploration and [6], [7] use a curiosity objective. In [8] RL is applied in a game

¹Joshua Ransiek and Jacob Langner are with the FZI Research Center for Information Technology, Karlsruhe, Germany ransiek@fzi.de

²Johannes Plaum is with Torc Europe GmbH, Stuttgart, Germany johannes.plaum@torc.ai

³Eric Sax is with the KIT Karlsruhe Institute of Technology, Karlsruhe, Germany eric.sax@kit.edu

production setting for game evaluation and balancing purposes. Furthermore, agents are utilised to explore graphical user interfaces (GUIs) of Android applications [9], [10], [11] and computer software [12], while [13], [14] employ agents to identify performance bottlenecks in server applications.

B. Goal-conditioned Reinforcement Learning

Goal-conditioned RL [15], [16], [17], [18] aims to train agents that can reach any goal provided to them. Given the current state and the goal, the resulting goal-conditioned policy predicts action sequences that lead towards the desired goal. Hindsight Experience Replay (HER) [15], [16] is often used to enhance the robustness and sample efficiency of goal-conditioned policies by relabeling or reweighting the reward obtained from an achieved goal. Hierarchical reinforcement learning (HRL) addresses the goal-conditioned setting by learning a higher-level policy to predict a sequence of intermediate subgoals iteratively. These subgoals can then serve as targets for low-level policies [19], [17], [20].

C. Safety-Critical Traffic Scenario Generation

The development of ADSs necessitates the creation of diverse and, ideally, realistic scenarios to ensure safe and efficient operation of the system in various traffic situations. The majority of approaches for safety-critical scenario generation involve perturbing the maneuvers of interactive actors in an existing scenario with adversarial behaviors. [21] modifies real world scenes in the latent space of a learned traffic model based on a graph-based conditional variational autoencoder (VAE). Scenario optimization through differentiable simulation by learning from demonstration and common sense is considered in [22]. [23] propose a neural autoregressive model to insert actors of different classes into traffic scenes. [24] modify the trajectories of the actors in a physically plausible way using query-based black-box optimisation. Furthermore, [25] use a human controller to create abnormal scenarios in the simulation. Prior works already choose RL to solve the safety-critical scenario generation task. [26], [27] introduce adaptive stress testing (AST) for automotive applications in a crosswalk scenario. AST is extended using reward augmentation [28], a long short-term memory (LSTM) policy network [29], the GoExplore algorithm [30], and a combination of backward algorithm and proximal policy optimization (PPO) [31]. Similarly, [32] employ a RL agent in a pedestrian crossing to evaluate a collision avoidance system. Various approaches [33], [34], [35] use adversarial agents in highway scenarios. [36] use a risk-based framework and [37] train vehicles to execute adversarial maneuvers to increase the collision probability. [38] learn adversarial policies from both offline naturalistic driving data and online simulation samples. [39] incrementally generate sequences of environmental changes by combining RL and many-objective search in straight, left-turn, and right-turn scenarios. In [40] the safety of a driving algorithms is evaluated in an intersection scenario. A method for finding failure scenarios that trains the adversarial agents using multi-agent RL is proposed by [41].

In this work the goal-conditioned RL approach is applied to a scenario generation process where the goals define critical events and desired scenario properties. The idea of identifying software bugs by exploring new states is employed to generate safety-critical scenarios for a given ADAS or ADS. In contrast to existing approaches, we will not train interactive agents to create collisions or exhibit adversarial behaviour. This is due to the fact that these agents require training in order to operate vehicles in an effective manner. Furthermore, their behaviour may exceed the system’s capabilities, resulting in unrealistic situations. Adopted from previous work [42], GOOSE controls the vehicle trajectory at the scenario level, without the need for the vehicle to learn individual control. Each step in the RL framework is equivalent to a scenario simulation, which allows for the effective generation of challenging scenarios.

III. BACKGROUND

A. Goal-conditioned Markov Decision Process

The goal-conditioned RL problem is defined by a finite-horizon, goal-conditioned Markov decision process (MDP) $(\mathcal{S}, \mathcal{G}, \mathcal{A}, p, R, T_{max}, \gamma, \rho_0, \rho_g)$, where \mathcal{S} is the set of states, \mathcal{G} is the set of goals, \mathcal{A} is the set of actions, $p(s_{t+1} | s_t, a_t)$ is the time-invariant dynamics function, R is the reward function, T_{max} is the maximum horizon, γ is the discount factor, ρ_0 is the initial state distribution, and ρ_g is the goal distribution [18]. The objective in goal-conditioned RL is to obtain a policy $\pi(a_t | s_t, g)$ to maximize the expected sum of rewards

$$J(\pi) = \mathbb{E} \left[\sum_{t=0}^{T_{max}} \gamma^t R(s_t, a_t, g) \right], \quad (1)$$

where the goal is sampled from ρ_g and the states are sampled according to the $s_0 \sim \rho_0$, $a_t \sim \pi(a_t | s_t, g)$, and $s_{t+1} \sim p(s_{t+1} | s_t, a_t)$.

B. Non-Uniform Rational B-Splines

The NURBS curve represents a parametric curve $C(u)$ that uses the B-spline functions as its basis [43]. The formulation

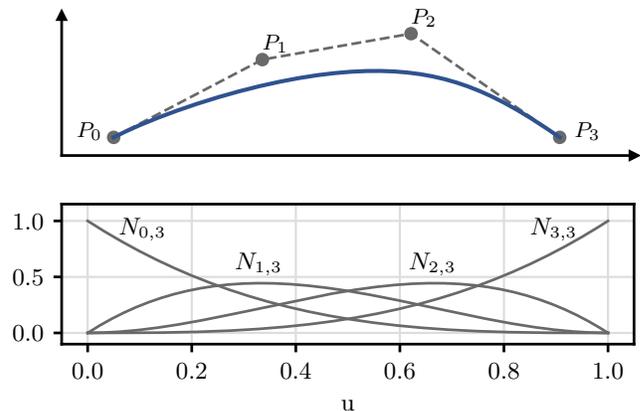


Fig. 2. Exemplary NURBS curve of 3-th degree with weights $\omega_0, \dots, \omega_3 = 1$ and the associated basis functions $N_{\{0, \dots, 3\}, 3}$

of the curve is shown in Equation (2).

$$C(u) = \frac{\sum_{i=0}^n N_{i,p}(u)\omega_i P_i}{\sum_{i=0}^n N_{i,p}(u)\omega_i}, \quad a \leq u \leq b, \quad (2)$$

where, p represents the curve degree, n represents the number of control points, P_i represents the i -th control point, ω_i represents the weight of the i -th control point, and $N_{i,p}(u)$ represents the p -th degree B-spline basis function defined on the non-periodic knot vector

$$U = \underbrace{\{a, \dots, a, u_{p+1}, \dots, u_{m-p-1}, b, \dots, b\}}_{p+1}. \quad (3)$$

The number of knots $m+1$ is calculated by $m = p + n + 1$. The i -th B-spline basis function of p -th degree is defined as

$$N_{i,0}(u) = \begin{cases} 1 & \text{if } u_i \leq u < u_{i+1} \\ 0 & \text{otherwise} \end{cases}, \quad (4)$$

$$N_{i,p}(u) = \frac{u - u_i}{u_{i+p} - u_i} N_{i,p-1}(u) + \frac{u_{i+p+1} - u}{u_{i+p+1} - u_{i+1}} N_{i+1,p-1}(u), \quad (5)$$

where u_i is the i -th knot, and the half-open interval $[u_i, u_{i+1})$ is the i -th knot span. We use a cubic NURBS curve (example shown in Figure 2), which is empirically found sufficient for modeling diverse trajectories, velocities and acceleration processes, while retaining a relatively small set of optimizable parameters.

IV. METHOD

The objective is to provide a RL agent that exhibits adversarial behavior in the given scenario to generate safety-critical scenarios. We approach this problem by formulating it as an optimization problem in the framework of goal-conditioned RL. The interaction between the RL agent and the environment, which includes the scenario simulation and SUT, is illustrated in Fig. 3. When the agent interacts with the environment at time step t , it receives state s_t that provides relevant information about the movement of the actors in the scenario. In addition, the agent is provided with a desired goal $g_{desired,t}$, which specifies the desired scenario properties, and an achieved goal $g_{achieved,t}$, which characterizes the most recently generated scenario. The distance between the achieved and the desired goal serves as an assessment metric for the generated scenarios and functions as a guidance for training the goal-conditioned policy. The trajectory of the target vehicle is incrementally altered by the agent's actions a_t . Afterwards the environment proceeds to the next state s_{t+1} , through the simulation of the generated scenario. The new scenario configuration results in a new ego vehicle trajectory, which is subsequently observed by the agent for further decision-making. We are particularly interested in scenarios where the SUT, that controls the ego vehicle, must intervene and deviate from its comfortable trajectory. The system is considered a black-box, and the RL agent has no access to its internal workings.

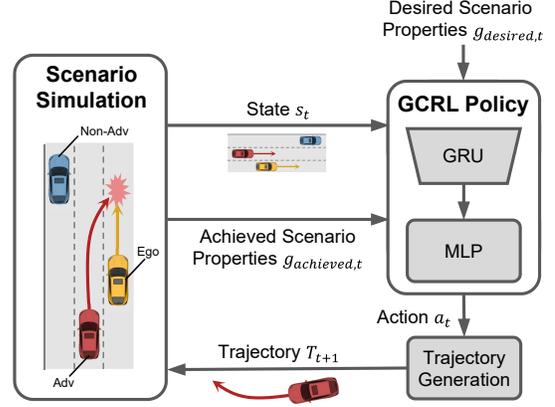


Fig. 3. Method for scenario generation using a goal-conditioned RL agent. The agent (red) attempts to increase the criticality of the simulated scenario by modifying the target vehicle's trajectory based on state and goal, while the ego vehicle (yellow) is trying to maintain a safe state.

GOOSE consists of three components, which are discussed in more detail in the following sections. These include the action space definition using NURBS (Sec. IV-A), which is an efficient method for modeling entire vehicle trajectories, feature extraction from high-dimensional observations (Sec. IV-B) to preprocess the high-dimensional scenario observations, and the constraint-based goal definition (Sec. IV-C) to specify the scenario generation task. The algorithm is summarized in Sec. IV-D.

A. Action Space Definition

The agent's actions permit it to alter the state of the environment, thereby modifying the scenario configuration. To make the decision making invariant to the road curvatures, GOOSE operates in the Frenet frame [44]. On the Frenet space, the adversarial vehicle's trajectory is specified in terms of longitudinal displacement s and the lateral offset d . To further simplify the action space the high-dimensional continuous space of trajectory values is represented as NURBS curve. The agent acts with the environment by incrementally altering the control points P_i and weights w_i of a NURBS curve (Sec. III-B). Thus, the set of actions consists of three components. The incremental alteration of the longitudinal displacement a_s , lateral offset a_d and weighting a_ω of each control point P :

$$\mathbf{a} = [a_s \quad a_d \quad a_\omega] \quad (6)$$

The s and d values, required for trajectory calculation in the Frenet frame, can be retrieved in a favorable discretization through point-wise evaluation of the NURBS curve. The trajectory T_{sd}^{adv} is then transformed into the Cartesian coordinates T_{xy}^{adv} and used to update the movement of the adversarial vehicle. The new scenario configuration is provided to the SUT to calculate a new ego vehicle trajectory T_{xy}^{ego} , which is subsequently observed by the deep RL agent for further decision-making. The application of these actions is illustrated in Fig. 4.

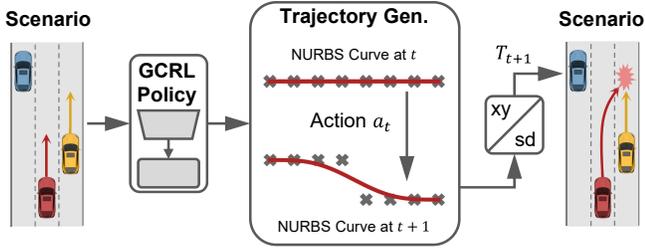


Fig. 4. Scheme outlining the application of an action to a vehicle trajectory

B. State Space Definition

The preprocessed state representation z is a tuple (f, g_a, g_d) , where f is a feature vector of the observed scenario, g_a is the achieved goal in the current step, and g_d is the desired goal in the current episode. The set of possible states S is vast and encompasses all relevant information about the movement of the actors within the scenario, and is expanded with the different goal definitions. Therefore, generalization is important to design an effective state representation. The feature vector f is extracted from the current scenario using a gated recurrent unit (GRU). The current scenario is represented by the following scenario observation:

$$s = [x_{0,\dots,M} \quad y_{0,\dots,M} \quad v_{0,\dots,M} \quad a_{0,\dots,M} \quad \delta_{0,\dots,M}]. \quad (7)$$

Here x, y being the coordinates of the vehicle's trajectory, v being the vehicle's velocities, a being the vehicle's accelerations and δ being the vehicle's steering angles. The observation encompasses all M actors present in the scenario, with values recorded from the initial time step until the final time step of the scenario. The state representation z is derived by concatenation of the feature vector f , achieved goal g_a and desired goal g_d . The GRU is simultaneously trained during the policy update step.

C. Constraint-based Goal Definition

In goal-conditioned RL goals are defined as desired properties or features. A goal is therefore asking the agent to achieve a final states that suffices specific features. Training the goal-conditioned RL agent requires defining a goal-conditioned reward function $r(s, g)$ that indicates whether the desired state is reached. Typically, the completion of a goal is a criterion that is known in advance. In the context of safety-critical scenario generation, scenarios must meet specific conditions tailored for targeted training and evaluation of ADS. As outlined in [45], scenarios can be categorised according to their level of abstraction, namely functional, logical and concrete. Logical scenarios are defined by parameter ranges, while concrete scenarios are defined by single parameter values. Both approaches fail to consider the interdependencies and relationships between the attributes and behaviours of the actor occurring in the scenario. Given that GOOSE operates at the scenario level, with the objective of exerting control over the behaviour of actors through the

course of the scenario, we are particularly interested in the relationships rather than modifying parameters at the initial state. [46] address the relationships within traffic, particularly cause-and-effect relationships, by defining abstract scenarios expressed through the use of constraints. The OpenScenario DSL [47] defines abstract scenarios through the use of equality and inequality constraints.

The combination of the goal definition of goal-conditioned RL and the requirements of safety-critical scenario generation allows for the definition of goals as desired abstract scenario properties that fulfill the test objective. While the RL agent functions as a constraint solver to explore the space of unknown scenarios. In the context of goal definition, two distinct types of goals can be identified: equality goals, denoted by g_{eq} , and inequality goals, denoted by g_{ieq} . Equality goals are concerned with the explicit achievement of specific values, such as certain vehicle distances or positions. In contrast, inequality goals focus on complex relations within traffic, such as acceleration, steering angle or criticality measures. Accordingly, the following definition of goals is proposed:

$$g = \left[\underbrace{c_1, \dots, c_n}_{g_{eq}}, \underbrace{d_1, \dots, d_m}_{g_{ieq}} \right]. \quad (8)$$

Here $c_{1,\dots,n}$ are the n equality constraints and $d_{1,\dots,m}$ are the m inequality constraints that are required to be satisfied. The proposed goal representation is utilized to derive a reward function that indicates whether the desired scenario properties have been fulfilled. The Euclidean distance between the state and the equality goal is used as the first metric, while

Algorithm 1 Training process of GOOSE

- 1: **Initialize:** Scenario simulation, replay buffer \mathcal{D} , goal-conditioned policy $\pi_\theta(\cdot|s, g)$
 - 2: **for** each episode **do**
 - 3: Reset environment and scenario simulation
 - 4: Sample initial state $s_0 \sim \rho_0$, desired goal $g \sim \rho_g$
 - 5: $t \leftarrow 1$
 - 6: **while** $t \leq T$ **do**
 - 7: Sample action $a_t \sim \pi_\theta(s_t, g)$
 - 8: Apply a_t to modify the scenario (Sec. IV-A)
 - 9: Step environment by running the scenario simulation $s_{t+1} \sim p(s_{t+1}|s_t, a_t)$
 - 10: Compute reward r_t for policy π_θ based on the goal definition (Sec. IV-C)
 - 11: Store $(s_t, a_t, r_t, s_{t+1}, g)$ in \mathcal{D}
 - 12: **if** $t \geq T$ **or** goal reached **then**
 - 13: End episode
 - 14: **end if**
 - 15: $t \leftarrow t + 1$
 - 16: **end while**
 - 17: Update policy network π_θ to maximize r_t based on preprocessed state z_t (Sec. IV-B)
 - 18: **end for**
 - 19: **output** agent policy π_θ
-

the fulfillment of the inequality goal is used as the second metric. In summary, the following reward function results:

$$r(\mathbf{s}, \mathbf{g}) = -\delta(\|\phi_{eq}(\mathbf{s}) - \mathbf{g}_{eq}\| \geq \epsilon) \times \delta(\phi_{ieq}(\mathbf{s}) \geq \mathbf{g}_{ieq}) \quad (9)$$

where δ is the indicator function, $\epsilon \in \mathbb{R}^+$ is the distance threshold and ϕ_{eq}, ϕ_{ieq} are mapping functions that map the observation to goals. In general, agents receive a negative reward of -1 at all time steps until $\phi_{ieq}(\mathbf{s}) < \mathbf{g}_{ieq}$ and $\|\phi_{eq}(\mathbf{s}) - \mathbf{g}_{eq}\| < \epsilon$, after which a reward of 0 is provided and the episode terminates. In order to minimize the overall negative reward, this approach encourages the goal to be achieved as quickly as possible.

D. Algorithm Summary

The entire pipeline of GOOSE is summarized in Algorithm 1. We train the goal-conditioned policy on randomly selected initial states and goals sampled from the distribution of desired goals ρ_g . At test time a new initial state is presented and the trained policy is employed to direct the scenario towards the desired scenario properties.

V. EXPERIMENTS AND RESULTS

As a test bed, we use a set of three abstract scenarios based on the UN Regulation No. 157 for Active Lane Keeping Systems (ALKS) [48]. We define RL policies to control the trajectory of a selected vehicle, while the ego vehicle aims to maintain a safe state, and all other vehicles follow their predetermined trajectories. The action space of the agent is continuous and specifies the desired change of the control points and weights of the NURBS curve. In every environment, a cubic NURBS curve ($p = 3$) with five control points ($n = 5$) is utilized. In the first environment, the RL-controlled vehicle should decelerate in front of the ego vehicle, which is therefore designated as *deceleration*. The adversarial vehicle and the ego vehicle are initiated in the same lane, with a longitudinal distance between 20 and 40 meters between them (Fig. 5). The goal g includes one equality constraint c_1 and two inequality constraints d_1, d_2 . Constraint c_1 is concerned with the distance between the ego and the adversarial vehicle, whereas the d_1 and d_2 are related to the acceleration and steering of the adversarial vehicle. The second environment is called *cut-in*, wherein the RL-controlled vehicle should merge in front of the ego vehicle. The scenario is initiated by positioning the adversarial vehicle to the left or right of the ego vehicle, the side from which the cut-in is executed. The longitudinal distance between the ego vehicle and the adversarial vehicle is set between 0 and

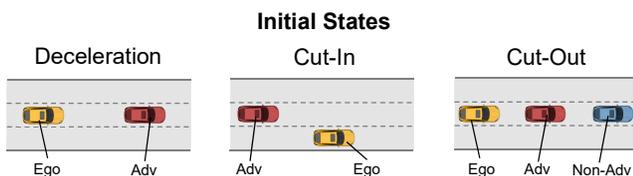


Fig. 5. Initial states for the deceleration, cut-in and cut-out scenarios

60 meters (Fig. 5). The goal g is analogous to the deceleration environment, but a third inequality constraint d_3 has been incorporated to address the angle between the ego and the adversarial vehicle. This is done to prevent the adversarial vehicle from crashing into the ego. The last environment is called *cut-out*. The objective is that the RL-controlled vehicle should exit the lane of the ego vehicle. All vehicles are initiated in the same lane, with a longitudinal distance between 20 and 40 meters between adversarial vehicle and the ego vehicle and a longitudinal distance of between 20 and 60 meters between adversarial vehicle and the non-adversarial vehicle (Fig. 5). The goal g includes one equality constraint c_1 and three inequality constraints. Constraint c_1 is concerned with the distance between the ego and the non-adversarial vehicle. The constraints d_1 and d_2 are related to the acceleration and steering of the adversarial vehicle. Finally, d_3 addresses the distance between adversarial, non-adversarial and ego vehicle. All environments have a episode length of $T_{max} = 200$ steps and will terminate if the agent reaches the desired scenario properties. It is considered a success, if the agent reaches within ϵ of the desired goal. All tasks are associated with sparse rewards, which are defined as either 0 or -1 .

A. Implementation Details

1) *RL Algorithm*: To solve the goal-conditioned scenario generation task, GOOSE utilizes Dropout Q-Functions (DroQ) [49], [50], an off-policy model-free reinforcement learning algorithm that enhances Soft Actor-Critic (SAC) [51] through the integration of dropout and layer normalization into the Q-function networks. SAC is a model-free RL method that uses entropy to increase the diversity of action. HER [15] is used to improve the sample efficiency of the goal-conditioned policy. The hyperparameters are listed in Table I.

2) *Simulator and Dataset*: For the generation and alteration of traffic scenarios, the ScenarioGym framework is

TABLE I
DROQ HYPERPARAMETERS

Hyperparameter	Value
optimizer	Adam
number of samples per batch	256
learning rate (λ)	3×10^{-4}
gradient steps	4
policy delay	2
replay buffer size	1×10^6
replay buffer class	HER
goal selection strategy	future
number of sampled goals	4
discount (γ)	0.95
entropy target	$-\dim(\mathbf{a})$
entropy temperature factor (α)	1
target network smoothing coefficient (ρ)	5×10^{-3}
number of hidden layers	2
number of hidden units per layer	256
number of GRU layers	1
number of hidden units per GRU layer	128
activation functions	ReLU
dropout rates	0.02

TABLE II
IDM PARAMETERS [54]

Parameter	Value
desired velocity (v_0)	15.0 m s ⁻¹
safe time headway (t_{HW})	1.6 s
maximum acceleration (a)	0.73 m s ⁻²
comfortable deceleration (b)	1.67 m s ⁻²
acceleration exponent (δ)	4
minimum distance (s_0)	2.0 m

selected [52]. As all our scenario generation environments are map-agnostic, a multi-lane scenario from the Argoverse 2 motion forecasting dataset [53] was utilized for all experiments. To maintain an observation vector of constant length during scenario generation, the simulation time is set to 10 seconds with a time step of 0.1 seconds. A starting position that meets the starting conditions is randomly selected on the map. For example, if the cut-in side is specified as left, there must be a left lane next to the ego vehicle.

3) *System under Test*: The intelligent driver model (IDM) [54] is applied to simulate the longitudinal dynamics, including the acceleration and deceleration of the ego vehicle. The IDM parameters are listed in Table II.

B. Training Performance

The goal-conditioned agent is trained according to Algo. 1. GOOSE uses DroQ and HER to optimize over 4 subgoals. To demonstrate the overall performance we compare the training success rates on the three scenario generation environments to DroQ and SAC. The results are shown in Fig. 6. GOOSE outperforms baselines in all tasks. Our method quickly learns to solve the scenario generation tasks at the beginning of the training, demonstrating high data efficiency and low

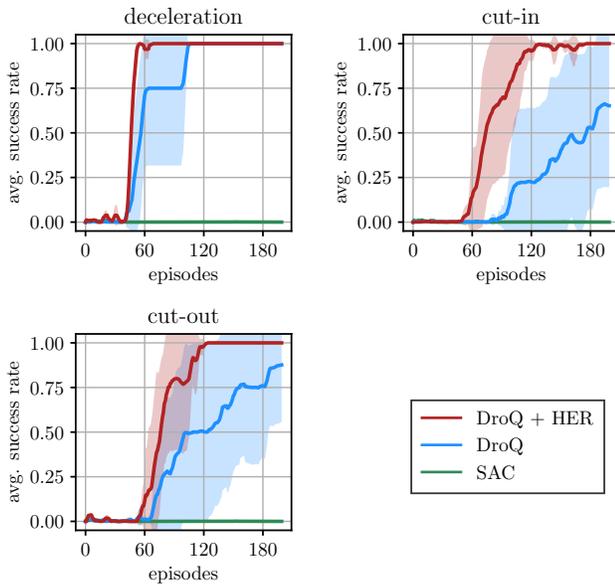


Fig. 6. Training success rates of the agent on the 3 generation environments deceleration, cut-in and cut-out. Curves are averaged over multiple seeds and shaded regions represent one standard deviation.

variance across different training seeds. SAC fails in all three environments since they have very sparse rewards. DroQ is capable of achieving success in some seeds, although the average success is characterised by high variance and slower convergence.

C. Goal-conditioned Scenario Generation

In goal-conditioned scenario generation, the RL agent should converge to a policy able to reach the desired scenario properties. The objective is to evaluate the ability of GOOSE to generate safety-critical scenarios in the three proposed environments, namely *deceleration*, *cut-in* and *cut-out*. The results demonstrate that the approach is capable of generating controllable and realistic safety-critical scenarios, which are essential for comprehensive ADAS and ADS testing. The following goal specifications are employed in the evaluation process. The objective in the *deceleration* task is defined as

$$g = [0.0 \text{ m} \quad 8.0 \frac{\text{m}}{\text{s}^2} \quad 0.7 \text{ rad}], \quad (10)$$

where the first value specifies the desired distance between the ego vehicle and the adversarial vehicle, while the second and third values specify the maximum acceleration or deceleration and maximum steering angle of the adversarial vehicle. In the *cut-in* task, the goal definition (10) is extended by a third inequality constraint:

$$g = [0.0 \text{ m} \quad 8.0 \frac{\text{m}}{\text{s}^2} \quad 0.7 \text{ rad} \quad 0.5 \text{ rad}], \quad (11)$$

which specifies the maximum angle between the ego vehicle and the adversarial vehicle in the event of a collision, in order to prevent the adversarial vehicle from crashing into the ego vehicle. The objective of the *cut-out* task is as follows:

$$g = [0.0 \text{ m} \quad 8.0 \frac{\text{m}}{\text{s}^2} \quad 0.7 \text{ rad} \quad 0.25 \text{ m}]. \quad (12)$$

Here the first value specifies the desired distance between the ego vehicle and the non-adversarial vehicle. The second and third values indicate the maximum acceleration or deceleration and maximum steering angle of the adversarial vehicle, respectively. The fourth value specifies the minimum distance between the adversarial vehicle and all other vehicles. At the beginning of each episode, a new random initial state is sampled from the set of potential initial states that fulfill the specified starting conditions (see Fig. 5). GOOSE generates crash scenarios using the outlined goals and the sampled initial state.

Fig. 7 illustrates the qualitative examples, demonstrating how GOOSE can challenge the SUT in various driving situations. In Fig. 7a the generated scenario in the *deceleration* environment is displayed. The adversarial vehicle is positioned in front of the ego vehicle at the beginning of the scenario. A combination of acceleration and deceleration of the adversarial vehicle results in a collision at $t = 5.0$ seconds. The results of the *cut-in* environment are presented in Fig. 7b. The adversarial vehicle is positioned behind the ego vehicle in the left lane. The adversarial vehicle overtakes the ego vehicle from the left and cuts

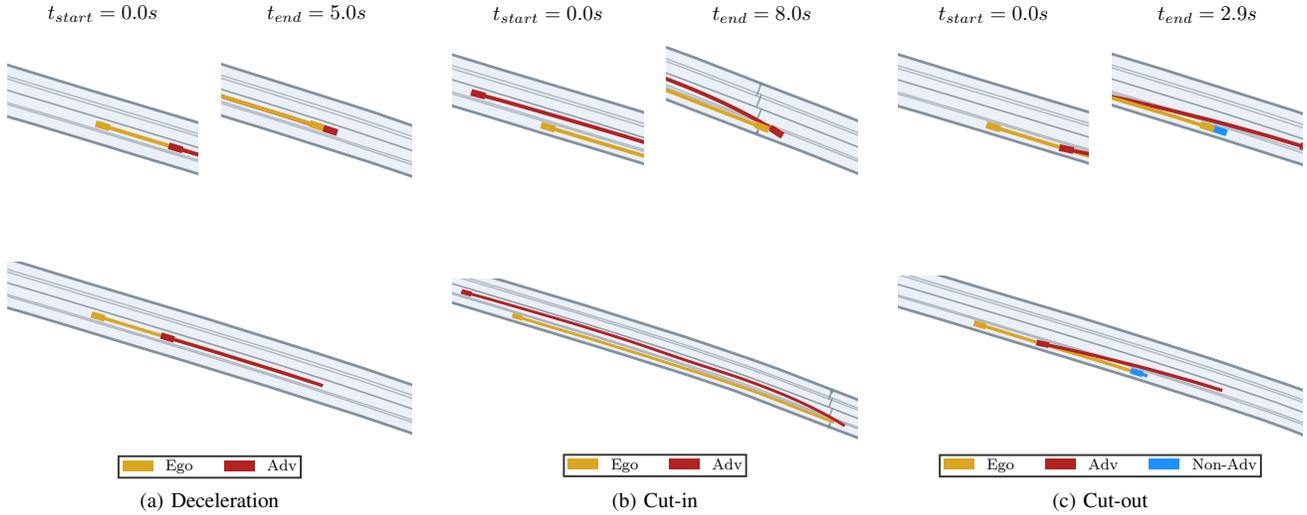


Fig. 7. Qualitative generation results of the goal-conditioned policy in the deceleration, cut-in and cut-out environments. The scene is visualised by the lane boundary lines as well as the actor trajectories, with the ego vehicle in yellow, the RL-controlled vehicle in red and all other actors in blue. At the top start and final time steps are visualised. The scenarios end when a collision with the ego vehicle occurs.

in the lane of the ego while decelerating, resulting in a collision at $t = 8.0$ seconds. Finally, in Fig. 7c, the generated scenario in the cut-out environment is depicted. The ego vehicle, adversarial vehicle and non-adversarial vehicle are all positioned in the same lane. During the scenario simulation, the adversarial vehicle performs a close cut-out manoeuvre, thereby exposing the non-adversarial vehicle to the ego, resulting in a collision between the ego and the non-adversarial vehicle at $t = 2.9$ seconds.

VI. CONCLUSION AND FUTURE WORK

We presented Goal-conditioned Scenario Generation (GOOSE), a goal-conditioned reinforcement learning method that generates safety-critical scenarios by exploring the space of adversarial trajectories to challenge automated driving systems (ADS). GOOSE uses Non-Uniform Rational B-Splines (NURBS) as a modeling tool for diverse trajectories, while retaining a relatively small set of optimizable parameters. This results in a significant reduction of the action space for the goal-conditioned policy. GOOSE employs a constraint-based goal definition to specify the scenario generation task, which is based on the OpenScenario DSL standard. Experimental results on scenarios from the UN Regulation No. 157 for Active Lane Keeping Systems (ALKS) show that GOOSE successfully generates scenarios that lead to critical events and outperforms other model-free RL methods in terms of data efficiency. While our approach only controls a single target vehicle, future work could explore multi-agent control for safety-critical scenario generation. Another exciting direction for future work is to examine the impact of different criticality measures on the characteristics of the generated scenarios. Future work could also apply the goal-conditioned policy to scenarios built from real-world data to increase criticality.

REFERENCES

- [1] S. Riedmaier, T. Ponn, D. Ludwig, B. Schick, and F. Diermeyer, "Survey on scenario-based safety assessment of automated vehicles," *IEEE access*, vol. 8, pp. 87 456–87 477, 2020.
- [2] B. Schütt, J. Ransiek, T. Braun, and E. Sax, "1001 ways of scenario generation for testing of self-driving cars: A survey," *arXiv preprint arXiv:2304.10850*, 2023.
- [3] International Organization for Standardization, *Road vehicles – Safety of the intended functionality*. ISO 21448, 2022.
- [4] A. Nie, E. Brunskill, and C. Piech, "Play to grade: testing coding games as classifying markov decision process," *Advances in Neural Information Processing Systems*, vol. 34, pp. 1506–1518, 2021.
- [5] Y. Zheng, X. Xie, T. Su, L. Ma, J. Hao, Z. Meng, Y. Liu, R. Shen, Y. Chen, and C. Fan, "Wuji: Automatic online combat game testing using evolutionary deep reinforcement learning," in *2019 34th IEEE/ACM International Conference on Automated Software Engineering (ASE)*. IEEE, 2019, pp. 772–784.
- [6] C. Gordillo, J. Bergdahl, K. Tollmar, and L. Gisslén, "Improving playtesting coverage via curiosity driven reinforcement learning agents," in *2021 IEEE Conference on Games (CoG)*. IEEE, 2021, pp. 1–8.
- [7] Z. Zhan, B. Aytemiz, and A. M. Smith, "Taking the scenic route: Automatic exploration for videogames," *arXiv preprint arXiv:1812.03125*, 2018.
- [8] I. Borovikov, Y. Zhao, A. Beirami, J. Harder, J. Kolen, J. Pestrak, J. Pinto, R. Pourabolghasem, H. Chaput, M. Sardari *et al.*, "Winning isn't everything: Training agents to playtest modern games," in *AAAI Workshop on Reinforcement Learning in Games*, 2019.
- [9] J. Eskonen, J. Kahles, and J. Reijonen, "Automating gui testing with image-based deep reinforcement learning," in *2020 IEEE International Conference on Autonomic Computing and Self-Organizing Systems (ACSOS)*. IEEE, 2020, pp. 160–167.
- [10] Y. Koroglu, A. Sen, O. Muslu, Y. Mete, C. Ulker, T. Tanriverdi, and Y. Donmez, "Qbe: Qlearning-based exploration of android applications," in *2018 IEEE 11th International Conference on Software Testing, Verification and Validation (ICST)*. IEEE, 2018, pp. 105–115.
- [11] M. Pan, A. Huang, G. Wang, T. Zhang, and X. Li, "Reinforcement learning based curiosity-driven testing of android applications," in *Proceedings of the 29th ACM SIGSOFT International Symposium on Software Testing and Analysis*, 2020, pp. 153–164.
- [12] L. Harries, R. S. Clarke, T. Chapman, S. V. Nallamalli, L. Ozgur, S. Jain, A. Leung, S. Lim, A. Dietrich, J. M. Hernández-Lobato *et al.*, "Drift: Deep reinforcement learning for functional software testing," *arXiv preprint arXiv:2007.08220*, 2020.
- [13] T. Ahmad, A. Ashraf, D. Truscan, and I. Porres, "Exploratory performance testing using reinforcement learning," in *2019 45th euromicro*

- conference on software engineering and advanced applications (seaa). IEEE, 2019, pp. 156–163.
- [14] J. Koo, C. Saumya, M. Kulkarni, and S. Bagchi, “Pyse: Automatic worst-case test generation by reinforcement learning,” in *2019 12th IEEE Conference on Software Testing, Validation and Verification (ICST)*. IEEE, 2019, pp. 136–147.
- [15] M. Andrychowicz, F. Wolski, A. Ray, J. Schneider, R. Fong, P. Welinder, B. McGrew, J. Tobin, O. Pieter Abbeel, and W. Zaremba, “Hindsight experience replay,” *Advances in neural information processing systems*, vol. 30, 2017.
- [16] L. P. Kaelbling, “Learning to achieve goals,” in *IJCAI*, vol. 2. Citeseer, 1993, pp. 1094–8.
- [17] O. Nachum, S. S. Gu, H. Lee, and S. Levine, “Data-efficient hierarchical reinforcement learning,” *Advances in neural information processing systems*, vol. 31, 2018.
- [18] T. Schaul, D. Horgan, K. Gregor, and D. Silver, “Universal value function approximators,” in *International conference on machine learning*. PMLR, 2015, pp. 1312–1320.
- [19] E. Chane-Sane, C. Schmid, and I. Laptev, “Goal-conditioned reinforcement learning with imagined subgoals,” in *International Conference on Machine Learning*. PMLR, 2021, pp. 1430–1440.
- [20] S. Nasiriany, V. Pong, S. Lin, and S. Levine, “Planning with goal-conditioned policies,” *Advances in Neural Information Processing Systems*, vol. 32, 2019.
- [21] D. Rempe, J. Phillion, L. J. Guibas, S. Fidler, and O. Litany, “Generating useful accident-prone driving scenarios via a learned traffic prior,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 17 305–17 315.
- [22] S. Suo, S. Regalado, S. Casas, and R. Urtasun, “TrafficSim: Learning to simulate realistic multi-agent behaviors,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021, pp. 10 400–10 409.
- [23] S. Tan, K. Wong, S. Wang, S. Manivasagam, M. Ren, and R. Urtasun, “Scenegen: Learning to generate realistic traffic scenes,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021, pp. 892–901.
- [24] J. Wang, A. Pun, J. Tu, S. Manivasagam, A. Sadat, S. Casas, M. Ren, and R. Urtasun, “Advsim: Generating safety-critical scenarios for self-driving vehicles,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021, pp. 9909–9918.
- [25] J. Wiederer, J. Schmidt, U. Kressel, K. Dietmayer, and V. Belagiannis, “A benchmark for unsupervised anomaly detection in multi-agent trajectories,” in *2022 IEEE 25th International Conference on Intelligent Transportation Systems (ITSC)*. IEEE, 2022, pp. 130–137.
- [26] M. Koren, S. Alsaif, R. Lee, and M. J. Kochenderfer, “Adaptive stress testing for autonomous vehicles,” in *2018 IEEE Intelligent Vehicles Symposium (IV)*. IEEE, 2018, pp. 1–7.
- [27] R. Lee, O. J. Mengshoel, A. Saksena, R. W. Gardner, D. Genin, J. Silberman, M. Owen, and M. J. Kochenderfer, “Adaptive stress testing: Finding likely failure events with reinforcement learning,” *Journal of Artificial Intelligence Research*, vol. 69, pp. 1165–1201, 2020.
- [28] A. Corso, P. Du, K. Driggs-Campbell, and M. J. Kochenderfer, “Adaptive stress testing with reward augmentation for autonomous vehicle validation,” in *2019 IEEE Intelligent Transportation Systems Conference (ITSC)*. IEEE, 2019, pp. 163–168.
- [29] M. Koren and M. J. Kochenderfer, “Efficient autonomy validation in simulation with adaptive stress testing,” in *2019 IEEE Intelligent Transportation Systems Conference (ITSC)*. IEEE, 2019, pp. 4178–4183.
- [30] —, “Adaptive stress testing without domain heuristics using go-explore,” in *2020 IEEE 23rd International Conference on Intelligent Transportation Systems (ITSC)*. IEEE, 2020, pp. 1–6.
- [31] M. Koren, A. Nassar, and M. J. Kochenderfer, “Finding failures in high-fidelity simulation using adaptive stress testing and the backward algorithm,” in *2021 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2021, pp. 5944–5949.
- [32] D. Karunakaran, S. Worrall, and E. Nebot, “Efficient statistical validation with edge cases to evaluate highly automated vehicles,” in *2020 IEEE 23rd International Conference on Intelligent Transportation Systems (ITSC)*. IEEE, 2020, pp. 1–8.
- [33] S. Kuutti, S. Fallah, and R. Bowden, “Training adversarial agents to exploit weaknesses in deep control policies,” in *2020 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2020, pp. 108–114.
- [34] B. Chen, X. Chen, Q. Wu, and L. Li, “Adversarial evaluation of autonomous vehicles in lane-change scenarios,” *IEEE transactions on intelligent transportation systems*, vol. 23, no. 8, pp. 10 333–10 342, 2021.
- [35] H. Sun, S. Feng, X. Yan, and H. X. Liu, “Corner case generation and analysis for safety assessment of autonomous vehicles,” *Transportation research record*, vol. 2675, no. 11, pp. 587–600, 2021.
- [36] M. O’Kelly, A. Sinha, H. Namkoong, R. Tedrake, and J. C. Duchi, “Scalable end-to-end autonomous vehicle testing via rare-event simulation,” *Advances in neural information processing systems*, vol. 31, 2018.
- [37] S. Feng, X. Yan, H. Sun, Y. Feng, and H. X. Liu, “Intelligent driving intelligence test for autonomous vehicles with naturalistic and adversarial environment,” *Nature communications*, vol. 12, no. 1, p. 748, 2021.
- [38] H. Niu, K. Ren, Y. Xu, Z. Yang, Y. Lin, Y. Zhang, and J. Hu, “(Re)²H2O: Autonomous driving scenario generation via reversely regularized hybrid offline-and-online reinforcement learning,” *arXiv preprint arXiv:2302.13726*, 2023.
- [39] F. U. Haq, D. Shin, and L. C. Briand, “Many-objective reinforcement learning for online testing of dnn-enabled systems,” in *2023 IEEE/ACM 45th International Conference on Software Engineering (ICSE)*. IEEE, 2023, pp. 1814–1826.
- [40] W. Ding, B. Chen, M. Xu, and D. Zhao, “Learning to collide: An adaptive safety-critical scenarios generating method,” in *2020 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2020, pp. 2243–2250.
- [41] A. Wachi, “Failure-scenario maker for rule-based agent using multi-agent adversarial reinforcement learning and its application to autonomous driving,” *arXiv preprint arXiv:1903.10654*, 2019.
- [42] J. Ransiek, B. Schütt, A. Hof, and E. Sax, “Generation of adversarial trajectories using reinforcement learning to test motion planning algorithms,” in *2023 IEEE 26th International Conference on Intelligent Transportation Systems (ITSC)*. IEEE, 2023, pp. 2819–2826.
- [43] L. Piegl and W. Tiller, *The NURBS book*. Springer Science & Business Media, 2012.
- [44] J. Stoker, “Differential geometry wiley,” 1969.
- [45] T. Menzel, G. Bagschik, and M. Maurer, “Scenarios for development, test and validation of automated vehicles,” in *2018 IEEE Intelligent Vehicles Symposium (IV)*. IEEE, 2018, pp. 1821–1827.
- [46] C. Neurohr, L. Westhofen, M. Butz, M. H. Bollmann, U. Eberle, and R. Galbas, “Criticality analysis for the verification and validation of automated vehicles,” *IEEE Access*, vol. 9, pp. 18 016–18 041, 2021.
- [47] ASAM, “ASAM OpenSCENARIO DSL,” 2024. [Online]. Available: <https://www.asam.net/standards/detail/openscenario-dsl/>
- [48] U. N. E. C. for Europe (UNECE), “Proposal for the 01 series of amendments to UN Regulation No. 157 (Automated Lane Keeping Systems),” *Addendum 156 to the 1958 Agreement - UN Regulation No. 157*, 2022.
- [49] T. Hiraoka, T. Imagawa, T. Hashimoto, T. Onishi, and Y. Tsuruoka, “Dropout q-functions for doubly efficient reinforcement learning,” *arXiv preprint arXiv:2110.02034*, 2021.
- [50] L. Smith, I. Kostrikov, and S. Levine, “A walk in the park: Learning to walk in 20 minutes with model-free reinforcement learning,” *arXiv preprint arXiv:2208.07860*, 2022.
- [51] T. Haarnoja, A. Zhou, P. Abbeel, and S. Levine, “Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor,” in *International conference on machine learning*. PMLR, 2018, pp. 1861–1870.
- [52] H. Scott, L. Niccolini, C. Stetson, N. Goldbeck, I. Souflas, N. Songur, A. Ahrabian, E. Candela, and P. Angeloudis, “Scenario gym: A scenario-centric lightweight simulator,” in *2023 IEEE 26th International Conference on Intelligent Transportation Systems (ITSC)*. IEEE, 2023, pp. 5216–5222.
- [53] B. Wilson, W. Qi, T. Agarwal, J. Lambert, J. Singh, S. Khandelwal, B. Pan, R. Kumar, A. Hartnett, J. K. Pontes *et al.*, “Argoverse 2: Next generation datasets for self-driving perception and forecasting,” *arXiv preprint arXiv:2301.00493*, 2023.
- [54] M. Treiber, A. Hennecke, and D. Helbing, “Congested traffic states in empirical observations and microscopic simulations,” *Physical review E*, vol. 62, no. 2, p. 1805, 2000.