

Date of publication xxxx 00, 0000, date of current version xxxx 00, 0000.

Digital Object Identifier 10.1109/ACCESS.2022.Doi Number

Stochastic Multi-objective Multi-trip AMR Routing Problem with Time Windows

LULU CHENG¹, NING ZHAO¹

¹ Faculty of Science, Kunming University of Science and Technology, Kunming, Yunnan, 650500, China

Corresponding author: Ning Zhao (e-mail: zhaoning@kust.edu.cn).

This work was supported in part by the State Key Laboratory of Industrial Control Technology under Grant ICT2021B51.

ABSTRACT In recent years, with the rapidly aging population, alleviating the pressure on medical staff has become a critical issue. To improve the work efficiency of medical staff and reduce the risk of infection, we consider the multi-trip autonomous mobile robot (AMR) routing problem with the stochastic environment to find the solution to minimizing the total expected operating cost and maximizing the total service quality of patients so that each route violates the vehicle capacity and the time window with only a very small probability. The travel time of AMRs is stochastic affected by the surrounding environment, the demand for each ward is unknown until the AMR reaches the ward, and the service time is linearly related to the actual demand. We develop a population-based tabu search algorithm (PTS) that combines the genetic algorithm with the tabu search algorithm to solve the problem. Extensive numerical experiments were conducted on the modified Solomon instances to show that the PTS algorithm is efficient and reveals the impacts of the confidence level on the optimal solution, providing insights for the decision-maker to devise delivery schemes that trade-off the operating cost for patient satisfaction.

INDEX TERMS Autonomous mobile robot, scheduling, stochastic programming model, Genetic algorithm, Tabu search.

I. INTRODUCTION

In recent years, with the increasing global aging population, medical services have become a major challenge [1]. This aging trend has led to an increase in chronic diseases and a growing demand for healthcare resources. This is followed by a shortage of medical staff, which further aggravates the pressure and burden on the medical industry [2]. Transportation tasks in nursing directly impact patient care time in the context of staff shortages and an aging society [3]. In addition, healthcare workers face a higher risk of infection when dealing with infectious diseases or outbreaks, which not only threatens their health but may also affect the operation and service quality of medical institutions.

With the rapid development of the smart manufacturing industry, robots can take over routine transportation tasks, such as lab specimens and patient forms, which ties up nursing staff and detracts from time devoted to patient care, treatment, and therapy [4]. Currently, automatic mobile robots (AMRs) have been widely used in various fields, such as material handling, unmanned aerial vehicle cruises, automatic factories, and so forth [5]. An

increasing number of scholars are dedicating their efforts to investigating AMR and automated guided vehicle (AGV) scheduling problems [6-8]. For real application scenarios, stochastic plays a vital role in the routing and scheduling of AMR. Sources of stochastic in an AMR scheduling problem can be travel times, service times, and demands of customers. Ignoring these stochastic factors may result in AMR scheduling problems that are not applicable in real situations. Aziez *et al.* [9] studied the fleet sizing and routing problem with synchronization for AGVs with dynamic demands in the context of a real-life application and proposed a powerful metaheuristic based on a fast and efficient dynamic re-optimization of the routes upon the arrival of new requests. Cheng, *et al.* [10] investigated the optimization problem of scheduling strategies for AMRs at smart hospitals, where the service and travel times of AMRs are stochastic.

However, the factors considered in these studies are not comprehensive enough. Primarily, AMR is subject to various uncertain factors during operation, resulting in randomness. Furthermore, there is uncertainty in the demand for each request, and the time served depends on

different demand levels. Lastly, the AMR exhibits a limited capacity, and each AMR will travel multiple trips to complete the service. Therefore, to practically address the above issues, we broaden previous research, to study scheduling problems that are more in line with practical applications, this paper investigates a stochastic multi-objective multi-trip autonomous mobile robot routing problem with time windows (SMMAMRRPTW). This problem involves multiple homogeneous AMRs assisting medical staff in completing related delivery work. The travel time of AMRs is stochastic, and the demand for each ward is uncertain. Additionally, the service time of AMRs depends on the size of the demand for the ward. Each AMR travels multiple paths to provide services to various wards while meeting its payload. The objective of the problem is to minimize the cost of investing AMRs in hospitals and maximize patient service efficiency. The main contributions of this paper are as follows:

- (1) Formulate the SMMAMRRPTW and establish a stochastic programming model.
- (2) Establish a stochastic programming model based on the SMMAMRRPTW and develop a population-based tabu search algorithm (PTS).
- (3) Demonstrate the effectiveness and robustness of the PTS algorithm through numerical experiments, compared with other algorithms, and provide relevant management insights.

The rest of the paper is as follows: Section II is a review of the papers on AMR scheduling problems and the stochastic vehicle routing problem. Section III introduces the stochastic programming model for solving the problem. Section IV describes the proposed population-based tabu search algorithm. Section V verifies the effectiveness of the proposed algorithm by a large number of experiments using a modified Solomon instance. Finally, the conclusions and looks forward to the future follow in Section VI.

II. LITERATURE REVIEW

Recently, an increasing number of researchers have dedicated their efforts to investigating AMR scheduling problems due to the development of the smart manufacturing industry. However, there is relatively little literature on the AMR scheduling problem in a stochastic environment. Therefore, the following literature review focuses on the AMR or AGV scheduling problem and stochastic vehicle routing problems.

As for the closely related AGV or AMR scheduling problem in flexible manufacturing systems and the healthcare industry, Nishi *et al.* [11] addressed a bilevel decomposition algorithm to solve the simultaneous scheduling and conflict-free routing problems for AGVs. Chikul *et al.* [12] developed a deterministic model for hospital supply chain management, evaluating the differences between manual and technologically

integrated approaches. Zou *et al.* [13] addressed a new multiple AGV dispatching problem. A mixed integer linear programming model was formulated to minimize transportation costs, and a discrete artificial bee colony algorithm was presented to solve the problem. Han *et al.* [14] proposed a digital twin-based dynamic AGV scheduling method to solve the AGV charging problem in the AGV scheduling system. Cheng *et al.* [15] aimed to minimize daily costs in hospitals and proposed an improved tabu search algorithm to solve the AMR scheduling problem at hospitals. However, due to the distinct nature of our specific research objectives, direct application of the approaches above may prove challenging.

SMMAMRRPTW shares many characteristics with stochastic vehicle routing problems and is a variant of stochastic vehicle routing problems. Gendreau *et al.* [16] proposed the real-time dynamic vehicle dispatching problem with pick-up and deliveries for new requests (including a pick-up and a delivery location). Biesinger *et al.* [17] considered the generalized vehicle routing problem with stochastic demands. Goel *et al.* [18] considered vehicle routing problems with time windows having stochastic demands and stochastic service times. Çimen and Soysal [19] addressed a time-dependent capacitated vehicle routing problem with stochastic vehicle speeds and environmental concerns. This problem takes time-dependency and stochasticity of the vehicle speeds into account. Elgharably *et al.* [20] studied the stochastic multi-objective vehicle routing problem in a green environment, where stochastic factors include demand type, service time, and travel time. The research on the vehicle routing problem mentioned above mostly considers incomplete random factors and neglects scenarios involving multi-trip transportation. Thus, addressing the SMMAMRRPTW is crucial for practical applications.

The vehicle routing problem has proven to be NP-hard in the strong sense [21]. In general, it is almost impossible for an NP-hard problem to obtain a solution by using exact solution methods in a limited amount of computing time [22]. As is an NP-hard problem, heuristic and metaheuristic approaches are more suitable for solving more complex and large instances than the exact methods. Gendreau *et al.* [16] proposed a neighborhood search heuristic algorithm to optimize the planned route of vehicles in real time when new requests occur. Biesinger *et al.* [17] presented a steady-state genetic algorithm to solve the generalized vehicle routing problem with stochastic demands using a preventive restocking strategy. Goel *et al.* [18] proposed a modified ant colony system to solve the vehicle routing problem with time windows having stochastic demands and stochastic service times, to minimize total transportation costs and maximize customer satisfaction. Elgharably *et al.* [20] presented a

new hybrid search algorithm to solve the stochastic multi-objective vehicle routing problem. Li and Li [23] proposed an improved tabu search algorithm based on a greedy algorithm to solve the vehicle routing problem with stochastic travel time and service time. The aforementioned literature has algorithms for the study of vehicle routing problems in a stochastic environment; however, the proposed algorithm cannot be directly applied to the SMMAMRRPTW.

As previously mentioned, the scheduling problem in a stochastic environment has become a research hotspot in recent years. However, no research on SMMAMRRPTW has been documented in the existing literature. Even though existing mathematical programming model and optimization algorithms have been proposed for scheduling problems in a stochastic environment, they cannot be used directly for the SMMAMRRPTW due to their problem-specific characteristics. Therefore, SMMAMRRPTW must establish a mathematical programming model and propose an efficient algorithm is vital for SMMAMRRPTW.

III. PROBLEM DESCRIPTION AND FORMULATION

The characteristics of the proposed stochastic multi-objective multi-trip autonomous mobile robot routing problem with time windows (SMMAMRRPTW) are presented followed by the mathematical formulation of the problem.

A. PROBLEM DESCRIPTION

In real life, each ward generates an unknown amount of medical waste, which is AMR transport to assist staff, and the actual demand only becomes revealed when AMRs reach the ward. Assuming the hospital introduces a fleet of m homogeneous AMRs with capacity Q to participate in medical services, which is stationed at the depot (waste disposal point), is waiting for the medical staff's instructions to pick up the medical waste to n medical requests (wards). It is worth noting that the number of AMRs considered in this paper is not fixed, but is to be determined by the solution approach. To improve the service rate of AMRs and reduce the cost of investing in AMRs, this research allows each AMR to travel multiple trips, and the set of routes traveled by the k th AMR is denoted as $L_k = \{1, 2, \dots, l_{max}^k\}$. AMR can avoid obstacles and take the elevator when serving medical requests. The uncertainty of the road conditions leads to the random nature of the travel time.

The following is a complete graph $G=(V,A)$ to define the SMMAMRRPTW, where $V=\{0,0'\} \cup R$ is the vertex set and $A=\{(i,j)|i,j \in V,i \neq j\}$ is the edge set. The vertex $0'$ is a dummy copy of the depot 0 with the same location. $R=\{1,2,\dots,n\}$ is the set of medical requests. Each request $i \in R$ has its time window $[e_i, h_i]$, service time S_i , and demand q_i , for each AMR, its load cannot exceed a given

boundary Q . When the k th AMR arrives at request $i \in R$ on the $p \in L_k$ path, the time is A_{pi}^k , the waiting time is W_{pi}^k , the time to start service request i is Y_{pi}^k , the remaining capacity of the AMR is u_{pi}^k . The travel time of the k th AMR from request $i \in R$ to request $j \in R$ on its p th route is T_{pij}^k . AMRs are required to provide services for requests within a prespecified time window. The uncertainty in travel time and service time would make the on-time service a challenging one to enforce. Hence, if an AMR arrives before or after the time window, it has a penalty cost.

It was found that most studies are based on the Central Limit Theorem stating that the distribution of the sufficiently large random samples will be approximately normally distributed. Assuming that the uncertain parameters follow the normal distribution [24]. Correspondingly, we assume that the demands $(q_i, i \in R)$ are independent and follow a normal distribution with mean μ_{q_i} and variance $\sigma_{q_i}^2$, the travel time follows a normal distribution with mean $\mu_{T_{pi}^k}$ and variance $\sigma_{T_{pi}^k}^2$. Since the actual service time of each ward is affected by the actual demand, we use $S_i = w \cdot q_i + b$ to represent the service time of request i , where w is the service time per demand unit and b is a bias. Hence, the service time also follows a normal distribution with mean $\mu_{S_i} = w \cdot \mu_{q_i} + b$ and variance $\sigma_{S_i}^2 = w^2 \cdot \sigma_{q_i}^2$.

Table 1 provides a summary of the notation used. The parameters and decision variables are defined as follow.

TABLE 1. Notation for the SMMAMRRPTW

Sets	
$R = \{1, 2, \dots, n\}$	Set of requests
L_k	Set of the route traveled by the k th AMR
Parameters	
Q	Cargo capacity of the AMR
ξ_1	Fixed cost of the AMR
ξ_2	Cost per unit time
q_i	Demand of request i
S_i	Service time of request i
$[e_i, h_i]$	Time window of request i
W_{pi}^k	Waiting time of the k th AMR at the request i on the p th route
u_{pi}^k	Remaining capacity of the k th AMR when it arrives at request i on its p th route
A_{pi}^k	Time when the k th AMR arrive at the request i on the p th route
Y_{pi}^k	Start service request i time of the k th AMR on the p th route
T_{pij}^k	Travel time spent by the k th AMR on the route $p \in L_k$ from request i to request j
Decision variables	
m	Number of AMRs participating in medical request services

z_{pi}^k	1 if the k th AMR completes service request $i \in R$ on its p th route; 0 otherwise
x_{pij}^k	1 if the k th AMR completes request i and j successively on its p th route; 0 otherwise

B. MODEL FORMULATION

With the above description, we present a mathematical model for the SMMAMRRPTW. Chance-constrained programming (CCP) is a modeling method for vehicle routing problems with stochastic demands. In the CCP, route failure is accepted with a probability of failure, no corrective action is taken to satisfy customer demands, and the costs of those failures are ignored [25]. This section establishes a chance-constrained stochastic multi-objective AMR routing programming model to deal with demand and time uncertainties where no course of action is taken in case of violating AMR's capacity, request demand, and time window. We aim to minimize the sum of fixed and time costs of AMR and maximize the quality of patient services.

The problem is formulated as follows:

$$\text{minimize } f_1 = \xi_1 m + \xi_2 \sum_{p \in L_k} \sum_{k=1}^m \sum_{j \in V} \sum_{i \in V} E \left[(T_{pij}^k + S_i + W_{pi}^k) \cdot x_{pij}^k \right] \quad (1)$$

$$\text{maximize } f_2 = \sum_{p \in L_k} \sum_{k=1}^m \sum_{i \in R} E \left[h_i - A_{pi}^k \right]^+ \quad (2)$$

Subject to

$$\sum_{j \in R \cup \{0\}, j \neq i} x_{pij}^k = \sum_{j \in \{0\} \cup R, j \neq i} x_{pj}^k, i \in V, k = 1, \dots, m, p \in L_k \quad (3)$$

$$\sum_{p \in L_k} \sum_{k=1}^m \sum_{j \in V \setminus \{0\}, i \neq j} x_{pij}^k = 1, i \in R \quad (4)$$

$$\sum_{i \in V \setminus \{0\}} x_{pij}^k = z_{pij}^k, j \in V \setminus \{0\}, k = 1, \dots, m, p \in L_k \quad (5)$$

$$u_{pj}^k \leq u_{pi}^k - x_{pij}^k \cdot q_{pi}^k + Q(1 - x_{pij}^k), i \in V \setminus \{0\}, j \in V \setminus \{0\}, i \neq j, k = 1, \dots, m, p \in L_k \quad (6)$$

$$P \left\{ \sum_{i \in R} q_i \cdot z_{pi}^k \leq Q \right\} \geq 1 - \varepsilon_1, k = 1, \dots, m, p \in L_k \quad (7)$$

$$P \left\{ q_j \cdot x_{pij}^k \leq u_{pi}^k \right\} \geq 1 - \varepsilon_1, i \in V \setminus \{0\}, j \in V \setminus \{0\}, i \neq j, k = 1, \dots, m, p \in L_k \quad (8)$$

$$P \left\{ Y_{pi}^k + S_i + T_{pij}^k \leq h_j \right\} \geq 1 - \varepsilon_2, i, j \in R, i \neq j, k = 1, \dots, m, p \in L_k \quad (9)$$

$$Y_{pi}^k + S_i + T_{pij}^k \cdot x_{pij}^k - h_0 \cdot (1 - x_{pij}^k) \leq Y_{pj}^k, i \in V \setminus \{0\}, j \in V \setminus \{0\}, i \neq j, k = 1, \dots, m, p \in L_k \quad (10)$$

$$Y_{pi}^k = A_{pi}^k + W_{pi}^k, i \in R, k = 1, \dots, m, p \in L_k \quad (11)$$

$$Y_{pi}^k = Y_{p+1,j}^k, i \in \{0\}, j \in \{0\}, k = 1, \dots, m, p \in L_k \quad (12)$$

$$W_{pi}^k = \max \{0, e_i - A_{pi}^k\}, i \in V, k = 1, \dots, m, p \in L_k \quad (13)$$

$$x_{pij}^k \in \{0, 1\}, i \in V \setminus \{0\}, j \in V \setminus \{0\}, i \neq j, k = 1, \dots, m, p \in L_k \quad (14)$$

$$z_{pi}^k \in \{0, 1\}, i \in R, k = 1, \dots, m, p \in L_k \quad (15)$$

Eq (1) represents the first objective function of minimizing the sum of fixed cost and meantime cost of AMRs. Eq (2) represents the second objective function of maximizing the quality of service to patients. Here we assume that all AMRs have an identical fixed cost ξ_1 (\$/each) and unit time cost ξ_2 (\$/sec), meanwhile, $\xi_1 > \xi_2$.

Eq (3) indicates that the number of input arcs at each point is equal to the number of output arcs. Eqs (4) and (5) impose that each request must be serviced exactly once by one route. The inequalities (6), (7), and (8) represent the capacity constraints of the AMR on any route. Inequalities (7) and (8) ensure that the probability of satisfying the capacity of the AMRs is not less than the confidence level $1 - \varepsilon_1$. The inequality (9) ensures that request i is served in its time window with a confidence level of $1 - \varepsilon_2$. For a very low $1 - \varepsilon_2$ value, the probability of overtime is increased. The constraints (10) represent the relationship of the start service time between a task and its predecessor. The eqs (11)-(13) represent the expressions for the start service time and waiting time of AMR. The formulas (14) and (15) denotes binary decision variable x_{pij}^k and z_{pi}^k .

Based on the start service time, travel time, and service time, we can express the time when the p th path of the k th AMR reaches request i as $A_{pi}^k = Y_{pi-1}^k + S_{i-1} + T_{p,i-1}^k$. We take the approach of Ehmke, *et al.* [26] to approximate the arrival time by a normal distribution, i.e., $A_{pi}^k \sim N(\mu_{A_{pi}^k}, \sigma_{A_{pi}^k}^2)$, where $\mu_{A_{pi}^k} = \mu_{Y_{pi-1}^k} + \mu_{S_{i-1}} + \mu_{T_{p,i-1}^k}$ and $\sigma_{A_{pi}^k}^2 = \sigma_{Y_{pi-1}^k}^2 + \sigma_{S_{i-1}}^2 + \sigma_{T_{p,i-1}^k}^2$. Therefore, the objective function (2) can be expressed as

$$\begin{aligned} \sum_{p \in L_k} \sum_{k=1}^m \sum_{i \in R} E \left[h_i - A_{pi}^k \right]^+ &= \sum_{p \in L_k} \sum_{k=1}^m \sum_{i \in R} E \left(\max \{h_i, A_{pi}^k\} - A_{pi}^k \right) \\ &= \sum_{p \in L_k} \sum_{k=1}^m \sum_{i \in R} \left(h_i \Phi \left(\frac{h_i - \mu(A_{pi}^k)}{\sigma(A_{pi}^k)} \right) + \mu(A_{pi}^k) \Phi \left(\frac{\mu(A_{pi}^k) - h_i}{\sigma(A_{pi}^k)} \right) \right. \\ &\quad \left. + \sigma(A_{pi}^k) \phi \left(\frac{h_i - \mu(A_{pi}^k)}{\sigma(A_{pi}^k)} \right) - \mu(A_{pi}^k) \right) \end{aligned} \quad (16)$$

The waiting time $W_{pi}^k = \max \{0, e_i - A_{pi}^k\}$ is a random variable because it depends on travel time T_{pij}^k , service time S_i , and the waiting time of the previous node. Nadarajah and Kotz [27] studied the mean and variance of the maximum of two normally distributed variables, $X = \max \{X_1, X_2\}$ with means μ_1 and μ_2 and variances σ_1^2 and σ_2^2 , and correlation coefficient ρ are known. Therefore, the expected and variance of the W_{pi}^k are

$$\mu_{W_{pi}^k} = \mu_{A_{pi}^k} \Phi \left(\frac{\mu_{A_{pi}^k} - e_i}{\sigma_{A_{pi}^k}} \right) + e_i \Phi \left(\frac{e_i - \mu_{A_{pi}^k}}{\sigma_{A_{pi}^k}} \right) + \sigma_{A_{pi}^k} \phi \left(\frac{\mu_{A_{pi}^k} - e_i}{\sigma_{A_{pi}^k}} \right) - \mu_{A_{pi}^k} \quad (17)$$

$$\begin{aligned} \sigma_{W_{pi}^k}^2 &= \left(\mu_{A_{pi}^k}^2 + \sigma_{A_{pi}^k}^2 \right) \Phi \left(\frac{\mu_{A_{pi}^k} - e_i}{\sigma_{A_{pi}^k}} \right) + e_i^2 \Phi \left(\frac{e_i - \mu_{A_{pi}^k}}{\sigma_{A_{pi}^k}} \right) \\ &\quad + \left(e_i + \mu_{A_{pi}^k} \right) \sigma_{A_{pi}^k} \phi \left(\frac{\mu_{A_{pi}^k} - e_i}{\sigma_{A_{pi}^k}} \right) - \mu_{W_{pi}^k}^2 - \sigma_{A_{pi}^k}^2 \end{aligned} \quad (18)$$

$\Phi(\cdot)$ is the cumulative distribution function of the standard normal distribution, and $\phi(\cdot)$ is the probability density function of the standard normal distribution. Therefore, the objective function (1) can be expressed as

$$\xi_1 m + \xi_2 \sum_{p \in L_k} \sum_{k=1}^m \sum_{j \in V} \sum_{i \in V} \left[(\mu_{T_{pi}^k} + \mu_{S_i} + \mu_{W_{pi}^k}) \cdot x_{pij}^k \right] \quad (19)$$

Based on the above discussion, the objective of the model can be transformed into a deterministic expression composed of equations (16) and (19). And according to Eq (13), we also know that the expected start time of the service is $\mu_{y_{pi}^k} = \mu_{A_{pi}^k} + \mu_{W_{pi}^k}$, and the variance is $\sigma_{y_{pi}^k}^2 = \sigma_{A_{pi}^k}^2 + \sigma_{W_{pi}^k}^2$.

Remaining capacity u_{pi}^k is a random variable because it depends on demand q_i which is defined as a random variable. The following lemmas explain the distribution and calculation of (7)-(9). Below, the reformulation of inequalities (7)-(9) will be explained in following to find a deterministic optimization model.

Lemma 1. If $\tilde{q}_p^k = \sum_{i \in R} q_i z_{pi}^k$, $q_i \sim N(\mu_{q_i}, \sigma_{q_i}^2)$, and z_{pi}^k is a binary variable, then we have:

$$P \left\{ \sum_{i \in R} q_i \cdot z_{pi}^k \leq Q \right\} \geq 1 - \varepsilon_1 \Rightarrow \Phi \left(\frac{Q - \sum_{i \in R} z_{pi}^k \mu_{q_i}}{\sqrt{\sum_{i \in R} z_{pi}^k \sigma_{q_i}^2}} \right) \geq 1 - \varepsilon_1 \quad (20)$$

$\forall k=1, \dots, m, p \in L_k$

Proof. Due $\tilde{q}_p^k = \sum_{i \in R} q_i z_{pi}^k$ and $q_i \sim N(\mu_{q_i}, \sigma_{q_i}^2)$, then $\tilde{q}_p^k \sim N(\mu_{\tilde{q}_p^k}, \sigma_{\tilde{q}_p^k}^2)$, where

$$\mu_{\tilde{q}_p^k} = \sum_{i \in R} \mu_{q_i} z_{pi}^k, \forall k=1, \dots, m, p \in L_k \quad (21)$$

$$\sigma_{\tilde{q}_p^k}^2 = \sum_{i \in R} \sigma_{q_i}^2 z_{pi}^k, \forall k=1, \dots, m, p \in L_k \quad (22)$$

The normal random variable \tilde{q}_p^k is converted to the standard normal distribution by transformation function $X_i = \frac{\tilde{q}_p^k - \mu_{\tilde{q}_p^k}}{\sigma_{\tilde{q}_p^k}}$.

Let $p_1 = P \left\{ \sum_{i \in R} q_i \cdot z_{pi}^k \leq Q \right\}$, So, the probability p_1 changes to:

$$p_1 = P \left\{ \tilde{q}_p^k \leq Q \right\} = P \left\{ X_i \leq \frac{Q - \mu_{\tilde{q}_p^k}}{\sigma_{\tilde{q}_p^k}} \right\} = \Phi \left(\frac{Q - \mu_{\tilde{q}_p^k}}{\sigma_{\tilde{q}_p^k}} \right).$$

Eqs. (21) and (22) are substituted, then we have:

$$p_1 = \Phi \left(\frac{Q - \sum_{i \in R} z_{pi}^k \mu_{q_i}}{\sqrt{\sum_{i \in R} z_{pi}^k \sigma_{q_i}^2}} \right),$$

then

$$P \left\{ \sum_{i \in R} q_i \cdot z_{pi}^k \leq Q \right\} \geq 1 - \varepsilon_1 \Rightarrow \Phi \left(\frac{Q - \sum_{i \in R} z_{pi}^k \mu_{q_i}}{\sqrt{\sum_{i \in R} z_{pi}^k \sigma_{q_i}^2}} \right) \geq 1 - \varepsilon_1 \quad \square$$

$\forall k=1, \dots, m, p \in L_k$

Lemma 2. If $q_i \sim N(\mu_{q_i}, \sigma_{q_i}^2)$, z_{pi}^k is a binary variable, and Q is a constant, then we have:

$$P \left\{ q_j \cdot x_{pij}^k \leq u_{pi}^k \right\} \geq 1 - \varepsilon_1 \Rightarrow \Phi \left(\frac{Q - \mu_{q_j} x_{pij}^k - \sum_{i \in R} \mu_{q_i} z_{pi}^k}{\sqrt{\sigma_{q_j}^2 x_{pij}^k + \sum_{i \in R} \sigma_{q_i}^2 z_{pi}^k}} \right) \geq 1 - \varepsilon_1, \quad (23)$$

$$\forall i \in \{0\} \cup R, j \in R \cup \{0\}, i \neq j, k=1, \dots, m, p \in L_k.$$

Proof. Due $u_{pi}^k = Q - \sum_{i \in R} q_i z_{pi}^k$, then $u_{pi}^k \sim N(\mu_{u_{pi}^k}, \sigma_{u_{pi}^k}^2)$, where

$$\mu_{u_{pi}^k} = Q - \sum_{i \in R} \mu_{q_i} z_{pi}^k, \forall k=1, \dots, m, p \in L_k \quad (24)$$

$$\sigma_{u_{pi}^k}^2 = \sum_{i \in R} \sigma_{q_i}^2 z_{pi}^k, \forall k=1, \dots, m, p \in L_k \quad (25)$$

Let $X_i = q_j x_{pij}^k - u_{pi}^k$, obviously, X_i is a normal random variable with mean $\mu_{X_i} = \mu_{q_j} x_{pij}^k - \mu_{u_{pi}^k}$ and variance $\sigma_{X_i}^2 = \sigma_{q_j}^2 x_{pij}^k + \sigma_{u_{pi}^k}^2$. The normal random variable X_i is converted to the standard normal distribution by transformation function $X'_i = \frac{X_i - \mu_{X_i}}{\sigma_{X_i}}$. Let $p_2 = P \left\{ q_j x_{pij}^k \leq u_{pi}^k \right\} = P \left\{ q_j x_{pij}^k - u_{pi}^k \leq 0 \right\} = P \left\{ X_i \leq 0 \right\}$, So, the probability p_2 changes to:

$$p_2 = P \left\{ X_i \leq 0 \right\} = P \left\{ X'_i \leq \frac{-\mu_{X_i}}{\sigma_{X_i}} \right\} = \Phi \left(-\frac{\mu_{X_i}}{\sigma_{X_i}} \right) = \Phi \left(\frac{\mu_{u_{pi}^k} - \mu_{q_j} x_{pij}^k}{\sqrt{\sigma_{q_j}^2 x_{pij}^k + \sigma_{u_{pi}^k}^2}} \right).$$

Eqs. (24) and (25) are substituted, then we have:

$$p_2 = \Phi \left(\frac{Q - \mu_{q_j} x_{pij}^k - \sum_{i \in R} \mu_{q_i} z_{pi}^k}{\sqrt{\sigma_{q_j}^2 x_{pij}^k + \sum_{i \in R} \sigma_{q_i}^2 z_{pi}^k}} \right),$$

then

$$P \left\{ q_j \cdot x_{pij}^k \leq u_{pi}^k \right\} \geq 1 - \varepsilon_1 \Rightarrow \Phi \left(\frac{Q - \mu_{q_j} x_{pij}^k - \sum_{i \in R} \mu_{q_i} z_{pi}^k}{\sqrt{\sigma_{q_j}^2 x_{pij}^k + \sum_{i \in R} \sigma_{q_i}^2 z_{pi}^k}} \right) \geq 1 - \varepsilon_1, \quad \square$$

$$\forall i \in \{0\} \cup R, j \in R \cup \{0\}, i \neq j, k=1, \dots, m, p \in L_k.$$

Lemma 3. If $T_{pij}^k \sim N(\mu_{T_{pij}^k}, \sigma_{T_{pij}^k}^2)$, $A_{pi}^k \sim N(\mu_{A_{pi}^k}, \sigma_{A_{pi}^k}^2)$, $S_i \sim N(\mu_{S_i}, \sigma_{S_i}^2)$, and w_{pi}^k with mean Eq. (17) and variance Eq. (18), then we have:

$$P \left\{ Y_{pi}^k + S_i + T_{pij}^k \leq h_j \right\} \geq 1 - \varepsilon_2 \Rightarrow \Phi \left(\frac{h_j - \mu_{A_{pi}^k} - \mu_{W_{pi}^k} - \mu_{S_i} - \mu_{T_{pij}^k}}{\sqrt{\sigma_{A_{pi}^k}^2 + \sigma_{W_{pi}^k}^2 + \sigma_{S_i}^2 + \sigma_{T_{pij}^k}^2}} \right) \geq 1 - \varepsilon_2, \quad (26)$$

$$i, j \in R, i \neq j, k=1, \dots, m, p \in L_k.$$

Proof. Let $X_i = Y_{pi}^k + S_i + T_{pij}^k$, obviously, X_i is a normal random variable with mean $\mu_{X_i} = \mu_{Y_{pi}^k} + \mu_{S_i} + \mu_{T_{pij}^k}$ and variance $\sigma_{X_i}^2 = \sigma_{Y_{pi}^k}^2 + \sigma_{S_i}^2 + \sigma_{T_{pij}^k}^2$, X_i is converted to the standard normal

distribution by transformation function $X'_i = \frac{X_i - \mu_{Y_{pi}^k} - \mu_{S_i} - \mu_{T_{pij}^k}}{\sqrt{\sigma_{Y_{pi}^k}^2 + \sigma_{S_i}^2 + \sigma_{T_{pij}^k}^2}}$.

Let $p_3 = P\{Y_{pi}^k + S_i + T_{pij}^k \leq h_j\}$, So, the probability p_3 changes to:

$$p_3 = P\{Y_{pi}^k + S_i + T_{pij}^k \leq h_j\} = P\left\{X'_i \leq \frac{h_j - \mu_{Y_{pi}^k} - \mu_{S_i} - \mu_{T_{pij}^k}}{\sqrt{\sigma_{Y_{pi}^k}^2 + \sigma_{S_i}^2 + \sigma_{T_{pij}^k}^2}}\right\}$$

$$= \Phi\left(\frac{h_j - \mu_{Y_{pi}^k} - \mu_{S_i} - \mu_{T_{pij}^k}}{\sqrt{\sigma_{Y_{pi}^k}^2 + \sigma_{S_i}^2 + \sigma_{T_{pij}^k}^2}}\right),$$

and $\mu_{Y_{pi}^k} = \mu_{A_{pi}^k} + \mu_{W_{pi}^k}$, $\sigma_{Y_{pi}^k}^2 = \sigma_{A_{pi}^k}^2 + \sigma_{W_{pi}^k}^2$, then

$$P\{Y_{pi}^k + S_i + T_{pij}^k \leq h_j\} \geq 1 - \varepsilon_2 \Rightarrow$$

$$\Phi\left(\frac{h_j - \mu_{A_{pi}^k} - \mu_{W_{pi}^k} - \mu_{S_i} - \mu_{T_{pij}^k}}{\sqrt{\sigma_{A_{pi}^k}^2 + \sigma_{W_{pi}^k}^2 + \sigma_{S_i}^2 + \sigma_{T_{pij}^k}^2}}\right) \geq 1 - \varepsilon_2, \quad \square$$

$$i, j \in R, i \neq j, k = 1, \dots, m, p \in L_k.$$

Thus, the inequalities (20), (23), and (26) are placed instead of inequalities (7)-(9) in the model.

IV. PROPOSED POPULATION-BASED TABU SEARCH ALGORITHM

The AMR scheduling problem is an NP-hard problem, which cannot be solved by any exact algorithm in polynomial time in general. The main solution method is heuristic algorithms. Given its stochastic nature and the fact that it combines several NP-hard subproblems, the SMMAMRRPTW is highly complex and difficult to solve exactly, even for relatively small instances. Tabu search (TS) algorithm is a meta-heuristic algorithm based on neighborhood search proposed by Glover [28] that is widely used to solve combinatorial optimization problems. It can solve a class of combinatorial optimization problems that involve stochastic factors. Genetic algorithm (GA) is a population-based meta-heuristic and can provide diverse solutions by searching the solution space parallelly [29].

In this section, we propose a population-based tabu search (PTS) algorithm that combines the tabu search, population mutation, and population crossover to solve SMMAMRRPTW. A repair operator is developed to repair the infeasible solutions. Algorithm 1 gives the overall process of the PTS algorithm. The population Pop , crossover probability μ , mutation probability ρ , and the maximum number of iterations N are the inputs for the algorithm. The solution x_{best} is the output for the PTS algorithm. Line 1 initializes the operator weights p_i , tabu lists B_i , tabu tenure t , and iteration counter ite . Line 2 generates the initial chromosome x_0 of the problem through Algorithm 2. Line 3 takes the x_0 as the current optimal solution and the initial solution currently used for algorithm iteration. The main idea of the PTS algorithm is a while loop from lines 4 to 23. In each iteration, operator i is selected through the roulette

wheel procedure to generate neighborhood solution $N(x_{current})$, repair infeasible solutions in $N(x_{current})$ (line 5), and find the optimal neighborhood solution x_{c_best} from $N(x_{current})$ (line 6). Lines 7-11 compare the generated neighborhood solution x_{c_best} with the current optimal solution x_{best} and update the current optimal solution, operator weights, and tabu table. The algorithm updates the weights p_i of the operators every ten runs (line 12). Line 13 fills the population with percentage r using x_{best} and randomly fills the remaining population to achieve diversity. In lines 14-20, we first get the new population Pop' using the crossover and mutation operators. Then delete duplicate chromosomes in population Pop' , and finally repair infeasible solutions in population Pop' . Update population Pop' . When the algorithm reaches the maximum number of iterations N , the algorithm stops.

Algorithm 1. population-based tabu search (PTS) algorithm

Input: Pop , μ , ρ , N

Output: x_{best}

1. Initialize the operator weights $p_i, i=1,2$, tabu lists $B_i, i=1,2$, tabu tenure t and iteration counter $ite=0$;
2. Generate initial chromosome x_0 through Greedy k-means algorithm; // **Algorithm 2**
3. $x_{current} \leftarrow x_0$, $x_{best} \leftarrow x_0$;
4. **While** $ite < N$ **do**
5. Use the roulette wheel procedure to select operators (2-opt and relocation) based on their weights p_i to generate neighborhood solution $N(x_{current})$, and the depot insertion operator is used to repair infeasible solutions;
6. Find the optimal objective value $F(x_{c_best})$, where $x_{c_best} \in N(x_{current})$;
7. **If** $F(x_{c_best}) < F(x_{best})$
8. $x_{best} \leftarrow x_{c_best}$, $x_{current} \leftarrow x_{c_best}$, $\rho_i \leftarrow \rho_i + 5$, and update the tabu list B_i ;
9. **Else if**
10. $x_{current} \leftarrow x_{c_best}$, $\rho_i \leftarrow \rho_i + 2$, and update the tabu list B_i ;
11. **End if**
12. The weight of each operator is updated after every ten iterations;
13. Fill the population with percentage r using x_{best} and randomly fill the remaining population;
14. **If** $\text{rand} < \mu$ **then**
15. $Pop' \leftarrow \text{crossover}(Pop)$;
16. **End if**
17. **If** $\text{rand} < \rho$ **then**
18. $Pop' \leftarrow \text{mutation}(Pop)$;
19. **End if**
20. Delete duplicate chromosomes, repair infeasible solutions in population;
21. The optimal chromosome in population Pop' as the current solution $x_{current}$;
22. $ite \leftarrow ite + 1$;
23. **End while**
24. **Return** x_{best}

The structure of Section IV is outlined as follows: in Section IV-A, for SMMAMRRPTW, we introduce the evaluation of the solution. Section IV-B covers the creation of an initial solution. In Section IV-C, we introduce the framework of the tabu search algorithm. Section IV-D and Section IV-E delve into the crossover operators and mutation operators. Lastly, Section IV-F presents the termination condition for the PTS algorithm.

A. EVALUATION OF SOLUTION

To facilitate the use of the PTS algorithm for solving SMMAMRRPTW, we convert multi-objective functions to a single objective. In terms of objective (2), to maximize the patient's satisfaction, the delayed service time of AMRs should be minimized, i.e.,

$$\text{minimize } (-f_2) = \sum_{k=1}^m \sum_{p \in L_k} \sum_{i \in R} E[A_{pi}^k - h_i]^+.$$

Hence, we can convert multi-objective functions to a single objective $\text{minimize}(f)$, where $f = f_1 + \xi_3(-f_2)$, ξ_3 is the penalty coefficient for delayed service time of AMRs.

B. INITIAL SOLUTION

It is well known that initial solutions play an important role in the performance of the algorithm. High-quality initial solutions can make the algorithm converge quickly in a short computing time. K-means is widely used for its efficiency in cluster algorithms [30]. In k-means clustering, several data points are partitioned into clusters so that the within-cluster variances (squared Euclidean distances) are minimized.

In this paper we employ a heuristic method of integrating Greedy insertion and k-means algorithm (Gk) for the PTS algorithm to construct initial solution, Algorithm 2 provides the pseudocode. The maximum number of iterations *kiter* of the Gk algorithm and change threshold of cluster center point τ are the inputs for the algorithm. The solution x_0 is the output for the Gk algorithm. Randomly select k requests as the initial centroids in Line 1. The Gk algorithm uses k-means to first group request points into distinct clusters, the main idea is a while loop from lines 2 to 6. In each iteration, the cluster based on the geographical location of all patients, repeats multiple times with different initial centroids and selects the clustering result with the minimum loss function RSS, where RSS is the squared error, which is the Euclidean distance from each point to the centroid. And divide the requests into k clusters (line 7). Then, using the Greedy insertion algorithm, requests are assigned to the AMR for delivery within each cluster based on the time window size of the requests in each cluster. The subroutes $route_i$ in all clusters are connected to form an initial AMR route (lines 8-10). Finally, use a repair operator to repair the initial route (line 11) to obtain the initial feasible solution x_0 of the PTS algorithm (line 12).

Algorithm 2. Gk algorithm

Input: *kiter*, τ

Output: solution x_0

1. Random select k requests as the initial centroids;
2. **While** loss function RSS less than $1/\tau$ or not reach the number of iterations *kiter* **do**
3. Assign each request to its closest centroid to create clusters;
4. Compute loss function RSS;
5. Update centroids by taking means of request locations within each cluster;
6. **End while**
7. Divided into k clusters $C = \{C_1, C_2, \dots, C_k\}$;
8. **For** $C_n \leftarrow C_1 \rightarrow C_k$ **do**
9. According to the lower limit of time window of each $route_i$, connect each $route_i$;
10. **End for**
11. Using repair operators to obtain feasible solutions;
12. **Return** the feasible route as initial solution x_0

C. TABU SEARCH

Tabu search is the core composition of our algorithm. We select the 2-opt and relocation operator to the roulette wheel procedure to generate neighborhood solutions. The 2-opt operator, depicted in Figure 1, involves randomly selecting two nodes, 4 and 1 (as illustrated in Figure 1 (a)), and employing the operator to interchange the segments between node 4 and node 1, resulting in a new solution, as depicted in Figure 1 (b). Similarly, the relocation operator, illustrated in Figure 2, begins by randomly selecting node 1 and node 4 (as shown in Figure 2 (a)), followed by the insertion of node 1 in front of node 4. This process yields a new solution, as shown in Figure 2 (b).

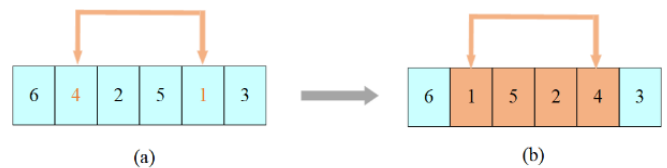


FIGURE 1. 2-opt operator.

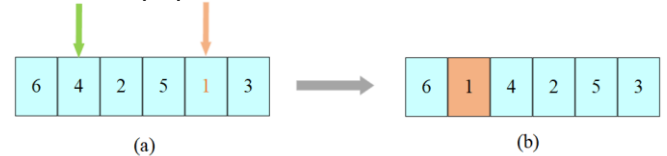


FIGURE 2. Relocation operator.

However, this operator does not always yield a feasible solution. To speed up the algorithm to find the optimal solution, we propose a repair operator (i.e., depot insertion operator) to repair the generated infeasible neighboring solution, which Definition 1 describes infeasible neighboring solutions. The depot insertion operator is shown in Figure 3. For example, at node 5, the current route is infeasible (see Figure 3 (a)). Use the depot insertion operator to insert a depot before the node where the route is infeasible, that is, insert node 0 before node 5 (see Figure 3 (b)).

Definition 1. The neighboring solution $x_{neighbor}$ is infeasible if the capacity constraints (6)-(8) or the time constraints (9)-(10) are not satisfied.




FIGURE 3. Depot insertion operator.

For tabu lists, we use $B_i, \forall i=1,2$ to store the solutions produced by 2-opt and relocation to each pair of requests, where the tabu list B_i is a $n \times n$ symmetric matrix, and n is the total number of requests. For the operator i , the element $B_i(j_1, j_2)$ in the tabu list B_i represents the tabu state of the neighborhood action $b_i(j_1, j_2)$ (i.e., tabu object), where $j_1, j_2 \in R$ are the two requests for 2-opt or relocation.

The tabu length in the PTS algorithm is used to record the number of iterations for removing tabu objects. As the PTS algorithm iterates, when the tabu length is zero, the tabu object $b_i(j_1, j_2)$ can be released from tabu table B_i .

In terms of the aspiration rule of the PTS algorithm, when a neighborhood solution is currently tabu but better than the current optimal solution, we revoke the tabu operation, and solution $x_{current}$ is selected to continue the algorithm iteration. Otherwise, the inferior solution shall be accepted. The suboptimal solution satisfying the tabu table is selected for iterations.

D. CROSSOVER OPERATORS

Crossover, often referred to as recombination, plays a vital role in evolutionary algorithms by combining the genetic information from two parents to produce offspring with hopefully better chromosomes. Essentially, crossover replaces partial structures of two-parent bodies to generate novel individuals. This operation not only retains the characteristics of high-quality individuals from the parent chromosomes but also maintains the diversity of solutions [31]. In this paper, before performing any operation on chromosome P , remove the node 0 (this node representing depot) contained within it first. The crossover operation is shown in Figure 4, where fragments (4,2,5) are selected from the parent P_1 , fragments (1,3,4) are selected from the parent P_2 , and then fragments (4,2,5) and (1,3,4) are placed before the parent P_2 and P_1 , respectively. The duplicate nodes are deleted, generating two new parents P'_1 and P'_2 . Finally, use the depot insertion operator to repair infeasibility in the offspring generated by the crossover operator.

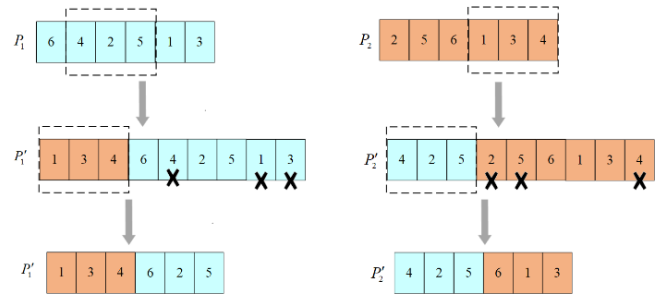


FIGURE 4. Crossover operator.

E. MUTATION OPERATORS

The mutation operator mainly imitates the gene mutation phenomenon in the process of biological evolution in nature and changes the individual gene values on the chromosome to obtain new chromosomes [32]. An excellent mutation operator can effectively avoid converging to the local optimum and generate high-quality solutions. The PTS algorithm proposed by this research selects the node swap mutation operator and the arc swap mutation operator to achieve diversity and widen the search space span.

In the arc swap mutation operator, two mutated gene segments are randomly generated, and the corresponding segments are exchanged. For example, in Figure 5, given a route of a chromosome (6,4,2,5,1,3) with randomly selected gene segments (6,4,2) and (1,3), the new route generated by this operator is (1,3,5,6,4,2). In the node swap mutation operator, two mutation gene bits are randomly generated, and the corresponding genes at the two positions are exchanged. In Figure 5, nodes 1 and 4 are selected and exchanged. The depot insertion operator is used to repair infeasible solutions of generated.

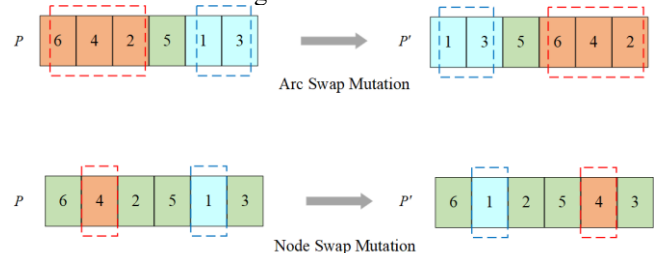


FIGURE 5. Swap operator.

F. PTS ALGORITHM STOP CONDITION

The algorithm stops after a predetermined maximum number of iterations N and outputs the current optimal solution.

V. COMPUTATIONAL STUDY

In this section, we first describe the benchmarks in the problem. Then, we report the parameter settings used in our experimental study. Moreover, the effectiveness of the developed algorithm is analyzed by comprehensive computational. Finally, we conducted relevant sensitivity analysis.

The algorithm is coded in MATLAB R2018b software. All experiments were performed on a PC with an Intel Core i5 CPU clocked at 2.40 GHz and 8 GB of memory running Windows 10 Professional 64-bit version.

A. DATASET GENERATION

The proposed model of SMMAMRRPTW involving stochastic demands and stochastic travel times seems to be the first of its kind. Therefore, no comparative algorithm and benchmarks are available for comparison. Therefore, we use the well-known Solomon’s dataset for VRPTW to generate our problem instances with appropriate modifications. The Solomon instances are grouped into three types. In type C, customers are clustering distributed. In type R, customers are randomly distributed, and in type RC, the customer distribution is mixed. Four instances are chosen from each type and thus there are a total of 12 instances tested, i.e., data sets C101, C102, C201, C202, R101, R102, R201, R202, RC101, RC102, RC201, and RC202.

We used the same vehicle capacity and customer and depot locations as in Solomon. We change the travel time of an edge $(i, j) \in A, i \neq j$ of an instance to a random variable T_{pij}^k , where the mean travel time $\mu_{T_{pij}^k}$ is the product of the Euclidean distance d_{ij} between two points and the travel speed v_r , and the variance of $\sigma_{T_{pij}^k}^2 = 0.2 \cdot \mu_{T_{pij}^k}$. The customer demands in Solomon as a mean $(\mu_{q_i}, i \in R)$ for the stochastic demand in our problem, and the variance is $\sigma_{q_i}^2 = 0.1 \cdot \mu_{q_i}, i \in R$. Furthermore, we consider a service time a per demand unit of 2 sec ($w = 2s$) and the bias is 10 sec ($b = 10s$), which corresponds to approximately 12 seconds per demand units. The confidence level for meeting the vehicle capacity $(1 - \varepsilon_1)$ and time window $(1 - \varepsilon_2)$ in SMMAMRRPTW is set to values of 0.95.

B. PARAMETER SETTING

To determine the appropriate parameter settings, we have used the Taguchi method to tune the parameters of the PTS algorithm. In the Taguchi method, orthogonal arrays are used to study a large number of decision variables with a small number of experiments. The Taguchi method offers orthogonal arrays to determine the best values of decision variables with a small number of experiments [33]. Taguchi method transforms the repetition data to another value which is the signal-to-noise (S/N) ratio. Here, ‘signal’ denotes the response variable, and ‘noise’ denotes the standard deviation. Therefore, the S/N ratio indicates the amount of variation

present in the response variable. The aim of the Taguchi method is to maximize the S/N ratio [33].

TABLE 2. Factor levels of the parameters of the PTS algorithm

Parameters	Factors	Parameter levels			Optimum level
		Level 1	Level 2	Level 3	
k-means iter	A	20	30	40	30
k-means threshold	B	0.0001	0.0002	0.0003	0.0002
Population size	C	100	120	150	120
Probability crossover	D	0.7	0.8	0.9	0.7
Probability mutation	E	0.05	0.1	0.15	0.15
Maximum number of iterations PTS	F	50	200	500	50

Table 2 shows the parameters of the PTS algorithm. For each parameter, three levels have been considered. Perform 10 different runs on 12 instances and the Minitab software 22 has been used to provide the mean S/N ratio plot for the PTS algorithm, as shown in Figure 6. Based on the S/N ratio plot illustrated in Figure 6, the optimum level of all parameters is obtained (Table 2).

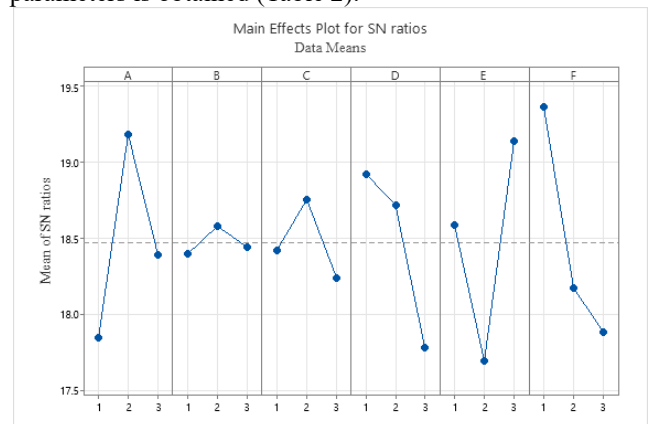


FIGURE 6. The mean S/N ratio plot for the PTS algorithm.

Finally, determine the portion of the population to be filled, and perform a set of runs with different percentages (r) for the six instances C101, C201, R101, R201, RC101, and RC201. Here, r represents the population percentage filled by the current optimal solution of the TS algorithm in the PTS algorithm, while the remaining portion $(1 - r)$ is filled randomly to achieve diversity. Figure 7 shows the iteration diagrams of six instances at four different proportions r (20%, 50%, 80%, and 100%). Figure 7 shows that using the current optimal solution generated by each iteration of the TS algorithm as a chromosome to fill the entire population ($r = 100\%$) can make the PTS algorithm converge to a better solution.

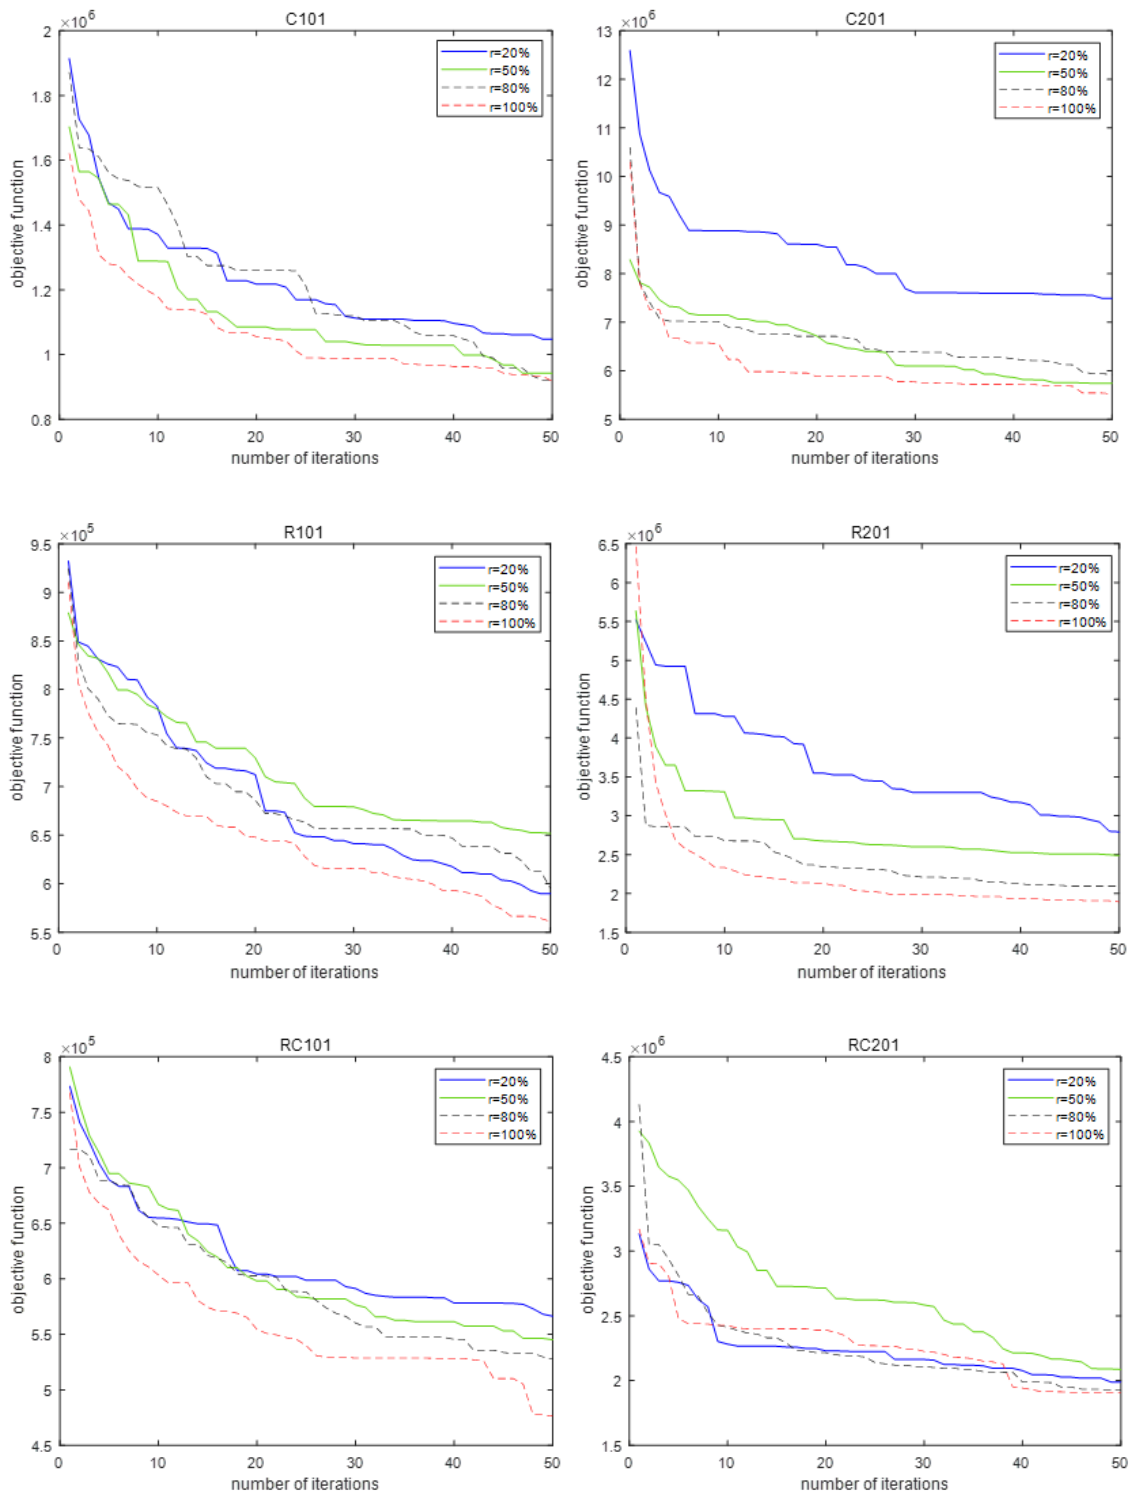


FIGURE 7. Experiment to determine the population setting of the PTS algorithm

C. PERFORMANCE OF THE PTS ALGORITHM

In this section, we conducted a series of experiments using 12 instances to assess the effectiveness and efficiency of the PTS algorithm and model. Specifically, the performance of the Gk algorithm for generating initial solutions was

validated by comparing k-means and Greedy insertion algorithms. Furthermore, we compared the PTS with TS and GA algorithms, and finally analyzed the service quality of patients.

We first compare Gk with the k-means and Greedy insertion algorithm on generating initial solutions. Run each

instance ten times, and the comparison results are described in Table 3, where f_{ave}^{Gk} and f_{ave}^k are the average objectives for ten runs, f_{best}^{Gk} and f_{best}^k are the optimal objectives for ten runs of the three algorithms, and f^G is the objective of Greedy insertion algorithm. It is worth noting that the Greedy insertion algorithm generates the same result every time it runs. The percentage improvement (Imp_1, Imp_2) of the average objective generated by the Gk algorithm relative to the average objectives generated by k-means and Greedy insertion algorithms, as defined by

$$Imp_1 = \frac{f_{ave}^k - f_{ave}^{Gk}}{f_{ave}^k} \times 100, \quad Imp_2 = \frac{f^G - f_{ave}^{Gk}}{f^G} \times 100.$$

TABLE 3. Comparison results of Gk, k-means, and Greedy insertion algorithms for solving initial solutions

Instance	Gk			k-means		Greedy insertion	
	f_{ave}^{Gk}	f_{best}^{Gk}	f_{ave}^k	f_{best}^k	Imp_1	f^G	Imp_2
C101	2045910.08	1863415	2610782	2417649	21.63	2617170	21.82
C102	1254631.38	1107483	1655803	1434495	24.22	1870543	32.92
C201	12085514.7	8324882	14809985	11851861	18.39	7814317	-54.65
C202	9612167.96	8365007	12044963	9850724	20.19	9311346	-3.23
R101	938552.54	884402.9	959881.3	830621	2.22	1166671	19.55
R102	742706.32	686893	797058	739009.9	6.81	953384.5	22.09
R201	5093775.34	3129344	7378546	6652661	30.96	5823723	12.53
R202	4614830.48	2115929	6124538	5632099	24.65	6014803	23.27
RC101	830637.94	718604	785494.6	734688.3	-5.74	1015725	18.22
RC102	693004.58	628846.4	666737.6	576412	-3.93	929352.6	25.43
RC201	4923085.68	3848542	5916827	5416624	16.79	5317144	7.41
RC202	3916137.13	2559224	5231515	4386069	25.14	5463542	28.32
Average	3895912.85	2852714.4	4915177.43	4210242.97	20.73	4024810.2	3.20

We then compare PTS with the TS and GA algorithms on the SMMAMRRPTW problem. The comparative results are provided in Table 4, where we report the average objective ($f_{ave}^{TS}, f_{ave}^{GA}$, and f_{ave}^{PTS}), best objective ($f_{best}^{TS}, f_{best}^{GA}$, and f_{best}^{PTS}), Gap value (G), and the computation time (CPU) on ten runs of three algorithms. The results clearly show that our proposed PTS algorithm is markedly efficient. The relative percentage deviation (G_1, G_2) between the average objective value obtained by the PTS algorithm and the average objective value obtained by TS and GA algorithm is calculated as follows, respectively.

$$G_1 = \frac{f_{ave}^{TS} - f_{ave}^{PTS}}{f_{ave}^{PTS}} \times 100, \quad G_2 = \frac{f_{ave}^{GA} - f_{ave}^{PTS}}{f_{ave}^{PTS}} \times 100.$$

A larger Gap value indicates better performance of the PTS algorithm. Indeed, the average objective and best objective in almost all the instances are found by the PTS algorithm.

TABLE 4. Comparison results of TS, GA, and PTS algorithms for solving SMMAMRRPTW

Instance	TS			GA		PTS			G_1	G_2	
	f_{best}^{TS}	f_{ave}^{TS}	CPU (s)	f_{best}^{GA}	f_{ave}^{GA}	CPU (s)	f_{best}^{PTS}	f_{ave}^{PTS}			CPU (s)
C101	1018859	1122640	41.68	1339227	1465171	20.41	794186.5	934713.9	70.44	20.1	56.7
C102	544306.6	660273.5	40.60	850956.7	887624.5	20.36	383453.1	510149.9	89.07	29.4	74.0
C201	5875695	6200411	36.04	6794412	7638171	14.80	5300789	5857005	80.19	5.9	30.4
C202	2707980	4023706	43.43	3946166	4838110	16.86	3032538	3568176	77.69	12.8	35.6
R101	601024.8	630914.4	44.75	777221.5	805799.9	18.74	564001.8	615274.9	81.56	2.54	31.0
R102	462079	496479.4	41.56	605469.9	639811.3	20.42	428810.9	459041.6	70.80	8.16	39.4

We see that in most cases Gk outperforms the k-means and Greedy insertion algorithm. Furthermore, we observe that the k-means method demonstrates favorable clustering outcomes for the type RC1 instances. This can be explained by the customer distribution characteristics and the width of time windows of RC1 instances. The k-means method can effectively cluster instances with mixed spatial distributions. And, the RC1 instance time window is relatively narrow, so the effectiveness of the Greedy insertion algorithm based on the width of time windows becomes less obvious. On the contrary, for the type C2 instances with clustering distribution and wide time windows, employing the Greedy insertion algorithm can obtain better initial solutions.

The average values of f_{best}^{TS} and f_{ave}^{TS} under the TS algorithm are 1604411 and 1855859, respectively, while the average values of f_{best}^{PTS} and f_{ave}^{PTS} under PTS are 1481096 and 1707478, respectively, demonstrating that PTS improves the average objective by $G_1 = 8.69\%$. This observation highlights the benefit of incorporating population into the TS framework. Similarly, comparing PTS with the GA algorithm, the addition of the tabu list and aspiration rule improves the average objective by $G_2 = 35.6\%$. This result shows the benefits of incorporating the tabu list and aspiration rule into GA. In terms of runtime, we can see that the PTS algorithm proposed in this research has the large CPU, while the GA algorithm has the shortest computation time since each iteration of the PTS algorithm not only requires a tabu mechanism on the current neighborhood solution but also crossover and mutation of the population, which needs additional computation time.

R201	2041798	2366187	42.13	2624790	2975805	16.96	1886346	2267428	68.81	4.36	31.2
R202	1626803	1862737	38.31	1915175	2140760	16.53	1518544	1679639	71.34	10.9	27.5
RC101	535131.9	572251	48.61	652803.2	709288.6	20.72	484415.7	548133.4	72.90	4.4	29.4
RC102	445098.8	480440.4	47.07	567694.6	587258.1	19.31	415750.2	443555.7	72.34	8.32	32.4
RC201	1888989	2147014	43.4	2682160	2991024	17.10	1689098	2106756	72.36	1.91	42.0
RC202	1505167	1707251	44.33	1775964	2111596	17.25	1275220	1499864	70.56	13.8	40.8
Average	1604411	1855859	42.66	2044337	2315868	18.29	1481096	1707478	74.84	8.69	35.6


All in all, the detailed analysis reveals that the PTS algorithm can find high-quality objective value. Moreover, it is evident that incorporating population crossover and mutation operations into the TS algorithm is useful and can significantly improve the quality of solutions.

D. SENSITIVITY ANALYSIS


The CCP considers management decisions by controlling confidence levels when solving the SMMAMRRPTW problem. Our next experiment aims to analyze the impact of confidence level $1-\varepsilon_1$ of capacity constraint on the total delay service time (TDS) of AMRs and the number of AMRs. We compare the $1-\varepsilon_1=0.95$, $1-\varepsilon_1=0.9$, $1-\varepsilon_1=0.8$, $1-\varepsilon_1=0.7$, and $1-\varepsilon_1=0.6$, as shown Figure 8.

From the observations in Figures 8 (a) and (b), we can see that increasing the confidence level tends to reduce the delayed service of AMRs, thereby improving the quality of

service for patients. Especially for types C1, R1, and RC1 instances (Figure 8 (a)), the impact of increasing the confidence level of capacity constraints on service quality is evident. Similarly, we can observe that increasing the confidence level leads to an increase in the use of AMR (see Figure 8 (c) and (d)), which is more pronounced in types C1, R1, and RC1 instances (Figure 8 (c)). This phenomenon can be explained by the smaller loading capacity of AMR in types C1, R1, and RC1 instances, while the larger capacity of AMR in types C2, R2, and RC2 instances. For instances with smaller capacity, increasing the confidence level on capacity constraints strengthens capacity constraints. Therefore, to satisfy capacity constraints, increasing the likelihood of AMR participating in services also increases accordingly, thereby reducing the cost of delayed services.

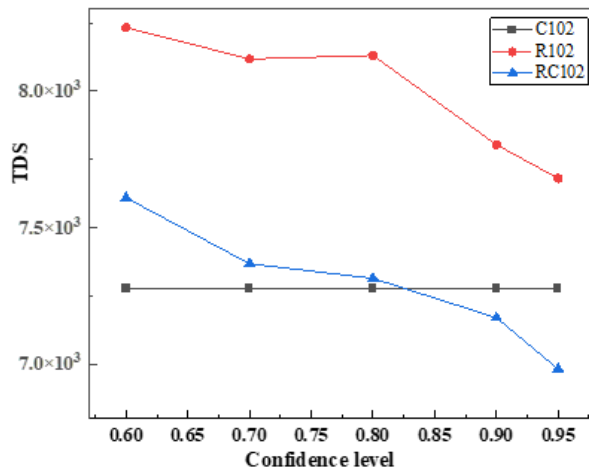

(a)

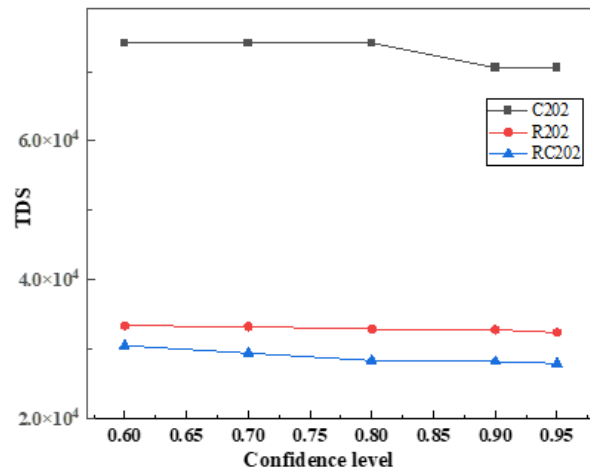

(b)

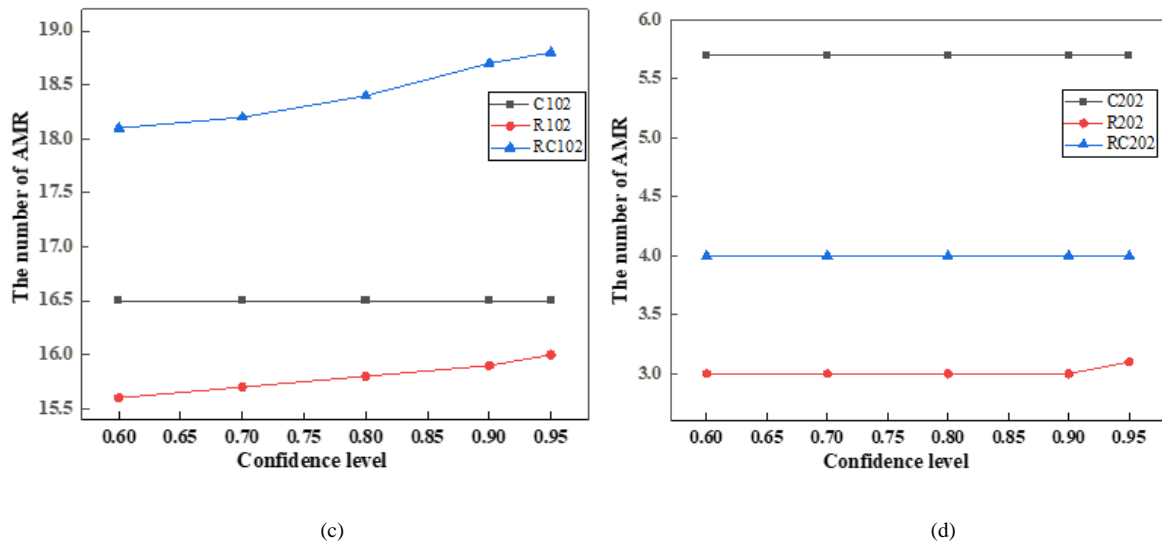


FIGURE 8. The impact of changing confidence levels

VI. CONCLUSION

In this paper, we study the routing problem of autonomous mobile robots with multiple trips in the stochastic environment to minimize the total expected operating cost and maximize the total expected service quality of patients. The developed chance constraint models consider stochastic travel time, service time, and demands. By combining the TS algorithm with the GA algorithm, we designed the PTS algorithm that adapts to the characteristics of the SMMAMRRPTW. We incorporate various improvement measures such as initial solution generation, population generation, and operators that generate neighborhoods, greatly enhancing the algorithm's performance.

Future research could expand our work in the following directions. Firstly, we focused on a single type of AMR for transportation services, but there is potential for multiple AMRs to transport various products. Thus, we are interested in extending our model to the collaborative transportation of multiple types of AMRs. Second, future research can explore the dynamic pickup and delivery AMR scheduling problem with multi-depot. Lastly, future work may consider using reinforcement learning to analyze and solve these models.

REFERENCES

- [1] L.-K. Chen, "Advancing the journey: Taiwan's ongoing efforts in reshaping the future for aging populations," *Archives of Gerontology and Geriatrics*, vol. 113, p. 105128, Oct. 2023.
- [2] B. L. Dijkman et al., "Developing a competence framework for gerontological nursing in China: a two-phase research design including a needs analysis and verification study," *BMC Nursing*, vol. 21, no. 1, p. 285, Oct. 2022.
- [3] D. Sommer, J. Kasbauer, D. Jakob, S. Schmidt, and F. Wahl, "Potential of Assistive Robots in Clinical Nursing: An Observational Study of Nurses' Transportation Tasks in Rural Clinics of Bavaria, Germany," *Nursing Reports*, vol. 14, no. 1, pp. 267-286, Jan. 2024.
- [4] S. Ozturkcan and E. Merdin-Uygur, "Humanoid service robots: The future of healthcare?," *Journal of Information Technology Teaching Cases*, vol. 12, no. 2, pp. 163-169, Nov. 2022.
- [5] N. Ding, C. Peng, M. Lin, and C. Wu, "A Comprehensive Review on Automatic Mobile Robots: Applications, Perception, Communication and Control," *Journal of Circuits, Systems and Computers*, vol. 31, no. 08, p. 2250153, May. 2022.
- [6] W. Zou, J. Zou, H. Sang, L. Meng, and Q. Pan, "An effective population-based iterated greedy algorithm for solving the multi-AGV scheduling problem with unloading safety detection," *Information Sciences*, vol. 657, p. 119949, Feb. 2024.
- [7] X.-J. Zhang, H.-Y. Sang, J.-Q. Li, Y.-Y. Han, and P. Duan, "An effective multi-AGVs dispatching method applied to matrix manufacturing workshop," *Computers & Industrial Engineering*, vol. 163, p. 107791, Jan. 2022.
- [8] W.-Q. Zou, Q.-K. Pan, L.-L. Meng, H.-Y. Sang, Y.-Y. Han, and J.-Q. Li, "An effective self-adaptive iterated greedy algorithm for a multi-AGVs scheduling problem with charging and maintenance," *Expert Systems with Applications*, vol. 216, p. 119512, Apr. 2023.
- [9] I. Aziez, J.-F. Côté, and L. C. Coelho, "Fleet sizing and routing of healthcare automated guided vehicles," *Transportation Research Part E: Logistics and Transportation Review*, vol. 161, p. 102679, May. 2022.
- [10] L. Cheng, N. Zhao, K. Wu, and Z. Chen, "The Multi-Trip Autonomous Mobile Robot Scheduling Problem with Time Windows in a Stochastic Environment at Smart Hospitals," *Applied Sciences*, vol. 13, no. 17, p. 9879, Aug. 2023.
- [11] T. Nishi, Y. Hiranaka, and I. E. Grossmann, "A bilevel decomposition algorithm for simultaneous production scheduling and conflict-free routing for automated guided vehicles," *Computers & Operations Research*, vol. 38, no. 5, pp. 876-888, May. 2011.
- [12] Mittal Chikul, Hsann Yin Maw, and Y. K. Soong, "Technology in healthcare: A case study of healthcare supply chain management models in a general hospital in Singapore," *Journal of Hospital Administration*, vol. 6, no. 6, pp. 63-70, Dec. 2017.
- [13] W.-Q. Zou, Q.-K. Pan, T. Meng, L. Gao, and Y.-L. Wang, "An effective discrete artificial bee colony algorithm for multi-AGVs dispatching problem in a matrix manufacturing workshop," *Expert Systems with Applications*, vol. 161, p. 113675, Dec. 2020.
- [14] W. Han et al., "Digital Twin-Based Automated Guided Vehicle Scheduling: A Solution for Its Charging Problems," *Applied Sciences*, vol. 12, no. 7, p. 3354, Mar. 2022.
- [15] L. Cheng, N. Zhao, M. Yuan, and K. Wu, "Stochastic Scheduling of Autonomous Mobile Robots at Hospitals," *PLOS ONE*, vol. 18, no. 10, p. e0292002, Oct. 2023.
- [16] M. Gendreau, F. Guertin, J. Y. Potvin, and R. Seguin, "Neighborhood Search Heuristics for A Dynamic Vehicle

- Dispatching Problem with Pick-ups and Deliveries," *Transportation Research Part C: Emerging Technologies*, vol. 14, no. 3, pp. 157-174, Jun. 2006.
- [17] B. Biesinger, B. Hu, and G. R. Raidl, "A Genetic Algorithm in Combination with a Solution Archive for Solving the Generalized Vehicle Routing Problem with Stochastic Demands," *Transportation Science*, vol. 52, no. 3, pp. 673-690, Feb. 2018.
- [18] R. Goel, R. Maini, and S. Bansal, "Vehicle routing problem with time windows having stochastic customers demands and stochastic service times: Modelling and solution," *Journal of Computational Science*, vol. 34, pp. 1-10, May. 2019.
- [19] M. Çimen and M. Soysal, "Time-dependent green vehicle routing problem with stochastic vehicle speeds: An approximate dynamic programming algorithm," *Transportation Research Part D: Transport and Environment*, vol. 54, pp. 82-98, Jul. 2017.
- [20] N. Elgharably, S. Easa, A. Nassef, and A. E. Damatty, "Stochastic Multi-Objective Vehicle Routing Model in Green Environment With Customer Satisfaction," *IEEE Transactions on Intelligent Transportation Systems*, vol. 24, no. 1, pp. 1337-1355, Jan. 2023.
- [21] J. K. Lenstra and A. H. G. R. Kan, "Complexity of vehicle routing and scheduling problems," *Networks*, vol. 11, no. 2, pp. 221-227, 1981.
- [22] K. Braekers, K. Ramaekers, and I. Van Nieuwenhuysse, "The vehicle routing problem: State of the art classification and review," *Computers & Industrial Engineering*, vol. 99, pp. 300-313, Sep. 2016.
- [23] G. Li and J. Li, "An Improved Tabu Search Algorithm for The Stochastic Vehicle Routing Problem with Soft Time Windows," *IEEE Access*, vol. 8, pp. 158115-158124, Aug. 2020.
- [24] O. Hashemi-Amiri, M. Mohammadi, G. Rahmanifar, M. Hajiaghaei-Keshteli, G. Fusco, and C. Colombaroni, "An allocation-routing optimization model for integrated solid waste management," *Expert Systems with Applications*, vol. 227, p. 120364, Oct. 2023.
- [25] K. C. Tan, C. Y. Cheong, and C. K. Goh, "Solving multiobjective vehicle routing problem with stochastic demand via evolutionary computation," *European Journal of Operational Research*, vol. 177, no. 2, pp. 813-839, Mar. 2007.
- [26] J. F. Ehmke, A. M. Campbell, and T. L. Urban, "Ensuring Service Levels in Routing Problems with Time Windows and Stochastic Travel Times," *European Journal of Operational Research*, vol. 240, no. 2, pp. 539-550, Jan. 2015.
- [27] S. Nadarajah and S. Kotz, "Exact Distribution of The Max/Min of Two Gaussian Random Variables," *IEEE Transactions on Very Large Scale Integration Systems*, vol. 16, pp. 210-212, Feb. 2008.
- [28] F. Glover, "Future Paths for Integer Programming and Links to Artificial Intelligence," *Computers & Operations Research*, vol. 13, no. 5, pp. 533-549, 1986.
- [29] T. Vidal, T. G. Crainic, M. Gendreau, and C. Prins, "A hybrid genetic algorithm with adaptive diversity management for a large class of vehicle routing problems with time-windows," *Computers & Operations Research*, vol. 40, no. 1, pp. 475-489, Jan. 2013.
- [30] H. Huang, C. Hu, J. Zhu, M. Wu, and R. Malekian, "Stochastic Task Scheduling in UAV-Based Intelligent On-Demand Meal Delivery System," *IEEE Transactions on Intelligent Transportation Systems*, vol. 23, no. 8, pp. 13040-13054, Aug. 2022.
- [31] Q. Wang, H. Li, D. Wang, T. C. E. Cheng, and Y. Yin, "Bi-objective perishable product delivery routing problem with stochastic demand," *Computers & Industrial Engineering*, vol. 175, p. 108837, Jan. 2023.
- [32] B. Chen, W. Zeng, Y. Lin, and D. Zhang, "A New Local Search-Based Multiobjective Optimization Algorithm," *IEEE Transactions on Evolutionary Computation*, vol. 19, no. 1, pp. 50-73, Feb. 2015.
- [33] M. Zandieh and H. Moradi, "An imperialist competitive algorithm in mixed-model assembly line sequencing problem to minimise unfinished works," *International Journal of Systems Science: Operations & Logistics*, vol. 6, no. 2, pp. 179-192, Apr. 2019.

LULU CHENG was born in 1997. She is currently pursuing a Ph.D. degree at Kunming University of Science and Technology, China. Her research interest is the vehicle routing problem.



NING ZHAO was born in 1980. She received the M.S. degree in applied mathematics from Shanghai Jiaotong University in 2005, and Ph.D. degree from University of Macau in 2011. From 2012-2014, she was a Research Assistant at Nanyang Technical University. She is currently an associate professor at Kunming University of Science and Technology, China. Her research interests include queuing

systems, inventory management, and vehicle routing problem.

