# arXiv:2406.13226v1 [math.OC] 19 Jun 2024

# Optimizing Inventory Management through Multiobjective Reverse Logistics with Environmental Impact

I. B. Wadhawan \* M. M. Rizvi<sup>†</sup>

June 21, 2024

Abstract We present novel mathematical models for inventory management within a reverse logistics system. Technological advancements, sustainability initiatives, and evolving customer behaviours have significantly increased the demand for repaired products. Our models account for varying demand levels for newly produced and repaired items. To optimize overall costs with constrained scenarios, we formulated mixed integer programming problems. Solution procedures for the proposed problems are introduced, and the accuracy of these solutions has been validated through numerical experiments. Additionally, we address the cost of waste disposal as an environmental concern. This paper develops a multiobjective mathematical model and provides an algorithm for the Pareto solution. Various scalarization techniques are utilized to identify the Pareto front, and a comparison of these techniques is presented.

**Keywords** Multiobjective programming problems, Inventory management, Reverse logistics system, Mixed Integer Programming, Scalarization method, Pareto front.

**AMS** subject classifications. 90B05, 90C25, 90C29, 90C30.

# 1 Introduction

Protecting the environment by recycling material and remanufacturing used products are inevitable options to reduce waste generation. Reducing waste can be attained through product recovery through refurbishing, repair, recycling and remanufacturing. Reverse logistics (RL) has been receiving increased attention because of the concrete benefits that

<sup>\*</sup>Centre for Smart Analytics (CSA), Institute of Innovation, Science and Sustainability, Federation University Australia, email: i.wadhawan@federation.edu.au

<sup>&</sup>lt;sup>†</sup>Centre for Smart Analytics (CSA), Institute of Innovation, Science and Sustainability, Federation University Australia, email: m.rizvi@federation.edu.au (corresponding author).

flow from the repair and are seen as a solution to environmental waste problems. The research on coordinating repair with manufacturing and waste management was started in the 1970s but only limited research has considered the waste as a disposal cost [2].

The earliest reported work is by Schrady [24], who establishes a deterministic Economic Order Quantity (EOQ) model for repaired items with instantaneous manufacturing and recovery rates. Nahmias and Rivera [16] extended Schardy's model for finite repair rate and one production cycle. Richter [18, 19] proposed an EOQ model and determined the optimal number of production and remanufacturing batch sizes based on the return rate. The system investigated by Richter [20] consists of the serviceable and the repairable stock, which was governed by "dispose all" or "recover all" strategies. Dobos and Richter [8] generalised the work by Richter [20] by considering finite production and repair rates. They extended the model by considering the quality of used products may not be suitable for recycling [9]. Teunter [28] conducted an analysis analogous to that of Richter [20] comparing two strategies: (1) the maximum remanufacturing strategy, involving multiple recovery cycles and a single production (manufacturing) cycle per interval, and (2) the maximum production strategy, which incorporates multiple production cycles and a single recovery cycle per interval. These strategies were extended with scenarios featuring indefinite recovery times. El Saadany and Jaber [22] considered a mixed strategy of production and remanufacturing as opposite to Richter [20]. Jaber and Saadany [12] proposed a model with the emphasis that remanufacturing items are considered as lower quality by the customers, which was extended by Hasanov et al [11] by incorporating different cases of backorder. Saadany [23] has investigated remanufacturability issues of reverse logistics and changed a common assumption by differentiating unlimited remanufacturing of repairable products from the production of manufactured products. In addition, disposal cost is considered in the total cost function. Bazan [2] also considered waste cost as a part of the overall cost to minimize. Singh et al [25] extended the work by Hasanov et al introducing finite production and remanufacturing rates. Bazan et al [3] reviewed the mathematical inventory model and established a production reliability model with random demand. Kozlovskaya et al [14] consider a general class of deterministic inventory models with constant demand and return to minimise the costs involved (sum of the production cost, holding cost and switching cost). Singh et al [26] considered a reverse logistic model with variable production and remanufacturing under learning effects.

Currently, government pressure and legislation have contributed to the increased motivation for sustainability practices, but limited research has been conducted on this. Forkan et al [10] further extended the work by Nahmias and Rivera [16] by considering two different demands for manufacturing and repaired items along with the environmental issues such as GHG and energy consumption in their model.

Our paper considers a mathematical approach to optimize the cost associated with re-

verse logistics with different demands and the cost associated with waste, hence converting the model to a multiobjective problem. This paper focuses on obtaining the optimal batch cycles by solving a Mixed Integer Programming (MIP) problem, which has not been considered in any research so far. The normal practice is fixing the number of cycles and optimizing the cost. However, our paper is obtaining optimum cycles along with the cost by solving the mixed integer programming problem.

In summary, the objectives of the current research are as follows.

- (i) Develop an efficient material flow model in the reverse logistics system to calculate average inventory cost where repaired items are not considered the same as new items.
- (ii) Develop mathematical expressions to calculate the total cost functions (involving optimised lot sizes and number of cycles) of the reverse logistics system for the case when the demand for the repaired and new procurement items are not the same.
- (iii) Minimise environmental impact by considering waste disposal while considering the reverse logistics system of inventory management.
- (iv) Develop a model for the multiobjective functions with inventory cost and waste cost and then minimise these conflicting functions simultaneously by using different scalarization techniques for the proposed models.
- (v) Design efficient algorithms and establish a solution procedure for the proposed models and implement them through computational experiments.

The rest of this paper comprises the following sections. Section 2 describes some preliminaries and assumptions to develop the proposed model. Section 3 develops formulating three new mathematical reverse logistic models for constrained optimization problems. A multiobjective model with a solution approach is proposed in this section. Section 4 comprises numerical experiments and sensitivity analysis. Section 5 provided the conclusion and further research directions. An alternative diagram of inventory behaviour for new, collected, used and repaired items to the proposed problem is presented in the Appendix.

# 2 Formulations and Solutions of the Proposed Models

The following parameters are used in the formulation of the model.

Length of new procurement and repair cycle.
Length of new items cycle.
Length of repaired items cycle.
Batch size for new procurement over the time $T_p/n$ .
Batch size for repaired items over the time $T_r/m$ .
Demand rate for new items/primary market.
Demand rate for repaired items/secondary market.
Proportion of $D_p$ of new items (units per unit time) $0 .$
Lost proportion of $D_p$ of new items (units per unit time).
Collection proportion of available returns of $pD_p$ $(0 \le q \le 1)$ .
Waste proportion of $pD_p$ .
Proportion of Dr of repaired items (units per unit time) $0 \le r \le 1$ .
Lost proportion of Dr of repaired items (units per unit time).
Collection proportion of available returns of $rD_r$ $(0 \le s \le 1)$ .
Waste proportion of $rD_r$ .
Repairable stock rate $(R_1 = qpD_p, R_2 = srD_r)$ .
Setup cost of supply and repair depot per unit time $T$ .
Holding cost of supply and repair depot respectively per unit time $T$ .
Waste cost per unit time $T$ .

The following assumptions are used to ensure the ease of the developed model.

- Repaired items are of a different quality than the new items therefore, the demand for the new and repaired items is not fixed in time and may not be the same [12, 25].
- Shortage is not allowed at the stock point and is represented by the constraint  $qpD_p + srD_r = R_1 + R_2 \ge D_r$ .
- Lead time is zero (instantaneous replenishment).
- Returned items undergo an inspection before being accepted at the repair depot.
- We assume the procurement period is never smaller than the repair period  $T_r \leq T_p$ and  $T = T_p + T_r$ .

We consider two types of depots (primary/supply and secondary/repair) in our proposed model as depicted in Figure 1. The first depot is the supply depot, which stores the new procurement and repaired items. The supply depot can satisfy customers' demand for new  $D_p$  and repaired  $D_r$  items. When the items are repaired, first they are stored at the repair depot and then shipped to the supply depot. The portion of demand  $(1 - p)D_p$ and  $(1 - r)D_r$  never return from the primary and secondary market to the system, so we assume that it does not have any influence on the system. Therefore,  $pD_p$  and  $rD_r$  are the portions of the demand which is returned to the system for either repair or disposal. Returned items vary in quality, and items with quality below the acceptance threshold are rejected. In the process, the amount of the accepted items is  $R_1 + R_2 = qpD_p + srD_r$  and the failed/waste item is  $(1 - q)pD_p$  and  $(1 - s)rD_r$ . This failed quantity is considered in our model as a second objective function to account for waste cost.

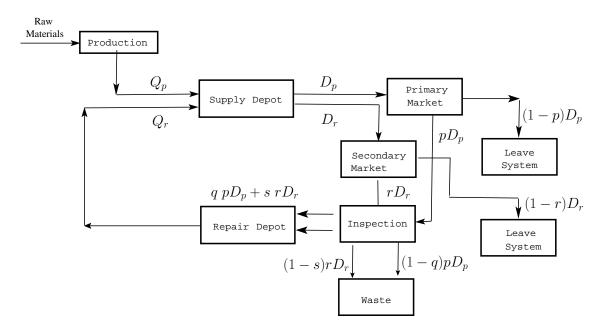


Figure 1: Material flow for a new procurement and repair system.

The inventory behaviour for new and repaired items is illustrated in Figure 2. The model begins with fulfilling the demand for newly produced and remanufactured items. As shown in Figure 2, the inventory of the supply depot always decreases at rate  $D_p$  for new items and at rate  $D_r$  at the repair depot for repaired items. In the proposed models, we consider n cycles for new procurement and m cycles for repair over the time  $T = T_p + T_r$ .

At the time T = 0, since there are no items in the repair depot, only new procurement  $Q_p$  is sold at the rate  $D_P$ . As new items are sold in *n* cycles over a time period  $T_p$ , the

inventory in the repair depot grows at the rate  $pqD_p$ . Therefore, we obtain  $T_pD_p = nQ_p$ . The same cycle repeats for the repaired items. The inventory of the repair depot increases at the rate  $srD_r$  as we sell the repaired procurement  $Q_r$  with the rate  $D_r$  in m cycles over period  $T_r$ . Therefore, we obtain  $T_rD_r = mQ_r$ . The total cost per unit time for the

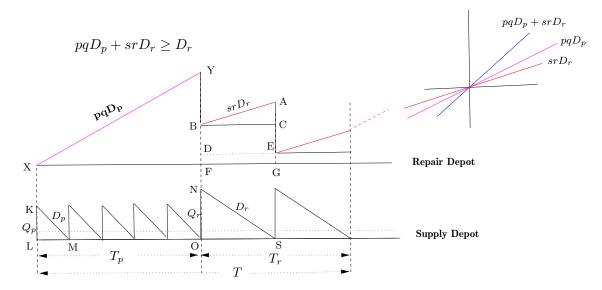


Figure 2: The behaviour of inventory for new, used and repaired items over the interval T.

proposed reverse logistic system  $C(Q_p, Q_r, m, n)$  is the sum of the setup cost per unit time for the system, the total inventory holding cost per unit time in the supply depot and the repair depot. This is achieved by adding the areas in the supply depot (n KLM + m NOS) and the repair depot (XYF + m ABC + (m - 1) BCED + m DEGF) and is given as

$$C(Q_p, Q_r, m, n) = \frac{1}{T} \left[ mS_n + nS_p + \left( \frac{Q_p T_p}{2} + \frac{Q_r T_r}{2} \right) h_p + \left[ \frac{R_1 T_p^2}{2} + \frac{R_2 T_r Q_r}{2D_r} + \frac{(m-1)}{2} T_r Q_r \left( 1 - \frac{R_2}{D_r} \right) + T_r \left( T_p R_1 - Q_r - (m-1) \left( 1 - \frac{R_2}{D_r} \right) Q_r \right) \right] h_r \right], \quad (1)$$

where,  $T = T_p + T_r$ ,  $R_1 = pqD_p$  and  $R_2 = srD_r$ . For detailed information on area calculation, please check the Appendix section 7.

# 3 Mathematical Model and Solution Approach

Numerous studies have addressed the disposal of non-repairable items [18, 19, 20, 23], with only a few considering it as a waste cost in the overall cost function [2]. However, none have examined this cost from an environmental perspective. Controlling this cost is crucial when optimizing the holding cost in reverse logistics systems. This paper explores the trade-offs between overall cost and waste cost, as well as between holding costs and waste cost.

The disposal cost function can be written as

$$f_2(s) = C_w \Big( (1-q)pD_p + (1-s)rD_r \Big).$$
(2)

Thus, we construct the reverse logistics problem as a mixed integer programming problem and propose three mathematical models. The objective of the first model is to minimize the inventory cost with the condition that the length of the new items cycle is always greater than the length of the repaired items cycle. In this particular model, the percentage of items s approved for repair from the returned items from the secondary market remains constant. The new and repaired items are represented by integers, each requiring a minimum of one cycle.

Model 1: When s is fixed

min 
$$C(Q_p, Q_r, m, n)$$
  
subject to the constraints  
 $T_r \leq T_p,$   
 $m, n \in \mathbb{Z} \geq 1.$  (3)

The second model also aims to minimize inventory costs with additional conditions. In addition to the first model, this model ensures that stock is always available and considers the changing percentages of items approved for repair from the returned items in the secondary market. We define (1) as  $f_1(Q_p, Q_r, m, n, s)$  when S is considered as a variable. **Model 2: When** s is variable

min 
$$f_1(Q_p, Q_r, m, n, s)$$
  
subject to the constraints  
 $T_r \leq T_p,$   
 $D_r \leq R_1 + R_2,$   
 $m, n \in \mathbb{Z} \geq 1,$   
 $0 \leq s \leq 1.$ 
(4)

The third model considers two functions, inventory cost and waste cost while taking into account all the constraints from Model 2. The objective is to generate a set of solutions that minimize both the inventory cost and the environmental impact of waste cost.

### Model 3: Multiobjective - Inventory cost versus Waste Cost

min {
$$f_1(Q_p, Q_r, m, n, s), f_2(s)$$
}  
subject to the constraints  
 $T_r \leq T_p,$   
 $D_r \leq R_1 + R_2,$   
 $m, n \in \mathbb{Z} \geq 1,$   
 $0 \leq s \leq 1.$  (5)

# 3.1 Solution procedure

# Step 1 (Input)

Input the parameters  $D_p$ ,  $D_r$ , p, q, r,  $h_r$ ,  $h_p$ ,  $S_p$  and  $S_r$ . Fix s for Model 1 with constraints represented by (3) as described in Example 4.1, and variable s for Model 2 with constraints presented in (4) discussed in Examples 4.2 and 4.3.

# Step 2 (Define Problem)

Define the cost function and constraints. Set the problem as a mixed integer problem (MIP) and execute MIP by using appropriate solvers such as Knitro, Bonmin, SCIP [1] or BARON. For Model 1, the variables  $Q_p$ ,  $Q_r$ , m and n are all defined as integers. However, for Model 2, s is defined as a continuous variable.

### Step 3 (Solve Problem)

Solve Problem min  $f_1$ , subject to the constraints of Model 1 represented by (3). The solver provides the solution  $Q_p$ ,  $Q_r$ , m and n with optimized value of cost.

# Step 4 (Solver Validation)

Utilise different solvers such as Knitro, Bonmin, SCIP and BARON in MATLAB environment [6] and AMPL to solve MIP and to cross-check the optimum solution obtained.

Repeat the same process with Model 2 with constraints represented by (4).

# 4 Numerical experiments, results and sensitivity analysis

This section provides numerical examples to demonstrate the reverse logistics models with various constraints. We used solution procedure (3.1) to optimize Models 1 and 2 by using solvers such as Bonmin, BARON, and SCIP. As our proposed model is an MIP, We require solvers capable of efficiently handling such complexities that arise in MIP. We tested the

above-listed solvers in Matlab and AMPL, and Bonmin appears to have been the most efficient in terms of computational time and accuracy in approximating the solution. Our analysis performs the computations on an HP Evo laptop equipped with 16 GB of RAM and a Core i7 processor running at 4.6 GHz.

Case I (Model 1): When s is fixed


**Example 4.1** Table 1 presents the relationship among costs, new item cycle n, repair cycle m and time cycle T when  $D_p = 100$ ,  $D_r = 43$ , s = 0.7, q = 0.8,  $h_r = 1.2$ , and  $S_r = 1$  respectively with p and r takes values from 40% to 80% and holding cost  $h_p$  and setup cost  $S_p$  switching between 1.6 and 10. These parameter values are taken from the Forkan et al [10] that belongs to the tyre industry. We aim to minimize Model 1 represented by (3).


p	r	$h_p$	$S_p$	$Q_p$	$Q_r$	m	n	$C(Q_p, Q_r, m, n)$	$T_r$	$T_p$	CPU time[sec]
0.4	0.4	1.6	10	35	15	3	3	51.78	1.05	1.05	6.2
0.4	0.4	10	1.6	5	3	15	21	62.81	1.05	1.05	3.3
0.6	0.6	1.6	10	35	15	3	3	68.78	1.05	1.05	4.2
0.6	0.6	10	1.6	5	3	15	21	79.81	1.05	1.05	1.05
0.8	0.8	1.6	10	35	15	3	3	85.78	1.05	1.05	4.2
0.8	0.8	10	16	5	3	15	21	96.81	1.05	1.05	4.11

Table 1: Example-4.1 – Numerical performance of model (1) when  $R_1 + R_2 \ge D_r$ .

According to the assumptions of Model 1 in our experiment, the repairable stock rate  $R_1 + R_2$  is always more than the demand rate  $D_r$ . As observed in Table 1, when the repair stock rate increases while demand remains constant—meaning more items are received at the repair depot than are demanded—the optimal cost also rises. This is illustrated in the first, third, and fifth rows of the table, where the cost increases from 51.78 to 85.78 and, similarly, from 62.81 to 96.81 in rows 2, 4, and 6. Additionally, when the setup cost exceeds the holding cost, the overall cost is minimised, as seen in rows 1, 3 and 5, compared to rows 2, 4 and 6.

**Example 4.2** Parameter values are taken from the Saadany [21] p = 0.667, q = 1, r = 0.667, Dp = 200, Dr = 200, Sp = 144, Sr = 72, hp = 12 and hr = 3.CPU time = 46 sec





We compared the optimal cost 923.9 from our model by taking the similar parameters from Saadany [21] and compared it with their result their optimal cost = 1635 with m = 2and n = 1. As mentioned earlier, the common practice is to consider combinations of m and n to get the optimal solution. Saadany [21] used various combinations of m and n to optimize cost and did not consider the combination m = 4 and n = 3, which turns out to be the optimal solution by our model. Also, Figure 3 shows that the inventory cost increases as s increases with other parameters fixed, meaning we are sending more items to the repair depot, which results in increased cost.

### **Case II (Model 2):** When s is not fixed and $R_1 + R_2 \ge D_r$

In this case, we control s to send the remaining items from the repair depot to fulfil the demand. Table 2 presents the relationship among costs, new item cycle n, repair cycle mand time cycle T and s.

**Example 4.3** In this example, we compare our model 2 (4) with the model introduced in [21, Model I in Section 6.3]. This test example is introduced in [29], and further analysis is conducted in [21] using their model I. The following parameter settings are taken in the example, where  $D_p = D_r = 1000$ , p = r = 0.8, q = 1,  $h_p = 2$ ,  $h_r = 2$ ,  $S_p = 20$  and  $S_r = 5$ . To facilitate the comparison, we slightly adjust the parameters, setting  $C_{1s} = C_{1r} = 0$  (cost per unit of lost demand for new and repaired items).

The optimum solution occurs with the combination m = 1, n = 7 and s = 0.2. The optimum cost is 924.07 when  $Q_p = 143$  and  $Q_r = 1001$ . We solved both models and obtained the optimum solution. After considering the parameters that provide us with the optimal solution, we created surfaces for both models, which are demonstrated in Figure 4. In this case, model 2 (4) successfully approximates a better solution than the Model I introduced in [21, Model I in Section 6.3].




Figure 4: Comparison of optimal solutions for Model (4) and [21, Model I in Section 6.3].

**Example 4.4** This test example is taken from Swati et al [27]. We assume that the demands in the primary and secondary markets are  $D_p = 1500$  and  $D_r = 2500$ , respectively, over cycle T. The collection percentage of available returns from new items is p = 0.8, and after sorting, the recovery rate is q = 0.8. Similarly, the collection percentage of available returns from the secondary market is r = 0.8. After sorting, the recovery rate is  $0 \le s \le 1$ , where s is a variable that depends on the number of items needed to fulfil the demand in the secondary market.

Assume that the holding costs per unit time for supply and repair depots are  $h_p = 5$  and  $h_r = 2$ , respectively. The setup costs for new and repaired items are  $S_p = 2400$  and  $S_r = 1400$ , respectively. We aim to determine the batch sizes  $Q_p$  and  $Q_r$ , and the cycle numbers for repaired items m and new items n, such that the average holding cost per unit time over cycle T is minimised. Therefore, we seek to minimise the cost of Model 2 with constraints given by equation (4) with the above parameter settings.

For the input settings in Example 4.4, the following results are obtained: total cost value 6372.5 where  $Q_p = 1500$ ,  $Q_r = 1250$ , m = 2, n = 1 and s = 0.77. The results indicate that to minimise the cost to 6372.5, the supply depot requires one cycle with a batch size of 1500 for new items and two cycles with 1250 for repaired items. The value s = 0.77 indicates that after sorting, the recovery rate must be at least 77% to meet the secondary market demand  $D_r$ . The algorithm's implementation takes approximately 1 second of computational time. The total cost function with the optimum solution is demonstrated in Figure 5.

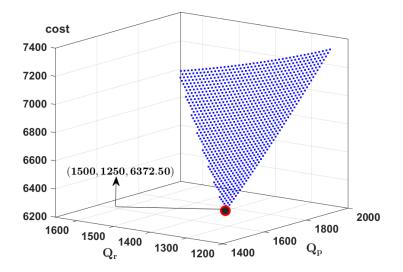


Figure 5: The total cost function with respect to  $Q_p$  and  $Q_r$  for Example 4.4 when m = 2, n = 1, and s = 0.77.

# 4.1 Sensitivity Analysis

A sensitivity analysis is conducted to examine the impact of parameter changes on the optimal solution. The results of this analysis are illustrated in Figures 6-8. The observations are as follows.

- (i) Figure 6(a) demonstrates that keeping  $S_r$  fixed results in no changes to the repair cycle m. However, when  $S_p$  decreases, there is a significant increase in the number of procurement cycles n, which reduces inventory costs by 44%. Therefore, the optimal strategy is to increase the number of new procurement cycles as the setup cost  $S_p$  decreases. Next, when  $S_p$  is fixed and  $S_r$  decreases, the number of repair cycles m significantly increases, which reduces total inventory costs by 33%. Hence, the best strategy is to increase the number of repair cycles as the setup cost  $S_r$  decreases, which is demonstrated in Figure 6(b).
- (ii) Figure 7(a) illustrates the impact on inventory cost when all parameters are fixed and the supply depot holding costs  $(h_p)$  is increased. When  $h_p = 5$ , the optimal cost is 6372.5, achieved with the combination m = 2 and n = 1. If  $h_p$  increases to 15, the cost rises by 72.36%, with the new optimal combination being m = 3

and n = 2. The supply depot deals with both new and repaired items, so any changes to  $h_p$  could potentially affect m and n. The cost continues to increase as  $h_p$  increases further, resulting in more cycles in the repair and supply depots. In this scenario, optimality is achieved with fewer cycles in repair and supply as  $h_p$  increases. Figure 7(b) illustrates the impact of the other two variables,  $Q_p$  and  $Q_r$ , and their relationship with the total cost as  $h_p$  changes.

(iii) A similar trend is observed when the repair shop holding cost  $(h_r)$  increases. We increased  $h_r$  by up to 45%, demonstrating the effect in Figures 8(a) and (b). Just as with  $h_p$ , it is recommended to reduce the number of cycles in the repair depot as  $h_r$  increases while keeping the repair setup costs fixed.

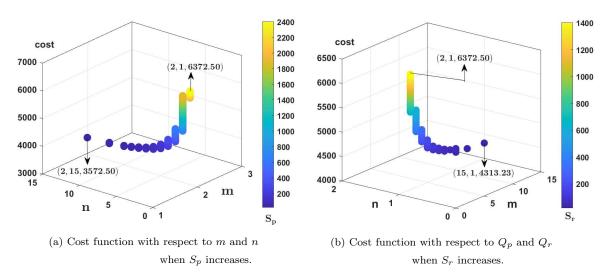


Figure 6: Effect of  $(S_p)$  and  $(S_r)$  on logistics inventory cost, repair and procurement cycles and batch sizes.

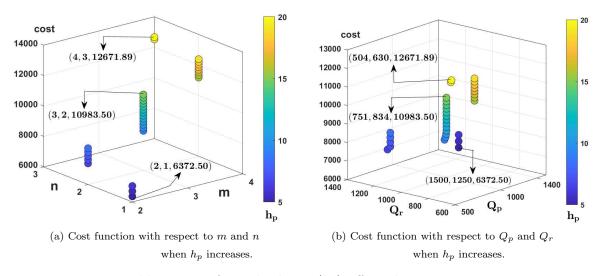


Figure 7: Holding cost of supply depot  $(h_p)$  effects logistics inventory cost, repair and procurement cycles and batch sizes.

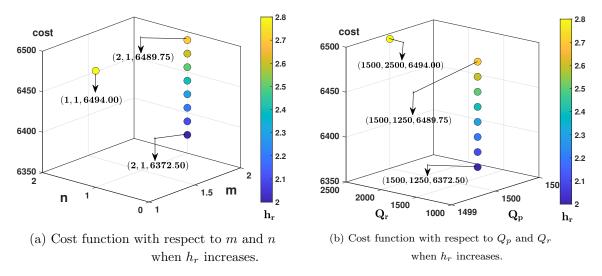


Figure 8: Holding cost of repair depot  $(h_r)$  effects logistics inventory cost, repair and procurement cycles and batch sizes.

# 4.2 Multiobjective Optimization Problems

Multiobjective optimization problems (MOPs) involve optimizing two or more conflicting objectives simultaneously, requiring a trade-off to find a set of optimal solutions known as the Pareto front. Scalarization techniques are a common approach to solving MOPs by transforming them into single-objective optimization problems. This transformation is achieved by combining the multiple objectives into a single scalar objective function, often using weights, which optimizes one objective while treating the others as constraints with specified bounds, and the achievement scalarizing function, which measures the distance from a solution to a reference point like the utopia point. These techniques facilitate the use of traditional optimization algorithms and provide decision-makers with a means to explore different trade-offs and prioritize conflicting objectives. In our analysis, we used two well-known scalarization techniques: the feasible-value-constraint approach [4] and the Pascoletti Serafini approach [17]. By applying both methods, we can evaluate the efficiency and robustness of our solutions, ensuring a complete approximation of the Pareto front. The descriptions of the approaches are given below.

The feasible-value-constraint approach : For  $\hat{x} \in X$ , X be a feasible set, and

$$W := \left\{ w \in \mathbb{R}^{\ell} \mid w_i > 0, \sum_{i=1}^{\ell} w_i = 1 \right\}.$$

Then  $w \in W$  and

$$w_k f_k(\hat{x}) = w_i f_i(\hat{x}), \ \forall i = 1, 2, ..., \ell, \ i \neq k.$$
 (6)

We assume a weight verifies (6). We define the scalar problem as

$$(P_{\hat{x}}^k) \begin{cases} \min_{x \in X} & w_k f_k(x), \\ \text{subject to} & w_i f_i(x) \le w_k f_k(\hat{x}), \quad i=1,2,\dots,\ell, \quad i \ne k. \end{cases}$$
(7)

The Pascoletti-Serafini approach: Another form of the parameter-based scalarization approach introduced in [17], is also known as goal-attainment method (see, [7, 15]). For a given  $w \in W$ , the scalarization is stated as follows.

(PS) 
$$\min_{(\alpha,x)\in\mathbb{R}\times X} \alpha, \quad \text{s.t.} \ w_i \left(f_i(x) - u_i\right) \le \alpha, \quad \forall \ i = 1, \dots, \ell,$$
(8)

where  $\alpha \in \mathbb{R}$  is a new variable and u is a utopia vector associated with Problem (P).

**Example 4.5** In this example, our objective is to solve multiobjective model 3 given by equation (5) for the following parameter configuration:  $D_p = 200$ ,  $D_r = 50$ , p = 0.3, q = 0.9, r = 0.8,  $S_p = 4$ ,  $S_r = 1$ ,  $h_p = 1$ ,  $h_r = 1$ , and  $c_w = 1$ . Our goal is to approximate the Pareto front of multiobjective model 3 using the scalarization methods  $P_{\hat{x}}^k$  and PS.

The point (-70, -1000) is taken as the reference point (utopia vector). Equal grids  $w_i$  are supplied in Algorithms 1 and 2 (see, Appendix 7) to obtain the Pareto points, which are shown in Figure 9. The information about the number of grid points, subproblems, and solutions is presented in Table 3. The scalarization approach  $P_{\hat{x}}^k$  approximated 278 Pareto points, and one dominated point, and this dominated point is removed from the front. Due to the local solver trap within the neighbourhood, results approximate non-Pareto point. One can use the global solver to avoid dominated points; however, a global solver takes a long computation time compared to the local solver.

$\frac{1}{\hat{x}} \text{ and } f S.$											
Methods	Number of	Number of	Time	Pareto	Non-Pareto						
	grid points	$\operatorname{subproblems}$	in seconds	points	points						
$P^k_{\hat{x}}$	200	600	600	278	1						
PS	200	200	52	200	Nil						

Table 3: Numerical performance of  $P_{\hat{x}}^k$  and PS.

Analysis: In Figures 9(a) and 9(b), the objective function  $f_1$  represents total inventory costs, with its range under the current parameter settings being between \$48.50 and \$69.60. On the other hand,  $f_2$  represents waste disposal costs, ranging from \$6.00 to \$46.00. It's evident that  $f_1$  has the lowest cost at \$48.50, while waste cost is at its highest at \$46.00. If one aims to decrease inventory costs, there's a need to compromise on waste costs. For the interval of inventory costs from \$59.00 to \$69.60, waste costs remain constant at \$6.00. This occurs when s = 1 within this interval. The Pareto front is a continuous front, with some gaps due to algorithmic challenges in approximating certain points on the front. We utilise the Pascoletti-Serafini approach (*PS*) and the objective constraint approach  $P_{\hat{x}}^k$ , two well-known scalarisation approaches, to solve the multiobjective optimisation problem. General algorithms for both methods are detailed in the appendix section (see Appendix 7). While the algorithm employs multiple solvers, solving the problem proves challenging due to its mixed-integer multiobjective nature [5]. We found that the local solver 'Bonmin' performs well in approximating Pareto solutions.

Waste and inventory costs largely vary depending on s, as illustrated in Figures 9(c) and 9(d). When s is small, waste costs increase, indicating that not all items are considered for repair even if they meet the conditions for repair. However, waste costs decrease when s = 1, meaning all repairable items are considered for repair.

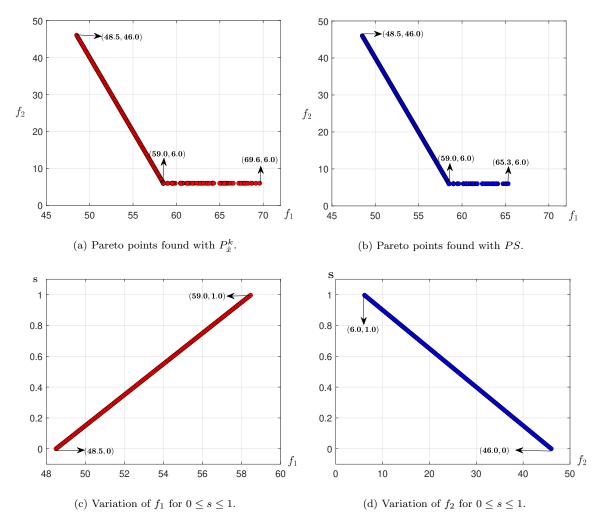


Figure 9: Equal grids are provided in Algorithm. (Red) circles indicate the Pareto front obtained by  $P_{\hat{x}}^k$  in (a), (blue) circles depict Pareto points found by (PS) in (b), variation of  $f_1$  and  $f_2$  over  $0 \le s \le 1$  is shown in (c) and (d).

# 5 Conclusion

This study explores a reverse logistics inventory model dealing with different primary and secondary market demands. While existing literature has examined separate markets for new and repaired items, none have addressed the issue of incorporating different types of parameters (integers and continuous) together. In our paper, we developed three models with distinct constraints and used Mixed Integer Programming to find the optimal solution. Model 3 incorporated environmental factor disposal cost as a secondary objective function. Additionally, we utilized two scalarization techniques to identify the Pareto front of the multiobjective problem. This gives manufacturers the flexibility to create their own optimal policy by balancing holding costs and repair costs.

For future work, we suggest expanding on the deterministic and stochastic Economic Production Quantity (EPQ) model for reverse logistics by using MIP and environmental factors such as GHG and energy consumption.

Acknowledgment: We acknowledge Chatgpt(3.5) AI tools, which are used to rephrase, edit and polish the author's written text for spelling, grammar, or general style.

# 6 Funding and/or Conflicts of interests/Competing interests

The authors declare that no funds, grants, or other support were received during the preparation of this manuscript. The authors have no relevant financial or non-financial interests to disclose.

# References

- [1] Achterberg T. (2009). SCIP: Solving constraint integer programs. *Mathematical Pro*gramming Computation, 1(1), 1-41.
- [2] Bazan E., Jaber M.Y., & Ahmed El Saadany M.A. (2015). Carbon emissions and energy effects on manufacturing-remanufacturing inventory models. *Computers & Industrial Engineering*, 88, 307-316.
- [3] Bazan E., Jaber M.Y., & Zanoni S. (2016). A review of mathematical inventory models for reverse logistics and the future of its modeling: An environmental perspective, *Applied Mathematical Modelling*, 40, 4151-4178.

- [4] Burachik R.S., Kaya C.Y., & Rizvi M.M. (2017). A new scalarization technique and new algorithms to generate Pareto fronts. SIAM Journal on Optimization, 27(2) 1010– 1034.
- [5] Burachik R.S., Kaya C.Y., & Rizvi M.M. (2022). Algorithms for Generating Pareto Fronts of multiobjective Integer and Mixed-Integer Programming Problems. *Engineering Optimization*, 54(8), 1413-1425.
- [6] Currie, J. D. (2014). Practical Applications of Industrial Optimization: From High-Speed Embedded Controllers to Large Discrete Utility Systems. *Doctoral dissertation*, *Auckland University of Technology*.
- [7] Dutta J., & Kaya, C.Y. (2011). A new scalarization and numerical method for constructing weak Pareto front of multiobjective optimization problems. *Optimization*, 60(8-9), 1091-1104.
- [8] Dobos I., & Richter K. (2004). An extended production/recycling model with stationary demand and return rates. *International Journal of Production Economics*, 90(3), 311–323.
- [9] Dobos I.,& Richter K. (2006). A production/recycling model with quality consideration. International Journal of Production Economics, 104(2), 571–579.
- [10] Forkan, M., Rizvi, M. M., & Chowdhury, M. A. M. (2022). Multiobjective reverse logistics model for inventory management with environmental impacts: An application in industry. *Intelligent Systems with Applications*, 14, 200078.
- [11] Hasanov, P., Jaber, M.Y., & Zolfaghari, S. (2012). Production remanufacturing and waste disposal model for the cases of pure and partial backordering. *Applied Mathematical Modelling*, 36 (11), 5249–5261.
- [12] Jaber M.Y., & El. Saadany A.M. (2009). The production, remanufacture and waste disposal model with lost sales. *International Journal of Production Economics*, 120(1), 115-124.
- [13] Jaber M.Y., Glock C.H., & El Saadney A.M. (2013a). Supply chain coordination with emissions reduction incentives. *International Journal of Production Research*, 51(1), 69-82.
- [14] Kozlovskaya N., Pakhomova K., & Richter K. (2017). A note on "The EOQ repair and waste disposal model with switching costs". *Computers & Industrial Engineering*, 103, 310-315.

- [15] Miettinen K.M. (1999). Nonlinear multiobjective optimization (Vol. 12). Springer Science & Business Media.
- [16] Nahmias, S., & Rivera, H. (1979). A deterministic model for a repairable item inventory system with a finite repair rate. *International Journal of Production Research*, 17(3), 215-221.
- [17] Pascoletti, A., & Serafini, P. (1984). Scalarizing vector optimization problems. Journal of Optimization Theory and Applications, 42(4), 499-524.
- [18] Richter K. (1996a). The EOQ repair and waste disposal model with variable setup numbers. European Journal of Operational Research, 95(2), 313-324.
- [19] Richter K. (1996b). The extended EOQ repair and waste disposal model. International Journal of Production Economics, 45(1-3) 443-447.
- [20] Richter K. (1997). Pure and mixed strategies for the EOQ repair and waste disposal problem. OR Spektrum, 19(2), 123-129.
- [21] El Saadany, A. M. (2009). Inventory management in reverse logistics with imperfect production, learning, lost sales, subassemblies, and price/quality considerations. Toronto: Ryerson University.
- [22] El Saadany A.M., & Jaber M.Y. (2010). A production/remanufacturing inventory model with price and quality dependent return rate. *Computers & Industrial Engineering*, 58, 352-362.
- [23] El Saadany, A.M., & Jaber, M.Y. (2013). How many times to remanufacture? International Journal of Production Economics, 143(2) 598-604.
- [24] Schrady D.A. (1967). A deterministic inventory model for repairable items. Naval Research Logistics, 14(2) 391-398.
- [25] Singh, S.R., & Sharma, S. (2016). A production reliable model for Deteriorating products with random demand and inflation. *International Journal of Systems Science: Operations & Logistics*, Pages 330-338. DOI:10.1080/23302674.2016. 1181221.
- [26] Singh, S. R., Sharma, S.& Kumar, M. (2020). A reverse logistics model for decaying items with variable production and remanufacturing incorporating learning effects. *International Journal of Operational Research*, 38(3), 422-448.
- [27] Sharma, S., Singh, S. R., & Kumar, M. (2021). A reverse logistics inventory model with multiple production and remanufacturing batches under fuzzy environment. *RAIRO-Operations Research*, 55(2), 571-588.

- [28] Teunter, R. H. (2001). Economic ordering quantities for recoverable item inventory systems. Naval Research Logistics 48(6), 484–495.
- [29] Teunter, R. H. (2004). Lot-sizing for inventory systems with product recovery. Computers & Industrial Engineering 46(3), 431–441.

# 7 Appendix

7.1  $C(Q_p, Q_r, m, n)$  formulation.

The calculations for the cost function (1) based on Figure 2 are as below.

$$Area \text{ KLM} = \frac{\text{KL.LM}}{2} = \frac{Q_p^2}{2D_p}.$$

$$Area \text{ NOS} = \frac{\text{NO.OS}}{2} = \frac{Q_r^2}{2D_r}.$$

$$Area \text{ XYF} = \frac{\text{XF.YF}}{2} = \frac{T_p^2 pq D_p}{2} = \frac{R_1 T_p^2}{2}.$$

$$Area \text{ ABC} = \frac{\text{AC.BC}}{2} = \frac{Q_r^2 sr D_r}{2D_r^2} = \frac{Q_r^2 R_2}{2D_r^2}.$$

$$Area \text{ BCDE} = \text{ BC} \times \text{ BD} = \frac{Q_r^2}{D_r} \left(1 - \frac{R_2}{D_r}\right).$$

$$Area \text{ DEGF} = \text{ DE} \times \text{ DF} = \frac{Q_r}{D_r} (YF - YD) = \frac{Q_r}{D_r} \left(T_p R_1 - (Q_r + (m-1)Q_r \left(1 - \frac{R_2}{D_r}\right))\right).$$

Adding all areas, the inventory cost function is given as

$$\begin{split} C(Q_p,Q_r,m,n) &= \frac{1}{T} \Bigg[ mS_n + nS_p + \left(\frac{Q_pT_p}{2} + \frac{Q_rT_r}{2}\right)h_p + \left[\frac{R_1T_p^2}{2} + \frac{R_2T_rQ_r}{2D_r} + \frac{(m-1)}{2}T_rQ_r\left(1 - \frac{R_2}{D_r}\right) + T_r\left(T_pR_1 - Q_r - (m-1)\left(1 - \frac{R_2}{D_r}\right)Q_r\right) \Bigg]h_r \Bigg], \end{split}$$

where,  $T = T_p + T_r$ ,  $R_1 = pqD_p$  and  $R_2 = srD_r$ .

# 7.2 Algorithms

We present Algorithms 1 and 2 which are used in Example-4.5 to generate the Pareto fronts for the scalarization approaches  $(P_{\hat{x}}^k)$  and PS, respectively.

# Algorithm 1

# Step 1 (Input)

Set all parameters that stated in Example-4.5.

### Step 2 (Determine the individual minima)

Solve min  $f_i$ , i = 1, 2, subject to the constraints given in model (5) for parameter settings stated in Example-4.5, and obtain solutions  $(\bar{Q}_{p_i}, \bar{Q}_{r_i}, \bar{m}_i, \bar{n}_i, \bar{s}_i)$ , for i = 1, 2, respectively.

### Step 3 (Generate weighted parameters)

In this step, we generate weight parameters  $w_i$ . Following the weight generation technique given in [5, Step 3 of Algorithm 3], we generate weights considering the boundary solution obtained in Step 1.

## Step 4 (Locate $\hat{x}$ )

Find  $\hat{x}$  that solves an additional problem  $\min_{x \in X} w_k f_k(x)$ , s.t.  $w_i f_i(x) = w_k f_k(\hat{x})$ , for some k.

**Step 5** Choose  $w = (w_1, 1 - w_1)$ , which generated from Step 3.

- (a) Find  $\hat{x}_k = (Q_{p_k}, Q_{r_k}, m_k, n_k, s_k)$  that solves Problems  $(P_{\hat{x}}^k), k = 1, 2$ .
- (b) Determine weak efficient points :
  - (i) If  $\bar{x}_1 = \bar{x}_2$ , then set  $\bar{x} = \bar{x}_1$  (an efficient point) and store the efficient point.
  - (ii) If  $\bar{x}_1 = \bar{x}_2$  does not hold, then any dominated point is discarded by comparing these 2 solutions. Store non-dominated Pareto points.

# Step 6 (Output)

All recorded points are Pareto points of Example-4.5.

# Algorithm 2

Steps 1-3 Same as Algorithm 1.

- **Step 4** Choose  $w = (w_1, 1 w_1)$  which generated from Step 3. Set utopia point u = (-70, -1000).
  - (a) Find  $\hat{x}_k = (Q_{p_k}, Q_{r_k}, m_k, n_k, s_k)$  that solves Problems (*PS*).
  - (b) Determine weak efficient points and record the points.

Step 5 (Output)

All recorded points are Pareto points of Example-4.5.

# 7.3 Alternative flow model

This is the alternative inventory flow diagram for new and returned (new and repaired) items. In this model, the flow of new and used items in the supply depot is represented in parallel as opposed to side by side, which is common in literature. The inventory cost can also be minimised by the cost function represented by equation (9).

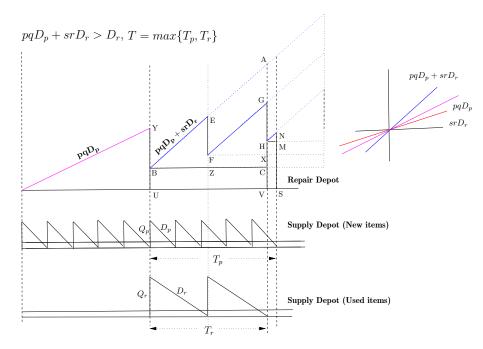


Figure 10: The behaviour of inventory for produced, collected, used and repaired items over the interval T in parallel flow.

Mathematical expression of the inventory cost function is as follows.

$$f_A(Q_p, Q_r, m, n, s) = \frac{1}{T} \left[ mS_n + nS_p + \left(\frac{Q_pT_p}{2} + \frac{Q_rT_r}{2}\right)h_p + \left[\frac{1}{2m}T_r^2(R_1 + R_2) + \frac{(m-1)}{2}T_rQ_r\left(\frac{R_1 + R_2}{D_r} - 1\right) + \frac{1}{2}(T_p - T_r)^2(R_1 + R_2) + (T_p - T_r)\left(T_r(R_1 + R_2) + R_1T_p - (m+1)Q_r\right) + (R_1T_p - Q_r)T_r\right]h_r \right], \quad (9)$$

where,  $T = T_p + T_r$ ,  $R_1 = pqD_p$  and  $R_2 = srD_r$ .

Author Contributions: Both authors contributed to the study conception and design. Material preparation, data collection and analysis were performed by Dr Indu Bala Wadhawan and Dr Mohammed Mustafa Rizvi.