

# LeanBin: Harnessing Lifting and Recompilation to Debloat Binaries

Igor Wodiany

igor.wodiany@manchester.ac.uk  
Department of Computer Science  
University of Manchester  
Manchester, United Kingdom

Antoni Pop

antoni.pop@manchester.ac.uk  
Department of Computer Science  
University of Manchester  
Manchester, United Kingdom

Mikel Luján

mikel.lujan@manchester.ac.uk  
Department of Computer Science  
University of Manchester  
Manchester, United Kingdom

## ABSTRACT

To reduce the source of potential exploits, *binary debloating* or *specialization* tools are used to remove unnecessary code from binaries. This paper presents a new binary debloating and specialization tool, LeanBin, that harnesses lifting and recompilation, based on *observed execution traces*. The dynamically recorded execution traces capture the required subset of instructions and control flow of the application binary for a given set of inputs. This initial control flow is subsequently augmented using *heuristic-free* static analysis to avoid overrestricting the input space; and the further structuring of the control flow and translation of binary instructions into a subset of C, enables a lightweight generation of the code that can be recompiled, obtaining LLVM IR and a new debloated binary. Unlike most debloating approaches, LeanBin enables both binary debloating of the application and shared libraries, while reusing the existing compiler infrastructure. Additionally, unlike existing binary lifters, it does not rely on potentially unsound heuristics, used by static lifters, nor suffers from long execution times, a limitation of existing dynamic lifters. Instead LeanBin combines both heuristic-free static and dynamic analysis. The run time during lifting and debloating SPEC CPU2006 INT benchmarks is on average 1.78×, normalized to the native execution, and the debloated binary runs with an average overhead of 1.21×. The percentage of gadgets, compared to the original binary, has a geomean between 24.10% and 30.22%, depending on the debloating strategy; the code size can be as low as 53.59%. For the SQLite use-case, LeanBin debloats a binary together with its shared library, and generates a debloated binary that runs up to 1.24× faster with 3.65% gadgets.

## CCS CONCEPTS

• **Software and its engineering** → **Software maintenance tools**; **Source code generation**; • **Security and privacy** → **Software reverse engineering**; *Software security engineering*.

## KEYWORDS

Binary debloating, Binary specialization, Binary lifting, Control-flow recovery, Recompilation, Heuristic-free static analysis

## 1 INTRODUCTION

To reduce potential exploits, *binary debloating* or *specialization* tools, are used to remove unnecessary code from binaries. For example, an average program uses only around 5% of the whole *libc* [41]. Debloating can be done either on the application source code or directly at the binary level, and often needs to be applied to production-optimized stripped binaries (no source code, no symbol table). When working only with binaries, the debloating tools can

*lift* the executable binary, or parts of, into a well-supported programming language, such as C, or into an intermediate representation (IR). This IR can either be low-level and designed specifically for binary analysis [30] or high-level and general-purpose, e.g., LLVM IR [32]. In this way, binary lifting can complement, and facilitate the reuse of analyses and transformations implemented in existing tools.

However, correctly recovering a high-level representation from existing binaries that are optimized, stripped or obfuscated remains a challenge. The majority of binary lifters rely on static heuristics to recover the control flow of the application. However, the precision of those heuristics is limited, and static lifters often impose a number of restrictions on binaries [5]. Dynamic lifting overcomes the limitations associated with static lifters, offering a compelling alternative for precise and correct lifting that does not rely on heuristics. However, fully dynamic lifting has an intrinsic execution time overhead, as the lifting happens as an extra computation during the binary execution. For example, a recent dynamic lifter, BinRec [4], reports that lifting of a single SPEC 2006 benchmark takes on average 50 hours (about 2 days) as it uses S<sup>2</sup>E [14] that emulates the entire environment. Moreover, the purely dynamic approach may not lift all relevant parts of the application, overrestricting the application input space.

This paper presents a new lifter-based debloating approach, and the tool LeanBin, that combines dynamic control-flow tracing based on observed execution with heuristic-free static lifting. Our approach relies on a lightweight tracer to record control flow, executed basic blocks and their boundaries, with low overhead. This run-time information, an *observed execution trace*, captures the required subset of instructions of the binary for a given set of inputs. Observed execution traces represent expected execution paths, and are further augmented with heuristic-free static analysis, to avoid overrestricting the application input space. Subsequently the recovered CFG is structured, and statically lifted into a subset of C. The lifted C can be then used to generate LLVM IR, or compiled into a debloated binary which may also include the executed parts of the shared libraries.

One of the key advantages of our approach is to combine the precision offered by fully dynamic solutions with faster lifting times more common with static lifters, by using both static and dynamic lifting techniques. By doing this, LeanBin fills the gap in the design space between static and dynamic lifters (see Section 2). LeanBin makes a limited set of assumptions, enabling lifting of highly optimized, position-independent, stripped, dynamically linked binaries. The robustness of LeanBin is evaluated with the SPEC CPU2006 INT benchmark suite, a complex use-case based on SQLite (Section 4)

and with multi-threaded Phoenix benchmarks [42]. To summarize, we make the following contributions:

- LeanBin is the first debloater for multi-threaded AArch64 executables that utilizes hybrid lifting, a novel lifting approach that combines heuristic-free static and dynamic analysis.
- LeanBin can correctly debloat optimized binaries from the SPEC CPU2006 INT benchmark suite. The lifting overhead is as small as 1.05× with a 1.78× geomean, normalized to native execution.
- We show that the number of gadgets, compared to the original binary, has a geomean between 24.10% and 30.22%, depending on the debloating strategy, going down up to 16.65% when using ARM PAC pointers. The size reduction has a geomean of 53.59% for a single execution trace.
- For an SQLite-based use-case, by debloating a binary together with its dependency, LeanBin generates a debloated binary that runs between up to 1.24× faster with as little as 4.47% gadgets.

## 2 RELATED WORK

### 2.1 Software Debloating

Table 1 summarizes the main related work on program debloating and specialization.

*Type* – The debloating can be done either based on static [2, 56] or dynamic [10, 31] information, or the combination of both [37, 57]. The majority of dynamic and hybrid tools suffer from the runtime overhead that is experienced only once when the software is debloated and subsequent runs are free from the overhead. However, three solutions [39, 41, 45] require an additional runtime, resulting in an overhead in every execution. The LeanBin tool, as well as BinRec [31], the closest related tool, both suffer from the dynamic overhead. However, LeanBin overhead is lower compared to BinRec.

*Source* – The debloating can be done either at the source code [2, 37] or binary level [1, 56]. Source code debloating simplifies analysis and transformations, compared to tools targeting binaries, however, it cannot be applied to production binaries. Both LeanBin and BinRec [31] combine a wider applicability of binary approaches with an ability to reuse existing source code analysis and transformations.

*Scope* – The debloating can be done at the user application level, libraries or kernel level, or combination of any of them. The only tool targeting the kernel space is DIABLO [11], with remaining tools targeting either user application (e.g., [2, 10, 31]), libraries [39, 41] or both [37, 56]. LeanBin enables creating specialized binaries which combine both the user binary and its dependencies.

*Granularity* – The debloating can either remove whole functions [7, 45] or only individual basic blocks [2, 31, 56]. Shredder [36], an exception, specializes function arguments at the call site. LeanBin enables fine-grained debloating at the basic block level.

### 2.2 Binary Lifting

Table 2 summarizes the related work on binary lifting, whereas Hazelwood [25] and Wenzel *et al.* [51] provide context on dynamic binary modification and binary rewriting.

*Static Lifting* – The majority of lifters (as listed in Table 2) use purely static analyses, with their limitations previously highlighted in Altinay *et al.* [4]. All of them, but RetDec [6] and FoxDec [50] that target C, lift binaries into LLVM IR. Whereas RetDec and FoxDec focus on generating high-quality C code, LeanBin generates C code that be recompiled to generate debloated binaries and LLVM IR, avoiding dependencies on a specific IR version.

Compared to static lifters, LeanBin precisely lifts observed execution traces, and uses heuristic-free static analysis, at the potential expense of a lower code coverage. For ARM, currently no existing static lifter can lift SPEC CPU benchmarks. RecDec represents the best-case scenario, but even then, it does not support recompilation. For x86, even popular static lifters, such as McSema [38] and rev.ng [19], fail to lift and recompile SPEC CPU 2006 benchmarks [4].

*Lifting for Dynamic Binary Instrumentation* – A number of dynamic binary instrumentation (DBI) and translation (DBT) tools internally lift binary instructions to LLVM IR. HQEMU [27] and DBILL [33] dynamically lift Tiny Code Generator (TCG) IR into LLVM IR, to enable JIT compilation of the emulated binary inside QEMU [9]. Instrew [21], generates LLVM IR as a part of their instrumentation and translation process without QEMU. It translates native instructions directly into LLVM IR, improving the overall performance and reducing the runtime overhead. Direct comparison with HQEMU is not included, as Instrew is on average faster, making the extra comparison redundant.

Neither of the approaches generates code that can be compiled into a standalone binary, and they only use LLVM IR internally, so changes to the code are not persistent. Moreover, the task of lifting within DBI/DBT is simpler compared to the one of LeanBin. The control-flow recovery is more localized (super block granularity), and the whole control-flow graph is not considered. Instrew follows only direct branches, and stops lifting on function calls, returns and indirect branches. It then releases control back to DBI to dispatch the next basic block and start the lifting process again. Our approach generates a single coherent program that can be run without a dynamic dispatcher. Finally, the coverage of LeanBin is no worse than the one of HQEMU and Instrew, as the latter two tools lift executed traces, but do not use static analysis.

*Dynamic Lifting* – The only current state-of-art dynamic lifter, BinRec [4], attempts to achieve precise and correct lifting with an ability to achieve higher code coverage. It uses the S<sup>2</sup>E [14] platform to execute the binary and collect execution traces, either using concrete or concolic execution. Such an approach suffers from the exceedingly high lifting overhead, especially when the concolic execution is used to maximize the coverage.

On the other hand, LeanBin, dynamically collects observed execution traces, and augments such dynamically collected CFG with heuristic-free static analysis to further expand the coverage - a novel hybrid scheme not used by any other lifter. Our tool achieves high performance by executing the binary natively under a light-weight tracer, as opposed to using S<sup>2</sup>E, and defers the actual lifting of instructions and additional analysis until the execution is finished. Moreover, LeanBin provides basic support for multi-threaded applications, something not available with BinRec.

*Lifting of Observed Execution Traces* – TOP [55] (trace-oriented programming) proposes lifting of observed execution traces into C with embedded assembly. If static analysis is not considered,

	Type	Source	Scope	Granularity	Policy	Overhead	Year
Squeeze [18]	D, S	Binary	P, L	Basic Blocks	Analysis + Traces	No	2000
Squeeze++ [16]	D, S	Binary	P, L	Basic Blocks	Analysis + Traces	No	2005
DIABLO [11, 17, 49]	D, S	Binary	P, L, K	Basic Blocks	Analysis + Traces	No	2005
OCCAM [34]	S	LLVM IR	P	Basic Blocks	Analysis	No	2015
Feature [29]	S	Bytecode	P	Functions	Analysis	No	2016
JRed [28]	S	Bytecode	P, L	Functions	Analysis	No	2016
Shredder [36]	D, S	Binary	P	Call Sites	Analysis	Run-time	2018
TOSS [12]	D	Binary	P	Basic Blocks	Config + Traces	Debloating	2018
Piece-wise [41]	D, S	LLVM IR†	L	Functions	Analysis	Load-time	2018
CHISEL [26]	S	C/C++	P	Basic Blocks	Analysis + Config	Debloating	2018
Perses [48]	S	C/C++	P	Basic Blocks	Analysis	No	2018
BinRec [31]	D	Binary	P	Basic Blocks	Traces	Debloating	2018
RAZOR [40]	D, S	Binary	P	Basic Blocks	Analysis + Traces	Debloating	2019
Shrinking [57]	D, S	Binary	P, L	Functions	Analysis + Traces	Debloating	2019
BinTrimmer [43]	S	Binary	P	Basic Blocks	Analysis	No	2019
ASSS [15]	S	LLVM IR	P, L	Functions	Analysis	No	2019
BlankIt [39]	D	Binary	L	Functions	Analysis	Run-time	2020
Nibbler [1]	S	Binary	P, L	Functions	Analysis	No	2020
DomGad [53]	S	C/C++	P	Basic Blocks	Analysis	No	2020
Guided Linking [7]	S	LLVM IR	P, L	Functions	Analysis	No	2020
ANCILE [10]	D	LLVM IR	P	Basic Blocks	Traces	Debloating	2021
LMCAS [3]	S	LLVM IR	P	Basic Blocks	Analysis + Config	No	2021
TRIMMER [2]	S	LLVM IR	P	Basic Blocks	Analysis + Config	No	2021
uTrimmer [56]	S	Binary	P, L	Basic Blocks	Analysis	No	2022
TLASR [45]	D	Binary	P, L	Functions	Analysis	Run-time	2023
OCCAMv2 [37]	D, S	LLVM IR	P, L	Basic Blocks	Analysis	No	2023
<b>LeanBin</b>	<b>D, S</b>	<b>Binary</b>	<b>P, L</b>	<b>Basic Blocks</b>	<b>Analysis + Traces</b>	<b>Debloating</b>	<b>2024</b>

Type: D - Dynamic, S - Static. Scope: P - Program, L - Library, K - Kernel. † Only shared libraries source code required.

**Table 1: Comparison of different software debloating tools.**

	Static Lifters*	HQEMU [27]	Instrew [21]	BinRec [4]	TOP [55]	LeanBin
CFG Recovery	Static	Dynamic	Dynamic	Dynamic	Dynamic	Hybrid
Code Coverage	Complete	Trace	Trace	Varies	Trace	Varies
Instructions Lifting	Static	Dynamic	Dynamic	Dynamic	Dynamic	Static
Debloating	No	No	No	Yes	No	Yes
Execution	-	QEMU	Native	S <sup>2</sup> E	QEMU	Native
Generates Binary	Yes	No	No	Yes	Yes	Yes
Architectures	Many	Many	x86, AArch64, RV64	x86	x86	AArch64
Multi-Threaded Binaries	-	Yes	Yes	No	Yes	Yes
Run Time Overhead	-	Low	Low	High	N/A	Low

\* Static Lifters: McSema [38], reopt [23], SecondWrite [5, 20], mctoll [54], LLBT [47], RevGen [13], rev.ng [19], RetDec [6], FoxDec [50]

**Table 2: Comparison of different binary lifting tools.**

conceptually, this approach is similar to LeanBin, however the generated code is more restricted. TOP relies heavily on inlined assembly to represent the body of basic blocks, and only uses C to represent control flow and function interfaces. Conversely, LeanBin lifts all instructions to a high-level representation, making it suitable for integration with existing compiler infrastructure and debloating tools. Direct performance comparisons with TOP are not feasible as the source code of TOP is not available. The overhead of TOP is expected to be higher than LeanBin as TOP relies on QEMU. Finally,

the overhead of TOP has been only evaluated against *coreutils* that are relatively simpler compared to SPEC CPU.

### 2.3 Binary Rewriting

Finally, we discuss the two most recent advances in binary rewriting Increment CFG patching (ICFGP) [35] and Armore [8]. CFGP proposes a number of heuristics and an efficient fallback mechanism for recovery of indirect branch targets. Whereas Armore proposes a low-overhead dynamic resolution of indirect branches in rewritten binaries without using heuristics. At the same time,

LeanBin aims for a heuristic-free indirect control-flow recovery, however it cannot rely on dynamic fallback mechanism, as the target of the indirect branch may not be lifted.

### 3 DESIGN AND IMPLEMENTATION

Figure 1 presents the overview of LeanBin. The debloating and lifting steps are split between dynamic and static parts. The dynamic part, (A) concrete execution tracer that collects information about executed basic blocks and indirect branches targets from unmodified binaries. The tracer outputs a control-flow graph (CFG) – representing control flow between basic blocks within a function, and among functions – of the executed application.

The static part consists of: (B) heuristic-free control-flow analysis to recover unexplored direct branches and expand the CFG; (C) control-flow structuring to refine the recovered graph; (D) instructions lifter that disassembles instructions into TCG IR, a QEMU intermediate representation, and then converts them into C statements. Those C statements and the recovered CFG are then combined to generate a **recompilable** C code. The C code is then passed to the clang compiler to generate LLVM IR (or other compilers/IRs), avoiding dependencies on a specific IR version. The following sections discuss in more detail the main components of LeanBin.

#### 3.1 Dynamic Tracing

To collect observed execution traces from an application, the target binary is run under a concrete execution tracer. The purpose of the tracer is twofold: firstly, to record all basic blocks and their boundaries as executed, and secondly to instrument indirect branches for which the target addresses cannot be recovered statically.

To keep the overhead low, we only collect information that cannot be precisely recovered using static analysis. For basic blocks ending with direct branches (b, b1, b.cond on AArch64), we only record the beginning and end of the block, as the target can be calculated directly from the instruction encoding. For indirect branches (br, b1r, ret), the tracer inserts a light-weight hash-map based instrumentation that dynamically records targets of those branches.

*Multi-Threading Support* – To enable the collection of execution traces efficiently in multi-threaded applications, we record the control flow of each thread in a per-thread private data cache. Once the application terminates, the control-flow information from all the threads is merged. This enables lock-free operation, while the threads are running. Moreover, for multi-threaded applications, we dynamically collect, using the tracer, entry points to new threads (e.g., calls to pthread\_create).

*Merging Multiple Execution Traces* – Since the tracer controls placement of the binary, the address of each basic block (or its offset from where the binary is loaded) can be fixed among runs. By doing that, CFGs generated by multiple runs can be merged. The final CFG consists then of all the unique basic blocks discovered across all runs, and a union of all the edges discovered for every basic block for each run.

#### 3.2 Heuristic-Free Static Analysis

As using only observed execution traces can overrestrict inputs supported by the application, LeanBin uses heuristic-free static

analysis to augment the dynamically discovered CFG. Whereas, classical static lifters, use analysis that may be unsafe for arbitrary binaries, this work proposes the use of heuristic-free analysis, that only follows unexplored direct control flow, leaving exploration of indirect branches to the dynamic tracer. The purpose of such approach is to avoid over exploration of new functionality, that would reduce benefits of the binary debloating, but allowing small variation to inputs, to avoid excessive execution failures, e.g., program failing due to different memory alignment of the same input parameters.

The main idea behind LeanBin’s static analysis is to first follow an unexplored side of a conditional branch and then to continue the exploration of conditional and unconditional control flow until it is no longer possible or desired. This gives a rise to two different debloating strategies. First, that follows all direct branches (b, b.cond and b1 on AArch64) until an indirect branch is reached and the heuristic-free analysis is no longer possible. Second, that follows only direct branches that are not marked as function calls (b and b.cond only), and that stops when branch-and-link is discovered – further recovery no longer desired to avoid overexploration. In both cases “dangling” branches of the CFG (branches that cannot reach end of the program) are pruned.

The first strategy supports more inputs, at the expense of reduced debloating, whereas the second one is intended to support a wider range of similar inputs without excessively adding new functionality. For the rest of the paper, we refer to those strategies as **DS2** (includes functions calls) and **DS1** (excludes function calls) respectively, with **D** denoting use of only dynamic traces with static analysis disabled. The example of all described strategies is presented in Figure 2.

#### 3.3 Control Flow Structuring

Lowering the abstraction level, compiler optimizations (e.g., *tail call* optimization) and deliberate obfuscation can change the original structure of the CFG. Such new structure often does not fit into the structure of high-level representations, such as C and LLVM IR. For example, no arbitrary control flow transfers between functions are allowed. To enable lifting, the control flow has to be first structured to fit into that high-level representation.

We define the CFG as a directed graph with nodes representing basic blocks, and edges representing the control flow transitions between those blocks. The edge can represent either regular control flow transitions (solid edges in Figure 3) or function calls (dotted edges). This is to allow representing the whole program, with all its functions, as a single graph. The return edges are implicit, as in a standard call graph representation.

We build the initial CFG with information collected by the execution tracer. Firstly, any control-flow edges coming out from basic blocks ending with a branch-and-link instruction (b1 and b1r on AArch64) are marked as function call edges; step (I) in Figure 3. An additional edge pointing to the next address, after the function call, is added to indicate that the execution resumes after the call once the function returns. This additional edge is later removed if the called function is shown to never return (e.g., call to `exit`).

Next, the CFG is split into functions, using initial call edges; step (II). Each basic block (represented as a circle:  $B1 \dots B8$ ) gets assigned

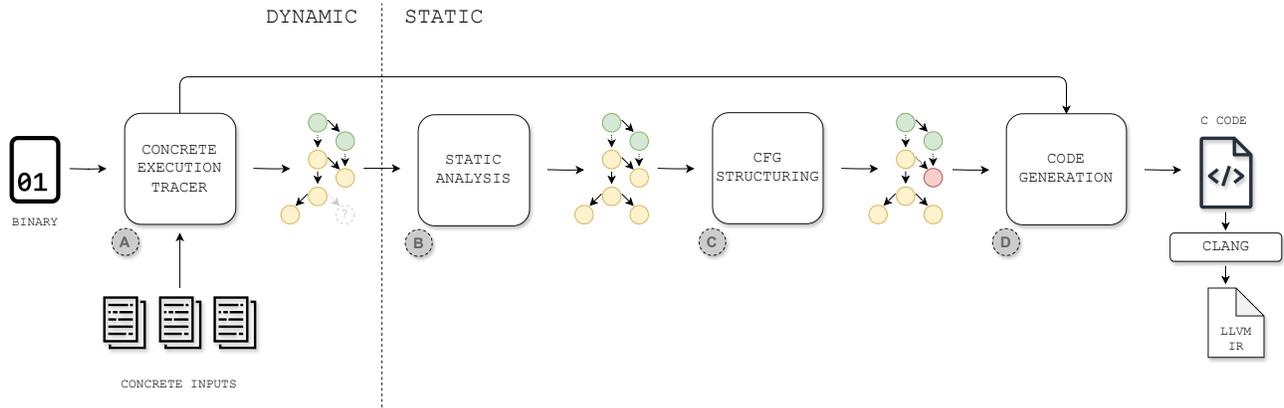


Figure 1: Debloating steps of LeanBin: (A) Dynamic concrete execution tracing; (B) Static heuristic-free analysis of the control flow; (C) Control-flow structuring; (D) Instructions lifting and code generation.

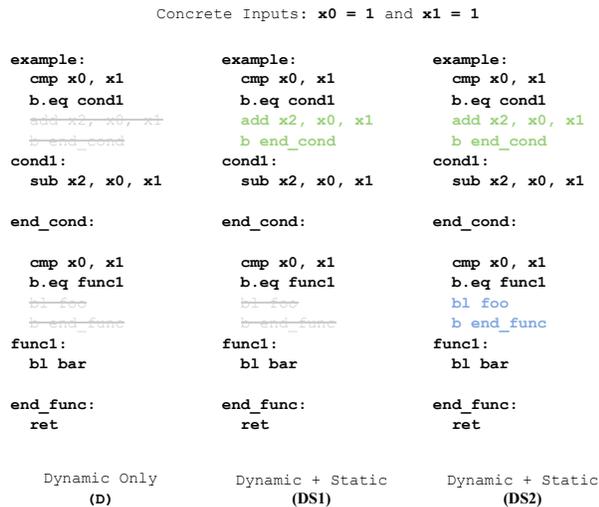


Figure 2: Static CFG analysis — step (B) in Figure 1. Instructions in bold represent dynamically discovered code (with  $x_0 = 1$  and  $x_1 = 1$  inputs), in green dynamically and statically with strategy DS1, and in blue with DS2.

an ID (color), the same ID indicates blocks in the same functions. Such CFG may not be correct, as some edges (e.g.,  $(B_8, B_3)$ ) cross the function boundary.

The problematic control flow edges are then promoted to function calls, effectively performing a function outlining and creating new functions. The promotion happens when the CFG branches to the block that is already called by another block, or when the branch crosses the function boundary. The splitting of CFG into functions and the promotion continues until there are no more edges left to promote.

Red bold arrows indicate edges most recently promoted to function calls. Functions discovered at every stage are listed at the bottom, with an index of the first basic block of the function in the circle. The example starts with an initial CFG in (I). Functions are first extracted, resulting in 4 functions being discovered in (II). An edge  $(B_8, B_3)$  — highlighted in red — is promoted to a call in (III), as there is already a function call edge  $(B_1, B_3)$ . In (IV),  $(B_7, B_8)$  is promoted due to the mismatch of IDs, and as a result  $(B_5, B_8)$  is promoted as well — both changes highlighted in red;  $B_8$  is added to the functions' list, as it now heads a newly discovered function. Finally, in (V), functions are re-assigned IDs, based on newly promoted edges.

The LeanBin tool does not aim to recover all function boundaries present in the original application, as in some cases that would be impossible due to optimizations applied by the compiler, such as function inlining. The aim is to create a control flow structure that can be represented as valid C or LLVM IR. In exchange, LeanBin does not rely on the symbol table or debug information to recover functions boundaries.

### 3.4 Instructions Lifting

Once the control flow is structured, the extracted functions boundaries are passed to the instruction lifting and code generation engine, alongside the original binary, to be disassembled and lifted into C. To avoid creating lifting rules for all possible hardware instructions, we firstly disassemble the code into TCG IR, an IR used by QEMU [9], and then lift those IR operations into simple C statements. The disadvantage of indirectly lifting instructions is that complex binary instructions are translated into a sub-optimal sequences of IR operations. Nevertheless, those can often be optimized by modern compilers. However, TCG IR does not yet directly support floating-point instructions, and instead provides a framework for their emulation, significantly increasing the overhead. As a mitigation, we replace selected floating-point helpers with actual floating-point operations. However, in general, benchmarks that rely heavily on floating-point operations suffer a more significant performance degradation, after recompilation, than integer ones.

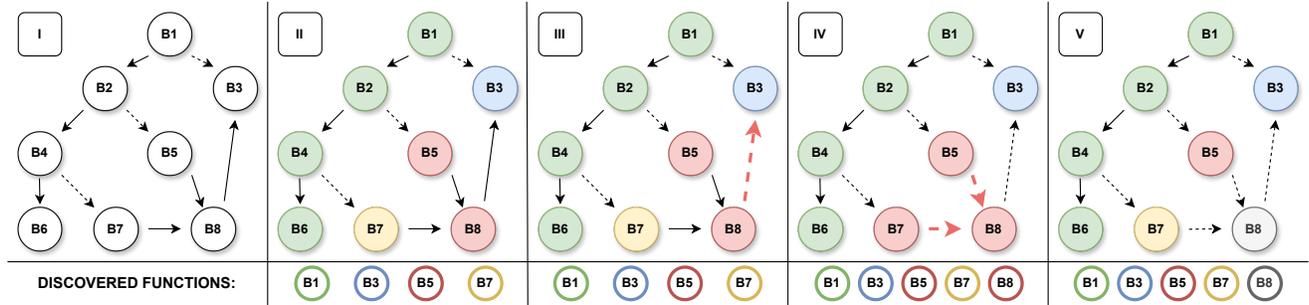


Figure 3: Control flow graph structuring – step (C) in Figure 1.

Moreover, in TCG IR, all variables representing hardware registers are considered global, and adopting such representation in C or LLVM IR limits the optimizations that the compiler can perform. To alleviate this problem, we localize selected global variables, that we know cannot be accessed outside the function scope. The localization is possible, as those variables represent registers in the original binary, hence additional assumptions, that are not true about arbitrary global variables – e.g., lack of potential side effects – can be made. This enables *liveness analysis*, similar to one used for registers allocation. In addition, such analysis can use additional knowledge based on the architecture ABI, about the scope of the registers.

Finally, the code generation engine takes lifted instructions and generates C code that can be subsequently recompiled. The current implementation does not map stack slots back to the local variables. Instead, the code implements a memory model that consists of two stacks: native and emulated. The native stack stores return addresses, register spills, as well as any additional data introduced by the lifting process. The emulated stack, implemented as space allocated with malloc in memory, holds any stack data, which include local variables, of the original binary.

*Undiscovered Control Flow* – As LeanBin may not lift the whole binary, this may cause the debloated application to fail. For example, if a specific input tries to execute a path that was not executed or discovered in the lifting process. We implement two mechanisms to handle it. The fail-safe approach guards unexplored branches with assert statements, so that the recompiled binary stops in a controlled manner, if an unexplored path is taken. This is a desired behavior, especially if such inputs are indicative of security attacks. A transparent approach, on the other hand, removes unexplored branches in the code, effectively promoting some of the conditional branches to unconditional jumps. This may improve the performance and size of the recompiled binary, as the compiler can remove dead code that the unexplored paths relied on. However, this mode assumes that the application input never forces it to take unexplored paths. Should an unexplored path be taken, the program would either produce an incorrect result, hang or fail with a segmentation fault. Such an approach could be used with comfort zones [44].

## 4 EVALUATION

The evaluation assesses LeanBin using a number of benchmarks and compares it against other existing lifting tools. More specifically the paper answers the following questions:

- **RQ1:** How does LeanBin compare to BinRec, Instrew and RetDec in terms of lifting time?
- **RQ2:** How does the code coverage of proposed lifting strategies varies?
- **RQ3:** How does the recompilation impact the run time of debloated binaries?
- **RQ4:** How does debloating impact the number of gadgets and code size?
- **RQ5:** How does debloating impact multi-threaded applications and linked libraries?

### 4.1 Experimental Setup

**4.1.1 Hardware Setup.** The experiments run on a Gigabyte R272-P30 Ampere Altra server with 80 ARMv8.2 cores (AArch64) and 512GB of RAM. This ARM machine runs Ubuntu 20.04 LTS with kernel version 5.15.0. The evaluation of BinRec performance executes on a 10-core Intel i9-7900X machine running at 3.30 GHz with 64 GB of RAM, Ubuntu 20.04 LTS and kernel version 5.15.0.

**4.1.2 Software Setup.** The proposed design is implemented as a plugin to a dynamic binary modification (DBM) tool MAMBO [24] – also see Wodiany *et al.* [52] for more information. The plugin acts as a concrete execution tracer and performs subsequent analysis, structuring, disassembly and lifting. For disassembly into TCG IR, we modified the QEMU-based UNICORN library [22] used for processor emulation. Since QEMU cannot be built as a standalone library, using UNICORN enables LeanBin to have access to actively maintained and updated ISA support for many architectures.

The evaluation compares LeanBin with Instrew, RetDec and BinRec. However, RetDec does not support debloating, and Instrew does not generate a standalone binary. For AArch64, there is no static lifter capable of executing complex benchmarks; RetDec is the most complete tool available. The direct comparison does not include BinRec as it does not support AArch64.

**4.1.3 Benchmarks.** We run LeanBin, Instrew, BinRec and RetDec with default settings on a single core with SPEC CPU2006. We selected SPEC CPU2006 because it is the main benchmark that works

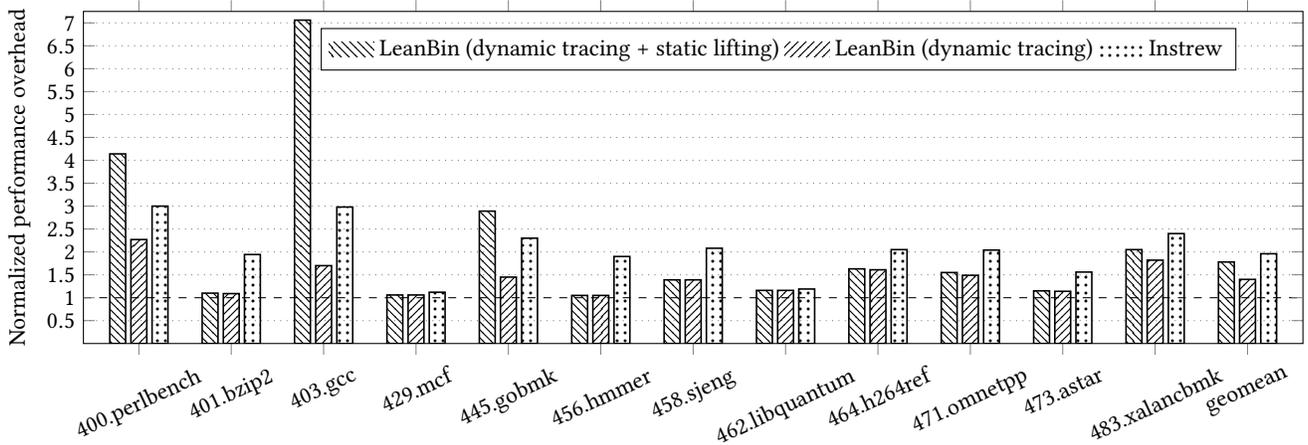


Figure 4: Overhead of debloating binaries — steps (A – D) and (A) in Figure 1 — with LeanBin and lifting with Instrew for SPEC CPU2006 INT benchmarks normalized to the native execution time on a single core.

	Native [s]	LeanBin [s]	Instrew [s]	BinRec Intel [h]†	RetDec (static) [s]
400.perlbench (C)	124	231	372	>24	157
401.bzip2 (C)	99	109	193	6.18	7
403.gcc (C)	38	270	114	-	1159
429.mcf (C)	303	322	339	2.97	1
445.gobmk (C)	173	330	263	0.23	3
456.hmmmer (C)	173	182	329	-	-
458.sjeng (C)	392	546	816	13.34	16
462.libquantum (C)	216	250	258	0.2	3
464.h264ref (C)	328	533	673	>24	178
471.omnetpp (C++)	245	380	499	1.23	32
473.astar (C++)	189	216	294	14.93	-
483.xalancbmk (C++)	178	365	428	0.31	896
geomean	177	285	337	1.68	31

† Execution time measured on the Intel platform with *test* inputs.

Table 3: Absolute single-core lifting time [seconds] of Instrew, RetDec (static) and BinRec [hours], and execution time of the native binary of LeanBin on SPEC CPU2006 INT benchmarks.

across Instrew, BinRec and RetDec. We compiled the benchmarks with gcc 9.4.0 as position-independent dynamically linked executables with the `-O3` optimization level and with `-fno-tree-vectorize`. The vectorization is disabled to avoid measuring the overhead of the sub-optimal disassembly of vector instructions into TCG IR. Following the evaluation of BinRec [4], we focus on the integer benchmarks. As TCG emulates floating-point operations, including the results for SPEC2006 FP would mainly measure the overhead of emulating floating-point with integer instructions. All experiments check the correct execution. As LeanBin currently does not support C++ exceptions, the *omnetpp* benchmark executes and generates results correctly, but the exit is not clean due to an uncaught exception. For BinRec, we compile SPEC benchmarks for x86 (32-bits) with gcc 4.8.0, to replicate the setup in Altinay *et al.* [4].

To stress the multi-threaded capabilities of LeanBin we use Phoenix [42] benchmarks. The suite evaluates map reduce applications on multi-core systems and takes advantage of all 80 cores.

The compiler optimization level was set to the default `-O3`. We excluded *histogram* as it encounters a segmentation fault even when running natively, and *kmeans* as it enters a deadlock condition under MAMBO. BinRec does not support multi-threaded applications, and Instrew fails with the multi-threaded benchmarks due to unsupported system calls.

## 4.2 Experimental Results

**4.2.1 RQ1: Debloating Time.** The execution time is an important consideration for the design of a debloating tool, as well as lifters. When debloating is used for security, and lifting to aid in reverse engineering, faster execution improves the productivity of security experts. The existing literature acknowledges this, and performance is always a key part of the evaluation [2, 3, 26].

Our binary debloating approach aims to reduce the overhead of running the binary under the tool compared to other dynamic approaches, hence reducing the overall lifting and debloating time.

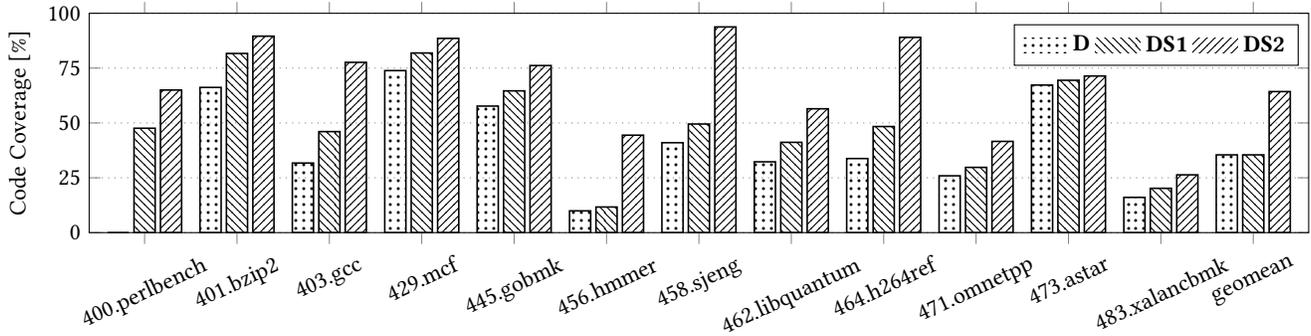


Figure 5: Coverage of SPEC CPU2006 INT binaries debloated with LeanBin utilizing D, DS1 and DS2 strategies.

To evaluate this overhead, we run SPEC CPU2006 INT benchmarks for *ref* inputs with and without our tool. We picked the one *ref* input with the longest native execution time for each benchmark. This follows the evaluation approach of BinRec that: “reports the maximum time among the reference workloads” [4]. In Figure 4, we plotted two overheads for each benchmark (expressed as a slowdown normalized to the native execution): the dynamic overhead of the control tracing, and the overhead of the entire process. We only evaluate the lifting overhead with **D** strategy, as the additional heuristic-free static analysis has a negligible ( $< 1s$ ) execution time.

The slowdown of the dynamic tracing varies between  $1.05\times$  and  $2.27\times$  with a geomean of  $1.40\times$ . However, for the entire process, the slowdown can be as high as  $7.06\times$ . For the majority of benchmarks, the static part has a negligible impact on the overall execution time, with an exception for *gcc* and *gobmk*, where at least half of the lifting time is spent on lifting basic blocks into IR. Those two benchmarks have the highest number of uniquely executed basic blocks, so that the static lifting dominates the overall execution time compared to smaller binaries. However, since the static lifting performance depends only on the application size and number of lifted basic blocks, it can be considered a *fixed* overhead, as it is not a function of the run time of the binary.

With dynamic control flow tracing, there are three factors impacting the execution time: (a) inherent overhead of the tracing tool; (b) overhead introduced by instrumenting basic blocks via callbacks; (c) overhead of running code with instrumentation. In order to minimize the first factor, we use a lightweight low-overhead DBM tool, MAMBO. The second factor depends on the number of unique basic blocks executed within the application. Each new basic block has to be scanned and recorded and instrumented if necessary. Finally, executing code with instrumentation increases the overall instruction count, and slows down the application. We minimize this overhead by instrumenting only indirect branches, which are less prevalent, and use a lightweight hash-map based instrumentation written in assembly.

To better quantify gains from using our lifting, we compare LeanBin with Instrew, BinRec and RetDec. All results were presented in Figure 4 and Table 3. As BinRec does not currently support AArch64 and was tested with smaller inputs, we do not aim to provide a definite comparison with it, but rather to show that even for small *test* inputs, resulting in a native execution of few seconds without

any tool, BinRec performs significantly slower than LeanBin and Instrew running with *ref* inputs.

Although Instrew does not enable lifting and recompilation into a standalone binary, and only generates LLVM IR on the fly, it is currently the closest project that our tool can be compared against. It generates LLVM IR and can lift observed execution. For all the benchmarks, LeanBin features a lower dynamic overhead, as it does not have to perform any lifting on the runtime. However, for benchmarks with a very large number of lifted basic blocks, (e.g., *gcc*), LeanBin incurs a large static lifting time, resulting in a higher overall overhead compared to Instrew.


This shows that we offer a competitive performance over Instrew despite offering more functionality; full lifting. Moreover, once the binary code is lifted and debloated, subsequent runs of the new binary do not require a tracer, thus lowering the execution overhead, something Instrew does by non-persistent caching of the lifted code.

Finally, for completeness, we present results for a static lifter, RetDec. In most cases, RetDec outperforms dynamic approaches, but it runs slower with the most complex binaries: *gcc* and *xalancbmk*. Note that RetDec does not guarantee that the lifted code is correct, and it cannot be debloated. It also fails to lift 2 tested benchmarks.


**4.2.2 RQ2: Code Coverage.** LeanBin relies on concrete inputs and heuristic-free static analysis to recover the control flow, however complete coverage is not a goal. The value of LeanBin, however, lies elsewhere, as it is a binary debloating tool, and enables a number of tasks such as: creating hardened binaries that can execute more securely for a set of inputs, or trace analysis allowing to ensure that the program does not exhibit insecure behavior on a given path.

We measure the coverage of binaries for given references inputs with **D**, **DS1** and **DS2** strategies. The coverage is measured as a percentage of the instructions lifted from the `.text` section of the original binary. The results are presented in Figure 5.

More irregular and complex applications that have to account for many different cases (e.g., *gcc*, *xalancbmk*) exhibit a low code coverage when only dynamic analysis is used, whereas more data-oriented applications that apply similar operations to all the data, e.g., *bzip2*, *mcf*, have a much higher dynamic coverage. At the same time, adding static analysis can provide significant benefits, when high coverage is required, with some applications reaching 90% or more. It is also important to note that 100% is not achievable using

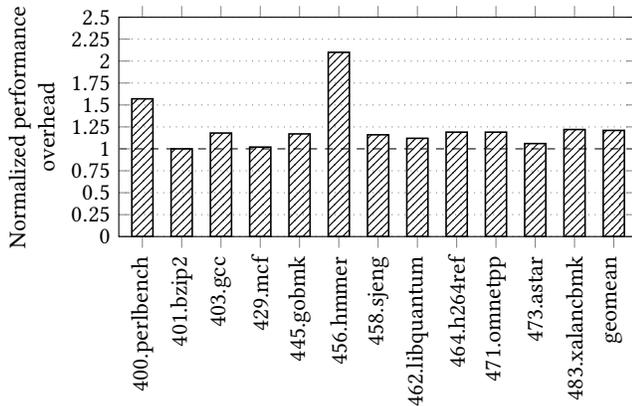

**Figure 6: Execution time of debloated binaries (DS2 strategy) normalized to the native execution of SPEC CPU2006 INT benchmarks.**

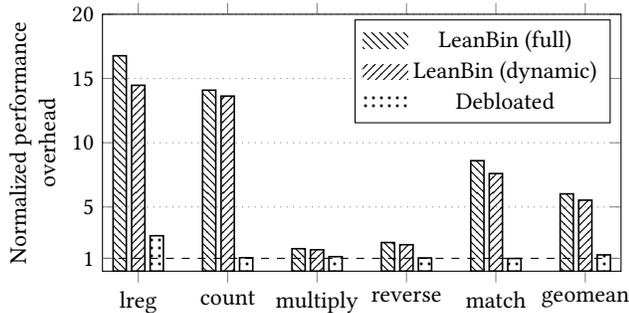

**Figure 7: Overhead of debloating — steps (A – D) and (A) in Figure 1 — Phoenix benchmarks with LeanBin and performance of debloated binary normalized to the native execution running on 80 cores.**

the current metric, as some code is never lifted, e.g., the `_start` function or any dead code. *perlbenc* is excluded in strategy **D**, as lifting it with a single trace overrestricts the new binary, causing failures due to changes in memory alignments.

Finally, this paper presents a number of strategies, but the analysis provided can be expanded in the future to suit specific applications and required guarantees. The proposed approach shows that combining dynamic and static analysis is a promising approach when code coverage, lifting correctness and execution time have to be balanced. As such, LeanBin is the first hybrid lifter combining static and dynamic analysis.

**4.2.3 RQ3: Execution Time of Debloated Binaries.** Figure 6 assesses the performance after debloating and recompiling the lifted code with `clang` and `-O3`. We only evaluate the **DS2** strategy as the largest amount of code is generated, reducing optimization opportunities and providing the most pessimistic run time. The geommean slowdown compared to the native execution without lifter is around 1.21 $\times$ . The reported geommean slowdown in Altinay *et al.* [4] for

BinRec is similar to using LeanBin. Benchmarks relying on floating-point helpers (e.g., *hmmr*) have a higher overhead compared to mainly integer only benchmarks (e.g., *bzip2*, *mcf*) that achieve native or near-native performance (1.00 – 1.02 $\times$ ).

The major factor impacting the performance is the inefficiency of mapping binary into TCG IR. Using the IR simplifies the process, as only a limited number of TCG operations has to be translated into C. However, complex binary instructions are turned into a sequence of TCG operations (e.g., integer comparison) or helper functions (e.g., floating-point emulation) that cannot always be recompiled back into the original code.

**4.2.4 RQ4: Attack Surface and Code Size Reduction.** In this section, we evaluate the ability of LeanBin to create specialized and hardened binaries that can be used to run for a set of defined inputs.

**Attack Surface Reduction** — To quantify the increase in the security of the application, we use Ropper [46], a tool for counting gadgets in a binary, and present results in Table 4. *Gadgets* are sequences of instructions that can be chained by a malicious actor in order to gain control over the system. Thus, a specialized binary with a smaller number of gadgets is more secure against return-oriented programming attacks.

We debloated SPEC CPU2006 INT benchmarks with selected *ref* inputs (the same as previously) and recompiled the code, creating specialized input-dependent binaries using the three proposed strategies. The number of gadgets expressed as the percentage of gadgets of the original binary varies between 4.96% and 78.84%, with geommean of 24.10% to 30.22%. Unsurprisingly, the largest benchmarks see the biggest reduction in the number of gadgets, as they cover many different conditions for various inputs. The smallest benchmark, *mcf*, with the highest code coverage results in the smallest reduction.

Since the lifted code can be recompiled with any tool, we can take further advantage of AArch64 architectural features to improve the security of the code. Since ARMv8.3, there is support for Pointer Authentication Code (PAC). Modern compilers can take advantage of this feature, for example, to check that return addresses from functions have not been modified. To quantify the effect of PAC, we compiled the lifted code with PAC enabled to further reduce the number of gadgets. For many benchmarks, the extra reduction was relatively modest, but comes at zero cost to developers. However, for some of the benchmarks the remaining number of gadgets was halved, bringing the total reduced number of gadgets for *xalancbmk* (strategy **D**) to 2.12%.

**Code Size Reduction** — Finally, we measure the code size (.text section size) of specialized binaries recompiled with `-O0`. The results are presented in Table 4. The code reduction, expressed as the percentage of the size of the original binary, can be as low as 18.82% with geommean of 53.59% for **D**, and 42.19% with geommean of 103.17% for **DS2**. It shows that debloated binaries not only have fewer gadgets, but in many cases feature a smaller code size. *astar* does not produce smaller code with any strategy due to combination of a 73% coverage and TCG helpers called in 71 instances limiting compiler optimizations. In the case of **DS2** the high coverage compounded with TCG inefficiencies results in larger binaries for many benchmarked, however future improvements to the disassembler can mitigate this issue.

	Debloated			Hardened			Size		
	D	DS1	DS2	D	DS1	DS2	D	DS1	DS2
400.perlbench	-	30.39%	28.52%	-	22.03%	22.13%	-	80.32%	119.87%
401.bzip2	40.30%	46.12%	50.43%	35.13%	36.42%	41.59%	74.61%	107.77%	122.29%
403.gcc	16.43%	35.96%	34.39%	10.56%	18.94%	21.27%	40.65%	68.92%	124.29%
429.mcf	70.54%	75.52%	78.84%	59.75%	61.00%	62.66%	94.83%	111.88%	120.12%
445.gobmk	47.55%	40.58%	37.05%	33.65%	20.28%	20.89%	84.92%	101.34%	123.51%
456.hmmcr	11.26%	15.41%	19.98%	8.87%	9.88%	11.96%	18.82%	25.90%	86.70%
458.sjeng	52.76%	54.01%	68.67%	37.22%	39.10%	51.00%	75.44%	59.20%	123.59%
462.libquantum	37.55%	38.80%	42.74%	32.78%	29.05%	32.57%	52.50%	66.05%	105.31%
464.h264ref	17.34%	22.29%	26.87%	13.45%	15.95%	20.09%	41.01%	68.98%	131.16%
471.omnetpp	4.96%	7.18%	6.81%	2.95%	3.94%	4.15%	38.88%	68.01%	76.17%
473.astar	55.10%	57.37%	57.37%	40.36%	41.50%	40.36%	102.86%	108.97%	113.18%
483.xalancbmk	6.79%	7.64%	6.53%	2.12%	4.81%	4.29%	33.42%	29.16%	42.19%
geomean	24.10%	28.97%	30.22%	16.65%	19.28%	21.00%	53.59%	68.25%	103.17%

Table 4: Reduction in the number of unique gadgets expressed as the percentage of gadgets of the original binary and code size expressed as the percentage of the .text section size of the original binary for SPEC CPU2006 INT benchmarks.

4.2.5 *RQ5: Additional Uses Cases.* Finally, we evaluate capability of LeanBin in lifting multi-threaded applications, and user binaries alongside their dependencies.

*Multi-threaded Applications* — Compared to BinRec (no support for multi-threaded applications) and Instrew (no debloating) LeanBin can lift multi-threaded applications. To showcase this ability, we lift, debloat and run 6 benchmarks from the Phoenix [42] benchmark suite, and present results in Figure 7. The benchmark *pca* is not included in the graph due to the short (<10ms) native execution time, which generates a disproportionate lifting overhead (>1000×).

Compared to SPEC benchmarks, the lifting overhead is higher due to Phoenix benchmarks executing on the 80 cores for a short period of time. As the compute time on each thread is relatively low, the DBM overhead dominates the overall execution time. Nevertheless, LeanBin correctly lifts all the benchmarks. The overhead after recompilation is comparable to the SPEC CPU2006 INT benchmarks, with *linear regression* being an outlier due to its overreliance on a long multiplication which is implemented as TCG helpers.

	Lib (O0)	Lib (O3)	Full
User (O0)	1.24× (6.30%)	1.01× (4.30%)	-
User (O3)	1.23× (6.50%)	1.06× (4.47%)	-
Full	-	-	0.98× (3.65%)

Table 5: Execution time speed-up (×) over the original binary and the number of gadgets expressed as the percentage of gadgets of the original binary (%) for SQLite use case.

*Debloating Including Linked Binaries* — LeanBin can be used to debloat not only application binaries, but also their dependencies, creating a more secure and faster specialized binary. We use SQLite as a use case by building a database user application (an interactive SQL shell) dynamically linked against the sqlite3 library. We then run the application with a sample database <sup>1</sup> and a compute heavy CROSS JOIN query. As a result, the new binary only contains code

<sup>1</sup><https://github.com/lerochoa/chinook-database>

that was previously executed from both the binary and the library. Since all the code now resides in a single file, the compiler is able to perform additional optimizations between the user and library code.

We ran the experiments in 5 different configurations: both SQL shell and library un-optimized; one of the components optimized; both components optimized. We also compiled together shell and library code, allowing the compiler to perform optimizations across both modules. After the debloating the percentage of the number of gadgets of the original binary and the SQLite library is between 3.65% and 6.50%. Moreover, by specializing the binary for selected inputs we can get a performance improvement (1.01× to 1.24×), showing that the debloater can be used as a post-release cross-library optimizer, even for initially optimized programs, by combining user and library code. The only case where a 1.02× slowdown is seen is for the fully optimized single binary, as the original compiler already performed cross module optimizations.

## 5 CONCLUSIONS

To debloat, specialize or understand a given application binary, it is helpful to be able to lift the executable from binary form into a well-supported and higher-level programming language, such as C, or into an intermediate representation of a compiler. Most available binary debloaters and lifters are focused on x86 architectures, with few examples targeting ARM despite its widespread occurrence.

We have presented a new tool, LeanBin, the first debloater utilizing a novel hybrid lifting that combines static heuristic-free analysis, instructions lifting and control-flow structuring with dynamic execution tracing, allowing faster lifting of real world off the shelf applications without relying on unsafe static heuristics or a slow concolic execution. LeanBin combines the precision of control flow recovery of dynamic lifters, with relatively short lifting times of static lifters. We have shown that the overhead of running binaries under LeanBin can be as low as 1.05×, with a geomean of 1.78× (1.40× for the dynamic part). Existing dynamic lifters take hours to lift one complex application and static lifters often fail. We have shown that LeanBin can debloat complex applications despite them

being optimized. At the same time, LeanBin, unlike the majority of the debloaters, combines the benefits of binary and source code debloating. We showed that the percentage of gadgets of the original binary has a geomean between 24.10% and 30.22%, becoming as low as 16.65% when using ARM PAC pointers. The code size has a geomean as low as 53.59% when only observed traces are lifted.

## ACKNOWLEDGMENTS

This research was partially supported by the UK Industrial Strategy Challenge Fund (ISCF) under the Digital Security by Design (DSbD) Programme delivered by UKRI as part of the MoatE (10017512) and Soteria (75243) projects. Mikel Luján is funded by an Arm/RAEng Research Chair award and a Royal Society Wolfson Fellowship.

## REFERENCES

- [1] Ioannis Agadakos, Nicholas Demarinis, Di Jin, Kent Williams-King, Jearson Alfajardo, Benjamin Shteinfeld, David Williams-King, Vasileios P. Kemerlis, and Georgios Portokalidis. 2020. Large-Scale Debloating of Binary Shared Libraries. *Digital Threats* 1, 4, Article 19 (dec 2020), 28 pages.
- [2] Aatira Anum Ahmad, Abdul Rafae Noor, Hashim Sharif, Usama Hameed, Shoaib Asif, Mubashir Anwar, Ashish Gehani, Fareed Zaffar, and Junaid Haroon Siddiqui. 2022. Trimmer: An Automated System for Configuration-Based Software Debloating. *IEEE Transactions on Software Engineering* 48, 9 (2022), 3485–3505.
- [3] Mohannad Alhanahnah, Rithik Jain, Vaibhav Rastogi, Somesh Jha, and Thomas Reps. 2022. Lightweight, Multi-Stage, Compiler-Assisted Application Specialization. In *2022 IEEE 7th European Symposium on Security and Privacy (EuroS&P)*. 251–269.
- [4] Anil Altinay, Joseph Nash, Taddeus Kroes, Prabhu Rajasekaran, Dixin Zhou, Adrian Dabrowski, David Gens, Yeoul Na, Stijn Volckaert, Cristiano Giuffrida, Herbert Bos, and Michael Franz. 2020. BinRec: Dynamic Binary Lifting and Recompilation. In *Proceedings of the Fifteenth European Conference on Computer Systems (Heraklion, Greece) (EuroSys '20)*. ACM, New York, NY, USA, Article 36, 16 pages.
- [5] Kapil Anand, Matthew Smithson, Khaled Elwazeer, Aparna Kotha, Jim Gruen, Nathan Giles, and Rajeev Barua. 2013. A Compiler-Level Intermediate Representation Based Binary Analysis and Rewriting System. In *Proceedings of the 8th ACM European Conference on Computer Systems (Prague, Czech Republic) (EuroSys '13)*. ACM, New York, NY, USA, 295–308.
- [6] Avast. 2022. RetDec. <https://github.com/avast/retdec> Accessed 2022-10-19.
- [7] Sean Bartell, Will Dietz, and Vikram S. Adve. 2020. Guided Linking: Dynamic Linking without the Costs. *Proc. ACM Program. Lang.* 4, OOPSLA, Article 145 (nov 2020), 29 pages.
- [8] Luca Di Bartolomeo, Hossein Moghaddas, and Mathias Payer. 2023. ARMORE: Pushing Love Back Into Binaries. In *32nd USENIX Security Symposium (USENIX Security 23)*. USENIX Association, Anaheim, CA, 6311–6328.
- [9] Fabrice Bellard. 2005. QEMU, a fast and portable dynamic translator. In *USENIX Annual Technical Conference, FREENIX Track*, Vol. 41. California, USA, 46.
- [10] Priyam Biswas, Nathan Burrow, and Mathias Payer. 2021. Code Specialization through Dynamic Feature Observation. In *Proceedings of the Eleventh ACM Conference on Data and Application Security and Privacy (Virtual Event, USA) (CODASPY '21)*. ACM, New York, NY, USA, 257–268.
- [11] Dominique Chagnet, Bjorn De Sutter, Bruno De Bus, Ludo Van Put, and Koen De Bosschere. 2005. System-Wide Compaction and Specialization of the Linux Kernel. In *Proceedings of the 2005 ACM SIGPLAN/SIGBED Conference on Languages, Compilers, and Tools for Embedded Systems (Chicago, Illinois, USA) (LCTES '05)*. ACM, New York, NY, USA, 95–104.
- [12] Yurong Chen, Shaowen Sun, Tian Lan, and Guru Venkataramani. 2018. TOSS: Tailoring Online Server Systems through Binary Feature Customization. In *Proceedings of the 2018 Workshop on Forming an Ecosystem Around Software Transformation (Toronto, Canada) (FEAST '18)*. ACM, New York, NY, USA, 1–7.
- [13] Vitaly Chipounov and George Candea. 2011. Enabling sophisticated analyses of \*86 binaries with RevGen. In *2011 IEEE/IFIP 41st International Conference on Dependable Systems and Networks Workshops (DSN-W)*. IEEE, Piscataway, NJ, USA, 211–216.
- [14] Vitaly Chipounov, Volodymyr Kuznetsov, and George Candea. 2011. S2E: A Platform for in-Vivo Multi-Path Analysis of Software Systems. In *Proceedings of the Sixteenth International Conference on Architectural Support for Programming Languages and Operating Systems (Newport Beach, California, USA) (ASPLOS XVI)*. ACM, New York, NY, USA, 265–278.
- [15] Nicolai Davidsson, Andre Pawlowski, and Thorsten Holz. 2019. Towards Automated Application-Specific Software Stacks. In *Computer Security – ESORICS 2019*, Kazuo Sako, Steve Schneider, and Peter Y. A. Ryan (Eds.). Springer International Publishing, Cham, 88–109.
- [16] Bjorn De Sutter, Bruno De Bus, and Koen De Bosschere. 2005. Link-Time Binary Rewriting Techniques for Program Compaction. *ACM Trans. Program. Lang. Syst.* 27, 5 (sep 2005), 882–945.
- [17] Bjorn De Sutter, Ludo Van Put, Dominique Chagnet, Bruno De Bus, and Koen De Bosschere. 2007. Link-Time Compaction and Optimization of ARM Executables. *ACM Trans. Embed. Comput. Syst.* 6, 1 (feb 2007), 5–es.
- [18] Saumya K. Debray, William Evans, Robert Muth, and Bjorn De Sutter. 2000. Compiler Techniques for Code Compaction. *ACM Trans. Program. Lang. Syst.* 22, 2 (mar 2000), 378–415.
- [19] Alessandro Di Federico, Mathias Payer, and Giovanni Agosta. 2017. RevNg: A Unified Binary Analysis Framework to Recover CFGs and Function Boundaries. In *Proceedings of the 26th International Conference on Compiler Construction (Austin, TX, USA) (CC 2017)*. ACM, New York, NY, USA, 131–141.
- [20] Khaled ElWazeer, Kapil Anand, Aparna Kotha, Matthew Smithson, and Rajeev Barua. 2013. Scalable Variable and Data Type Detection in a Binary Rewriter. In *Proceedings of the 34th ACM SIGPLAN Conference on Programming Language Design and Implementation (Seattle, Washington, USA) (PLDI '13)*. ACM, New York, NY, USA, 51–60.
- [21] Alexis Engelke, Dominik Okwieka, and Martin Schulz. 2021. Efficient LLVM-Based Dynamic Binary Translation. In *Proceedings of the 17th ACM SIGPLAN/SIGOPS International Conference on Virtual Execution Environments (Virtual, USA) (VEE 2021)*. ACM, New York, NY, USA, 165–171.
- [22] Unicorn Engine. 2022. Unicorn. <https://github.com/unicorn-engine/unicorn> Accessed 2022-11-06.
- [23] Inc. Galois. 2022. Reopt. <https://github.com/GaloisInc/reopt> Accessed 2022-05-12.
- [24] Cosmin Gorgovan, Amanieu d'Antras, and Mikel Luján. 2016. MAMBO: A Low-Overhead Dynamic Binary Modification Tool for ARM. *ACM Trans. Archit. Code Optim.* 13, 1, Article 14 (apr 2016), 26 pages.
- [25] Kim Hazelwood. 2011. *Dynamic Binary Modification: Tools, Techniques, and Applications*. Morgan & Claypool Publishers.
- [26] Kihong Heo, Woosuk Lee, Pardis Pashakhanloo, and Mayur Naik. 2018. Effective Program Debloating via Reinforcement Learning. In *Proceedings of the 2018 ACM SIGSAC Conference on Computer and Communications Security (Toronto, Canada) (CCS '18)*. ACM, New York, NY, USA, 380–394.
- [27] Ding-Yong Hong, Chun-Chen Hsu, Pen-Chung Yew, Jan-Jan Wu, Wei-Chung Hsu, Pangfeng Liu, Chien-Min Wang, and Yeh-Ching Chung. 2012. HQEMU: A Multi-Threaded and Retargetable Dynamic Binary Translator on Multicores. In *Proceedings of the Tenth International Symposium on Code Generation and Optimization (San Jose, California) (CGO '12)*. ACM, New York, NY, USA, 104–113.
- [28] Yufei Jiang, Dinghao Wu, and Peng Liu. 2016. JRed: Program Customization and Bloatware Mitigation Based on Static Analysis. In *2016 IEEE 40th Annual Computer Software and Applications Conference (COMPSAC)*, Vol. 1. 12–21.
- [29] Yufei Jiang, Can Zhang, Dinghao Wu, and Peng Liu. 2016. Feature-Based Software Customization: Preliminary Analysis, Formalization, and Methods. In *2016 IEEE 17th International Symposium on High Assurance Systems Engineering (HASE)*. 122–131.
- [30] Soomin Kim, Markus Faerevaag, Minkyu Jung, Seungll Jung, DongYeop Oh, JongHyup Lee, and Sang Kil Cha. 2017. Testing intermediate representations for binary analysis. In *2017 32nd IEEE/ACM International Conference on Automated Software Engineering (ASE)*. 353–364.
- [31] Taddeus Kroes, Anil Altinay, Joseph Nash, Yeoul Na, Stijn Volckaert, Herbert Bos, Michael Franz, and Cristiano Giuffrida. 2018. BinRec: Attack Surface Reduction Through Dynamic Binary Recovery. In *Proceedings of the 2018 Workshop on Forming an Ecosystem Around Software Transformation (Toronto, Canada) (FEAST '18)*. ACM, New York, NY, USA, 8–13.
- [32] C. Lattner and V. Adve. 2004. LLVM: a compilation framework for lifelong program analysis & transformation. In *International Symposium on Code Generation and Optimization, 2004. CGO 2004*. IEEE, Piscataway, NJ, USA, 75–86.
- [33] Yi-Hong Lyu, Ding-Yong Hong, Tai-Yi Wu, Jan-Jan Wu, Wei-Chung Hsu, Pangfeng Liu, and Pen-Chung Yew. 2014. DBILL: An Efficient and Retargetable Dynamic Binary Instrumentation Framework Using Llvm Backend. In *Proceedings of the 10th ACM SIGPLAN/SIGOPS International Conference on Virtual Execution Environments (Salt Lake City, Utah, USA) (VEE '14)*. ACM, New York, NY, USA, 141–152.
- [34] Gregory Malecha, Ashish Gehani, and Natarajan Shankar. 2015. Automated Software Winnowing. In *Proceedings of the 30th Annual ACM Symposium on Applied Computing (Salamanca, Spain) (SAC '15)*. ACM, New York, NY, USA, 1504–1511.
- [35] Xiaozhu Meng and Weijie Liu. 2021. Incremental CFG Patching for Binary Rewriting. In *Proceedings of the 26th ACM International Conference on Architectural Support for Programming Languages and Operating Systems (Virtual, USA) (ASPLOS '21)*. ACM, New York, NY, USA, 1020–1033.
- [36] Shabeeh Mishra and Michalis Polychronakis. 2018. Shredder: Breaking Exploits through API Specialization. In *Proceedings of the 34th Annual Computer Security Applications Conference (San Juan, PR, USA) (ACSAC '18)*. ACM, New York, NY,

- USA, 1–16.
- [37] Jorge A. Navas and Ashish Gehani. 2023. OCCAM-v2: Combining Static and Dynamic Analysis for Effective and Efficient Whole-Program Specialization. *Commun. ACM* 66, 4 (mar 2023), 40–47.
- [38] Trail of Bits. 2022. McSema. <https://github.com/lifting-bits/mcsema> Accessed 2022-05-12.
- [39] Chris Porter, Girish Mururu, Prithayan Barua, and Santosh Pande. 2020. BlankIt Library Debloating: Getting What You Want Instead of Cutting What You Don't. In *Proceedings of the 41st ACM SIGPLAN Conference on Programming Language Design and Implementation* (London, UK) (PLDI 2020). ACM, New York, NY, USA, 164–180.
- [40] Chenxiang Qian, Hong Hu, Mansour Alharthi, Pak Ho Chung, Taesoo Kim, and Wenke Lee. 2019. RAZOR: A Framework for Post-deployment Software Debloating. In *28th USENIX Security Symposium (USENIX Security 19)*. USENIX Association, Santa Clara, CA, 1733–1750.
- [41] Anh Quach, Aravind Prakash, and Lok Yan. 2018. Debloating Software through Piece-Wise Compilation and Loading. In *27th USENIX Security Symposium (USENIX Security 18)*. USENIX Association, Baltimore, MD, 869–886.
- [42] Colby Ranger, Ramanan Raghuraman, Arun Penmetsa, Gary Bradski, and Christos Kozyrakis. 2007. Evaluating MapReduce for Multi-core and Multiprocessor Systems. In *2007 IEEE 13th International Symposium on High Performance Computer Architecture*. 13–24.
- [43] Nilo Redini, Ruoyu Wang, Aravind Machiry, Yan Shoshitaishvili, Giovanni Vigna, and Christopher Kruegel. 2019. BinTrimmer: Towards Static Binary Debloating Through Abstract Interpretation. In *Detection of Intrusions and Malware, and Vulnerability Assessment*, Roberto Perdisci, Clémentine Maurice, Giorgio Giacinto, and Magnus Almgren (Eds.). Springer International Publishing, Cham, 482–501.
- [44] Martin C. Rinard. 2007. Living in the comfort zone. In *Proceedings of the 22nd Annual ACM SIGPLAN Conference on Object-Oriented Programming Systems, Languages and Applications* (Montreal, Quebec, Canada) (OOPSLA '07). ACM, New York, NY, USA, 611–622.
- [45] Florian Rommel, Christian Dietrich, Andreas Ziegler, Illia Ostapshyn, and Daniel Lohmann. 2023. Thread-Level Attack-Surface Reduction. In *Proceedings of the 24th ACM SIGPLAN/SIGBED International Conference on Languages, Compilers, and Tools for Embedded Systems* (Orlando, FL, USA) (LCTES 2023). ACM, New York, NY, USA, 64–75.
- [46] Sascha Schirra. 2022. Ropper. <https://github.com/sashes/Ropper> Accessed 2022-11-09.
- [47] Bor-Yeh Shen, Wei-Chung Hsu, and Wu Yang. 2014. A Retargetable Static Binary Translator for the ARM Architecture. *ACM Trans. Archit. Code Optim.* 11, 2, Article 18 (jun 2014), 25 pages.
- [48] Chengnian Sun, Yuanbo Li, Qirun Zhang, Tianxiao Gu, and Zhendong Su. 2018. Perses: Syntax-Guided Program Reduction. In *Proceedings of the 40th International Conference on Software Engineering* (Gothenburg, Sweden) (ICSE '18). ACM, New York, NY, USA, 361–371.
- [49] L. Van Put, D. Chanet, B. De Bus, B. De Sutter, and K. De Bosschere. 2005. DIABLO: a reliable, retargetable and extensible link-time rewriting framework. In *Proceedings of the Fifth IEEE International Symposium on Signal Processing and Information Technology*, 2005. 7–12.
- [50] Freek Verbeek, Joshua Bockenek, Zhoulai Fu, and Binoy Ravindran. 2022. Formally Verified Lifting of C-Compiled X86-64 Binaries. In *Proceedings of the 43rd ACM SIGPLAN International Conference on Programming Language Design and Implementation* (San Diego, CA, USA) (PLDI 2022). ACM, New York, NY, USA, 934–949.
- [51] Matthias Wenzl, Georg Merzdovnik, Johanna Ullrich, and Edgar Weippl. 2019. From Hack to Elaborate Technique—A Survey on Binary Rewriting. *ACM Comput. Surv.* 52, 3, Article 49 (2019), 37 pages.
- [52] Igor Wodiany. 2023. *On Novel Binary Lifting and Its Applications*. PhD thesis. University of Manchester, Manchester, UK.
- [53] Qi Xin, Myeongsoo Kim, Qirun Zhang, and Alessandro Orso. 2021. Subdomain-Based Generality-Aware Debloating. In *Proceedings of the 35th IEEE/ACM International Conference on Automated Software Engineering* (Virtual Event, Australia) (ASE '20). ACM, New York, NY, USA, 224–236.
- [54] S. Bharadwaj Yadavalli and Aaron Smith. 2019. Raising Binaries to LLVM IR with MCTOLL (WIP Paper). In *Proceedings of the 20th ACM SIGPLAN/SIGBED International Conference on Languages, Compilers, and Tools for Embedded Systems* (Phoenix, AZ, USA) (LCTES 2019). ACM, New York, NY, USA, 213–218.
- [55] Junyuan Zeng, Yangchun Fu, Kenneth A. Miller, Zhiqiang Lin, Xiangyu Zhang, and Dongyan Xu. 2013. Obfuscation Resilient Binary Code Reuse through Trace-Oriented Programming. In *Proceedings of the 2013 ACM SIGSAC Conference on Computer & Communications Security* (Berlin, Germany) (CCS '13). ACM, New York, NY, USA, 487–498.
- [56] Haotian Zhang, Mengfei Ren, Yu Lei, and Jiang Ming. 2022. One Size Does Not Fit All: Security Hardening of MIPS Embedded Systems via Static Binary Debloating for Shared Libraries. In *Proceedings of the 27th ACM International Conference on Architectural Support for Programming Languages and Operating Systems* (Lausanne, Switzerland) (ASPLOS '22). ACM, New York, NY, USA, 255–270.
- [57] Andreas Ziegler, Julian Geus, Bernhard Heinloth, Timo Hönig, and Daniel Lohmann. 2019. Honey, I Shrunk the ELF: Lightweight Binary Tailoring of Shared Libraries. *ACM Trans. Embed. Comput. Syst.* 18, 5s, Article 102 (oct 2019), 23 pages.