QuadrupedGPT: Towards a Versatile Quadruped Agent in Open-ended Worlds

Ye Wang^{*†} Renmin University of China wyeee0001@gmail.com Yuting Mei* Renmin University of China meiyuting1004@ruc.edu.cn

Sipeng Zheng Beijing Academy of Artificial Intelligence spzheng@baai.ac.cn Qin Jin[‡] Renmin University of China qjin@ruc.edu.cn

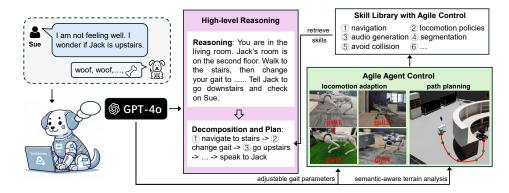


Figure 1: Based upon emerging large foundation models, QuadrupedGPT aims to develop a versatile quadruped agent with the agility of four-legged pets while being able to comprehend intricate human commands and complete them safely and efficiently in open-world environments.

Abstract: While pets offer companionship, their limited intelligence restricts advanced reasoning and autonomous interaction with humans. Considering this, we propose QuadrupedGPT, a versatile agent designed to master a broad range of complex tasks with agility comparable to that of a pet. To achieve this goal, the primary challenges include: i) effectively leveraging multimodal observations for decision-making; ii) mastering agile control of locomotion and path planning; iii) developing advanced cognition to execute long-term objectives. QuadrupedGPT processes human command and environmental contexts using a large multimodal model (LMM). Empowered by its extensive knowledge base, our agent autonomously assigns appropriate parameters for adaptive locomotion policies and guides the agent in planning a safe but efficient path towards the goal, utilizing semantic-aware terrain analysis. Moreover, QuadrupedGPT is equipped with problem-solving capabilities that enable it to decompose long-term goals into a sequence of executable subgoals through high-level reasoning. Extensive experiments across various benchmarks confirm that QuadrupedGPT can adeptly handle multiple tasks with intricate instructions, demonstrating a significant step towards the versatile quadruped agents in open-ended worlds. Our website and codes can be found at https://quadruped-gpt.github.io.

¹* Equal contributions.

²[†]Work done during an internship at Beijing Academy of Artificial Intelligence.

³‡Corresponding author.

Keywords: quadruped robot, versatile agent, large multimodal model

1 Introduction

Quadruped pets like cats and dogs are naturally agile creatures, known for their flexible gaits and ability to easily traverse various terrains. However, they typically require extensive training to learn advanced cognition to comprehend and obey human commands (e.g., guide dogs). Inspired by the dream of companions that combine human-like cognitive abilities with the physical agility of pets, researchers have made significant exploration towards this goal. Yet, current works in quadruped robotics [1, 2, 3] primarily focus on teaching agents fundamental skills such as various gaits (e.g., jump, climb and parkour [4]) and path planning [5, 6]. Despite these advancements, most of these works fall short of developing a holistic versatile agent capable of autonomously mastering a broad range of quadruped tasks using only conventional sensory inputs, such as images and audio.

Recently, advancements in large multi-modal models (LMMs) [7, 8, 9] have highlighted their potential as versatile tools. Once pre-trained, these LMMs can support multi-round communication with humans [10, 11], automate intricate tasks like code generation [12], and formulate high-level strategies for long-term objectives [13, 14]. For example, Voyager [15] introduces a lifelong learning agent in MineCraft [16], which continually learns new skills and uncovers insights through selfexploration. Compared to humanoid intelligence, the applications of quadruped agents in emulating pet-like behaviors are relatively simpler, presenting a promising avenue for developing generalpurpose agents in the real world. Considering this, we pose the question: "Could we develop an LMM-based quadruped agent that brings together the agility of pets with the cognitive abilities of humans, enabling it to explore and interact with our open-ended world without human intervention?"

To achieve this goal, several key challenges must be addressed: i) Dynamic multimodal observations from a quadruped agent require semantic alignment with visual cues to understand human commands and environments. ii) To attain agility comparable to that of four-legged pets, quadruped agents must flexibly adapt their locomotion skills to diverse and challenging terrains while navigating toward the targets by determining efficient and safe paths. iii) To achieve long-term goals of complex tasks, quadruped agents are required to obtain advanced reasoning capabilities to perform high-level planning. This is particularly crucial in practical applications such as search and rescue.

In this work, we introduce **QuadrupedGPT**, a versatile quadruped agent designed to tackle the challenges above: i) First, it relies on powerful foundation models to reason about the current situation and interpret received commands for informed decision-making. ii) To move with the agility of quadruped pets, our agent employs the LMM to enhance locomotion adaptation and path planning. It autonomously adjusts gait skills to suit varying terrains by modulating parameters through self-tuning. We design a Location-Simulation-Selection (LSS) strategy that grounds specific parameter sets into appropriate actions, avoiding impractical step-wise human intervention. Additionally, QuadrupedGPT generates an open-vocabulary semantic cost map for path planning, allowing it to effectively distinguish the traversability of different terrains and identify obstacles. iii) To handle long-horizon tasks, we pre-set a skill library that contains essential pretrained skills for various scenarios (e.g., different gaits, obstacle avoidance). QuadrupedGPT decomposes the task into a sequence of executable subgoals via LMM. Each subgoal is accomplished by retrieving the appropriate skill from our curated library. Moreover, our agent leverages the LMM to encode each skill into functions, enhancing interpretability and ease of execution.

In summary, our contributions are as follows: i) Empowered by nascent foundation models, we propose a versatile agent named QuadrupedGPT to perform complex, open-ended tasks. ii) Our agent achieves agile skill control similar to quadruped pets by leveraging the LMM to provide appropriate parameters for the adaptive locomotion skill and semantic-aware cost map for the path planning skill. iii) We conduct extensive experiments on benchmarks, including locomotion adaptation, local path planning, and high-level task reasoning, and the results showcase the strong capabilities of QuadrupedGPT as a holistic general-purpose agent in the open-ended world.

2 Related Work

Quadruped Locomotion Learning. Traditional studies split the learning into phases, such as elevation mapping, foothold planning [17] and pose adaptation [18]. Recently, end-to-end reinforcement learning (RL) approaches [1, 19, 20] focus on performing a direct mapping between the environment and control signals, initially learned in simulations and then applied in real-world scenarios. Many of these methods operate without sensory input. On the contrary, some works explore incorporating visual cues [19, 20] such as ego-vision [21] and front-facing depth [22]. In scenarios resembling parkour challenges, Zhang *et al.* [4] develop end-to-end vision-based policies that rely solely on simple rewards without reference motion data. Hoeller *et al.* [23] train robots to learn advanced locomotion skills for crossing obstacles on different terrains. In contrast to RL-based methods, recent works [24, 25] have explored using LLMs for adapting locomotion strategies. Shek *et al.* [25] integrate a context translator with RL agents, enabling context-aware locomotion that allows robots to interpret and adapt to their surroundings through LLMs. Compared with traditional [1] or LLM-based RL approaches [25], we design an automatic locomotion adaptation strategy that avoids tedious parameter tuning and policy retraining, offering a more efficient solution.

Quadruped Path Planning. Previous approaches [26, 27, 28] follow a modularized paradigm by combining a traversability estimation module with a path-searching algorithm. Most recent researches adopt data-driven approaches, which can be broadly categorized into four types: 1) modular geometric methods [5] which rely primarily on geometric information (e.g., point clouds [29], meshes [30]) to analyze environments and predict traversability based on specific metrics (e.g., occupancy or stepping difficulty [31]); 2) modular semantic methods [32, 33], which utilize additional semantic cues to assess a traversability cost for each semantic class, thereby enhancing environmental reasoning; 3) imitation and self-supervised learning [34, 35] based on expert demonstrations; and 4) RL-based methods. In addition to these approaches, Yang *et al.* [2] propose imperative learning, treating path planning as an offline bi-level optimization problem. Roth *et al.* [36] further enhance this study by generating local plans based on geometric and semantic information.

Large Multimodal Model for High-level Reasoning. Empowered by the reasoning and prompting capabilities of LMMs [37, 38, 39], research in embodied agents [40, 41, 42] has increasingly utilized LMMs for high-level planning [43, 44]. These works typically learn various skills through self-exploration [15], integrate environmental feedback with LLMs [45], and generate plans via strategy like skill decomposition [46]. However, such plans can be impractical due to hallucinations [47] and may not adjust well to environmental variance. To address this, recent works [48, 45, 49] leverage robotic affordance prediction using mechanisms like value-function prompting [49]. In this paper, we leverage the advanced reasoning capability of LMMs to interpret and decompose human instructions. Combining this with automatic locomotion adaptation and semantic-aware path planning, our quadruped agent makes complex tasks in an open-ended world achievable.

3 Method

As shown in Figure 1, we introduce QuadrupedGPT, a holistic agent specifically engineered to address complex, long-term tasks while ensuring responsive control. In Section 3.1, we describe the training of QuadrupedGPT's policies conditioned on dynamical gait adjustments for varying terrains. Subsequently, in Section 3.2, we showcase its proficiency in semantic-aware path planning. Moreover, in Section 3.3, we present its high-level reasoning by leveraging the strong comprehension abilities of LMM, which enables QuadrupedGPT to solve long-horizon tasks by decomposing them into actionable skill sequences and retrieving these skills from pre-established library.

3.1 Adaptive Locomotion Learning

A desired versatile quadruped agent should be able to effectively adapt to various terrains during navigation, requiring behaviors validated within a controlled training setting to generalize well across diverse and unseen landscapes. Inspired by [1], we develop a conditional locomotion policy, $\pi(\cdot|c_t, b_t)$. The policy $\pi(\cdot)$ is tailored to leverage a comprehensive set of behavior parameters b_t , facilitating terrain adaptation. Here, c_t denotes the three-dimensional command vector $(v_x^{\text{cmd}}, v_y^{\text{cmd}}, w_z^{\text{cmd}})$, which controls omnidirectional velocity tracking. Specifically, v_x^{cmd} and v_y^{cmd} are target velocities along the body frame's x- and y-axes, respectively, while w_z^{cmd} represents the desired angular velocity around the yaw axis. The behavior parameters $b_i = [h_z, f, \phi, s_y, h_z^f, \theta]$ include: (i) body height h_z , (ii) stepping frequency f, (iii) body pitch ϕ ; (iv) foot stance width s_y , and (v) foot swing height h_z^f . Additionally, $\theta = (\theta_1, \theta_2, \theta_3)$ represents timing offsets between feet pairs. We specify four predefined gaits for automatic locomotion adaption, including pronking($\theta = [0, 0, 0]$), pacing($\theta = [0, 0, 0.5]$, trotting($\theta = [0.5, 0, 0]$) and bounding($\theta = [0, 0.5, 0]$).

The input to the policy $\pi(\cdot)$ consists of $\{o, c, a, \Delta\}_{t-H:t}$, which includes the history of observation, commands, previous actions, and time reference variables, respectively, spanning a period indicated by H up to the current timestamp t. Specifically, the observation o_t encompasses joint positions, velocities, and the gravity vector in the body frame, as measured by the accelerometer. The timing reference variables are represented as $\Delta_t = [\sin(2\pi t_i)],$ where *i* refers to each of the four feet: FR (forward-right), FL (forward-left), RR (rear-right), RL (rear-left). These variables are derived from the foot timings offsets as $[t^{\text{FR}}, t^{\text{FL}}, t^{\text{RR}}, t^{\text{RL}}] = [t + \theta_2 +$ $\theta_3, t + \theta_1 + \theta_3, t + \theta_1, t + \theta_2$, with $t \in$ [0, 1] marking a cycle counter during each gait. Moreover, the policy input includes estimated domain parameters such as the robot's body velocity and ground friction,




Figure 2: The overview of our automatic locomotion adaption strategy "Location-Simulation-Selection".

predicted from the observation history through a supervised learning method detailed in [50]. The action space, a_t , specifies the position targets for each of the twelve joints of the quadruped robot. Further details about policy training and implementation are available in our appendix.

Manual Locomotion Adaption. Previous works [1] employ a low-level quadruped controller that relies on manual tuning of adjustable parameters b_t through trial and error, which demands considerable human intervention, making it inefficient and challenging for inexperienced users.

Automatic Locomotion Adaption based on LMM. Manual tuning requires significant human intervention as operators must manually adjust the robot's behavior parameters. In contrast, as depicted in Figure 2, we introduce an automatic method that utilizes the broad common sense knowledge encapsulated in LMMs for agile locomotion adaptation, bypassing the need to imitate real-world demonstrations directly. However, it is important to recognize that LMMs often struggle with numerical values due to their lack of physical world interaction, which makes direct parameter prediction unfeasible. To overcome this, we propose a "Location-Simulation-Selection" (LSS) strategy inspired by [25], which consists of: 1) *Parameter Range Location*: Initially, the LMM is tasked to locate approximate ranges for each parameter rather than specifying the exact values. The parameter ranges are categorized into five levels: very low, low, medium, high, and very high; 2) *Simulation and Evaluation*: We then simulate various candidate parameter sets within these ranges and measure the cumulative rewards for each configuration; 3) *Best Parameter Selection*: Finally, the parameters yielding maximum linear velocity reward are chosen. Additionally, it is crucial for the LMM to understand the context to align parameter values with specific tasks and behaviors accurately. As shown in Figure 3, we carefully design our prompts to include a detailed task description and be-

havior parameter overview. This ensures that QuadrupedGPT can autonomously adjust parameters suitable for different terrains without manual intervention.

3.2 Local Path Planning

The environment where the robot operates is defined as three-dimensional space $Q \in \mathbb{R}^3$. Within this space, Q_{obs} denotes areas with non-traversable geometric or semantic obstacles, while Q_{trav} encompasses the traversable regions where movement is safe. Note that navigation is a critical function for four-legged robots and typically involves multiple possible paths, requiring the agent to identify an efficient and collision-free path from its current location to a specified target and avoid obstacles. To facilitate this, prior works [2, 36] have developed methods to construct a cost map that partitions the traversable area Q_{trav} into K_i subsets. Each subset has a navigable cost per pixel, scored from 0 to 1, where $i \in \{1, 2, ..., K\}$. These costs reflect the difficulty or resource expense of traversing each subset, assisting the agent in selecting the most suitable path. However, these methods often depend on a segmentation module limited to predefined, closed-set classes, which can restrict their adaptability in diverse and changing environments. Our work proposes using LMMs to enhance adaptability by generating dense segmentation based on SEEM [51] for both known and unseen objects and terrains.

Open-vocabulary Semantic Cost Map.

We start by constructing a 2D instance map as a spatial representation of the environment, which tracks the locations of object instances, obstacles, and explored areas. Each cell on this map corresponds to an area of $25cm^2(5 \times 5cm)$ in the real world. To generate this map, we project egocentric semantic segmentation into point clouds using dense depth information captured by RGB-D cameras. These point clouds are then categorized into a 3D semantic voxel map. By summing over the vertical dimension, we produce the 2D instance map. Furthermore, We leverage the LMM to enrich the map with enhanced detail of the environment. Specifically, the LMM first identifies a comprehensive list of potential object and terrain categories from the observed frames and performs dense segmentation based on this inventory. It then assigns appropriate cost values to each category, considering their semantic significance and traversability. This process re-




Figure 3: Examples of the curated prompts used to guide quadruped agents across uneven terrains. The LMM generates more appropriate parameter values by aligning with the semantic contexts of the task description and parameter introduction.

sults in a 2D semantic cost map, which is instrumental in guiding our agent's navigation. Equipped with this map, QuadrupedGPT can efficiently plan routes towards its objectives while avoiding obstacles.

3.3 High-level Reasoning

Drawing on data from camera observations and its memory, QuadrupedGPT must navigate dynamic environments and bridge complex semantic gaps using the LMM to make informed decisions. Upon receiving a new long-horizon command, the agent formulates a strategy by breaking down the overall task into a series of executable subgoals. The agent assesses the current context for each subgoal and utilizes abstract reasoning to derive a feasible plan from natural language descriptions of the task and the skills at its disposal. The agent then selects the most suitable skill from a pre-curated library, which includes both basic movement functions such as "sit_down()", and higher-level cognitive abilities such as "navigate_to()". Each selected skill may need to be instantiated with specific parameters and fine-tuned using LMMs, for instance, to adapt to different locomotion requirements. As noted in previous works [15, 52], skills in QuadrupedGPT are coded as functions, offering flexibility, interpretability, and ease of maintenance for LMMs. Following skill selection, the agent executes the sequence to interact with the environment. Additionally, the LMM is employed to evaluate the success of each executed skill and the completion of the task, determining when to conclude an ongoing activity. Further details are available in our appendix.

4 **Experiments**

4.1 Experimental Details and Setup

We employ the Unitree Go2 robot, outfitted with a RealSense D435i camera for RGB-D observation and an NVIDIA Orin-X for deploying the agent and its pretrained skills. In this study, GPT-4o [7] functions as the LMM. For the locomotion adaptation benchmark, we conduct simulations in Isaac Gym [53], averaging results over 10 runs, with each evaluation episode comprising 250 steps. The benchmark tests the agent across five challenging terrains: uphill slopes, downhill slopes, upward stairs, downward stairs, and randomly generated uneven ground. We evaluate the agent based on the average reward for achieving desired linear and angular velocities and maintaining the appropriate gait, reflecting the robot's ability to meet specific operational criteria. We adopt the adjustable policy detailed in [1], setting the commanded linear velocity at $1.0 \ m/s$ along the x-axis and the angular velocity at $0 \ rad/s$ during evaluation, indicating that the robot should walk in a straight line. We also experiment with five target objects, including the chair, backpack, book, clothes, and cardboard box in a real environment to test the path planning capability of QuadrupedGPT. We consider it a successful path planning if the agent can reach the target within a 0.5m radius. Due to space constraints, further details are included in the appendix.

Table 1: Details of rewards for locomotion adaption evaluation, where $C_{\text{foot}}^{\text{cmd}}(\theta, t)$ computes the desired contact state of each foot from the phase and timing variable [54].

TERM	DEFINITION	EQUATION	MAXIMUM
$r_{v_{x,y}^{\text{cmd}}}$	xy velocity tracking	$\exp\{- v_{x,y} - v_{x,y}^{\text{cmd}} ^2/\sigma_{vxy}\}$	1.0
$r_{\omega_z^{\mathrm{cmd}}}$	yaw velocity tracking	$\exp\{- \omega_z - \omega_z^{\mathrm{cmd}} ^2/\sigma_{\omega z}\}$	1.0
$r_{c_{f}^{\text{cmd}}}$	swing phase tracking (force)	$\sum_{\text{foot}} [1 - C_{\text{foot}}^{\text{cmd}}(\theta, t)] \exp\{- \mathbf{f}^{\text{foot}} ^2 / \sigma_{cf}\}$	0.08
$r_{c_v^{\mathrm{cmd}}}$	stance phase tracking (velocity)	$\sum_{\rm foot} [1 - C_{\rm foot}^{\rm cmd}(\theta,t)] \exp\{- \mathbf{v}_{xy}^{\rm foot} ^2/\sigma_{cv}\}$	0.08

4.2 Results of Locomotion Adaption

In this benchmark, we utilize the rewards $r_{v_{x,y}^{\text{cmd}}}$, $r_{\omega_z^{\text{cmd}}}$, $r_{c_f^{\text{cmd}}}$, $r_{c_v^{\text{cmd}}}$ as evaluation metrics, as outlined in Table 1. To implement manual parameter tuning, we recruit 10 participants and provide them with details and visual aids regarding behavior parameters and terrains ("Manual"). Each participant adjusts these parameters for specific tasks, with final results calculated by averaging the outcomes from 10 runs for each parameter set. As illustrated in Table 2, our automatic locomotion adaption strategy ("Auto"), which employs the LMM to predict exact parameter values directly, achieves superior gait parameters compared to manual tuning. The results underscore that manual tuning can be less effective in practice without expert knowledge than our automatic approach, despite the LMM's limited comprehension of numerical values related to the physical world.

Additionally, an expert familiar with robot kinematics is invited to perform the manual tuning ("Expert") as well. As shown in the table, after introducing the Location-Simulation-Selection strategy, our approach ("Auto+LSS") performs even better than Expert. The comparison results suggest that, with a carefully curated prompting process (Location-Simulation-Selection), LMMs can function as

TERRAIN	METHOD	$r_{v_{x,y}^{ m cmd}}$	$r_{\omega_z^{ m cmd}}$	$r_{c_f^{ m cmd}}$	$r_{c_v^{ m cmd}}$
	Manual	62.20	63.83	91.20	95.35
	Expert	70.08	75.68	95.44	94.15
Uphill Slope	Auto	71.48	77.35	93.99	95.10
	Auto+LSS	71.83 (+9.63)	80.03 (+16.20)	93.95 (+2.75)	95.61 (+0.26)
	Manual	44.52	52.53	88.55	90.58
	Expert	69.91	76.89	93.07	96.14
Downhill Slope	Auto	73.07	75.29	93.42	96.24
	Auto+LSS	71.76 (+27.24)	76.59 (+24.06)	93.25 (+4.70)	96.00 (+5.42)
	Manual	24.26	40.99	83.73	91.91
	Expert	29.44	43.97	90.69	93.01
Upside Stair	Auto	25.98	39.01	87.77	91.72
	Auto+LSS	31.66 (+7.40)	44.17 (+3.18)	87.29 (+3.56)	94.44 (+2.53)
	Manual	37.82	43.95	87.29	91.92
	Expert	60.31	63.50	94.85	93.94
Downside Stair	Auto	55.62	60.41	93.03	91.63
	Auto+LSS	61.97 (+24.15)	62.10 (+18.16)	91.75 (+4.46)	95.93 (+4.01)
	Manual	43.65	44.45	87.01	92.74
	Expert	54.31	56.07	92.47	94.22
Uneven Ground	Auto	51.33	51.62	91.23	94.84
	Auto+LSS	53.56 (+9.91)	54.57 (+10.12)	90.65 (+3.64)	95.11 (+2.37

Table 2: Results on the locomotion adaption benchmark, where "Manual", "Auto", "LSS" denote manual parameter tuning as introduced in [1], automatic locomotion adaptation by directly predicting parameter numbers, and by adopting the Location-Simulation-Selection strategy, respectively. All results are expressed as percentages of maximum episodic reward.

an autonomous specialist, even outperforming human experts. Notice that $r_{v_{x,y}^{\text{cmd}}}$ and $r_{\omega_z^{\text{cmd}}}$ present significant improvement compared to other metrics, indicating that our approach can greatly enhance the agility of robot movement by increasing the velocity.

To better investigate the impact of different alternatives to select parameters for the policy, we conduct ablation experiments as shown in Table 3. LSS with the "Sampling" option means that the LMM first locates a range, samples parameters within the range, and then simulates to determine the best parameter set. LSS with the "Determining" option means that the LMM directly chooses among the midpoints of these ranges (i.e., Options are given as numbers). The results indicate that allowing the LMM to make selections generally produces superior outcomes than directly generating numerical values. Furthermore, we observe that the results of LSS-Determining are notably unstable, exhibiting significant fluctuations. Such instability is likely due


Table 3: Ablation results of different parameter selection methods in LSS strategy.

$\begin{array}{ c c c c c c c } \hline {\rm TERRAIN} & {\rm LSS} & {\it T}_{v_{x,y}^{\rm cmm}} \\ \hline {\rm Uphill Slope} & {\rm Sampling} & {\bf 71.83} \\ \hline {\rm Determining} & {\rm 60.66} \\ \hline {\rm Downhill Slope} & {\rm Sampling} & {\bf 71.76} \\ \hline {\rm Determining} & {\rm 65.87} \\ \hline {\rm Upside Stair} & {\rm Sampling} & {\bf 31.66} \\ \hline {\rm Determining} & {\bf 34.42} \\ \hline {\rm Downside Stair} & {\rm Sampling} & {\bf 61.97} \\ \hline {\rm Determining} & {\bf 59.09} \\ \hline {\rm Uneven Ground} & {\rm Sampling} & {\bf 53.56} \\ \hline {\rm Determining} & {\bf 52.25} \\ \hline \end{array}$	er selection metho	Jus III Loo sua	alegy.
Determining60.66Downhill SlopeSampling Determining 71.76 65.87Upside StairSampling Determining31.66 34.42 Downside StairSampling Determining 61.97 59.09Uneven GroundSampling 53.56	TERRAIN	LSS	$r_{v_{x,y}^{\rm cmd}}$
Determining65.87Upside StairSampling Determining31.66 34.42Downside StairSampling Determining61.97 59.09Uneven GroundSampling 53.5653.56	Uphill Slope	1 0	
Determining34.42Downside StairSampling Determining61.97 59.09Uneven GroundSampling53.56	Downhill Slope	1 0	
Determining59.09Uneven GroundSampling53.56	Upside Stair	1 0	
	Downside Stair	1 0	
	Uneven Ground	1 0	

to the LMM's limited sensitivity to precise numerical values. Consequently, we opt for the LSS with the sampling strategy as it consistently yields more stable and effective results.

4.3 Results of Path Planning

We conduct real-world tests to evaluate the path planning performance of a quadruped agent targeting various objects under two distinct strategies. The non-cost strategy does not consider terrain costs, leading the agent to opt for the shortest path to the target. Therefore, the agent is often in-

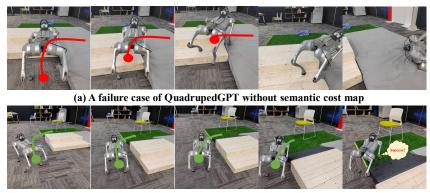

(b) A successful case of QuadrupedGPT with semantic cost map

Figure 4: Cases of path planning with and without using open-vocabulary semantic cost map. Without the cost map, the agent cannot alter its path in response to obstacles, leading to failure when navigating over a mattress. In contrast, the agent using a semantic cost map can plan a path that avoids obstacles and successfully finds the chair.

volved in navigating through challenging terrains, thereby increasing the risk of failure. In contrast, we employ an LMM to assign costs to complex terrains, which directs the robot along smoother and safer routes. As illustrated in Figure 4, the LMM-based cost assignment method demonstrates superior performance to the non-cost strategy. This enhancement is primarily due to the LMM's effectiveness in guiding the robot away from challenging terrains, substantially reducing the likelihood of task failure.

However, it is essential to acknowledge that the current agent's performance is still limited by many factors, such as the accuracy of the depth camera and limitations in the segmentation model. Our future work may focus on improving the precision and robustness of the perception module to promote the robot's navigation capabilities in complex real-world environments.

4.4 Results of High-level Task Reasoning

To validate the high-level reasoning capabilities of our agent, we instruct the robot to finish a longterm goal (e.g., "squat down, stand up, greet me, then walk through the bed and grass, find the blue clothes, and sit next to them"). Our QuadrupedGPT needs to decompose the human instruction into subgoals (e.g., squat down, find the blue clothes) and searching the right skill from the pre-curated skill library to accomplish these subgoals in order. Figure 5 provides a qualitative example of the agent successfully completing the long-horizon task from received human commands.



Figure 5: An example of the quadruped agent successfully completing the long-term objective based on a given human instruction.

5 Conclusion

QuadrupedGPT marks new advancements in developing versatile quadruped agents, combining animal agility with human cognitive abilities. Utilizing the advanced comprehension abilities of LMMs, QuadrupedGPT autonomously navigates and interacts within an open-ended environment, effectively addressing critical challenges such as dynamically adapting locomotion, planning efficient routes, and engaging in sophisticated reasoning. The agent relies on a library of pre-trained skills to achieve high-level task reasoning, which is further refined through autonomous locomotion adaption and semantic-aware path planning, ensuring safe and efficient navigation across varied terrains. Extensive testing has underscored QuadrupedGPT's proficiency in critical benchmarks, highlighting its potential as a general-purpose quadruped agent suitable for a broad range of practical applications in real-world settings.

6 Appendix

In this appendix, we first provide more details related to the benchmarks for locomotion adaption in Section 6.1, including additional details of the specific terrains involved (Section 6.1.1), the prompt design (Section 6.1.2), the methodology for parameter sampling (Section 6.1.3), and further analytical insights (Section 6.1.4).

Furthermore, in Section 6.2, we introduce the modular architecture of the path planning system implemented in QuadrupedGPT, whose architecture comprises several key components including the perception module (Section 6.2.1), the semantic map representation (Section 6.2.2), the memory module for objects and terrains (Section 6.2.3), the trajectory planning module (Section 6.2.4), and the design of prompt (Section 6.2.5).

6.1 Additional Details of Locomotion Adaption

6.1.1 Details of the Terrains

In our study focusing on the locomotion adaption benchmark, we select the Isaac Gym environment [53] to simulate various challenging terrains, which is well-suited for testing the dynamic responses of robots to different ground conditions. As shown in Table 4, we provide a comprehensive parameter setup for each type of terrain included in this benchmark. Specifically, we have designed a slightly larger central platform area for terrains where the quadruped robot needs to adjust its stability by lowering its center of gravity (e.g., downhill slopes and downside stairs). This modification aims to offer longer preparation time for the robot as it traverses these challenging terrains, allowing for precise adjustments to its behavior in response to varying environmental conditions.

Table 4: The parameter setup for each type of the terrains included in the locomotion adaption	on
benchmark, where the length is measured in meters.	

TERRAIN	PARAMETER
Uphill Slope	slope = -0.15, platform size $= 0.6$
Downhill Slope	slope = 0.4, platform size $= 0.8$
Upside Stair	step width = 0.5 , step height = -0.1 , platform size = 0.8
Downside Stair	step width = 0.5 , step height = 0.1 , platform size = 1.0
Uneven Ground	$\min \text{ height} = 0, \max \text{ height} = 0.2$

6.1.2 Details of Prompt Design

In this section, we introduce how to curate the prompts for the automatic parameter generation process "Auto" and "Auto+LSS". Table 5 provides detailed information on the specific ranges for parameter adjustments to curate the prompts.

As introduced in the main paper, "Auto" describes the method where the LMM directly generates numerical parameters essential for locomotion skills. In contrast, "Auto+LSS" employs a more so-phisticated approach known as the Location-Simulation-Selection (LSS) strategy. During the "Location" phase of "Auto+LSS", the LMM is first tasked with determining appropriate ranges for the parameters as detailed in Table 5. Following this, we utilize GPT-40 [7] to generate three candidate sets of parameters. From these candidates, we either compute the average of the results ("Auto") or select the range that receives the majority of votes ("Auto+LSS") for implementation in our experiments. This strategy ensures that the generated parameters are applicable for diverse simulation environments. To illustrate our prompt design according to the above process, we provide prompt examples for both "Auto" and "Auto+LSS".

Auto:

Task Description

LOCATION RANGE			LOCATION RANGE		
	Very High	0.4~0.45		Very High	3.5~4
	High	0.3~0.4	Stepping Frequency (Hz)	High	3~3.5
Body Height (m)	Medium	0.2~0.3		Medium	$2.5 \sim 3$
	Low	$0.15 {\sim} 0.2$		Low	$2 \sim 2.5$
	Very Low	0.1~0.15		Very Low	$1.5 \sim 2$
	Very Positive	0.24~0.4	Foot Swing Height (m)	Very High	0.21~0.25
	Positive	$0.08 {\sim} 0.24$		High	0.16~0.21
Body Pitch (rad)	Neural	$-0.08 {\sim} 0.08$		Medium	0.11~0.16
	Negative	$-0.24 \sim -0.08$		Low	$0.07 {\sim} 0.11$
	Very Negative	$-0.4 \sim -0.24$		Very Low	$0.03 {\sim} 0.07$
	Pronking	[0, 0, 0]	Foot Stance Width (m)	Very High	0.37~0.45
	Trotting	[0.5, 0, 0]		High	$0.29 {\sim} 0.37$
Gait Type (θ)	Bounding	[0, 0.5, 0]		Medium	$0.21 {\sim} 0.29$
	Pacing	$\left[0,0,0.5\right]$		Low	0.13~0.21
				Very Low	0.05~0.13

Table 5: Specific ranges of different adjustable parameters to set up the prompt.

Given the description of the environment, set the behavior parameters for a robotic dog to navigate through it. Note: The answer should be within the given range. You should give an exact number for each parameter.

Parameter Introduction

Body height refers to the vertical distance from the bottom of the robot's feet to the top of its body. Body height ranges from 0.1 to 0.45.

Stepping frequency refers to the rate at which the robotic dog takes steps. It is measured in steps per second. Stepping frequency ranges from 1.5 to 4.0.

Foot swing height refers to the maximum vertical distance that the foot of the robotic dog lifts off the ground during each step. Foot swing height ranges from 0.03-0.25.

Body pitch refers to the rotational angle of the robotic dog around its lateral (side-to-side) axis. Pitch ranges from -0.4 to 0.4. Foot stance width refers to the lateral distance between the feet of the robotic dog when it is standing or walking. Stance width ranges from 0.05 to 0.45.

The gaits include pronking, trotting, bounding and pacing.

Input

Input:

There is a staircase going up here. Each step is 10 centimeters in height and 50 centimeters in width. Output:

Auto+LSS:

Task Description

Given the description of the environment, choose the option to set the behavior parameters for a robotic dog to navigate through it. Note: The answer could only come from the given options.

Parameter Introduction (+Prior Knowledge)

Body height refers to the vertical distance from the bottom of the robot's feet to the top of its body. When the dog walks on an unstable surface, it may need a lower body height to lower its center of gravity. Conversely, on stable surfaces, a higher body height can be used. Stepping frequency refers to the rate at which the robotic dog takes steps. It is measured in steps per second. A high stepping frequency increases the speed of the robotic dog, allowing it to move quickly, but may reduce stability, especially on uneven or slippery surfaces. A low stepping frequency decreases the speed, making the robot move more slowly and carefully, and enhances stability and precision. Foot swing height refers to the maximum vertical distance that the foot of the robotic dog lifts off the ground during each step. This parameter influences the robot's ability to step over obstacles and maintain balance. High Foot Swing Height allows the robotic dog to lift its feet higher, which is useful for stepping over larger obstacles, uneven surfaces, or rough terrain. Low Foot Swing Height keeps the foot closer to the ground, making the robot's movement more energy-efficient and faster on flat and smooth surfaces.

Body pitch refers to the rotational angle of the robotic dog around its lateral (side-to-side) axis. This parameter determines how much the front or back of the robot tilts up or down. A positive pitch means the front of the robotic dog tilts upward, which can be useful for climbing inclines or stepping onto higher surfaces. A negative pitch means the front of the robotic dog tilts downward, which can help when descending slopes or stepping down from elevated surfaces.

Foot stance width refers to the lateral distance between the feet of the robotic dog when it is standing or walking. Wide stance width increases the distance between the feet, providing greater stability, especially on uneven or slippery surfaces. Narrow stance width decreases the distance between the feet, making the robot more agile and able to maneuver through tight spaces.

The gaits include pronking, trotting, bounding and pacing. Pronking is a gait where all four legs leave and touch the ground simultaneously. It is often used for quick bursts of speed and demonstrating strength or agility. Trotting is a symmetrical gait where diagonally opposite legs move together. It provides a balanced and efficient form of movement. Bounding is a fast, asymmetrical gait where the front legs move together followed by the hind legs. It is a high-speed gait that is less stable than trotting but allows for rapid movement. Pacing is a symmetrical gait where the legs on the same side of the body move together. It can help with balance, especially when carrying loads or moving on flat surfaces.

In-Context Example (Prior Knowledge)
Input:
There is an uphill slope.
Output:
Q1: What is the proper body height for this environment? Choose among
very high, high, medium, low, very low.
A1: Low.
Q2: What is the proper stepping frequency for this environment? Choose
among very high, high, medium, low, very low.

```
A2: High.
Q3: What is the proper foot swing height frequency for this
environment? Choose among very high, high, medium, low, very low.
A3: High.
Q4: What is the proper body pitch for this environment? Choose among
very positive, positive, neural, negative, very negative.
A4: Positive.
Q5: What is the proper foot stance width for this environment? Choose
among very high, high, medium, low, very low.
A5: Medium.
Q6: What is the proper gait for this environment? Choose among
pronking, trotting, bounding, pacing.
A6: Trotting.
# Input
Input:
There is uneven ground. The ground's maximum height is 20 cm, and the
minimum height is 0 cm.
Output:
```

6.1.3 Parameter Sampling and Selection

In our experimental setup, we employ uniform sampling to determine values for all continuous adjustable parameters within the ranges specified by the LMM. Specifically, we set sampling intervals for key locomotive parameters as: body height at 0.05, stepping frequency at 0.2, foot swing height at 0.02, body pitch at 0.08, and foot stance width at 0.05. Once these parameters are sampled, they are permuted and evaluated in our simulation environment to assess their impact on the robot's performance. The effectiveness of each parameter set is evaluated based on the performance metric $r_{v^{cmd}}$, which is calculated as follows:

$$r_{v_{x,y}^{\text{cmd}}} = \exp\left(\frac{-|v_{xy} - v_{xy}^{\text{cmd}}|^2}{\sigma_{vxy}}\right) \tag{1}$$

This formula measures the deviation of the robot's actual velocity (v_{xy}) from its commanded velocity (v_{xy}^{cmd}) , normalized by a variance term (σ_{vxy}) . The parameter set yielding the highest $r_{v_{xy}^{\text{cmd}}}$ value is selected for implementation, as it demonstrates the best speed performance under current terrain conditions.

6.1.4 Further Analysis

Does prior knowledge on the basis of Auto help? Based on the results presented in Table 6, including prior knowledge in the form of detailed parameter explanations and contextual examples does not enhance, but rather diminishes the performance of the "Auto" strategy. This unexpected decline may be attributed to the LMM's limitations in effectively processing numerical values. As the input becomes more complex and verbose, the LMM struggles to capture the extended critical information. This observation highlights the superior efficacy of our Location-Simulation-Selection (LSS) strategy in managing continuous inputs.

How does manual tuning affect the results? Manual tuning introduces a significant variability in locomotion outcomes, which often pushes parameter values toward more extreme limits than automatic strategies. For instance, in our experiment involving ten participants tasked with manually setting parameters on the Downside Stair terrain, a notable variability in their selection is observed. The average body pitch determined by the participants is -0.3, with four of them giving the lowest possible value of -0.4. Such results contrast sharply with the range selected by the LMM, which is only between [-0.24, -0.08], a comparatively moderate range. The tendency of manual tuning

Table 6: Additional results of the locomotion adaption benchmark. The terms "Manual", "Auto", "LSS" represents different tuning strategies: manual parameter tuning as introduced in [1], automatic locomotion adaptation through direct numeric prediction, and the implementation of the Location-Simulation-Selection strategy, respectively. All outcomes are presented as percentages of maximum episodic reward achieved.

TERRAIN	METHOD	$r_{v_{x,y}^{ m cmd}}$	$r_{\omega_z^{ m cmd}}$	$r_{c_f^{ m cmd}}$	$r_{c_v^{ m cmd}}$
	Manual	62.20	63.83	91.20	95.35
Ush'll Class	Expert	70.08	75.68	95.44	94.15
Uphill Slope	Auto	71.48	77.35	93.99	95.10
	Auto+prior	66.73	72.74	93.53	94.27
	Auto+LSS	71.83 (+9.63)	80.03 (+16.20)	93.95 (+2.75)	95.61 (+0.26)
	Manual	44.52	52.53	88.55	90.58
	Expert	69.91	76.89	93.07	96.14
Downhill Slope	Auto	73.07	75.29	93.42	96.24
	Auto+prior	64.84	67.31	92.40	95.61
	Auto+LSS	71.76 (+27.24)	76.59 (+24.06)	93.25 (+4.70)	96.00 (+5.42)
	Manual	24.26	40.99	83.73	91.91
II :1 0/ :	Expert	29.44	43.97	90.69	93.01
Upside Stair	Auto	25.98	39.01	87.77	91.72
	Auto+prior	20.63	36.99	83.95	95.00
	Auto+LSS	31.66 (+7.40)	44.17 (+3.18)	87.29 (+3.56)	94.44 (+2.53)
	Manual	37.82	43.95	87.29	91.92
D 110	Expert	60.31	63.50	94.85	93.94
Downside Stair	Auto	55.62	60.41	93.03	91.63
	Auto+prior	53.56	57.02	91.71	93.37
	Auto+LSS	61.97 (+24.15)	62.10 (+18.16)	91.75 (+4.46)	95.93 (+4.01)
	Manual	43.65	44.45	87.01	92.74
	Expert	54.31	56.07	92.47	94.22
Uneven Ground	Auto	51.33	51.62	91.23	94.84
	Auto+prior	45.26	53.50	90.21	92.63
	Auto+LSS	53.56 (+9.91)	54.57 (+10.12)	90.65 (+3.64)	95.11 (+2.37)

to skew toward extreme values suggests its potential limitations, particularly for those human pilots who are less experienced. Given that the robotic control policies are highly sensitive to these adjustable parameters, the experimental results shown in Table 6 indicate the challenge and risks associated with manual tuning in achieving optimal performance.

6.2 Additional Details of Path Planning

Our path planning module uses a modular architecture based on the GOAT framework [55]. Unlike the original implementation, our QuadrupedGPT extends its functionality to not only detect specific object instances but also to categorize different types of terrain. These elements are identified and localized within a top-down semantic map of the scene, which is then stored in a dedicated semantic memory. The path planning process begins when a goal is specified. The global policy first searches the semantic memory to locate the goal. If the goal is not found within the stored memory, the global policy shifts its focus to exploration, setting an interim exploration goal to gather more information about the environment. Subsequently, a local policy takes over to compute the atomic actions required to navigate towards the long-term goal, optimizing the path based on the dynamically updated semantic map and current situational awareness.

6.2.1 Perception Module

For sensory input and environmental mapping, we employ the RealSense D435i camera, which captures RGB images (I_t) and depth images (D_t) at each timestep. In addition, onboard sensors provide 2D positional data and RPY (roll, pitch, yaw) orientation. The RGB image I_t is initially processed using the LMM to identify object and terrain categories. These categories are then utilized as semantic labels for the dense segmentator, where we adopt SEEM [51] in this paper. Following segmentation, the labels are projected onto a point cloud generated from the depth image D_t . This point cloud is then binned into a 3D semantic voxel map, which segments the environment spatially into bins that incorporate semantic data with geometric structure. To synthesize this information into a practical format for navigation and planning, we perform a vertical summation over the voxel map's height, resulting in a comprehensive 2D instance map (m_t) . This map provides a detailed representation of the terrain and object distribution at ground level, which is crucial for path planning and obstacle avoidance in dynamic environments.

6.2.2 Semantic Map Representation

The semantic map, denoted as m_t for each timestep t, serves as a spatial representation of the environment and is crucial for tracking the coverage of various objects and terrain types. The map is structured as a $K \times M \times M$ integer matrix, where $M \times M$ represents the map's area and K is the total number of map channels. Specifically, each cell within this grid corresponds to a real-world area of 25 square centimeters (5 cm \times 5 cm). The channels of the map are defined by K = C + 3, where C is the number of distinct semantic categories identified in the environment. The additional three channels are designed for logging explored areas and the agent's current and historical positions, respectively. In this map, a non-zero entry in a particular channel indicates that the cell contains either an object or terrain region corresponding to that semantic category, or that the cell has been explored. Conversely, a zero value indicates that the cell has not been classified as belonging to that semantic category or has not yet been explored. The first C channels of the map store the unique instance IDs of the objects as they are projected onto the map. At the onset of each episode, the map is initialized to all zeros, with the robot positioned centrally, facing east. This initialization sets the stage for the agent to systematically explore and interact with its environment, progressively filling the map with valuable semantic and positional data.

6.2.3 Memory Module for Objects and Terrains

Our memory module clusters object and terrain detection results over time, grouping them into distinct instances based on their map location and category. Each instance, denoted by i, is cataloged as a set of map cells C_i , a collection of object views represented as bounding boxes with contextual details M_i , and an integer indicating the semantic category S_i . When a new RGB image is processed, objects and terrains are detected. For each detected element d, we define the bounding box I_d around the detection, assign a semantic class S_d , and map the corresponding points C_d based on projected depth information. To facilitate the matching process between new detection and existing memory entries, each set of points C_d on the map is dilated by p units, creating an expanded set of points D_d . This dilation allows for a broader search area when matching new detection with previously recorded instances.

In addition, pairwise matching checks are conducted between each new detection and existing instances in the memory. A detection d is considered to match an instance i if they share the same semantic category and there is any overlap between the dilated detection area and the instance's location on the map, i.e., $S_d = S_i$ and $D_d \cap C_i \neq \emptyset$. Upon finding a match, we update the existing instance by merging the new points and image into it:

$$C_i \leftarrow C_i \cup C_d, \ M_i \leftarrow M_i \cup I_d \tag{2}$$

If no existing instance matches the detection, a new instance is created using C_d and I_d . This systematic aggregation of unique instances over time facilitates the efficient matching of new goals to all relevant images and categories previously cataloged. Thus, the dynamic memory structure

can enhance the robustness and accuracy of our path planning by maintaining a comprehensive and evolving understanding of the environment.

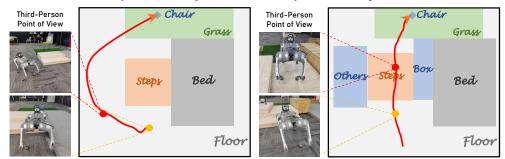




Figure 6: The figure illustrates a schematic diagram of the semantic cost map and planned path for a quadruped robot during path planning. The left side showcases the selection of the safest path, while the right side demonstrates choosing the shortest path while avoiding obstacles in a more complex environment.

6.2.4 Trajectory Planning Module

When a new goal is specified to the agent, the global policy (π_G) initiates by searching the instance memory to check if the goal has already been encountered and recorded. The matching process between the specified goal and memory instances is adapted according to the modality of the goal input. If a matching instance is found, its recorded location on the top-down map is set as a longterm navigation goal. If no such instance is found, π_G shifts its strategy to generate an exploration goal, employing a frontier-based approach that targets the nearest unexplored region.

Once the global policy identifies a long-term goal, the local policy (π_L) takes over. It begins by assigning differential costs given by LMM to various semantic categories represented on the semantic map, effectively constructing a nuanced cost map. This map forms the basis for path planning, where the Fast Marching Method is applied to calculate an optimal route to the goal. On the Go2 robot, the process is achieved by calculating the positional offset from the robot's current location to the target point and employing its built-in motion control system to navigate to the target.

Figure 6 illustrates the path planning scheme of the local policy π_L after a long-term goal is determined. The left side of the figure shows a cost map that prioritizes the safest path. The robot chooses to bypass difficult terrains, opting for the safest "floor" to reach the target. The right side demonstrates a more complex environment with a higher density of objects, where the cost of descending stairs is lowered by given instruction. This encourages the robot to choose the fastest stair path while avoiding other obstacles and promptly switching gaits to reach the designated goal.

6.2.5 Details of Prompt Design

In this section, we introduce how to curate the prompts for cost map construction. We provide prompt example as follows.

Task Description

As a quadruped robot, based on instructions and current observations, please output the following information in JSON format to facilitate parsing by a segmentation model:

Output Requirements

Detailed category name of the target object (e.g., color and type). Detailed category names of objects or obstacles encountered along the path. Terrain information along the path, including: Terrain category name (describe the color and material of the terrain). Terrain traversal cost (0 indicates passable, 1 indicates impassable). Terrain gait requirements (0 indicates normal gait, 1 indicates raised leg gait). Hint: Terrain information needs to follow the instructions and consider all factors affecting traversal. For example, soft cushions, slippery floors, or other unstable surfaces may affect traversal and should be reflected in the traversal cost or gait requirements.

```
# In-context Example
```

```
Example:
Instruction: Go to the red cabinet in the kitchen
{
    "target_object": "red cabinet",
    "obstacles": ["white kitchen table", "wooden chair"],
    "terrain": [
        "type": "light wooden floor", "cost": 0, "gait": 0,
        "type": "gray tiles", "cost": 0, "gait": 0,
        "type": "metal steps", "cost": 1, "gait": 1
]
}
```

```
# Input
```

Instruction: Go through the stairs to find a chair

References

- G. B. Margolis and P. Agrawal. Walk these ways: Tuning robot control for generalization with multiplicity of behavior. In *Conference on Robot Learning*, pages 22–31. PMLR, 2023.
- [2] F. Yang, C. Wang, C. Cadena, and M. Hutter. iplanner: Imperative path planning. *arXiv* preprint arXiv:2302.11434, 2023.
- [3] J. Lee, J. Hwangbo, L. Wellhausen, V. Koltun, and M. Hutter. Learning quadrupedal locomotion over challenging terrain. *Science robotics*, 5(47):eabc5986, 2020.
- [4] Z. Zhuang, Z. Fu, J. Wang, C. Atkeson, S. Schwertfeger, C. Finn, and H. Zhao. Robot parkour learning. arXiv preprint arXiv:2309.05665, 2023.
- [5] C. Cao, H. Zhu, F. Yang, Y. Xia, H. Choset, J. Oh, and J. Zhang. Autonomous exploration development environment and the planning algorithms. In 2022 International Conference on Robotics and Automation (ICRA), pages 8921–8928. IEEE, 2022.
- [6] D. Hoeller, L. Wellhausen, F. Farshidian, and M. Hutter. Learning a state representation and navigation in cluttered and dynamic environments. *IEEE Robotics and Automation Letters*, 6 (3):5081–5088, 2021.
- [7] OpenAI. Gpt-40. https://openai.com/index/hello-gpt-40/, 2024.
- [8] S. Zheng, B. Zhou, Y. Feng, Y. Wang, and Z. Lu. Unicode: Learning a unified codebook for multimodal large language models. arXiv preprint arXiv:2403.09072, 2024.
- [9] J. Li, D. Li, S. Savarese, and S. Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *International conference on machine learning*, pages 19730–19742. PMLR, 2023.
- [10] H. Liu, C. Li, Q. Wu, and Y. J. Lee. Visual instruction tuning. Advances in neural information processing systems, 36, 2024.
- [11] H. Zhang, X. Li, and L. Bing. Video-Ilama: An instruction-tuned audio-visual language model for video understanding. arXiv preprint arXiv:2306.02858, 2023.
- [12] B. Roziere, J. Gehring, F. Gloeckle, S. Sootla, I. Gat, X. E. Tan, Y. Adi, J. Liu, T. Remez, J. Rapin, et al. Code llama: Open foundation models for code. *arXiv preprint arXiv:2308.12950*, 2023.
- [13] S. Zheng, Y. Feng, Z. Lu, et al. Steve-eye: Equipping llm-based embodied agents with visual perception in open worlds. In *The Twelfth International Conference on Learning Representations*, 2023.
- [14] Y. Feng, Y. Wang, J. Liu, S. Zheng, and Z. Lu. Llama rider: Spurring large language models to explore the open world. arXiv preprint arXiv:2310.08922, 2023.
- [15] G. Wang, Y. Xie, Y. Jiang, A. Mandlekar, C. Xiao, Y. Zhu, L. Fan, and A. Anandkumar. Voyager: An open-ended embodied agent with large language models. *arXiv preprint* arXiv:2305.16291, 2023.
- [16] L. Fan, G. Wang, Y. Jiang, A. Mandlekar, Y. Yang, H. Zhu, A. Tang, D.-A. Huang, Y. Zhu, and A. Anandkumar. Minedojo: Building open-ended embodied agents with internet-scale knowledge. *Advances in Neural Information Processing Systems*, 35:18343–18362, 2022.
- [17] S. Gangapurwala, M. Geisert, R. Orsolino, M. Fallon, and I. Havoutis. Rloc: Terrain-aware legged locomotion using reinforcement learning and optimal control. *IEEE Transactions on Robotics*, 38(5):2908–2927, 2022.

- [18] S. Fahmi, V. Barasuol, D. Esteban, O. Villarreal, and C. Semini. Vital: Vision-based terrainaware locomotion for legged robots. *IEEE Transactions on Robotics*, 39(2):885–904, 2022.
- [19] A. Loquercio, A. Kumar, and J. Malik. Learning visual locomotion with cross-modal supervision. In 2023 IEEE International Conference on Robotics and Automation (ICRA), pages 7295–7302. IEEE, 2023.
- [20] A. Kumar, Z. Fu, D. Pathak, and J. Malik. Rma: Rapid motor adaptation for legged robots. arXiv preprint arXiv:2107.04034, 2021.
- [21] A. Agarwal, A. Kumar, J. Malik, and D. Pathak. Legged locomotion in challenging terrains using egocentric vision. In *Conference on robot learning*, pages 403–415. PMLR, 2023.
- [22] X. Cheng, K. Shi, A. Agarwal, and D. Pathak. Extreme parkour with legged robots. In *Towards Generalist Robots: Learning Paradigms for Scalable Skill Acquisition@ CoRL2023*, 2023.
- [23] D. Hoeller, N. Rudin, D. Sako, and M. Hutter. Anymal parkour: Learning agile navigation for quadrupedal robots. *Science Robotics*, 9(88):eadi7566, 2024.
- [24] T. Guan, R. Song, Z. Ye, and L. Zhang. Vinet: Visual and inertial-based terrain classification and adaptive navigation over unknown terrain. In 2023 IEEE international conference on robotics and automation (ICRA), pages 4106–4112. IEEE, 2023.
- [25] C. L. Shek, X. Wu, D. Manocha, P. Tokekar, and A. S. Bedi. Lancar: Leveraging language for context-aware robot locomotion in unstructured environments. *arXiv preprint* arXiv:2310.00481, 2023.
- [26] B. Paden, M. Čáp, S. Z. Yong, D. Yershov, and E. Frazzoli. A survey of motion planning and control techniques for self-driving urban vehicles. *IEEE Transactions on intelligent vehicles*, 1(1):33–55, 2016.
- [27] N. Ratliff, M. Zucker, J. A. Bagnell, and S. Srinivasa. Chomp: Gradient optimization techniques for efficient motion planning. In 2009 IEEE international conference on robotics and automation, pages 489–494. IEEE, 2009.
- [28] S. Karaman and E. Frazzoli. Sampling-based algorithms for optimal motion planning. *The international journal of robotics research*, 30(7):846–894, 2011.
- [29] J. Frey, D. Hoeller, S. Khattak, and M. Hutter. Locomotion policy guided traversability learning using volumetric representations of complex environments. In 2022 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), pages 5722–5729. IEEE, 2022.
- [30] N. Hudson, F. Talbot, M. Cox, J. Williams, T. Hines, A. Pitt, B. Wood, D. Frousheger, K. L. Surdo, T. Molnar, et al. Heterogeneous ground and air platforms, homogeneous sensing: Team csiro data61's approach to the darpa subterranean challenge. *arXiv preprint arXiv:2104.09053*, 2021.
- [31] D. D. Fan, K. Otsu, Y. Kubo, A. Dixit, J. Burdick, and A.-A. Agha-Mohammadi. Step: Stochastic traversability evaluation and planning for risk-aware off-road navigation. arXiv preprint arXiv:2103.02828, 2021.
- [32] X. Cai, M. Everett, J. Fink, and J. P. How. Risk-aware off-road navigation via a learned speed distribution map. In 2022 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), pages 2931–2937. IEEE, 2022.
- [33] D. Maturana, P.-W. Chou, M. Uenoyama, and S. Scherer. Real-time semantic mapping for autonomous off-road navigation. In *Field and Service Robotics: Results of the 11th International Conference*, pages 335–350. Springer, 2018.

- [34] A. Loquercio, E. Kaufmann, R. Ranftl, M. Müller, V. Koltun, and D. Scaramuzza. Learning high-speed flight in the wild. *Science Robotics*, 6(59):eabg5810, 2021.
- [35] M. Pfeiffer, M. Schaeuble, J. Nieto, R. Siegwart, and C. Cadena. From perception to decision: A data-driven approach to end-to-end motion planning for autonomous ground robots. In 2017 ieee international conference on robotics and automation (icra), pages 1527–1533. IEEE, 2017.
- [36] P. Roth, J. Nubert, F. Yang, M. Mittal, and M. Hutter. Viplanner: Visual semantic imperative learning for local navigation. arXiv preprint arXiv:2310.00982, 2023.
- [37] T. Brown, B. Mann, N. Ryder, M. Subbiah, J. D. Kaplan, P. Dhariwal, A. Neelakantan, P. Shyam, G. Sastry, A. Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- [38] C. Raffel, N. Shazeer, A. Roberts, K. Lee, S. Narang, M. Matena, Y. Zhou, W. Li, and P. J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of machine learning research*, 21(140):1–67, 2020.
- [39] J. Wei, Y. Tay, R. Bommasani, C. Raffel, B. Zoph, S. Borgeaud, D. Yogatama, M. Bosma, D. Zhou, D. Metzler, et al. Emergent abilities of large language models. *arXiv preprint* arXiv:2206.07682, 2022.
- [40] J. Duan, S. Yu, H. L. Tan, H. Zhu, and C. Tan. A survey of embodied ai: From simulators to research tasks. *IEEE Transactions on Emerging Topics in Computational Intelligence*, 6(2): 230–244, 2022.
- [41] H. Ravichandar, A. S. Polydoros, S. Chernova, and A. Billard. Recent advances in robot learning from demonstration. *Annual review of control, robotics, and autonomous systems*, 3: 297–330, 2020.
- [42] J. Collins, S. Chand, A. Vanderkop, and D. Howard. A review of physics simulators for robotic applications. *IEEE Access*, 9:51416–51431, 2021.
- [43] W. Huang, P. Abbeel, D. Pathak, and I. Mordatch. Language models as zero-shot planners: Extracting actionable knowledge for embodied agents. In *International Conference on Machine Learning*, pages 9118–9147. PMLR, 2022.
- [44] S. Y. Min, D. S. Chaplot, P. Ravikumar, Y. Bisk, and R. Salakhutdinov. Film: Following instructions in language with modular methods. *arXiv preprint arXiv:2110.07342*, 2021.
- [45] W. Huang, F. Xia, T. Xiao, H. Chan, J. Liang, P. Florence, A. Zeng, J. Tompson, I. Mordatch, Y. Chebotar, et al. Inner monologue: Embodied reasoning through planning with language models. arXiv preprint arXiv:2207.05608, 2022.
- [46] Y. Ouyang, J. Li, Y. Li, Z. Li, C. Yu, K. Sreenath, and Y. Wu. Long-horizon locomotion and manipulation on a quadrupedal robot with large language models. arXiv preprint arXiv:2404.05291, 2024.
- [47] Y. Bang, S. Cahyawijaya, N. Lee, W. Dai, D. Su, B. Wilie, H. Lovenia, Z. Ji, T. Yu, W. Chung, et al. A multitask, multilingual, multimodal evaluation of chatgpt on reasoning, hallucination, and interactivity. arXiv preprint arXiv:2302.04023, 2023.
- [48] J. Liang, W. Huang, F. Xia, P. Xu, K. Hausman, B. Ichter, P. Florence, and A. Zeng. Code as policies: Language model programs for embodied control. In 2023 IEEE International Conference on Robotics and Automation (ICRA), pages 9493–9500. IEEE, 2023.
- [49] A. Brohan, Y. Chebotar, C. Finn, K. Hausman, A. Herzog, D. Ho, J. Ibarz, A. Irpan, E. Jang, R. Julian, et al. Do as i can, not as i say: Grounding language in robotic affordances. In *Conference on robot learning*, pages 287–318. PMLR, 2023.

- [50] G. Ji, J. Mun, H. Kim, and J. Hwangbo. Concurrent training of a control policy and a state estimator for dynamic and robust legged locomotion. *IEEE Robotics and Automation Letters*, 7(2):4630–4637, 2022.
- [51] X. Zou, J. Yang, H. Zhang, F. Li, L. Li, J. Wang, L. Wang, J. Gao, and Y. J. Lee. Segment everything everywhere all at once. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023.
- [52] W. Tan, Z. Ding, W. Zhang, B. Li, B. Zhou, J. Yue, H. Xia, J. Jiang, L. Zheng, X. Xu, et al. Towards general computer control: A multimodal agent for red dead redemption ii as a case study. arXiv preprint arXiv:2403.03186, 2024.
- [53] V. Makoviychuk, L. Wawrzyniak, Y. Guo, M. Lu, K. Storey, M. Macklin, D. Hoeller, N. Rudin, A. Allshire, A. Handa, et al. Isaac gym: High performance gpu-based physics simulation for robot learning. *arXiv preprint arXiv:2108.10470*, 2021.
- [54] J. Siekmann, Y. Godse, A. Fern, and J. Hurst. Sim-to-real learning of all common bipedal gaits via periodic reward composition. In 2021 IEEE International Conference on Robotics and Automation (ICRA), pages 7309–7315. IEEE, 2021.
- [55] M. Chang, T. Gervet, M. Khanna, S. Yenamandra, D. Shah, S. Y. Min, K. Shah, C. Paxton, S. Gupta, D. Batra, et al. Goat: Go to any thing. arXiv preprint arXiv:2311.06430, 2023.