

# Stokes' paradox in rarefied gases: A perspective through the method of fundamental solutions

Himanshi<sup>\*1</sup>, Anirudh Singh Rana<sup>†2</sup> and Vinay Kumar Gupta<sup>‡1</sup>

<sup>1</sup>Department of Mathematics, Indian Institute of Technology Indore,  
Indore 453552, India

<sup>2</sup>Department of Mathematics, Birla Institute of Technology and Science Pilani,  
Rajasthan 333031, India

## Abstract

In the realm of fluid dynamics, a curious and counterintuitive phenomenon is Stokes' paradox. While Stokes equations—used for modeling slow and steady flows—lead to a meaningful solution to the problem of slow and steady flow past a sphere, they fail to yield a non-trivial solution to the problem of slow and steady flow past an infinitely long cylinder (a two-dimensional problem essentially); this is referred to as Stokes' paradox. We revisit this paradox in the context of rarefied gas flows by means of the method of fundamental solutions (MFS). To this end, we adopt an extended hydrodynamic model, referred to as the CCR model, consisting of the balance equations for the mass, momentum and energy and closed with the coupled constitutive relations. We determine an analytic solution of the CCR model for the problem and compare it with the MFS-based numerical solution. Apart from addressing flow past a circular cylinder, we aim to showcase the capability of the MFS to predict the flow past other objects in two dimensions for which the analytic solutions do not exist. For that, we investigate the problem of rarefied gas flow past an infinitely long semicircular cylinder.

## 1 Introduction

Fluid flow around stationary objects, especially spheres and cylinders, is a classic problem in fluid dynamics. Early research on low-speed viscous flows (often, referred to as low-Reynolds-number flows) of incompressible fluids was pioneered by Sir George Gabriel Stokes in the 19th century. He postulated that at low velocities, the inertial forces become negligible with the pressure forces predominantly balanced by the viscous forces alone and, for such flows, the Navier–Stokes equations in turn boil down to the celebrated Stokes equations. In the honor of Sir Stokes, such a flow is referred to as a Stokes flow (or creeping flow). Stokes flows are often encountered in nature, e.g., in swimming of microorganisms and sperms, and also in industries dealing with paints, polymers, etc.

Stokes was successful in describing slow and steady flow of a viscous fluid past a sphere mathematically through the Stokes equations. However, when attempting to describe a slow and steady flow of a viscous fluid past an infinite cylinder (which is essentially a quasi-two-dimensional flow) using the Stokes equations [1], he encountered difficulties in satisfying the boundary conditions at the cylinder surface and in the fluid at infinity simultaneously. That led

---

\*[phd2001141003@iiti.ac.in](mailto:phd2001141003@iiti.ac.in)

†[anirudh.rana@pilani.bits-pilani.ac.in](mailto:anirudh.rana@pilani.bits-pilani.ac.in)

‡[vkg@iiti.ac.in](mailto:vkg@iiti.ac.in)

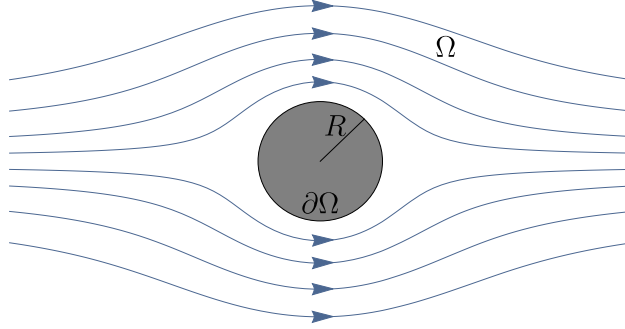


Figure 1: Schematic of Stokes flow past an infinite circular cylinder of radius  $R$ , where the fluid is moving transversely to the axis of the cylinder.

him to suggest the potential absence of a solution for the steady-state fluid flow past an infinite cylinder—a notion later coined as Stokes’ paradox.

To explain the paradox mathematically, we consider a viscous fluid moving slowly and steadily past an infinitely long right-circular cylinder of radius  $R$  in the direction transverse to the axis of the cylinder as shown in Fig. 1. Let the flow domain be denoted by  $\Omega$  and the boundary of the disk by  $\partial\Omega$  and let the far-field velocity of the fluid be  $(v_0, 0, 0)$  in the Cartesian coordinate system. Owing to the symmetry around the axis of the cylinder, the problem essentially reduces to a (quasi-)two-dimensional problem or, equivalently, to the problem of fluid flow past a circular disk of radius  $R$ . The Stokes equations for the problem read

$$\nabla \cdot \mathbf{v} = 0 \quad \text{and} \quad \nabla p - \mu \Delta \mathbf{v} = \mathbf{0} \quad \text{in} \quad \Omega, \quad (1)$$

where  $\mathbf{v}$ ,  $p$  and  $\mu$  are the velocity, pressure and viscosity, respectively, of the fluid. The no-slip boundary condition on the surface of the cylinder reads

$$\mathbf{v} = \mathbf{0} \quad \text{on} \quad \partial\Omega \quad (2)$$

and the far-field boundary condition reads

$$\lim_{|x| \rightarrow \infty} v_x = v_0. \quad (3)$$

Eliminating the pressure  $p$  from the Stokes equations (1) and introducing the stream function  $\psi(x, y)$ —which is related to the components of the velocity via the relations  $v_x = \partial\psi/\partial y$  and  $v_y = -\partial\psi/\partial x$ , the Stokes equations (1) reduce to the biharmonic equation

$$\Delta^2 \psi = 0 \quad \text{in} \quad \Omega, \quad (4)$$

and the no-slip boundary condition (2) reduces to

$$\frac{\partial\psi}{\partial x} = \frac{\partial\psi}{\partial y} = 0 \quad \text{on} \quad \partial\Omega. \quad (5)$$

For determining  $\psi$ , it is convenient to transform the equations from the Cartesian coordinate system  $(x, y)$  to the polar coordinate system  $(r, \theta)$  so that  $x = r \cos \theta$ ,  $y = r \sin \theta$ ,  $\psi(x, y) \equiv \psi(r, \theta)$ , which is related to the components of the velocity in the polar coordinates via the relations  $v_r = r^{-1}(\partial\psi/\partial\theta)$  and  $v_\theta = -\partial\psi/\partial r$ . In the polar coordinates, the no-slip boundary condition (5) changes to

$$\frac{\partial\psi}{\partial r} = \frac{\partial\psi}{\partial\theta} = 0 \quad \text{at} \quad r = R \quad \text{and} \quad \forall \quad \theta \in [0, 2\pi) \quad (6)$$

and the far-field condition (3) changes to

$$\lim_{r \rightarrow \infty} \frac{1}{r} \frac{\partial \psi}{\partial \theta} = v_0 \cos \theta \quad \text{and} \quad \lim_{r \rightarrow \infty} \frac{\partial \psi}{\partial r} = v_0 \sin \theta. \quad (7)$$

The far-field conditions (7) require that the stream function be of the form  $\psi = f(r) \sin \theta$  [2–4]. Inserting this form of  $\psi$  in (the polar form of) the biharmonic equation (4), its solution reads [2, 5]

$$\psi(r, \theta) = \left( Ar + \frac{B}{r} + Cr^3 + Dr \ln r \right) \sin \theta, \quad (8)$$

where  $A, B, C, D$  are the constants that need to be determined using boundary conditions (6) and (7). Both conditions in boundary condition (7) imply that  $C = D = 0$  and  $A = v_0$ . Consequently, there remains only one constant  $B$  with which two conditions in boundary conditions (6) are to be fulfilled, a scenario that is impossible unless  $v_0 = 0$ . This shows the nonexistence of solution to the Stokes equations for a steady flow past an infinite circular cylinder whereas such flows do exist physically—this is the essence of Stokes’ paradox. The paradox arises not only in the case of flow past a circular cylinder, but also for an unbounded flow past any two-dimensional object of any shape [6].

Another important consequence of Stokes’ paradox is that the drag force on the cylinder in the aforementioned problem turns out to be infinite [7], which is unreasonable physically. Numerous endeavors have been dedicated to addressing Stokes’ paradox and to determine the correct drag force on an infinitely long cylinder immersed in a viscous fluid moving transversely to the axis of the cylinder. Oseen [8], in 1910, propounded an improvement to the Stokes equations by considering inertia effects at large distances and proposed the Oseen equations by adding convective acceleration terms to the Stokes equations. Oseen equations not only resolved Stokes’ paradox but also led to an improved approximation of the drag force on a sphere immersed in a slow viscous flow. Subsequent contributions by Lamb [9], Bairstow *et al.* [10], Tomotika and Aoi [11], refined the drag coefficient approximations for the cylinder using the Oseen equations. Further attempts to advance Oseen’s ideas sparked the birth of a novel domain in applied mathematics known as the method of matched asymptotic expansions. Originally, Kaplun [12] and Kaplun and Lagerstrom [13] executed the method of matched asymptotic expansions to obtain a new drag coefficient for flow past a circular cylinder. Further, Proudman and Pearson [14] used the method of matched asymptotic expansions for flows past cylinder and sphere, and they came up with a novel drag result for sphere. Later, Kida and Take [15], through asymptotic expansions, provided expressions for the drag coefficient at different orders of approximation for low-Reynolds-number flow past a cylinder. Their results on the drag coefficient agreed well with experimental measurements at low Reynolds numbers. Recently, Khalili and Liu [16] studied the problem of flow past a cylinder with the lattice-Boltzmann method and their simulation results on the drag coefficient led them to propose a slight correction to the expression for the drag coefficient obtained at the first order of approximation by Kida & Take [15].

In this paper, we revisit the problem of fluid flow past a cylinder but with fluid being a rarefied gas instead of a viscous liquid. The reason for taking this problem is threefold: (i) the classic fluid dynamics models, e.g. the Navier–Stokes–Fourier (NSF) equations (or Stokes equations for that matter), are incapable of capturing many intriguing rarefaction effects pertinent to rarefied gases, and hence better models (typically more involved than the Stokes equations, which are somewhat easy to handle) are needed for modeling rarefied gas flows, (ii) the occurrence of Stokes’ paradox in rarefied gases as well poses mathematical challenges, and (iii) the problem leads to a method whose usefulness is noteworthy especially for problems for which an analytic solution either does not exist or is very difficult to obtain. The problem is not only interesting from a theoretical point of view but research on rarefied gas flows past different objects is driven by the critical need to address challenges in space exploration, micro/nanotechnology, and

vacuum system industries, etc. Despite the presence of sufficient literature on two-dimensional unbounded flows in continuum fluid dynamics, there has been comparatively less attention towards rarefied gas flows past objects, particularly in two dimensions. To the best of the authors' knowledge, the first study on Stokes' paradox in rarefied gases was presented by Cercignani [17], wherein he showed that, despite the fact that the Boltzmann equation is the most accurate model for investigating rarefied gases, the linearized Boltzmann equation—similarly to the Stokes equations—does not give bounded solutions for the flow past an axisymmetric body. To circumvent Stokes' paradox, he proposed an inner-outer expansion of the Boltzmann equation. Yamamoto & Sera [18] investigated rarefied gas flow past a circular cylinder at low Mach numbers by dividing the flow into two regions: (i) the kinetic region (flow domain near the cylinder) modeling and (ii) near continuum region (flow domain outside the kinetic region). They handled the kinetic region with the simultaneous integral equations derived from the linearized Bhatnagar–Gross–Krook model and the continuum region with the Oseen–Stokes equation. Their result on the drag on the cylinder matched reasonably well with those available in previous studies for a wide range of the Knudsen number. Recently, utilizing the advancements of moment methods in kinetic theory, Gu *et al.* [19] investigated non-equilibrium effects on flow past a circular cylinder. In the present work, we utilize a relatively simple yet efficient model proposed by Rana *et al.* [20] that provides constitutive relations for the stress and heat flux appearing in the conservation laws. These relations are called the coupled constitutive relations (CCR) as the stress and heat flux in these relations are coupled with each other through a coupling coefficient and hence the model is referred to as the CCR model [20]. We aim to investigate and validate slow flow of a monatomic rarefied gas past an infinitely long right-circular cylinder using the CCR model. To show the capabilities of our findings, we also extend this study to rarefied gas flow past a semicircular cylinder.

To tackle the problem with the CCR model, we employ an efficient meshfree numerical technique, known as the method of fundamental solutions (MFS) [21]. The core idea of the MFS relies on the approximation of the solution of a (linear) boundary value problem with the help of linear combination of free-space Green's functions or the fundamental solutions of the linear partial differential operator. Once the fundamental solutions are known, the MFS is a very efficient numerical approach as it does not require domain discretization unlike the oftentimes used numerical methods, such as finite volume and finite element methods that—at their core—rely on complex meshing to discretize the domain. Owing to many advantages of the MFS over some other traditional numerical methods, the MFS has been applied to various problems in engineering and science [22–25] and has recently gained popularity in exploring rarefied gas flows [26–29]. Building on our previous work [29], where we determined the fundamental solutions of the CCR model in two dimensions, in this work we aim to extend application of the MFS to rarefied gas flows past circular and semicircular cylinders (which are quasi-two-dimensional problems). This study not only addresses Stokes' paradox but also validates the numerical scheme against analytic solution of the CCR model for the problem under consideration obtained using the symmetry-ansatz approach proposed by Torrilhon [30], Westerkamp & Torrilhon [31]. To demonstrate the versatility and power of the MFS in solving complex rarefied gas flow problems, we extend the investigation to rarefied gas flow past a semicircular cylinder positioned at different angles for which no analytical solution exists or at least is very difficult to obtain.

The rest of the article is structured as follows. The problem of rarefied gas flow past an infinitely long right-circular cylinder and the CCR model along with the boundary conditions are discussed in Sec. 2. The procedure for finding an analytic solution of the CCR model for the problem under consideration is elucidated in Sec. 3, followed by the fundamental solutions of the CCR model and the technique to implement the MFS in Sec. 4. The results for rarefied gas flow past an infinitely long circular cylinder are presented and validated in Sec. 5. The problem of rarefied gas flow past an infinitely long semicircular cylinder is discussed in Sec. 6. The paper

ends with conclusion in Sec. 7.

## 2 Problem formulation

In this section, we describe the problem under consideration and the mathematical model with which the problem will be tackled. Nonetheless, before this, let us point out that—to simplify the notations—all symbols with tilde as accent will henceforth denote quantities with dimensions while those without any accent will denote dimensionless quantities.

### 2.1 Problem description

We consider a steady low-speed flow of a rarefied monatomic gas past an infinitely long right-circular cylinder having radius  $\tilde{R}_1$ . We assume that the cylinder is isothermal (having uniform temperature  $\tilde{T}_0$ , which is the same as the far-field ambient temperature of the gas) with large solid-to-gas thermal conductivity ratio. Let the circular cross section of the cylinder be in the  $\tilde{x}\tilde{y}$ -plane, the axis of the cylinder be coinciding with the  $\tilde{z}$ -axis and the flow be approaching the cylinder from the negative  $\tilde{x}$ -direction toward the positive  $\tilde{x}$ -direction. As aforementioned, owing to the axial symmetry of the cylinder, the problem is quasi-two-dimensional, i.e., it is sufficient to study the problem for a circular disk of the same radius instead of studying the problem for the infinitely long cylinder. A two-dimensional cross-sectional view of the problem is depicted in Fig. 2 wherein the center of the disk is assumed to be fixed at the origin of the coordinate system. The radius of the disk is taken as the characteristic length scale  $\tilde{L}$  for non-dimensionalization so that the dimensionless radius of the disk is  $R_1 = \tilde{R}_1/\tilde{L} = 1$ . To circumvent Stokes' paradox and hence the non-existence of a solution to the problem, we assume an artificial circular boundary of radius  $\tilde{R}_2$  (where  $\tilde{R}_2 \gg \tilde{R}_1$ ) outside the disk. The radius of the artificial boundary is taken to be sufficiently large in comparison to the radius of the disk so that the artificial boundary has only insignificant effects on the problem under consideration.

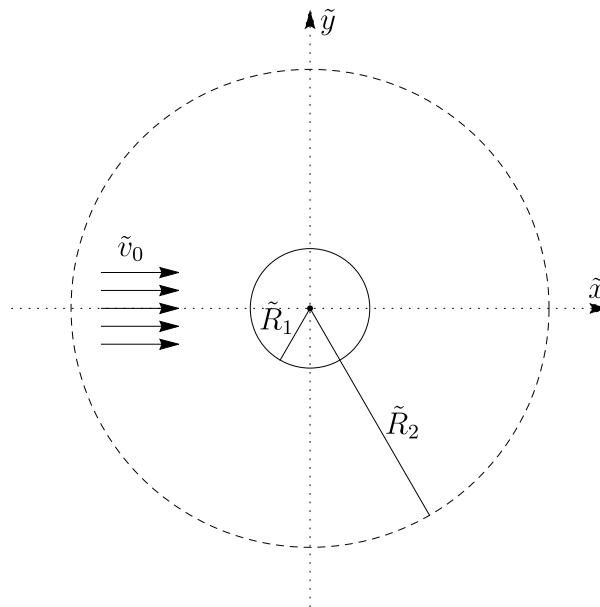


Figure 2: Cross-sectional view of the problem of a rarefied gas flow past an infinitely long cylinder. The solid circle represents the periphery of the cylinder while the dashed circle represents an artificial boundary far away from the cylinder.

## 2.2 Governing equations

To account for rarefaction effects, we approach the problem with the CCR model [20] that consists of the mass, momentum and energy balance equations as the governing equations and special constitutive relations for the stress and heat flux which are coupled with each other. Owing to the coupling between the constitutive relations for the stress and heat flux, the model has been referred to as the CCR model. The governing equations (the mass, momentum and energy balance equations) in the CCR model reads [20]

$$\frac{\partial \tilde{\rho}}{\partial \tilde{t}} + \tilde{\mathbf{v}} \cdot \tilde{\nabla} \tilde{\rho} + \tilde{\rho} \tilde{\nabla} \cdot \tilde{\mathbf{v}} = 0, \quad (9)$$

$$\tilde{\rho} \left( \frac{\partial \tilde{\mathbf{v}}}{\partial \tilde{t}} + \tilde{\mathbf{v}} \cdot \tilde{\nabla} \tilde{\mathbf{v}} \right) + \tilde{\nabla} \tilde{p} + \tilde{\nabla} \cdot \tilde{\boldsymbol{\sigma}} = \tilde{\rho} \tilde{\mathbf{F}}, \quad (10)$$

$$\tilde{\rho} \tilde{c}_v \left( \frac{\partial \tilde{T}}{\partial \tilde{t}} + \tilde{\mathbf{v}} \cdot \tilde{\nabla} \tilde{T} \right) + \tilde{p} \tilde{\nabla} \cdot \tilde{\mathbf{v}} + \tilde{\nabla} \cdot \tilde{\mathbf{q}} + \tilde{\boldsymbol{\sigma}} : \tilde{\nabla} \tilde{\mathbf{v}} = 0, \quad (11)$$

where  $\tilde{\rho}$ ,  $\tilde{\mathbf{v}}$ ,  $\tilde{T}$ ,  $\tilde{p}$ ,  $\tilde{\boldsymbol{\sigma}}$ ,  $\tilde{\mathbf{q}}$  are the density, velocity, temperature, pressure, stress tensor and heat flux, respectively;  $\tilde{t}$  is the time variable;  $\tilde{\mathbf{F}}$  is the external force per unit mass; and the coefficient  $\tilde{c}_v$  is the specific heat at constant volume and for monatomic gases  $\tilde{c}_v = 3\tilde{R}/2$ , with  $\tilde{R}$  being the specific gas constant. Needless to say, the system of the governing equations (9)–(11) is not closed as such due to the presence of the additional unknowns  $\tilde{\boldsymbol{\sigma}}$  and  $\tilde{\mathbf{q}}$ . The constitutive relations in the CCR model for closing the system of equations (9)–(11) read [20]

$$\tilde{\boldsymbol{\sigma}} = -2\tilde{\mu} \left[ \overline{\tilde{\nabla} \tilde{\mathbf{v}}} + \frac{\alpha_0}{\tilde{p}} \left\{ \overline{\tilde{\nabla} \tilde{\mathbf{q}}} - \alpha_1 \overline{\tilde{\mathbf{q}} \tilde{\nabla}(\ln \tilde{\theta})} - \alpha_2 \overline{\tilde{\mathbf{q}} \tilde{\nabla}(\ln \tilde{p})} \right\} \right], \quad (12)$$

$$\tilde{\mathbf{q}} = -\tilde{\kappa} \left[ \tilde{\nabla} \tilde{\theta} + \frac{\alpha_0}{\tilde{\rho}} \left\{ \tilde{\nabla} \cdot \tilde{\boldsymbol{\sigma}} - (1 - \alpha_1) \tilde{\boldsymbol{\sigma}} \cdot \tilde{\nabla}(\ln \tilde{\theta}) - (1 - \alpha_2) \tilde{\boldsymbol{\sigma}} \cdot \tilde{\nabla}(\ln \tilde{p}) \right\} \right], \quad (13)$$

where  $\tilde{\mu}$  is the coefficient of the shear viscosity,  $\tilde{\kappa}\tilde{R}$  is the coefficient of the thermal conductivity,  $\tilde{\theta} = \tilde{R}\tilde{T}$  represents the temperature in energy units, and the overline above a quantity denotes its symmetric and tracefree part. For a  $d$ -dimensional vector  $\boldsymbol{\psi}$ , the symmetric-tracefree part of the tensor  $\nabla \boldsymbol{\psi}$  is defined as [32]

$$\overline{\nabla \boldsymbol{\psi}} = \frac{1}{2} \left[ \nabla \boldsymbol{\psi} + (\nabla \boldsymbol{\psi})^\top \right] - \frac{1}{d} (\nabla \cdot \boldsymbol{\psi}) \mathbf{I}, \quad (14)$$

where  $\mathbf{I}$  is the identity tensor in  $d$ -dimensions. For three- and quasi-two-dimensional problems,  $d = 3$ . The coefficient  $\alpha_0$  in constitutive relations (12) and (13) is referred to as the coupling coefficient since it induces the coupling between constitutive relations for the stress and heat flux. Setting  $\alpha_0 = 0$  in (12) and (13) removes the coupling between the constitutive relations (12) and (13) and reduces them simply to the NSF constitutive relations. The coefficients  $\alpha_1$  and  $\alpha_2$  in (12) and (13) are typically determined from experimental or theoretical scenarios; nonetheless,  $\alpha_1 = \alpha_2 = 0$  for Maxwell molecules [20]. Equations (9)–(11) along with the constitutive relations (12) and (13) are referred to as the CCR model [20].

As we are interested in employing the MFS that relies on the linearity of equations, we shall be dealing with the linearized CCR model. For linearization, we choose the equilibrium state of the gas as the reference state wherein let the density and temperature of the gas be  $\tilde{\rho}_0$  and  $\tilde{T}_0$ , respectively, so that the pressure in the reference state be  $\tilde{p}_0 = \tilde{\rho}_0 \tilde{\theta}_0$ , where  $\tilde{\theta}_0 = \tilde{R}\tilde{T}_0$ . The other quantities (velocity, stress tensor and heat flux) in the reference state are zero. For linearization, we introduce small perturbations in the flow variables from their values in the equilibrium state and, for convenience, we also make all quantities dimensionless using a length scale  $\tilde{L}$ , time scale  $\tilde{L}/\sqrt{\tilde{\theta}_0}$  and appropriate combinations of the reference density  $\tilde{\rho}_0$  and reference temperature  $\tilde{T}_0$ .

The dimensionless perturbations in the density, temperature, velocity, stress tensor and heat flux from their values in the reference state are given by

$$\rho = \frac{\tilde{\rho} - \tilde{\rho}_0}{\tilde{\rho}_0}, \quad T = \frac{\tilde{T} - \tilde{T}_0}{\tilde{T}_0}, \quad \mathbf{v} = \frac{\tilde{\mathbf{v}}}{\sqrt{\tilde{\theta}_0}}, \quad \boldsymbol{\sigma} = \frac{\tilde{\boldsymbol{\sigma}}}{\tilde{\rho}_0 \tilde{\theta}_0} \quad \text{and} \quad \mathbf{q} = \frac{\tilde{\mathbf{q}}}{\tilde{\rho}_0 (\tilde{\theta}_0)^{3/2}}, \quad (15)$$

respectively. Inserting these dimensionless perturbations in the CCR model (9)–(13) and dropping all nonlinear terms in the dimensionless perturbations, we get the linear-dimensionless CCR model, which reads

$$\frac{\partial \rho}{\partial t} + \nabla \cdot \mathbf{v} = 0, \quad (16)$$

$$\frac{\partial \mathbf{v}}{\partial t} + \nabla p + \nabla \cdot \boldsymbol{\sigma} = \mathbf{F}, \quad (17)$$

$$c_v \frac{\partial T}{\partial t} + \nabla \cdot \mathbf{v} + \nabla \cdot \mathbf{q} = 0, \quad (18)$$

$$\boldsymbol{\sigma} = -2\text{Kn} \left( \overline{\nabla \mathbf{v}} + \alpha_0 \overline{\nabla \mathbf{q}} \right), \quad (19)$$

$$\mathbf{q} = -\frac{c_p \text{Kn}}{\text{Pr}} \left( \nabla T + \alpha_0 \nabla \cdot \boldsymbol{\sigma} \right), \quad (20)$$

where  $t = \tilde{t} \sqrt{\tilde{\theta}_0} / \tilde{L}$ ,  $\nabla \equiv (1/\tilde{L}) \tilde{\nabla}$ , the dimensionless perturbation in the pressure  $p$  is  $p = \rho + T$  due to the linearization,  $c_v = \tilde{c}_v / \tilde{R}$ ,

$$\text{Kn} = \frac{\tilde{\mu}_0}{\tilde{\rho}_0 \sqrt{\tilde{\theta}_0} \tilde{L}} \quad \text{and} \quad \text{Pr} = c_p \frac{\tilde{\mu}_0}{\tilde{\kappa}_0} \quad (21)$$

are the Knudsen number and Prandtl number, respectively, with  $\tilde{\mu}_0$  and  $\tilde{\kappa}_0 \tilde{R}$  being the coefficients of the shear viscosity and thermal conductivity, respectively, in the reference state. In (21),  $c_p = \tilde{c}_p / \tilde{R}$  with  $\tilde{c}_p$  being the specific heat at constant pressure. For monatomic gases,  $\tilde{c}_p = 5\tilde{R}/2$ . It may be noted that while performing the linearization, the external force  $\tilde{\mathbf{F}}$  has been assumed to be small (of the order of perturbed variables) and has been scaled with  $\tilde{\theta}_0/L$ , i.e.  $\mathbf{F} = \tilde{\mathbf{F}}L/\tilde{\theta}_0$ . Equations (16)–(20) are referred to as the linear-dimensionless CCR model.

For the problem under consideration, the length scale  $\tilde{L}$  is the radius of the disk  $\tilde{R}_1$ , there is no external force, i.e.  $\mathbf{F} = \mathbf{0}$ , and the steady-state equations are obtained simply by setting all time-derivative terms in equations (16)–(20) to zero, i.e. by setting  $\partial(\cdot)/\partial t = 0$ . Consequently, the linear-dimensionless CCR model in the steady state reduces to

$$\left. \begin{aligned} \nabla \cdot \mathbf{v} &= 0, \\ \nabla p + \nabla \cdot \boldsymbol{\sigma} &= \mathbf{0}, \\ \nabla \cdot \mathbf{q} &= 0, \end{aligned} \right\} \quad (22)$$

with the closure (for a monatomic gas)

$$\left. \begin{aligned} \boldsymbol{\sigma} &= -2\text{Kn} \left( \overline{\nabla \mathbf{v}} + \alpha_0 \overline{\nabla \mathbf{q}} \right), \\ \mathbf{q} &= -\frac{c_p \text{Kn}}{\text{Pr}} \left( \nabla T + \alpha_0 \nabla \cdot \boldsymbol{\sigma} \right). \end{aligned} \right\} \quad (23)$$

It is worthwhile noting that for  $\alpha_0 = 0$  the CCR model reduces to the NSF model and for  $\alpha_0 = 2/5$  the steady-state linear-dimensionless CCR model (Eqs. (22) and (23)) reduces to steady-state linear-dimensionless Grad 13-moment equations; for more details, see [20, 28].

### 2.3 Boundary conditions

The thermodynamically-consistent boundary conditions complementing the linear CCR model were derived in Ref. [28] for evaporation/condensation problems and are given in Eqs. (4.2) and (4.3) of Ref. [28]. Since the problem under consideration does not involve evaporation or condensation, all of the Onsager reciprocity coefficients  $\eta_{11}$ ,  $\eta_{12}$  and  $\eta_{22}$  in Eq. (4.2) of Ref. [28] are zero. Moreover, the boundary conditions in Ref. [28] in a two-dimensional case are simplified further by considering only one tangential direction instead of two in Eq. (4.3) of Ref. [28]. Therefore, the boundary conditions complementing the linear CCR model in two dimensions are [28, 29]

$$(\mathbf{v} - \mathbf{v}_w) \cdot \mathbf{n} = 0, \quad (24)$$

$$\mathbf{q} \cdot \mathbf{n} = -2\tau_0(T - T_w + \alpha_0 \mathbf{n} \cdot \boldsymbol{\sigma} \cdot \mathbf{n}), \quad (25)$$

$$\mathbf{t} \cdot \boldsymbol{\sigma} \cdot \mathbf{n} = -\zeta(\mathbf{v} - \mathbf{v}_w + \alpha_0 \mathbf{q}) \cdot \mathbf{t}, \quad (26)$$

where  $\mathbf{n}$  and  $\mathbf{t}$  are the unit normal and tangent vectors, respectively; and  $\mathbf{v}_w$  and  $\mathbf{T}_w$  are dimensionless perturbations in the velocity and temperature of the boundary wall. Note that the reference values of the velocity and temperature for making the velocity and temperature of the boundary wall linear and dimensionless are the same as those for making the velocity and temperature of the gas linear and dimensionless. Equations (25) and (26) represent the temperature-jump and velocity-slip boundary conditions in which the temperature-jump and velocity-slip coefficients are given by [28]

$$\tau_0 = 0.8503 \frac{\chi}{2 - \chi} \sqrt{\frac{2}{\pi}} \quad \text{and} \quad \zeta = 0.8798 \frac{\chi}{2 - \chi} \sqrt{\frac{2}{\pi}}, \quad (27)$$

respectively, where  $\chi \in [0, 1]$  is the accommodation coefficient that signifies the amount of the particles diffused/reflected on/from the wall into the gas. We assume the boundary to be diffusely reflecting, for which the accommodation coefficient  $\chi = 1$  [33].

As pointed out in Sec. 2, to circumvent Stokes' paradox, an artificial boundary in the flow domain has been assumed. To ensure that there is no disturbance to the flow due to this artificial boundary, the boundary conditions at the artificial boundary are taken as

$$v_x = v_0, \quad v_y = 0 \quad \text{and} \quad T = 0. \quad (28)$$

## 3 Analytic solution

As mentioned above, flow past an infinitely long right circular cylinder is actually a quasi-two-dimensional problem when the fluid flow is in the normal direction of the axis of the cylinder. In this case, there is no change in the flow variables in the axial direction of the cylinder. To tackle the problem, it is convenient to work in a cylindrical coordinate system  $(r, \vartheta, z)$ , wherein the  $z$ -axis coincides with the axis of the cylinder. Owing to the axial symmetry, the flow variables do not change in the  $z$ -direction.

In this cylindrical coordinate system, the linear steady-state CCR model (Eqs. (22) and (23)) can be written as follows. The mass, momentum and energy balance equations (22) in the cylindrical coordinate system read

$$\frac{\partial v_r}{\partial r} + \frac{1}{r} \frac{\partial v_\vartheta}{\partial \vartheta} + \frac{v_r}{r} = 0, \quad (29)$$

$$\frac{\partial q_r}{\partial r} + \frac{1}{r} \frac{\partial q_\vartheta}{\partial \vartheta} + \frac{q_r}{r} = 0. \quad (30a)$$

$$\frac{\partial p}{\partial r} + \frac{\partial \sigma_{rr}}{\partial r} + \frac{1}{r} \frac{\partial \sigma_{r\vartheta}}{\partial \vartheta} + \frac{\sigma_{rr} - \sigma_{\vartheta\vartheta}}{r} = 0, \quad (30b)$$

$$\frac{1}{r} \frac{\partial p}{\partial \vartheta} + \frac{\partial \sigma_{r\vartheta}}{\partial r} + \frac{1}{r} \frac{\partial \sigma_{\vartheta\vartheta}}{\partial \vartheta} + \frac{2\sigma_{r\vartheta}}{r} = 0, \quad (31)$$



where (29) is the mass balance equation (22)<sub>1</sub>, (30a) and (30b) are the momentum balance equation (22)<sub>2</sub> in the  $r$ - and  $\theta$ -directions, respectively, and (31) is the energy balance equation (22)<sub>3</sub>. It may be noted that the momentum balance equation in the  $z$ -direction is trivially satisfied, owing to the fact that there is no change in flow variables with respect to the  $z$ -coordinate. The required variables to close the system (29)–(31) from the closure relations (23)—in the cylindrical coordinate system—read

$$\sigma_{rr} = -2\text{Kn} \frac{\partial v_r}{\partial r} - 2\text{Kn}\alpha_0 \frac{\partial q_r}{\partial r}, \quad (32a)$$

$$\sigma_{r\vartheta} = -\text{Kn} \left( \frac{\partial v_\vartheta}{\partial r} + \frac{1}{r} \frac{\partial v_r}{\partial \vartheta} - \frac{v_\vartheta}{r} \right) - \alpha_0 \text{Kn} \left( \frac{\partial q_\vartheta}{\partial r} + \frac{1}{r} \frac{\partial q_r}{\partial \vartheta} - \frac{q_\vartheta}{r} \right), \quad (32b)$$

$$\sigma_{\vartheta\vartheta} = -2\text{Kn} \left( \frac{1}{r} \frac{\partial v_\vartheta}{\partial \vartheta} + \frac{v_r}{r} \right) - 2\alpha_0 \text{Kn} \left( \frac{1}{r} \frac{\partial q_\vartheta}{\partial \vartheta} + \frac{q_r}{r} \right), \quad (32c)$$

$$q_r = -\frac{c_p \text{Kn}}{\text{Pr}} \left[ \frac{\partial T}{\partial r} + \alpha_0 \left( \frac{\partial \sigma_{rr}}{\partial r} + \frac{1}{r} \frac{\partial \sigma_{r\vartheta}}{\partial \vartheta} + \frac{\sigma_{rr} - \sigma_{\vartheta\vartheta}}{r} \right) \right], \quad (33a)$$

$$q_\vartheta = -\frac{c_p \text{Kn}}{\text{Pr}} \left[ \frac{1}{r} \frac{\partial T}{\partial \vartheta} + \alpha_0 \left( \frac{\partial \sigma_{r\vartheta}}{\partial r} + \frac{1}{r} \frac{\partial \sigma_{\vartheta\vartheta}}{\partial \vartheta} + \frac{2\sigma_{r\vartheta}}{r} \right) \right]. \quad (33b)$$

To determine an analytic solution of the CCR model (29)–(33b) (in quasi-two dimensions), we convert the partial differential equations (29)–(33b) into ordinary differential equations using symmetry ansatz, which is inspired by the solution of the Stokes equations. This approach has also been utilized to determine analytic solutions of the linearized R13 and R26 equations for the problems of flow past a sphere and a cylinder [30, 31, 34]. In symmetry ansatz, the radial dependency of the variables is separated and the angular dependency of the variables is expressed using the sine and cosine functions. For this purpose, the vector and tensor components having an odd number of indices in  $\vartheta$  are selected to be proportional to  $\sin \vartheta$  whereas the scalars and tensor components with an even number of indices in  $\vartheta$  are made proportional to  $\cos \vartheta$  [30]. Furthermore, since the problem is quasi-two-dimensional, the  $z$ -coordinate dependency of the variables is automatically eliminated. With these symmetry ansatz, the solution for the vectors  $\mathbf{v}$  and  $\mathbf{q}$  should be of the form

$$\mathbf{v}(r, \vartheta) = \begin{bmatrix} a(r) \cos \vartheta \\ b(r) \sin \vartheta \\ 0 \end{bmatrix} \quad \text{and} \quad \mathbf{q}(r, \vartheta) = \begin{bmatrix} \alpha(r) \cos \vartheta \\ \beta(r) \sin \vartheta \\ 0 \end{bmatrix}, \quad (34)$$

that for the scalars  $p$  and  $T$  should be of the form

$$p(r, \vartheta) = c(r) \cos \vartheta \quad \text{and} \quad T(r, \vartheta) = d(r) \cos \vartheta, \quad (35)$$

and that for  $\boldsymbol{\sigma}$  should be of the form

$$\boldsymbol{\sigma}(r, \vartheta) = \begin{bmatrix} \gamma(r) \cos \vartheta & \kappa(r) \sin \vartheta & 0 \\ \kappa(r) \sin \vartheta & \omega(r) \cos \vartheta & 0 \\ 0 & 0 & \sigma_{zz} \end{bmatrix}, \quad (36)$$

where  $a(r)$ ,  $b(r)$ ,  $\alpha(r)$ ,  $\beta(r)$ ,  $c(r)$ ,  $d(r)$ ,  $\gamma(r)$ ,  $\kappa(r)$  and  $\omega(r)$  are the unknown functions that need to be determined, and  $\sigma_{zz} = -[\gamma(r) + \omega(r)] \cos \vartheta$  as  $\boldsymbol{\sigma}$  is a symmetric and tracefree tensor of rank 2. Insertion of ansatz (34)–(36) in Eqs. (29)–(33b) leads to a system of ordinary differential equations in the unknowns  $a(r)$ ,  $b(r)$ ,  $\alpha(r)$ ,  $\beta(r)$ ,  $c(r)$ ,  $d(r)$ ,  $\gamma(r)$ ,  $\kappa(r)$  and  $\omega(r)$  that is solved to determine these unknowns. For the sake of brevity, we omit to present the explicit values of these unknowns here. Nevertheless, substituting the obtained values of the unknowns in ansatz (34)–(36), we get the following solution for the field variables.

$$v_r(r, \vartheta) = \left( c_3 - \frac{c_4}{r^2} + c_5 r^2 + c_6 \ln r \right) \cos \vartheta, \quad (37)$$

$$v_\vartheta(r, \vartheta) = \left( -c_3 - \frac{c_4}{r^2} - 3c_5 r^2 - c_6 - c_6 \ln r \right) \sin \vartheta, \quad (38)$$

$$q_r(r, \vartheta) = \left( \frac{c_1}{r^2} + c_2 \right) \cos \vartheta, \quad (39)$$

$$q_\vartheta(r, \vartheta) = \left( \frac{c_1}{r^2} - c_2 \right) \sin \vartheta, \quad (40)$$

$$p(r, \vartheta) = \text{Kn} \left( 8rc_5 - \frac{2c_6}{r} \right) \cos \vartheta, \quad (41)$$

$$\sigma_{rr}(r, \vartheta) = \text{Kn} \left( \frac{4\alpha_0 c_1}{r^3} - \frac{4c_4}{r^3} - 4rc_5 - \frac{2c_6}{r} \right) \cos \vartheta, \quad (42)$$

$$\sigma_{r\vartheta}(r, \vartheta) = \text{Kn} \left( \frac{4\alpha_0 c_1}{r^3} - \frac{4c_4}{r^3} + 4rc_5 \right) \sin \vartheta, \quad (43)$$

$$\sigma_{\vartheta\vartheta}(r, \vartheta) = \text{Kn} \left( \frac{-4\alpha_0 c_1}{r^3} + \frac{4c_4}{r^3} + 4rc_5 + \frac{2c_6}{r} \right) \cos \vartheta, \quad (44)$$

$$T(r, \vartheta) = \left( \frac{\text{Pr}}{c_p \text{Kn}} \left( \frac{c_1}{r} - rc_2 \right) + \text{Kn} \alpha_0 \left( 8rc_5 - \frac{2c_6}{r} \right) \right) \cos \vartheta. \quad (45)$$

The constants  $c_1$ ,  $c_2$ ,  $c_3$ ,  $c_4$ ,  $c_5$  and  $c_6$  in the above solution are determined using boundary conditions (24)–(26) and (28). However, it is crucial to acknowledge that without the presence of the outer artificial wall or, in other words, without imposing the specified boundary conditions (28), determining the six constants  $c_1$ ,  $c_2$ ,  $c_3$ ,  $c_4$ ,  $c_5$  and  $c_6$  uniquely through three boundary conditions (24)–(26) is impracticable. Moreover, for solutions to converge in the far-field (as  $r \rightarrow \infty$ ), it becomes necessary that the constants  $c_2 = c_5 = c_6 = 0$ . Additionally, if the boundary conditions (24)–(26) are imposed, it follows that the remaining constants  $c_1$ ,  $c_3$ , and  $c_4$  also become zero, resulting in an overall zero solution. This scenario illustrates the occurrence of Stokes' paradox with the CCR model as well, and thereby affirms the necessity of employing an artificial boundary to circumvent this paradox. Therefore, the constants  $c_1, c_2, \dots, c_6$  are determined using boundary conditions (24)–(26) and (28). Substituting the determined values of the constants, the final flow variables—when required—can be converted back into the Cartesian coordinate system using the transformation

$$\begin{bmatrix} \hat{x} \\ \hat{y} \\ \hat{z} \end{bmatrix} = \begin{bmatrix} \cos \vartheta & -\sin \vartheta & 0 \\ \sin \vartheta & \cos \vartheta & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \hat{r} \\ \hat{\vartheta} \\ \hat{z} \end{bmatrix}, \quad (46)$$

where  $\hat{x}, \hat{y}, \hat{z}$  denote the unit vectors in the Cartesian coordinate system and  $\hat{r}, \hat{\vartheta}, \hat{z}$  are the unit vectors in the polar coordinate system. For instance, the velocity is given by

$$\mathbf{v} = (v_x, v_y, 0)^\top = (v_r \cos \vartheta - v_\vartheta \sin \vartheta, v_r \sin \vartheta + v_\vartheta \cos \vartheta, 0)^\top. \quad (47)$$

## 4 Fundamental solutions and their implementation

The MFS utilizes the fundamental solutions (or free-space Green's functions) of the governing equations as the basis functions. The fundamental solutions have their own source points (or singularities) located outside the physical domain of the problem, ensuring that the MFS remains free from singularities. In approximating the numerical solution through the superposition of the fundamental solutions, the unknowns associated with the source points are introduced and these unknowns are determined by satisfying the boundary conditions at the discretized boundary nodes (or collocation points). Consequently, the overall solution relies on the unknowns related to the source points and on the boundary conditions for the problem. The two-dimensional fundamental solutions for the CCR model have been derived by us in Ref. [29], wherein it has been shown that the fundamental solutions of the CCR model depend on the point mass

source  $h$ , point force  $\mathbf{f} = (f_1, f_2)^\top$  and point heat source  $g$  that were included as the Dirac delta forcing terms in the mass, momentum and energy balance equations, respectively. The point mass source  $h$  considered in Eq. (20) of [29] is nonzero only for the problems involving evaporation or condensation. In the present work, we do not deal with such problems, so it is not necessary to include the forcing term in the mass balance equation, i.e. the governing equations with the forcing terms for the problem under consideration read

$$\left. \begin{aligned} \nabla \cdot \mathbf{v} &= 0, \\ \nabla p + \nabla \cdot \boldsymbol{\sigma} &= \mathbf{f} \delta(\mathbf{r}), \\ \nabla \cdot \mathbf{q} &= g \delta(\mathbf{r}), \end{aligned} \right\} \quad (48)$$

where  $\mathbf{r}$  is the position of the singularity whereat the point sources  $\mathbf{f}$  and  $g$  are placed. Solving system (48) with constitutive relations (23) yields the fundamental solutions of the CCR model in two dimensions. A method of determining the fundamental solutions of the CCR model in two dimensions is given in [29]. But for the sake of completeness, we also present a slightly different way of determining these fundamental solutions in Appendix A. Notwithstanding, the methods given in Appendix A and in [29] are equivalent and give exactly the same fundamental solutions. The fundamental solutions of the CCR model in two dimensions read [29] (see also Appendix A)

$$\mathbf{v}(\mathbf{r}) = \frac{1}{8\pi\text{Kn}} \mathbf{f} \cdot \left[ \frac{2\mathbf{r}\mathbf{r}}{r^2} - (2\ln r - 1)\mathbf{I} \right] + \frac{c_p\text{Kn}}{2\pi\text{Pr}} \alpha_0^2 \mathbf{f} \cdot \left( \frac{2\mathbf{r}\mathbf{r}}{r^4} - \frac{\mathbf{I}}{r^2} \right), \quad (49)$$

$$p(\mathbf{r}) = \frac{\mathbf{f} \cdot \mathbf{r}}{2\pi r^2}, \quad (50)$$

$$\boldsymbol{\sigma}(\mathbf{r}) = \frac{2\text{Kn} g \alpha_0 + \mathbf{f} \cdot \mathbf{r}}{2\pi} \left( \frac{2\mathbf{r}\mathbf{r}}{r^4} - \frac{\mathbf{I}}{r^2} \right), \quad (51)$$

$$T(\mathbf{r}) = -\frac{\text{Pr} g}{2\pi\text{Kn} c_p} \ln r, \quad (52)$$

$$\mathbf{q}(\mathbf{r}) = \frac{g}{2\pi} \frac{\mathbf{r}}{r^2} - \frac{c_p\text{Kn}}{2\pi\text{Pr}} \alpha_0 \mathbf{f} \cdot \left( \frac{2\mathbf{r}\mathbf{r}}{r^4} - \frac{\mathbf{I}}{r^2} \right), \quad (53)$$

where  $r = |\mathbf{r}|$ .

As discussed in Sec. 1, the mathematical origin of Stokes' paradox lies in the logarithmic dependence of the solution of the Stokes equations. This logarithmic dependence is also seen in the fundamental solutions of the CCR model (see Eqs. (49) and (52)), due to which the solution diverges in the far field. To circumvent this difficulty, we employ the MFS on a bounded domain by again introducing an artificial outer boundary which is far enough from the original circular disk. To place the singularity points outside the computational domain, we assume that the source points are located on two circles—one inside the actual periphery of the disk and the other outside of the artificial boundary. The circles on which the singularity points are placed will henceforth be referred to as the fictitious boundaries. An illustration depicting the boundary nodes on the periphery of the disk and on the artificial boundary, and the location of source points on the fictitious boundaries is presented in Fig. 3. For more details on the location of source points, the reader is referred to [29]. We consider a total of  $N_s$  source points, out of which  $N_{s_1}$  points lie on the inner fictitious boundary having dimensionless radius  $R'_1$  and  $N_{s_2}$  points on the outer fictitious boundary having dimensionless radius  $R'_2$  (where  $R'_1 < R_1$  and  $R'_2 > R_2$ ). Additionally, we place  $N_{b_1}$  boundary nodes on the actual periphery of the disk and  $N_{b_2}$  boundary nodes on the artificial boundary accounting for a total of  $N_b$  boundary points. To define the positions, we denote the position of the  $i^{\text{th}}$  singularity by  $\mathbf{x}_s^{(i)}$  and that of the  $j^{\text{th}}$  boundary node by  $\mathbf{x}_b^{(j)}$ . The vector from the  $i^{\text{th}}$  singularity site to the point situated at position  $\mathbf{x}$  in the domain is represented by  $\mathbf{r}^{(i)} = \mathbf{x} - \mathbf{x}_s^{(i)}$  and the vector from the  $i^{\text{th}}$  singularity site to the  $j^{\text{th}}$  boundary node is denoted by  $\mathbf{r}^{(ij)} = \mathbf{x}_b^{(j)} - \mathbf{x}_s^{(i)}$ . Corresponding to the  $i^{\text{th}}$  singularity ( $i = 1, 2, 3, \dots, N_s$ ),

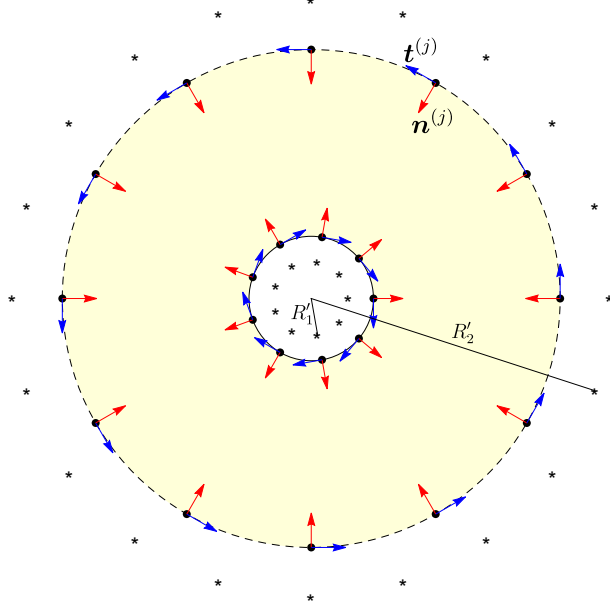


Figure 3: Placement of the collocation points (black dots) on the boundary and singularities (black stars) outside the confined domain. The blue and red arrows at each boundary node denote the unit tangent and normal vectors, respectively.

there are three unknowns, namely  $f_1^{(i)}$ ,  $f_2^{(i)}$  and  $g^{(i)}$ , where  $f_1^{(i)}$  and  $f_2^{(i)}$  are the components of the point force  $\mathbf{f}^{(i)}$  applied on the  $i^{\text{th}}$  singularity, i.e.  $\mathbf{f}^{(i)} = \left( f_1^{(i)}, f_2^{(i)} \right)^\top$ , and  $g^{(i)}$  is the point heat source applied on the  $i^{\text{th}}$  singularity. Thus there are a total of  $3 \times N_s$  unknowns. These unknowns are to be computed using the boundary conditions at both the actual and artificial boundaries. This means that three boundary conditions need to be applied at each boundary node, which leads to a set of  $3 \times N_b$  linear algebraic equations that are to be solved for  $3 \times N_s$  unknowns. Since the boundary conditions are to be applied on the boundary nodes, it makes sense to write the field variables—obtained from the superposition of the fundamental solutions (49)–(53) for all singularities—at the  $j^{\text{th}}$  boundary node. On superposition of the fundamental solutions (49)–(53) for all singularities, the field variables at the  $j^{\text{th}}$  boundary node read

$$\mathbf{v}^{(j)} = \sum_{i=1}^{N_s} \frac{\mathbf{f}^{(i)}}{8\pi\text{Kn}} \cdot \left( \frac{2\mathbf{r}^{(ij)}\mathbf{r}^{(ij)}}{|\mathbf{r}^{(ij)}|^2} - (2\ln|\mathbf{r}^{(ij)}| - 1)\mathbf{I} \right) + \frac{c_p\text{Kn}\alpha_0^2}{2\pi\text{Pr}} \mathbf{f}^{(i)} \cdot \left( \frac{2\mathbf{r}^{(ij)}\mathbf{r}^{(ij)}}{|\mathbf{r}^{(ij)}|^4} - \frac{\mathbf{I}}{|\mathbf{r}^{(ij)}|^2} \right), \quad (54)$$

$$p^{(j)} = \sum_{i=1}^{N_s} \frac{\mathbf{f}^{(i)} \cdot \mathbf{r}^{(ij)}}{2\pi|\mathbf{r}^{(ij)}|^2}, \quad (55)$$

$$\boldsymbol{\sigma}^{(j)} = \sum_{i=1}^{N_s} \frac{2\text{Kn}g^{(i)}\alpha_0 + \mathbf{f}^{(i)} \cdot \mathbf{r}^{(ij)}}{2\pi} \mathbf{K}(\mathbf{r}^{(ij)}), \quad (56)$$

$$T^{(j)} = - \sum_{i=1}^{N_s} \frac{g^{(i)}\text{Pr}\ln|\mathbf{r}^{(ij)}|}{c_p\text{Kn}2\pi}, \quad (57)$$

$$\mathbf{q}^{(j)} = \sum_{i=1}^{N_s} \left( \frac{g^{(i)}}{2\pi} \frac{\mathbf{r}^{(ij)}}{|\mathbf{r}^{(ij)}|^2} - \frac{c_p\text{Kn}}{2\pi\text{Pr}} \alpha_0 \mathbf{f}^{(i)} \cdot \left( \frac{2\mathbf{r}^{(ij)}\mathbf{r}^{(ij)}}{|\mathbf{r}^{(ij)}|^4} - \frac{\mathbf{I}}{|\mathbf{r}^{(ij)}|^2} \right) \right). \quad (58)$$

From boundary conditions (24)–(26), the boundary conditions for the  $j^{\text{th}}$  boundary node on the

actual periphery of the disk are

$$\mathbf{v}^{(j)} \cdot \mathbf{n}^{(j)} = 0, \quad (59)$$

$$\mathbf{q}^{(j)} \cdot \mathbf{n}^{(j)} + 2\tau_0 \left[ T^{(j)} + \alpha_0 \mathbf{n}^{(j)} \cdot \boldsymbol{\sigma}^{(j)} \cdot \mathbf{n}^{(j)} \right] = 0, \quad (60)$$

$$\mathbf{n}^{(j)} \cdot \boldsymbol{\sigma}^{(j)} \cdot \mathbf{t}^{(j)} + \varsigma \left[ \mathbf{v}^{(j)} + \alpha_0 \mathbf{q}^{(j)} \right] \cdot \mathbf{t}^{(j)} = 0, \quad (61)$$

for  $j = 1, 2, \dots, N_{b_1}$ . Here,  $\mathbf{n}^{(j)}$  and  $\mathbf{t}^{(j)}$  are the unit vectors normal and tangent to the boundary at the  $j^{\text{th}}$  boundary node. From boundary conditions (28), the boundary conditions for the  $j^{\text{th}}$  boundary node on the artificial boundary are

$$v_x^{(j)} = v_0, \quad v_y^{(j)} = 0 \quad \text{and} \quad T^{(j)} = 0 \quad (62)$$

for  $j = 1, 2, \dots, N_{b_2}$ .

Now, using the field variables at the  $j^{\text{th}}$  boundary node from Eqs. (54)–(58) in boundary conditions (59)–(61) for  $j = 1, 2, \dots, N_{b_1}$  and in boundary conditions (62) for  $j = 1, 2, \dots, N_{b_2}$ , we obtain a system of  $3N_{b_1} + 3N_{b_2} = 3N_b$  linear equations in  $3N_s$  unknowns, namely  $f_1^{(1)}, f_2^{(1)}, g^{(1)}, f_1^{(2)}, f_2^{(2)}, g^{(2)}, \dots, f_1^{(N_s)}, f_2^{(N_s)}, g^{(N_s)}$ . This system can be written in a matrix form as

$$\mathcal{M}\mathbf{U} = \mathbf{b}, \quad (63)$$

where  $\mathbf{U}$  is the column vector containing all the unknowns, i.e.  $\mathbf{U} = (f_1^{(1)}, f_2^{(1)}, g^{(1)}, f_1^{(2)}, f_2^{(2)}, g^{(2)}, \dots, f_1^{(N_s)}, f_2^{(N_s)}, g^{(N_s)})^{\text{T}}$ ;  $\mathcal{M}$  is the corresponding coefficient matrix, often referred to as the collocation matrix; and  $\mathbf{b}$  is the column vector containing only the wall properties, e.g.  $v_0$ . We have solved the system using the method of least squares in Mathematica. Since the MFS may lead to a bad-conditioned collocation matrix, it is favorable to use the method of least squares even if the collocation matrix is square [35]. The obtained unknowns facilitate the computation of the flow properties across the entire domain as the flow variables at position  $\mathbf{x}$  in the flow domain can be determined simply by dropping the superscript “ $(j)$ ” and “ $j$ ” from the superscript “ $(ij)$ ” everywhere in Eqs. (54)–(58). For example, the velocity  $\mathbf{v} \equiv \mathbf{v}(\mathbf{x})$  at position  $\mathbf{x}$  in the flow domain is given by

$$\mathbf{v} = \sum_{i=1}^{N_s} \frac{\mathbf{f}^{(i)}}{8\pi\text{Kn}} \cdot \left( \frac{2\mathbf{r}^{(i)}\mathbf{r}^{(i)}}{|\mathbf{r}^{(i)}|^2} - (2\ln|\mathbf{r}^{(i)}| - 1)\mathbf{I} \right) + \frac{c_p\text{Kn}\alpha_0^2}{2\pi\text{Pr}} \mathbf{f}^{(i)} \cdot \left( \frac{2\mathbf{r}^{(i)}\mathbf{r}^{(i)}}{|\mathbf{r}^{(i)}|^4} - \frac{\mathbf{I}}{|\mathbf{r}^{(i)}|^2} \right). \quad (64)$$

## 5 Results and discussion for flow past a circular cylinder

For numerical computations, we fix the dimensionless radius of the artificial boundary to  $R_2 = 10$  and the dimensionless radii of the inner and outer fictitious boundaries to  $R'_1 = 0.5$  and  $R'_2 = 20$ , respectively, the number of boundary nodes on the actual periphery of the disk to  $N_{b_1} = 50$  and the number of boundary nodes on the artificial boundary to  $N_{b_2} = 100$ . For simplicity, we fix the number of singularity points on the inner fictitious boundary to be equal to the number of inner boundary nodes, i.e.  $N_{s_1} = N_{b_1} = 50$ , and the number of singularity points on the outer fictitious boundary to be equal to the number of boundary nodes on the outer artificial boundary, i.e.  $N_{s_2} = N_{b_2} = 100$  so as to make the collocation matrix (having dimensions  $3N_b \times 3N_s$ ) square. Notwithstanding, the results obtained with a rectangular collocation matrix do not differ significantly from those obtained with a square collocation matrix in the present work since we have used the method of least squares for solving the formed system of equations numerically. Furthermore, the (dimensionless) approaching velocity (in the  $x$ -direction) of the gas far away from the cylinder has been fixed to  $v_0 = 1$ .

In order to validate our code, we first plot the (dimensionless) speed of the gas against the radial position (as one moves away from the cylinder) for the angles  $\vartheta = 0, \pi/4$  and  $\pi/2$  in

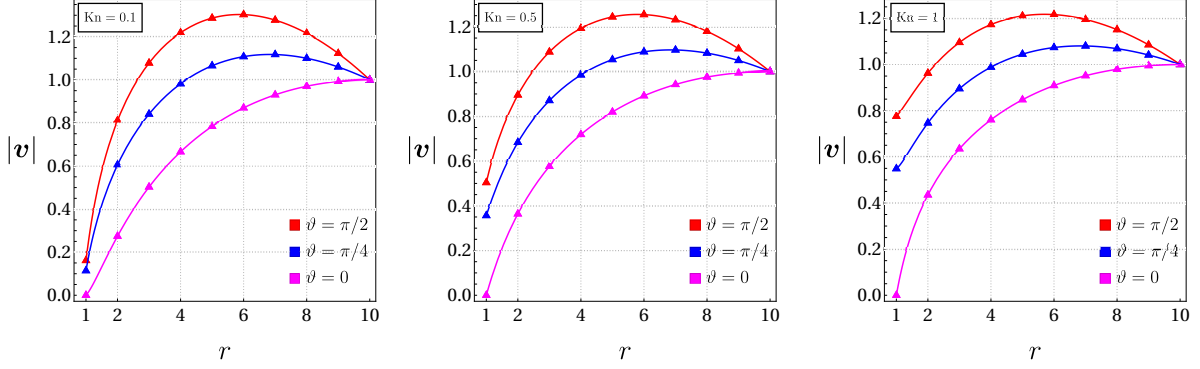


Figure 4: Speed of the gas varying with the radial position in different directions for  $\text{Kn} = 0.1$ ,  $0.5$  and  $1$ . The solid lines represent the results obtained from the MFS applied to the CCR model and the symbols represent the analytic solutions. The other parameters are  $N_{b_1} = N_{s_1} = 50$ ,  $N_{b_2} = N_{s_2} = 100$ ,  $R_1 = 1$ ,  $R_2 = 10$ ,  $R'_1 = 0.5$ ,  $R'_2 = 20$ .

Fig. 4. From left to right, the panels in the figure depict the speed of the gas for  $\text{Kn} = 0.1$ ,  $0.5$  and  $1$ . The solid lines in the figure delineate the results obtained from the MFS applied on the CCR model while the symbols display the results obtained from the analytic solution of the CCR model obtained in Sec. 3. An excellent agreement of the results from the MFS with the analytic results—evident in the figure—validates our numerical code. The figure reveals that the speed of the gas starts increasing for all values of  $\vartheta$  as one moves away from the disk. For  $\vartheta = 0$ , the speed keeps on increasing with  $r$  all the way till the artificial boundary. On the other hand, for  $|\vartheta| > 0$  (blue and red colors in the figure), the speed of the gas starts increasing as one moves away from the disk; the speed even surpasses its inlet value due to the accelerated flow occurring due to the production of pressure gradient around the disk; after attaining a maximum at a point somewhere in between the periphery of the disk and the artificial boundary the speed slows down on moving further away from the disk to match the fixed speed (through the boundary condition) on the artificial boundary. The figure also shows that for  $|\vartheta| > 0$  (blue and red colors in the figure), the speed of the gas on the disk increases with the Knudsen number due to increasing slip velocity with the Knudsen number. In order to have a better idea about the speed and velocity profiles around the disk, the streamlines and speed contours obtained from the MFS results for  $\text{Kn} = 0.1$ ,  $0.5$  and  $1$  are exhibited in Fig. 5. While the streamlines in Fig. 5 are qualitatively alike, the speed contours reveal the quantitative differences for different Knudsen numbers. The speed contours in Fig. 5, similarly to Fig. 4, also show that the speed of the gas at any point in the domain increases with increasing the Knudsen number in general. Particularly, it is clearly visible from the speed contours in a close proximity of the disk. Moreover, for  $|\vartheta| = \pi/2$ , Fig. 5—similarly to that shown by red lines in Fig. 4—shows that the point at which the speed surpasses its inlet value of  $v_0 = 1$  becomes closer and closer to the disk with increasing the Knudsen number.

It is well established theoretically as well as experimentally that rarefied gases, when flowing around an object, manifest temperature polarization near the boundary of the object, even in the absence of any external temperature difference [30, 31, 36, 37]. Temperature polarization is a rarefaction effect that is pertinent to rarefied gases. To check for the temperature polarization effect in our problem, we plot the (dimensionless) temperature of the gas at different points along the  $x$ -axis in Fig. 6, which illustrates the temperature on the left and right sides of the disk (i.e., along  $\vartheta = \pi$  and  $\vartheta = 0$ , respectively) for different values of the Knudsen number  $\text{Kn} = 0.009$ ,  $0.1$  and  $0.5$ . Since the induced temperature is very small, the temperature has been scaled up by its order while depicting it in Fig. 6. The solid lines and symbols again denote the results obtained from the MFS applied on the CCR model and from the analytic solution, respectively, that again turn out to be in an admirable agreement. The figure shows

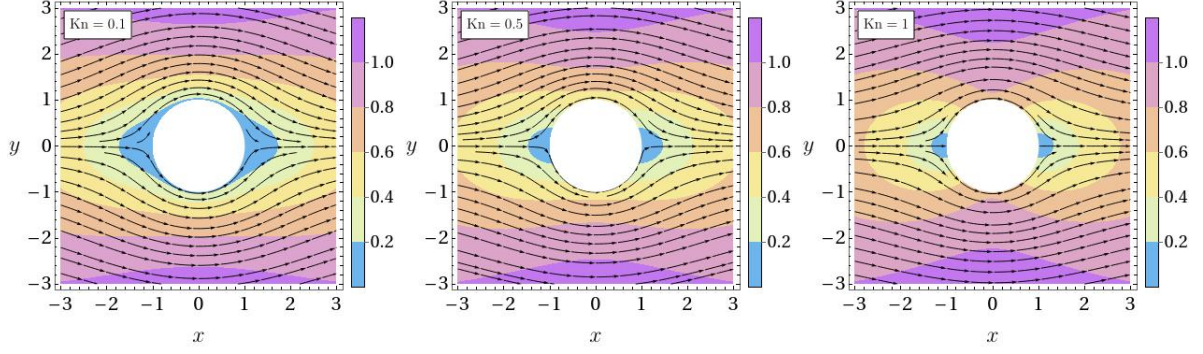


Figure 5: Velocity streamlines over speed contours obtained from the MFS applied on the CCR model for the Knudsen numbers  $\text{Kn} = 0.1, 0.5$  and  $1$ . The other parameters are the same as those for Fig. 4.

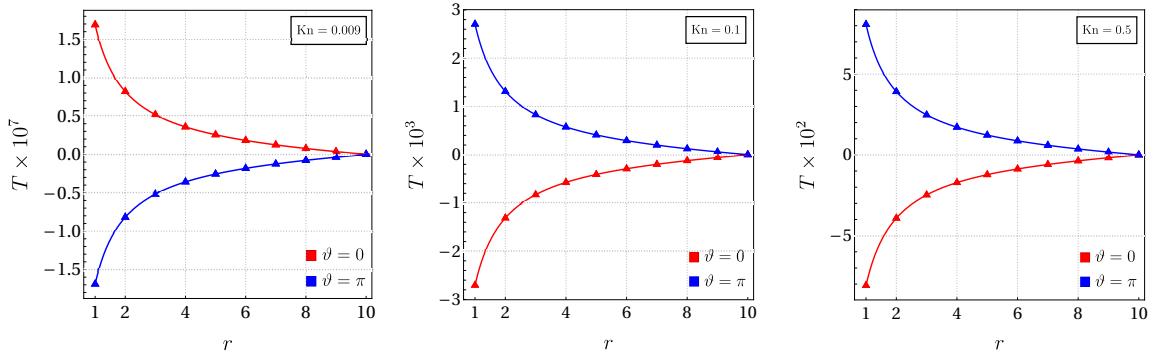


Figure 6: Temperature along the left and right sides of the disk for  $\text{Kn} = 0.009, 0.1$  and  $0.5$ . Solid lines represent the results obtained from the MFS applied to the CCR model and the triangles represent the analytic solutions. The other parameters are the same as those for Fig. 4.

the presence of temperature polarization. Nonetheless, for small Knudsen number  $\text{Kn} = 0.009$  that corresponds to the hydrodynamic regime (the left most panel in the figure), the magnitude of temperature polarization is very small (of the order of  $10^{-7}$ ) with minute cold and hot regions near the disk boundary along  $\vartheta = \pi$  and  $\vartheta = 0$ , respectively. However, as the Knudsen number increases (see the middle and right panels of the figure), the magnitude of temperature polarization increases and, moreover, temperature reversal can also be seen from the middle and right panels of the figure for  $\text{Kn} = 0.1$  and  $\text{Kn} = 0.5$ . The temperature reversal for higher Knudsen numbers has also been seen in rarefied gas flows around spheres [30]. To get deeper insights of temperature polarization and temperature reversal, we plot the temperature contours and heat-flux lines in Fig. 7. The figure shows that the heat-flux lines in all panels are starting from the right side of the disk and going toward the left side of the disk for all Knudsen numbers. However, the temperature on the right side of the disk is higher than that on the left side only for very small Knudsen numbers (e.g. for  $\text{Kn} = 0.009$  in the left most panel of Fig. 7), i.e., when the flow is in the hydrodynamic regime. In this regime, Fourier's law remains valid and hence the heat flows from hot to cold regions. For large Knudsen numbers (e.g. for  $\text{Kn} = 0.5$  and  $0.1$  in the middle and right panels of Fig. 7), the temperature on the left side of the disk is higher than that on the right side due to temperature reversal and heat interestingly seems to be flowing from cold to hot regions, which is an anti-Fourier effect and is common to stress-driven rarefied gas flows; see, e.g. [20, 30, 34, 37, 38]. As no temperature difference is applied externally in such problems, minuscule temperature differences are rendered by the stress gradients. In other words, stress gradients in such problems dominate the temperature gradients and since

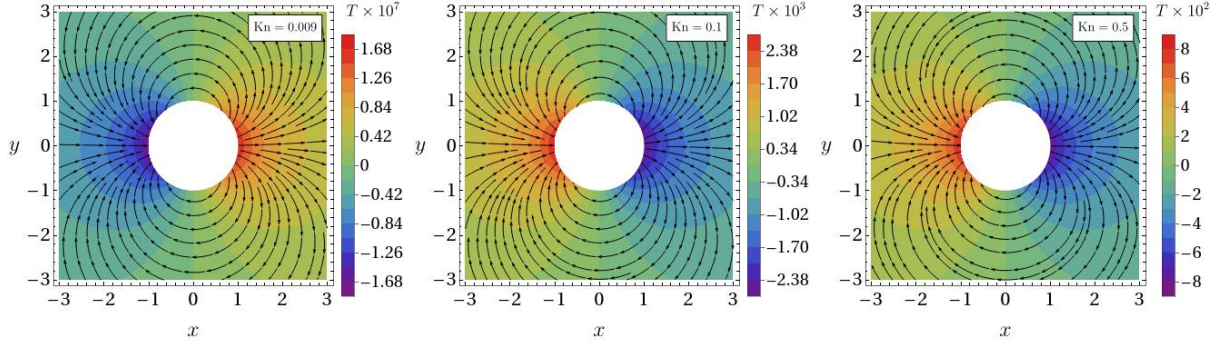


Figure 7: Heat flux lines over (scaled) temperature contours obtained from the MFS applied to the CCR model for Knudsen numbers  $\text{Kn} = 0.009, 0.1$  and  $0.5$ . The other parameters are the same as those for Fig. 4.

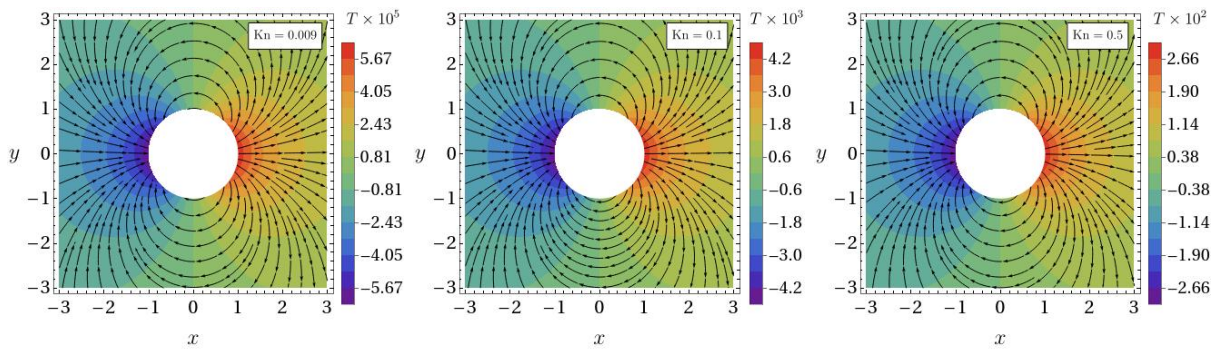


Figure 8: Heat flux lines over (scaled) temperature contours obtained from the MFS applied to the NSF model for Knudsen numbers  $\text{Kn} = 0.009, 0.1$  and  $0.5$ . The other parameters are the same as those for Fig. 4.

Fourier's law depends only on the temperature gradient, anti-Fourier effect cannot be described by the NSF equations. On the other hand, the inherent coupling of the heat flux with the stress gradient in the constitutive relations of the CCR model enables it to capture the anti-Fourier effect. To corroborate the inability of the NSF model in capturing the above findings, we have also applied the MFS to the NSF model (by setting  $\alpha_0 = 0$  in the CCR model) and displayed the temperature contours and heat-flux lines obtained from the MFS applied to the NSF model in Fig. 8. It turns out that the NSF model with the first-order temperature-jump boundary condition does not show temperature polarization at all (not shown here explicitly for brevity). With the second-order temperature jump boundary condition, the NSF model does show temperature polarization, yet reversal of temperature does not appear in order to respect imposed Fourier's law adherent to the NSF equations, which is clearly discernible in Fig. 8, which has been made using the second-order velocity-slip and temperature-jump boundary conditions. Also by comparing Figs. 7 and 8, it is evident that the NSF model does not show temperature reversal on the disk for large Knudsen numbers.

Next, we aim to calculate the drag force acting on the disk analytically as well as numerically through the MFS. The analytic expression for the net force  $\mathbf{F}^{(A)}$  acting on disk is given by the integration of the normal component of the pressure tensor  $\mathbf{P}(= \boldsymbol{\sigma} + p\mathbf{I})$  over the periphery of the disk, i.e.

$$\mathbf{F}^{(A)} = \int \mathbf{P} \cdot \mathbf{n} ds = R_1 \int_0^{2\pi} (\mathbf{P} \cdot \mathbf{n}) d\vartheta, \quad (65)$$

where  $\mathbf{n}$  is the normal vector to the boundary and  $ds$  is the length of the arc that subtends angle  $d\vartheta$  on the center of the disk. The net force  $\mathbf{F}^{(A)}$  can be simplified using the analytic solutions



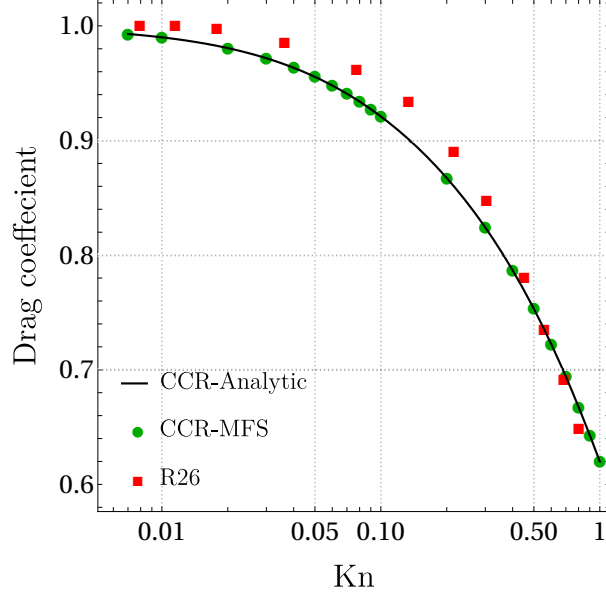


Figure 9: Variation of the drag coefficient with the Knudsen number. The solid (black) line denotes the results obtained from the analytic solution of the CCR model, the (green) disks denote the numerical solution of the CCR model obtained via the MFS and the (red) squares denote the results obtained from the R26 equations in Ref. [19]. The other parameters are the same as those for Fig. 4.

for  $\sigma$  and  $p$  determined in Sec. 3. The drag force on the disk is given by the projection of the net force in the upstream direction, i.e. by

$$F_d^{(A)} = -\mathbf{F}^{(A)} \cdot \hat{\mathbf{x}}, \quad (66)$$

where  $\hat{\mathbf{x}}$  denotes the unit vector in the downstream direction. On simplification the (analytic) drag force turns out to be

$$F_d^{(A)} = 4\pi\text{Kn}c_6, \quad (67)$$

where the value of the constant  $c_6$  is evaluated from the boundary conditions and hence changes with the values of the parameters  $\text{Kn}$  and  $\alpha_0$ . In order to calculate the net force acting on the disk through the MFS, all the point force vectors acting on the singularity points lying on the inner fictitious boundary inside the disk are superimposed, i.e.

$$\mathbf{F}^{(\text{MFS})} = \sum_{i=1}^{N_{s1}} \mathbf{f}^{(i)}. \quad (68)$$

The drag on the disk is again given by the projection of the net force in the upstream direction, i.e. by

$$F_d^{(\text{MFS})} = -\sum_{i=1}^{N_{s1}} \mathbf{f}^{(i)} \cdot \hat{\mathbf{x}} = -\sum_{i=1}^{N_{s1}} f_1^{(i)}. \quad (69)$$

For comparison purpose, it is convenient to compare the drag coefficient, defined by the drag force normalized with the Stokes drag, instead of the drag forces directly. Furthermore, we also include the results on the drag coefficient obtained recently with the R26 moment equations for the Reynolds number  $\text{Re} = 0.1$  by Gu *et al.* [19] in our comparison. Fig. 9 illustrates the variation of the drag coefficient with the Knudsen number. The figure shows that the

drag coefficient obtained numerically with the MFS applied to the CCR model is in excellent agreement with that obtained analytically. Moreover, although the drag coefficient obtained from the CCR model is qualitatively similar to that obtained with the R26 equations in [19], quantitative mismatch in the results from the CCR model and the R26 equations is also apparent in the figure. This is due to the fact that the nonlinear R26 equations have been used in [19] while the linear CCR model has been used in the present work to exploit the utility of the MFS. Another possible reason for the disagreement in the results of the CCR model and the R26 equations could be limitation of the CCR model in capturing Knudsen layers, which are prominent near the boundary of the object and can be captured well by the R26 equations since they are higher-order accurate equations.

It is worthwhile noting that the values of the flow variables depend significantly on the radius of the artificial boundary or on the distance at which the far-field conditions are implemented. A study based on the dependence of the size of the domain in the context of classical fluids can be found in [16]. Although the dependence of our results on the location of the artificial boundary, or on  $R_2$ , cannot be neglected, the validation of the results done using  $R_2 = 10$  suggests the sufficiency for fixing the value of  $R_2$  to get adequate results for other problems as well.

## 6 Results and discussion for flow past a semicircular cylinder

The numerical framework developed in the present paper can be employed to investigate other quasi-two-dimensional flow problems as well. In particular, the expediency of the method is notable for problems wherein either an analytic solution cannot be found or is arduous to find.

To showcase the capabilities of the method, we now consider a problem, where the radial symmetry is absent. We consider the problem of rarefied gas flow past an infinitely long semicircular cylinder in its transverse direction. The problem is still quasi-two-dimensional but flow behavior changes according to the orientation of the cylinder. To setup the orientation of the cylinder and the flow direction, let an infinitely long semicircular cylinder of radius  $\tilde{R}_1$  be placed in such a way that its axis is along the  $\tilde{z}$ -direction and its semicircular base is in the upper half of the  $\tilde{x}\tilde{y}$ -plane with the midpoint of the diameter of the semicircular base being fixed at the origin of the Cartesian coordinate system  $(\tilde{x}, \tilde{y}, \tilde{z})$  as shown in Fig. 10. Two cases are considered: (i) a rarefied monatomic gas approaching the cylinder from the negative  $\tilde{x}$ -direction; we refer to this case as the case of horizontal flow or simply the horizontal case, and (ii) a rarefied monatomic gas approaching the cylinder from the positive  $\tilde{y}$ -direction; we refer to this case as the case of

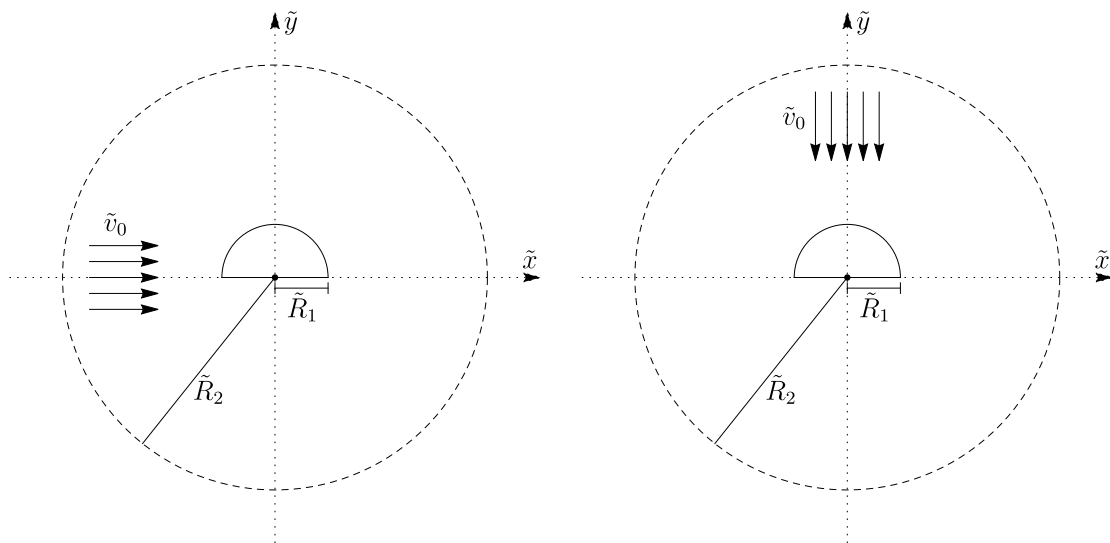


Figure 10: Cross-sectional view of horizontal and vertical flow past a semicircular cylinder.

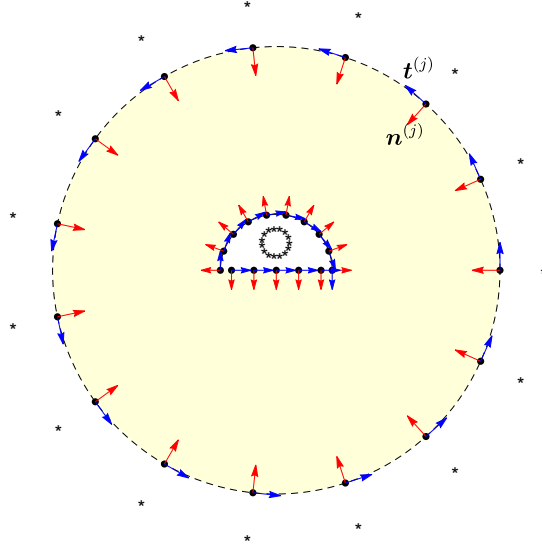


Figure 11: Schematic representation for arrangement of singularities (stars) and boundary nodes (dots). The red and blue arrows represent the normal and tangent vectors at each boundary node.

vertical flow or simply the vertical case analogously. A schematic exhibiting the cross-sectional view of both cases has also been shown in Fig. 10. Furthermore, it is assumed that the temperature at the surface of the cylinder is the same as the far-field ambient temperature of the gas  $\tilde{T}_0$ . Needless to say, we shall solve the problem in the  $\tilde{x}\tilde{y}$ -plane or equivalently in the  $\tilde{r}\vartheta$ -plane, where  $\tilde{x} = \tilde{r} \cos \vartheta$  and  $\tilde{y} = \tilde{r} \sin \vartheta$ , for the semicircular disk in the dimensionless form. The radius of the disk  $\tilde{R}_1$  is taken as the characteristic length scale  $\tilde{L}$  for non-dimensionalization so that  $x = \tilde{x}/\tilde{R}_1$ ,  $y = \tilde{y}/\tilde{R}_1$ ,  $r = \tilde{r}/\tilde{R}_1$ , and the dimensionless radius of the disk  $R_1 = \tilde{R}_1/\tilde{L} = 1$ . To circumvent Stokes' paradox, we—similarly to the above—place an artificial circular boundary of radius  $\tilde{R}_2$  centered at  $(0, 0)$  sufficiently far from the semicircular disk. The dimensionless radius of the artificial boundary is  $R_2 = \tilde{R}_2/\tilde{L}$ , where  $R_2 > R_1$ . Furthermore, for implementation of the MFS, we also introduce two fictitious boundaries, one inside the semicircular disk and other outside the artificial circular boundary, on which the source points are to be placed. Let the inner fictitious boundary be a circle of radius  $\tilde{R}'_1$  centered at  $(0, 0.5)$  and the outer fictitious boundary be a circle of radius  $\tilde{R}'_2$  centered at  $(0, 0)$ . The dimensionless radii of the inner and outer fictitious boundaries are  $R'_1 = \tilde{R}'_1/\tilde{L}$  and  $R'_2 = \tilde{R}'_2/\tilde{L}$ . An illustration exhibiting the boundary nodes on the semicircular disk and on the artificial boundary, and the location of source points on the fictitious boundaries is shown in Fig. 11. Once the singularities are placed, the rest of the procedure of implementing the MFS remains the same as explained in Sec. 4.

The horizontal and vertical flow cases are covered by changing the boundary conditions on the artificial boundary. For the horizontal case, the boundary conditions on the artificial boundary are

$$v_x = v_0, \quad v_y = 0, \quad T = 0, \quad (70)$$

while for the vertical case, the boundary conditions on the artificial boundary are

$$v_x = 0, \quad v_y = -v_0, \quad T = 0. \quad (71)$$

The boundary conditions on the actual periphery of the disk remain the same as boundary conditions (24)–(26).

In numerical computations,  $v_0$  is taken as unity, the number of boundary nodes on the actual periphery of the disk is taken as  $N_{b_1} = 200$  and that on the artificial boundary is taken as  $N_{b_2} = 400$ , and the number of singularity points on the inner and outer fictitious boundaries are

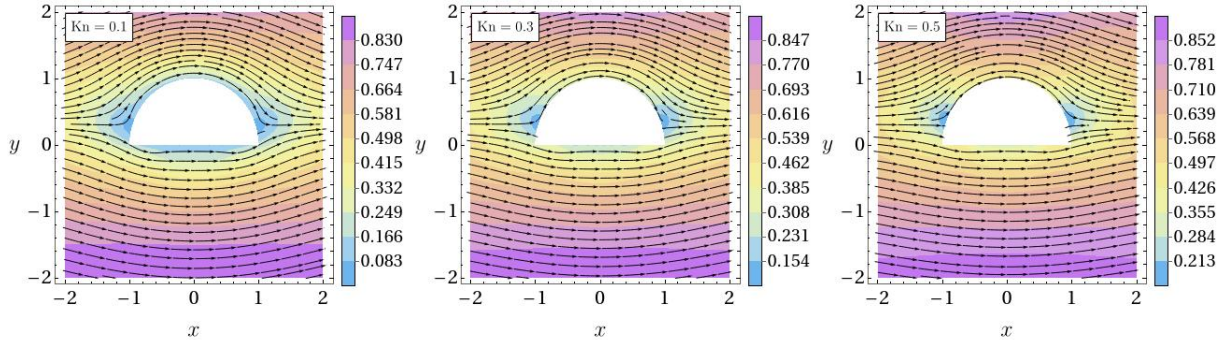


Figure 12: Velocity streamlines along with contour plots of the speed in the background obtained from the MFS applied on the CCR model for  $\text{Kn} = 0.1, 0.3$  and  $0.5$ . The other parameters are  $R_1 = 1, R_2 = 10, R'_1 = 0.1, R'_2 = 50, N_{b_1} = N_{s_1} = 200$  and  $N_{b_2} = N_{s_2} = 400$ .

taken as  $N_{s_1} = 200$  and  $N_{s_2} = 400$ , respectively. The dimensionless radius of the semicircular disk is  $R_1 = 1$  and the dimensionless radius of the artificial boundary is taken as  $R_2 = 10$ . The dimensionless radii of the inner and outer fictitious boundaries are taken as  $R'_1 = 0.1$  and  $R'_2 = 50$ , respectively. In the case of a circular cylinder, we had the advantage of having an analytic solution, allowing us to validate our results even with relatively lesser number of boundary nodes and singularity points ( $N_{b_1} = N_{s_1} = 50$  and  $N_{b_2} = N_{s_2} = 100$ ). However, when dealing with the case of semicircular cylinder, we have taken a relatively larger number of boundary nodes and singularities. This decision is based on the studies from the existing literature [35, 39], which suggest that more boundary nodes and singularity points in the method of fundamental solution lead to improved accuracy. Furthermore, as neither it is easy to obtain an analytic solution for the present problem nor we could find any experimental or theoretical study in the existing literature, our focus remains only on the qualitative analysis of the results.

## 6.1 Results in the case of horizontal flow

Figure 12 illustrates the velocity streamlines around the semicircular disk along with density plots of the speed in the background for  $\text{Kn} = 0.1, 0.3$  and  $0.5$  in the case of horizontal flow, i.e. when the flow is along the  $x$ -direction. Analogously to problem of flow past a circular cylinder demonstrated in Sec. 5, the streamlines in Fig. 12 are qualitatively alike for the considered Knudsen numbers. Nonetheless, contour plots of the speed do depict quantitative differences in the speed of the gas for different Knudsen numbers that are prominently discernible in the close proximity of the disk. It is evident from the colors of the contour plots near the disk that the speed of the gas on the disk increases with the Knudsen number due to increase in the slip velocity with an increasing Knudsen number. Apparently, it is true even for any point in the domain that the speed of the gas at this point increases with increasing the Knudsen number.

Interestingly, the effects of asymmetry in the shape of the object are revealed when the variation of temperature of the gas is explored. In order to explore the asymmetry effects, we plot in Fig. 13 the heat flux lines superposed on density plots of the temperature for  $\text{Kn} = 0.1, 0.3$  and  $0.5$ . The figure reveals the existence of temperature polarization near the disk for all Knudsen numbers—with hot region (denoted by red color) on the left side of the curved portion of the disk and cold region (denoted by blue color) on the right side due to compression (expansion) of the gas on the left (right) side. In addition, a minute (but opposite in sign) temperature polarization also occurs below the flat portion of the disk and is conspicuous for small Knudsen numbers (for  $\text{Kn} = 0.1$  in the figure) but diminishes as the Knudsen number increases. This double polarization could be attributed to the presence of corners in the geometry or to the asymmetry present in the geometry. As the Knudsen number increases, the strength of temperature polarization on the curved portion of the disk increases and hence it takes over the

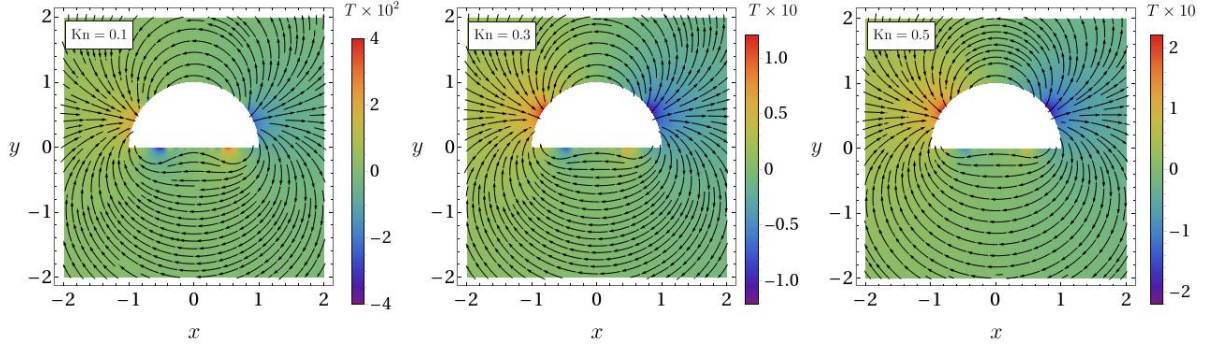


Figure 13: Heat flux lines along with density plots of the temperature in the background obtained from the MFS applied on the CCR model for  $\text{Kn} = 0.1, 0.3$  and  $0.5$ . The other parameters are the same as those for Fig. 12.

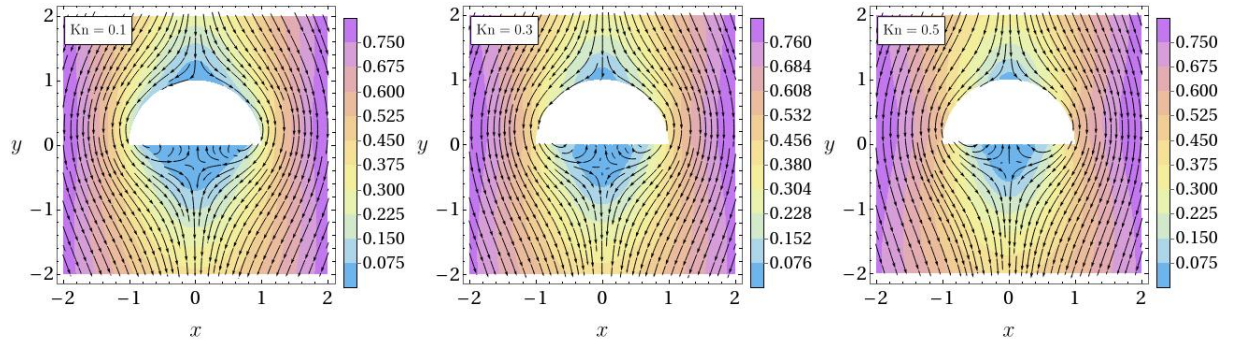


Figure 14: Velocity streamlines along with contour plots of the speed in the background obtained from the MFS applied on the CCR model for  $\text{Kn} = 0.1, 0.3$  and  $0.5$ . The other parameters are the same as those for Fig. 12.

minute temperature polarization below the flat portion of the disk, and the latter fades away gradually as the Knudsen number increases. The heat flux lines in Fig. 13 indicate the flow of heat from cold to hot regions, depicting anti-Fourier effect that again cannot be captured with the classical models in fluid dynamics.

## 6.2 Results in the case of vertical flow

Figure 14 exhibits the velocity streamlines around the semicircular disk along with stream plots of the speed in the background for  $\text{Kn} = 0.1, 0.3$  and  $0.5$  in the case of vertical flow, i.e. when the flow is along the negative  $y$ -direction. The figure presents flow separation and formation of circulation zones after the flow crosses the disk. The figure shows that the flow separation starts reducing slightly with increasing the Knudsen number. Flow separation and an analogous outcome—reduction in the size circulation zone with decreasing Reynolds number—have also been reported by Nie & Lin [40] for a creeping (or low-Reynolds-number) flow past a semicircular cylinder. Thus, owing to the inverse relationship between the Reynolds number and the Knudsen number, the qualitative nature of the flow predicted by the CCR model in the present work is justified. Contour plots of the speed in Fig. 14 again depict that the speed of the gas around the disk increases with increase in the Knudsen number.

Figure 15 illustrates the heat flux lines superposed over density plots of the temperature for  $\text{Kn} = 0.1, 0.3$  and  $0.5$  in the case of vertical flow. Temperature polarization again occurs in this case but it is symmetric about the  $y$ -axis in this case, creating hot and cold regions on the top and bottom of the disk, respectively. The strength of temperature polarization increases

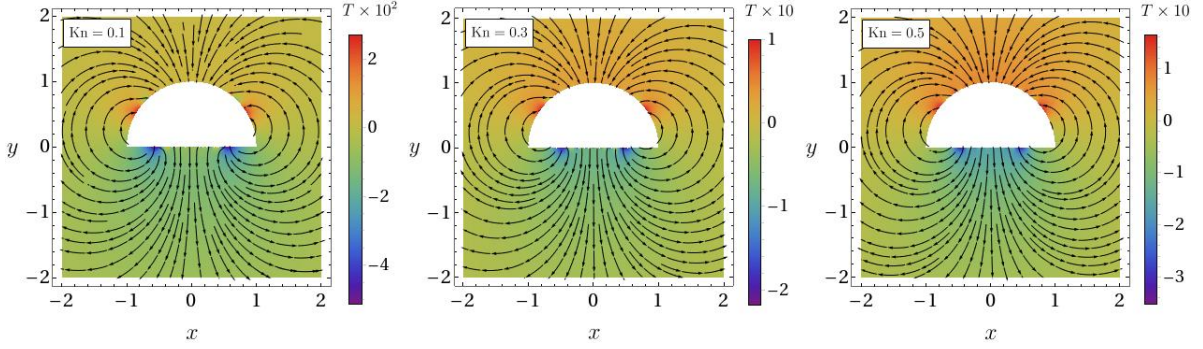


Figure 15: Heat flux lines along with density plots of the speed in the background obtained from the MFS applied on the CCR model for  $\text{Kn} = 0.1, 0.3$  and  $0.5$ . The other parameters are the same as those for Fig. 12.

with increase in the Knudsen number. The heat flux lines are also symmetric about the  $y$ -axis for all Knudsen numbers and show the heat flowing from cold to hot regions, illustrating the anti-Fourier effect in the present case as well.

### 6.3 Drag force in the horizontal and vertical cases

To the best of our knowledge, an analytic expression or any experimental result for the drag force exerted on the semicircular disk in this problem does not exist in the literature. Therefore, we directly present the drag force predicted by the CCR model through the MFS in Fig. 16 for the horizontal and vertical cases. The drag force in the horizontal case has been obtained by taking the projection of net force in the negative  $x$ -direction (similarly to that in the problem of flow past a circular cylinder in Sec. 5) and is demarcated in Fig. 16 by the solid (black) line while the drag force in the vertical case has been obtained by taking the projection of net force in the positive  $y$ -direction and is demarcated in Fig. 16 by the dashed (blue) line. Similarly to the drag force on the circular cylinder obtained in Sec. 5, Fig. 16 shows that the drag force increases with increasing the Knudsen number in both horizontal and vertical cases. However, unlike the case of a circular cylinder where the dependence of the drag force on the Knudsen number was apparent through Eq. (67), an expression revealing dependence of the drag force on the Knudsen number in the case of a semicircular cylinder is lacking unfortunately.

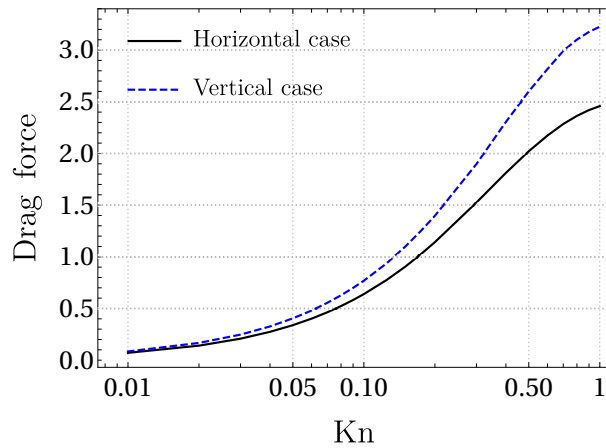


Figure 16: Drag force on the semicircular disk plotted against the Knudsen number in the horizontal and vertical cases. The other parameters are the same as those for Fig. 12.

## 7 Conclusion

Slow transverse-directional flows of a rarefied monatomic gas past a circular cylinder and past a semicircular cylinder have been investigated with the CCR model. The CCR model, being a refined model than the classical NSF equations, has allowed us to study moderately rarefied gas flows by means of the MFS, an efficient meshfree numerical method. Owing to the uniformity of the flow along the axes of the cylinders, the problem of flow past a right circular cylinder reduces to the problem of flow past a circular disk and the problem of flow past a right semicircular cylinder to the problem of flow past a semicircular disk; and hence both problems have essentially been investigated in two dimensions. To overcome the limitations imposed by Stokes' paradox when studying flow past two-dimensional objects, the domain has been made bounded by putting an artificial boundary far away from the disk and by setting appropriate boundary conditions on this artificial boundary so that the flow does not get disturbed by the presence of the artificial boundary. The bounded domain has allowed us to find a meaningful analytic solution for the problem of flow past a circular disk and the analytic solution allowed us to verify our numerical framework based on the MFS. The numerical results for the physical quantities, like velocity, temperature and drag force, obtained from the MFS applied on the CCR model have shown an excellent agreement with the analytic solution of the CCR model. The drag coefficient obtained from the MFS in the present work even agrees reasonably well with that obtained with the R26 equations in Ref. [19]. It has been found that the CCR model is able to capture the well-known rarefaction effects pertaining to the problem of flow past a circular disk, e.g., temperature polarization, temperature reversal and, especially, the anti-Fourier heat transfer and that the last two effects could not be captured by the NSF equations. To demonstrate the capabilities of the developed numerical framework, the problem of flow past a semicircular disk has also been investigated for which an analytic solution of any model (even the Stokes equations) does not exist as per our knowledge. The temperature polarization and anti-Fourier heat transfer have been revealed by the CCR model for this problem as well. Overall, the results obtained from the MFS applied to the CCR model provided valuable insights into rarefied gas flows past circular and semicircular cylinders. The ultimate usefulness of the present work will be revealed once it can be used to investigate the problem of flow past an object of an arbitrary shape. For this, although there is nothing special that requires to be done with the developed numerical framework, defining the boundary of the object mathematically and hence defining the normal and tangent vectors at the boundary nodes require some effort. So the problem of rarefied gas flow past objects of arbitrary shapes will be a subject for future research. Notwithstanding, the present work does provide a direction toward this goal.

## A Fundamental solutions of the CCR model

In order to find the fundamental solutions, we use the Fourier transformation which is defined as

$$\mathcal{F}(F(\mathbf{r})) = \hat{F}(\mathbf{k}) := \int_{\mathbb{R}^2} F(\mathbf{r}) e^{i\mathbf{k}\cdot\mathbf{r}} d\mathbf{r} \quad (\text{A.1})$$

and the corresponding inverse Fourier transformation is defined as

$$\mathcal{F}^{-1}(\hat{F}(\mathbf{k})) = F(\mathbf{r}) := \frac{1}{(2\pi)^2} \int_{\mathbb{R}^2} \hat{F}(\mathbf{k}) e^{-i\mathbf{k}\cdot\mathbf{r}} d\mathbf{k}, \quad (\text{A.2})$$

where  $\mathbf{k}$  is the wavevector in the spatial-frequency domain and  $i$  is the imaginary unit. Now, we derive the fundamental solutions (previously derived in [29]) via alternate approach of considering two different cases by incorporating the sourcing terms separately in the momentum balance and the energy balance equation. In the first case, a sourcing term is considered in the

momentum balance equation, which is a point force vector  $f_i$ . The balance equations (22) in indicial notations read

$$\frac{\partial v_i}{\partial x_i} = 0, \quad (\text{A.3})$$

$$\frac{\partial p}{\partial x_i} + \frac{\partial \sigma_{ij}}{\partial x_j} = f_i \delta(\mathbf{r}), \quad (\text{A.4})$$

$$\frac{\partial q_i}{\partial x_i} = 0, \quad (\text{A.5})$$

where  $\mathbf{r} = (x_1, x_2)^\top$ . The constitutive relations (23) read

$$\sigma_{ij} = -2\text{Kn} \left[ \frac{1}{2} \left( \frac{\partial v_i}{\partial x_j} + \frac{\partial v_j}{\partial x_i} \right) - \frac{1}{3} \delta_{ij} \frac{\partial v_\ell}{\partial x_\ell} \right] - 2\alpha_0 \text{Kn} \left[ \frac{1}{2} \left( \frac{\partial q_i}{\partial x_j} + \frac{\partial q_j}{\partial x_i} \right) - \frac{1}{3} \delta_{ij} \frac{\partial q_\ell}{\partial x_\ell} \right]. \quad (\text{A.6})$$

$$q_i = -\frac{c_p \text{Kn}}{\text{Pr}} \left( \frac{\partial T}{\partial x_i} + \alpha_0 \frac{\partial \sigma_{ij}}{\partial x_j} \right), \quad (\text{A.7})$$

Applying the Fourier transformation in Eqs. (A.3)–(A.5), (A.6) and (A.7) and using the fact that  $\mathcal{F}[\delta(\mathbf{r})] = 1$ , we obtain ( $i, j, \ell \in \{1, 2\}$ )

$$k_i \hat{v}_i = 0, \quad (\text{A.8})$$

$$k_i \hat{p} + k_j \hat{\sigma}_{ij} = \mathfrak{i} f_i, \quad (\text{A.9})$$

$$k_i \hat{q}_i = 0, \quad (\text{A.10})$$

$$\hat{\sigma}_{ij} = \mathfrak{i} \text{Kn} \left[ k_j (\hat{v}_i + \alpha_0 \hat{q}_i) + k_i (\hat{v}_j + \alpha_0 \hat{q}_j) - \frac{2}{3} \delta_{ij} k_\ell (\hat{v}_\ell + \alpha_0 \hat{q}_\ell) \right], \quad (\text{A.11})$$

$$\hat{q}_i = \mathfrak{i} \frac{c_p \text{Kn}}{\text{Pr}} \left( k_i \hat{T} + \alpha_0 k_j \hat{\sigma}_{ij} \right), \quad (\text{A.12})$$

where the variables with hat are the Fourier transforms of the corresponding field variables. Using Eqs. (A.8) and (A.10), Eq. (A.11) simplifies to

$$\hat{\sigma}_{ij} = \mathfrak{i} \text{Kn} [k_j (\hat{v}_i + \alpha_0 \hat{q}_i) + k_i (\hat{v}_j + \alpha_0 \hat{q}_j)]. \quad (\text{A.13})$$

Multiplying the above equation with  $k_j$  and  $k_i k_j$ , we obtain

$$k_j \hat{\sigma}_{ij} = \mathfrak{i} \text{Kn} k^2 (\hat{v}_i + \alpha_0 \hat{q}_i), \quad (\text{A.14})$$

$$k_i k_j \hat{\sigma}_{ij} = 0, \quad (\text{A.15})$$

respectively, where  $k_i k_i = |k_i|^2 = k^2$  has been used. Multiplying Eq. (A.12) with  $k_i$  and utilizing Eqs. (A.10) and (A.15), we obtain

$$\hat{T} = 0. \quad (\text{A.16})$$

Again, multiplying Eq. (A.9) with  $k_i$  and utilizing Eq. (A.15), we obtain

$$\hat{p} = \mathfrak{i} \frac{k_i f_i}{k^2}. \quad (\text{A.17})$$

Now, from Eqs. (A.9) and (A.17), one can easily write

$$k_j \hat{\sigma}_{ij} = \mathfrak{i} f_i - \mathfrak{i} \frac{k_i k_j f_j}{k^2}. \quad (\text{A.18})$$

Substituting the value of  $\hat{T}$  from Eq. (A.16) and the value of  $k_j \hat{\sigma}_{ij}$  from Eq. (A.18) into Eq. (A.12), we obtain

$$\hat{q}_i = -\frac{c_p \text{Kn}}{\text{Pr}} \alpha_0 f_j \left( \delta_{ij} - \frac{k_i k_j}{k^2} \right). \quad (\text{A.19})$$



Now, from Eqs. (A.14), (A.18) and (A.19),

$$\hat{v}_i = \frac{f_j}{\text{Kn}} \left( \frac{\delta_{ij}}{k^2} - \frac{k_i k_j}{k^4} \right) + \frac{c_p \text{Kn}}{\text{Pr}} \alpha_0^2 f_j \left( \delta_{ij} - \frac{k_i k_j}{k^2} \right). \quad (\text{A.20})$$

Finally, using Eqs. (A.19) and (A.20) in Eq. (A.11), we obtain

$$\hat{\sigma}_{ij} = \text{i} f_\ell \left( \frac{k_j \delta_{i\ell} + k_i \delta_{j\ell}}{k^2} - 2 \frac{k_i k_j k_\ell}{k^4} \right). \quad (\text{A.21})$$

Applying the inverse Fourier transformation in Eqs. (A.16), (A.17) and (A.19)–(A.21) with the help of the formulae derived in [29], the field variables turn out to be

$$\left. \begin{aligned} v_i &= \frac{f_j}{\text{Kn}} \left( \frac{x_i x_j}{4\pi r^2} - \frac{2 \ln r - 1}{8\pi} \delta_{ij} \right) + \frac{c_p \text{Kn}}{\text{Pr}} \alpha_0^2 \frac{f_j}{2\pi} \left( \frac{2x_i x_j}{r^4} - \frac{\delta_{ij}}{r^2} \right), \\ q_i &= -\frac{c_p \text{Kn}}{\text{Pr}} \alpha_0 \frac{f_j}{2\pi} \left( \frac{2x_i x_j}{r^4} - \frac{\delta_{ij}}{r^2} \right), \\ p &= \frac{f_i x_i}{2\pi r^2}, \\ T &= 0, \\ \sigma_{ij} &= \frac{f_\ell x_\ell}{2\pi} \left( \frac{2x_i x_j}{r^4} - \frac{\delta_{ij}}{r^2} \right), \end{aligned} \right\} \text{Case I} \quad (\text{A.22})$$

where  $r = |x_i|$  and  $i, j, \ell \in \{1, 2\}$ . In the second case, a sourcing term is considered in the energy balance equation i.e. balance equations read

$$\frac{\partial v_i}{\partial x_i} = 0, \quad (\text{A.23})$$

$$\frac{\partial p}{\partial x_i} + \frac{\partial \sigma_{ij}}{\partial x_j} = 0, \quad (\text{A.24})$$

$$\frac{\partial q_i}{\partial x_i} = g \delta(\mathbf{r}), \quad (\text{A.25})$$

Applying the Fourier transformation in Eqs. (A.23)–(A.25), (A.6) and (A.7) in this case, we obtain

$$k_i \hat{v}_i = 0, \quad (\text{A.26})$$

$$k_i \hat{p} + k_j \hat{\sigma}_{ij} = 0, \quad (\text{A.27})$$

$$k_i \hat{q}_i = \text{i} g, \quad (\text{A.28})$$

Using Eqs. (A.26) and (A.28), Eq. (A.11) simplifies to

$$\hat{\sigma}_{ij} = \text{i} \text{Kn} [k_j (\hat{v}_i + \alpha_0 \hat{q}_i) + k_i (\hat{v}_j + \alpha_0 \hat{q}_j)] + \frac{2}{3} \delta_{ij} \text{Kn} \alpha_0 g. \quad (\text{A.29})$$

Multiplying the above equation with  $k_j$  and  $k_i k_j$ , we obtain

$$k_j \hat{\sigma}_{ij} = \text{i} \text{Kn} k^2 (\hat{v}_i + \alpha_0 \hat{q}_i) - \frac{1}{3} \text{Kn} k_i \alpha_0 g, \quad (\text{A.30})$$

$$k_i k_j \hat{\sigma}_{ij} = -\frac{4}{3} \text{Kn} k^2 \alpha_0 g, \quad (\text{A.31})$$

Multiplying Eq. (A.12) with  $k_i$  and exploiting Eqs. (A.10) and (A.31), we obtain

$$\hat{T} = \frac{\text{Pr}}{c_p \text{Kn}} \frac{g}{k^2} + \frac{4}{3} \text{Kn} \alpha_0^2 g. \quad (\text{A.32})$$

Again, multiplying Eq. (A.9) with  $k_i$  and exploiting Eq. (A.15), we obtain

$$\hat{p} = \frac{4}{3}\text{Kn}\alpha_0 g. \quad (\text{A.33})$$

Now, from Eqs. (A.9) and (A.17), one can easily write

$$k_j \hat{\sigma}_{ij} = -\frac{4}{3}k_i \text{Kn} \alpha_0 g. \quad (\text{A.34})$$

Substituting the value of  $\hat{T}$  from Eq. (A.32) and the value of  $k_j \hat{\sigma}_{ij}$  from Eq. (A.34) into Eq. (A.12), we obtain

$$\hat{q}_i = \frac{k_i g}{k^2}. \quad (\text{A.35})$$

Now, from Eqs. (A.30), (A.34) and (A.35),

$$\hat{v}_i = 0. \quad (\text{A.36})$$

Finally, using Eqs. (A.35) and (A.36) in Eq. (A.11), we obtain

$$\hat{\sigma}_{ij} = -2\text{Kn} \left( \frac{k_i k_j}{k^2} - \frac{\delta_{ij}}{3} \right) \alpha_0 g. \quad (\text{A.37})$$

Applying the inverse Fourier transformation in Eqs. (A.32), (A.33) and (A.35)–(A.37) with the help of the formulae derived in [29], the field variables turn out to be

$$\left. \begin{aligned} v_i &= 0, \\ q_i &= \frac{g}{2\pi} \frac{x_i}{r^2}, \\ p &= 0, \\ T &= -\frac{\text{Pr}}{c_p \text{Kn}} \frac{g \ln r}{2\pi}, \\ \sigma_{ij} &= \frac{2\text{Kn}\alpha_0 g}{2\pi} \left( \frac{2x_i x_j}{r^4} - \frac{\delta_{ij}}{r^2} \right). \end{aligned} \right\} \text{Case II} \quad (\text{A.38})$$

Combining the two cases (A.22) and (A.38), we obtain the fundamental solutions (49)–(53).

## References

- [1] Stokes, G. G. 1851 On the effect of the internal friction of fluids on the motion of pendulums. *Trans. Cambridge Philos. Soc.*, **9 (Part II)**, 8–106.
- [2] Tanner, R. 1993 Stokes paradox for power-law flow around a cylinder. *J. Nonnewton. Fluid Mech.*, **50**, 217–224.
- [3] Van Dyke, M. 1964 *Perturbation Methods in Fluid Mechanics*. New York: Academic Press.
- [4] Lamb, H. 1932 *Hydrodynamics*. Cambridge: Cambridge University Press.
- [5] Marušić-Paloka, E. 2001 On the Stokes paradox for power-law fluids. *Z. Angew. Math. Mech.*, **81**, 31–36.
- [6] Smith, S. H. 1990 Some limitations of two-dimensional unbounded Stokes flow. *Phys. Fluids A*, **2**, 1724–1730.

- [7] Morra, G. 2018 Insights on the physics of Stokes flow. In *Pythonic Geodynamics: Implementations for Fast Computing*, pp. 93–104. Cham: Springer International Publishing. doi:10.1007/978-3-319-55682-6\_6.
- [8] Oseen, C. W. 1910 Über die Stokes'sche Formel und über eine verwandte Aufgabe in der Hydrodynamik. *Arkiv Mat. Astron. Fysk.*, **6**, 1–59.
- [9] Lamb, H. 1911 XV. on the uniform motion of a sphere through a viscous fluid. *The London, Edinburgh, and Dublin Philosophical Magazine and Journal of Science*, **21**, 112–121.
- [10] Bairstow, L., Cave, B. M. & Lang, E. D. 1923 X. The resistance of a cylinder moving in a viscous fluid. *Philos. Trans. Royal Soc. A*, **223**, 383–432.
- [11] Tomotika, S. & Aoi, T. 1950 The steady flow of viscous fluid past a sphere and circular cylinder at small Reynolds numbers. *Q. J. Mech. Appl. Math.*, **3**, 141–161.
- [12] Kaplun, S. 1954 The role of coordinate systems in boundary-layer theory. *Z. Angew. Math. Phys.*, **5**, 111–135.
- [13] Kaplun, S. & Lagerstrom, P. A. 1957 Asymptotic expansions of Navier-Stokes solutions for small Reynolds numbers. *Appl. Math. Mech.*, **6**, 585–593.
- [14] Proudman, I. & Pearson, J. R. A. 1957 Expansions at small Reynolds numbers for the flow past a sphere and a circular cylinder. *J. Fluid Mech.*, **2**, 237–262.
- [15] Kida, T. & Take, T. 1992 Asymptotic expansions for low Reynolds number flow past a cylindrical body. *JSME Int. J. Ser. 2*, **35**, 144–150.
- [16] Khalili, A. & Liu, B. 2017 Stokes' paradox: Creeping flow past a two-dimensional cylinder in an infinite domain. *J. Fluid Mech.*, **817**, 374–387.
- [17] Cercignani, C. 1968 Stokes paradox in kinetic theory. *Phys. Fluids*, **11**, 303–308.
- [18] Yamamoto, K. & Sera, K. 1985 Flow of a rarefied gas past a circular cylinder. *Phys. Fluids*, **28**, 1286–1293.
- [19] Gu, X.-J., Barber, R. W., John, B. & Emerson, D. R. 2019 Non-equilibrium effects on flow past a circular cylinder in the slip and early transition regime. *J. Fluid Mech.*, **860**, 654–681.
- [20] Rana, A. S., Gupta, V. K. & Struchtrup, H. 2018 Coupled constitutive relations: a second law based higher-order closure for hydrodynamics. *Proc. Roy. Soc. A*, **474**, 20180323.
- [21] Kupradze, V. D. & Aleksidze, M. A. 1964 The method of functional equations for the approximate solution of certain boundary value problems. *USSR Comput. Math. Math. Phys.*, **4**, 82–126.
- [22] Berger, J. R. & Karageorghis, A. 2001 The method of fundamental solutions for layered elastic materials. *Eng. Anal. Bound. Elem.*, **25**, 877–886.
- [23] Fairweather, G., Karageorghis, A. & Martin, P. 2003 The method of fundamental solutions for scattering and radiation problems. *Eng. Anal. Bound. Elem.*, **27**, 759–769.
- [24] Karageorghis, A., Lesnic, D. & Marin, L. 2011 A survey of applications of the MFS to inverse problems. *Inverse Probl. Sci. Eng.*, **19**, 309–336.
- [25] Liu, Q. G., Fan, C. M. & Šarler, B. 2021 Localized method of fundamental solutions for two-dimensional anisotropic elasticity problems. *Eng. Anal. Bound. Elem.*, **125**, 59–65.

- [26] Lockerby, D. A. & Collyer, B. 2016 Fundamental solutions to moment equations for the simulation of microscale gas flows. *J. Fluid Mech.*, **806**, 413–436.
- [27] Claydon, R., Shrestha, A., Rana, A. S., Sprittles, J. E. & Lockerby, D. A. 2017 Fundamental solutions to the regularised 13-moment equations: efficient computation of three-dimensional kinetic effects. *J. Fluid Mech.*, **833**, R4.
- [28] Rana, A. S., Saini, S., Chakraborty, S., Lockerby, D. A. & Sprittles, J. E. 2021 Efficient simulation of non-classical liquid–vapour phase-transition flows: a method of fundamental solutions. *J. Fluid Mech.*, **919**, A35.
- [29] Himanshi, Rana, A. S. & Gupta, V. K. 2023 Fundamental solutions of an extended hydrodynamic model in two dimensions: Derivation, theory, and applications. *Phys. Rev. E*, **108**, 015 306.
- [30] Torrilhon, M. 2010 Slow gas microflow past a sphere: Analytical solution based on moment equations. *Phys. Fluids*, **22**, 072 001.
- [31] Westerkamp, A. & Torrilhon, M. 2012 Slow rarefied gas flow past a cylinder: Analytical solution in comparison to the sphere. *AIP Conf. Proc.*, **1501**, 207–214.
- [32] Gupta, V. K. 2020 Moment theories for a  $d$ -dimensional dilute granular gas of Maxwell molecules. *J. Fluid Mech.*, **888**, A12.
- [33] Maxwell, J. C. 1879 On stresses in rarefied gases arising from inequalities of temperature. *Phil. Trans. R. Soc. Lond.*, **170**, 231–256.
- [34] Rana, A. S., Gupta, V. K., Sprittles, J. E. & Torrilhon, M. 2021  $H$ -theorem and boundary conditions for the linear R26 equations: application to flow past an evaporating droplet. *J. Fluid Mech.*, **924**, A16.
- [35] Cheng, A. H. & Hong, Y. 2020 An overview of the method of fundamental solutions—Solvability, uniqueness, convergence, and stability. *Eng. Anal. Bound. Elem.*, **120**, 118–152.
- [36] Bakanov, S. P., Vysotskij, V. V., Derjaguin, B. V. & Roldughin, V. I. 1983 Thermal polarization of bodies in the rarefied gas flow. *J. Non-Equilib. Thermodyn.*, **8**, 75–83.
- [37] Rana, A., Torrilhon, M. & Struchtrup, H. 2013 A robust numerical method for the R13 equations of rarefied gas dynamics: Application to lid driven cavity. *J. Comput. Phys.*, **236**, 169–186.
- [38] Gupta, V. K. 2015 Mathematical modeling of rarefied gas mixtures. Ph.D. thesis, RWTH Aachen University, Germany.
- [39] Fam, G. S. A. & Rashed, Y. F. 2002 A study on the source points locations in the method of fundamental solution. pp. 297–312. WIT Press, Southampton, UK. doi:10.2495/BE020281.
- [40] Nie, D. & Lin, J. 2019 Numerical study on flow past a confined half cylinder in two bluff arrangements. *Fluid Dyn. Res.*, **52**, 015 506.