

# Well-posedness and Bilinear Controllability of a Repairable System with Degraded State

Daniel Owusu Adu <sup>\*</sup>      Weiwei Hu <sup>†</sup>

July 9, 2024

## Abstract

In this work, we consider the dynamics of repairable systems characterized by three distinct states: one signifying normal operational states, another representing degraded conditions and a third denoting failed conditions. These systems are characterized by their ability to be repaired when failures and/or degradation occur. Typically described by transport equations, these systems exhibit a coupled nature, interlinked through integro-differential equations and integral boundary conditions that dictate the transitions among all the states. In this paper, we address two less-explored facets: 1) the well-posedness and the asymptotic behavior of such systems with maximum repair time being finite; and 2) the bilinear controllability of the system via repair actions. In particular, we focus on the case where only one degraded and one failed states exist. We first discuss part 1) for given time-independent repair rates and then design the space-time dependent repair strategies that can manipulate system dynamics to achieve the desired level over a finite horizon. Our objective is to enhance the system availability- the probability of being operational when needed over a fixed period of time. We present rigorous analysis and develop control strategies that leverage the bilinear structure of the system model.

## 1. INTRODUCTION

In real life practice, systems often encounter challenges stemming from failures or degradation. These issues are prevalent across various applications such as product design, inventory systems, computer networking, electrical power systems, and complex manufacturing processes. All these systems are susceptible to degradation or failure but are able to be restored to satisfactory operation through repair actions (e.g., [1, 2, 4, 9, 10]). Repairable systems are capable of undergoing repair/maintenance actions when failures and/or degradation occur.

---

<sup>\*</sup>Department of Mathematics, University of Georgia, Athens, GA 30602, USA (e-mail: daniel.adu@uga.edu)

<sup>†</sup>Department of Mathematics, University of Georgia, Athens, GA 30602, USA (e-mail: Weiwei.Hu@uga.edu)

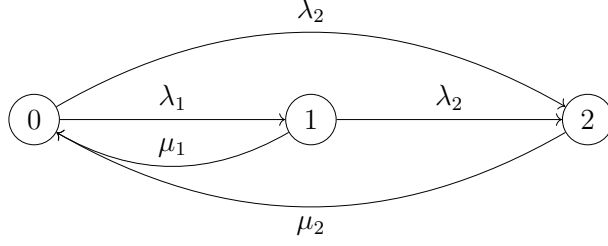


Figure 1: Transition digram of a three-state repairable system. Here 0, 1, 2 denote good, degraded and failed states. Good state can degrade or fail with rates  $\lambda_1$  and  $\lambda_2$ , respectively. Degraded and failed states can be repaired at rates  $\mu_1$  and  $\mu_2$ , respectively. The degraded state can also fail with rate  $\lambda_2$ .

Our current work focuses on a three-state repairable system, characterized by its transitions among three states: the functioning (good), the degraded, and the failed ones. The digram of the model is presented in Fig.1.

The mathematical model considered here is described by transport equations, collectively interwoven through an integro-differential equation. Moreover, an integral boundary condition is prescribed to the transport equation which is a crucial element that governs the transitions of the states. This type of mathematical models for repairable systems was derived using Markov chain and supplementary variable techniques (e.g., [5, 6, 8, 25]). Specifically, we consider the mathematical model proposed by Gupta and Agarwal in [8]

$$\left\{ \begin{array}{l} \dot{p}_0(t) = -\sum_{i=1}^2 \lambda_i p_0(t) + \sum_{i=1}^2 \int_0^L \mu_i(x) p_i(x, t) dx \\ \frac{\partial p_1(x, t)}{\partial t} + \frac{\partial p_1(x, t)}{\partial x} = -(\mu_1(x) + \lambda_2) p_1(x, t) \\ \frac{\partial p_2(x, t)}{\partial t} + \frac{\partial p_2(x, t)}{\partial x} = -\mu_2(x) p_2(x, t) \end{array} \right. \quad (1.1)$$

with boundary conditions

$$p_1(0, t) = \lambda_1 p_0(t), \quad (1.2)$$

$$p_2(0, t) = \lambda_2 p_0(t) + \lambda_2 \int_0^L p_1(x, t) dx, \quad (1.3)$$

and initial conditions

$$p_0(0) = \phi_0 \geq 0, \quad p_1(x, 0) = \phi_1(x) \geq 0, \quad p_2(x, 0) = \phi_2(x) \geq 0. \quad (1.4)$$

Here

- 1)  $\lambda_1 > 0$  and  $\lambda_2 > 0$  represent the failure rates of the system from the good mode to the degraded and to the failed states, respectively (see Fig. 1). It is assumed that the system has the same failure rate  $\lambda_2$  from the degraded to the failed state.

- 2)  $\mu_1(x) \geq 0$  and  $\mu_2(x) \geq 0$  represent the repair rates of system in the degraded and the failed states with an elapsed repair time  $x \in [0, L]$  for  $0 < L < \infty$ , respectively. Assume that

$$\int_0^l \mu_i(x) dx < \infty, \quad \text{for } 0 < l < L, \quad (1.5)$$

$$\text{and } \int_0^L \mu_i(x) dx = \infty, \quad i = 1, 2. \quad (1.6)$$

We further assume that there exists some positive integer  $N \in \mathbb{N}^+$  such that

$$\lim_{x \rightarrow L} \mu_i(x)(L - x)^N < \infty, \quad i = 1, 2. \quad (1.7)$$

- 3)  $p_0(t)$  represents the probability of the system in good state at time  $t$ ;
- 4)  $p_1(x, t)$  and  $p_2(x, t)$  represent the probability density distributions of the system in the degraded and the failed states, respectively, at time  $t$  with an elapsed repair time  $x$ ;
- 5) Let  $\hat{p}_1(t)$  and  $\hat{p}_0(t)$  denote the probabilities of the system in the degraded and the failed states at time  $t$ , respectively. We have

$$\hat{p}_1(t) = \int_0^L p_1(x, t) dx \quad \text{and} \quad \hat{p}_2(t) = \int_0^L p_2(x, t) dx. \quad (1.8)$$

- 6) The initial probability distributions of the system satisfy

$$\phi_0 + \sum_{i=1}^2 \int_0^L \phi_i(x) dx = 1. \quad (1.9)$$

*Assumptions associated with the system.* (1) The failure and degradation rates are constant. (2) All failures are statistically independent. (3) The system can fail in the degraded state and the failure rate is the same regardless of whether the system is good or degraded. (4) The repair time for the degraded or the failed device is arbitrarily distributed. (5) The repair process begins soon after the device is in failure state. (6) The system has only one repair facility and repair is to the same quality as new. Repair never damages anything.

In [8], Laplace transport was used to solve system (1.1)–(1.4) and its steady-state without discussing the well-posedness and the stability of the system model. Recently in [11], Hu *et al.* discussed the degradation and failure rates identification of this system, however, the well-posedness issues were not in their scope. In the current work, we will first rigorously address these issues using  $C_0$ -semigroup theory with repair rates being given and time-independent. Since repair actions play an essential role in ensuring the system performance, it is natural

to employ them as control inputs for the system. Furthermore, due to the bilinear structure between the repair rates and the system states. This immediately leads to a bilinear control problem. While the optimal bilinear open-loop control design of similar systems has been considered in [3, 15], the bilinear controllability keeps open. Our main objective of this work is to establish this result of the system via repair actions, where we assume that repair actions are allowed to be time-dependent and we propose explicit feedback laws for the actions to steer the system behavior to the desired one at a given final time.

The rest of this paper is organized as follows. In Section 2, we first establish the well-posedness of system (1.1)–(1.4) by showing that the system operator generates a positive  $C_0$ -semigroup of contraction. Moreover, it can be shown that zero is a simple eigenvalue of the generator and the only spectrum on the imaginary axis. Lastly, by showing the eventual compactness of the semigroup, we are able to obtain the exponential convergence of the time-dependent solution of the system to its steady-state. In Section 3, we employ the repair actions as the system control inputs and construct explicit space-time dependent repair rates in feedback forms. The closed-loop system shares similar attributes of the open-loop. Finally, we establish the bilinear controllability of the system by making use of its exponential stability and conclude our work in Section 4.

## 2. WELL-POSEDNESS AND ASYMPTOTIC BEHAVIOR OF THE SYSTEM

In this section, we address the well-posedness of system (1.1)–(1.4) and its asymptotic stability using  $C_0$ -semigroup theory.

Let  $X = \mathbb{R} \times L^1(0, L) \times L^1(0, L)$  be equipped with the norm  $\|\cdot\|_X := |\cdot| + \sum_{i=1}^2 \|\cdot\|_{L^1(0,L)}$ . It is clear that the Banach space structure  $(X, \|\cdot\|)$  is compatible with the order structure  $(X, \leq)$ , that is,  $|f| \leq |g|$  for  $f, g \in X$  implies  $f \leq g$ , thus  $X$  is a Banach lattice. Let  $\vec{p}(t) = (p_0(t), p_1(\cdot, t), p_2(\cdot, t))^T$ . Then system equations (1.1)–(1.4) can be written as an abstract Cauchy problem in  $X$ :

$$\begin{cases} \dot{\vec{p}}(t) = \mathcal{A}\vec{p}(t), \\ \vec{p}_0 = (\phi_0, \phi_1, \phi_2)^T, \end{cases} \quad (2.1)$$

where the system operator  $\mathcal{A}: D(\mathcal{A}) \subset X \rightarrow X$  is defined as

$$\mathcal{A} = \begin{pmatrix} -\sum_{i=1}^2 \lambda_i & \int_0^L \mu_1 \cdot dx & \int_0^L \mu_2 \cdot dx \\ 0 & -(\frac{d}{dx} + \mu_1(x) + \lambda_2) & 0 \\ 0 & 0 & -(\frac{d}{dx} + \mu_2(x)) \end{pmatrix}, \quad (2.2)$$

with domain

$$\mathcal{D}(\mathcal{A}) = \left\{ \vec{p} = (p_0, p_1(\cdot), p_2(\cdot))^T \in X : p_i \in W^{1,1}(0, L), \int_0^L \mu_i p_i dx < \infty, \quad i = 1, 2, \right. \\ \left. \text{and } (p_1(0) \ p_2(0))^T = \Gamma_1 p_0(x) + \int_0^L \Gamma_2 p_1(x) dx \right\}, \quad (2.3)$$

where

$$\Gamma_1 = \begin{pmatrix} \lambda_1 \\ \lambda_2 \end{pmatrix} \quad \text{and} \quad \Gamma_2 = \begin{pmatrix} 0 \\ \lambda_2 \end{pmatrix}. \quad (2.4)$$

The well-posedness of the repairable systems governed by the coupled transport and differential-integral equations has been well-studied in literature using  $C_0$ -semigroup theory, where the majority focuses on the case that the maximum repair time  $L = \infty$  (e.g. [12, 13, 15, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31]). However, in real life applications it is more realistic to assume  $L < \infty$ , as no system can be under repair forever. In this case, the repair rates  $\mu_i, i = 1, 2$  would have a singularity at  $x = L$ , as shown in the assumptions (1.5)–(1.6). This leads to some different system properties compared to the situation when  $L = \infty$  (e.g., [14]). In this work, we consider that  $L$  is finite and provide a complete proof of the well-posedness of the system (2.1) for the convenience of the reader.

Let  $\sigma(\mathcal{A})$  and  $\rho(\mathcal{A})$  denote the spectrum and the resolvent set of  $\mathcal{A}$ , respectively. To start with, we first show that the right open half-plane is contained in the resolvent set of  $\mathcal{A}$ .

**Proposition 2.1.** *For the operator  $\mathcal{A}$  with its domain  $D(\mathcal{A})$  defined in (2.2)–(2.3), we have the following statements hold:*

(1)  $\rho(\mathcal{A})$  contains the set

$$\Psi = \{r \in \mathbb{C} : \text{Re}(r) > 0 \quad \text{and} \quad r = ia, \quad a \neq 0\}; \quad (2.5)$$

(2) the resolvent operator  $\mathcal{R}(r, \mathcal{A})$  is compact for  $r \in \rho(\mathcal{A})$ ;

(3) zero is a simple eigenvalue of  $\mathcal{A}$  and the only real eigenvalue.

*Proof.* To analyze the properties of the resolvent set and the resolvent operator, we first let  $r \in \Psi$ ,  $\vec{y}(\cdot) = (y_0, y_1(\cdot), y_2(\cdot))^T \in X$ , and consider the operator equation

$$(rI - \mathcal{A})\vec{p} = \vec{y},$$

that is,

$$\left( r + \sum_{i=1}^2 \lambda_i \right) p_0 - \sum_{i=1}^2 \int_0^L \mu_i(x) p_i(x) dx = y_0, \quad (2.6)$$

$$\frac{dp_1(x)}{dx} + (r + \mu_1(x) + \lambda_2) p_1(x) = y_1(x), \quad (2.7)$$

$$\frac{dp_2(x)}{dx} + (r + \mu_2(x)) p_2(x) = y_2(x), \quad (2.8)$$

with the boundary conditions

$$p_1(0) = \lambda_1 p_0, \quad p_2(0) = \lambda_2 p_0 + \lambda_2 \int_0^L p_1(x) dx. \quad (2.9)$$

Solving (2.7) and (2.8) yields

$$p_1(x) = \lambda_1 p_0 e^{-\int_0^x (r+\lambda_2+\mu_1(s)) ds} + \int_0^x e^{-\int_\tau^x (r+\lambda_2+\mu_1(s)) ds} y_1(\tau) d\tau \quad (2.10)$$

and

$$\begin{aligned} p_2(x) &= \lambda_2 p_0 e^{-\int_0^x (r+\mu_2(s)) ds} + \lambda_2 \lambda_1 p_0 e^{-\int_0^x (r+\mu_2(s)) ds} \int_0^L e^{-\int_0^x (r+\lambda_2+\mu_1(s)) ds} dx \\ &\quad + \lambda_2 e^{-\int_0^x (r+\mu_2(s)) ds} \int_0^L \int_0^x e^{-\int_\tau^x (r+\lambda_2+\mu_1(s)) ds} y_1(\tau) d\tau dx \\ &\quad + \int_0^x e^{-\int_\tau^x (r+\mu_2(s)) ds} y_2(\tau) d\tau. \end{aligned} \quad (2.11)$$

Substituting (2.10)–(2.11) in (2.6) gives

$$\Phi(r)p_0 = F_r(y),$$

where

$$\begin{aligned} \Phi(r) &= r + \sum_{i=1}^2 \lambda_i - \lambda_1 \int_0^L \mu_1(x) e^{-\int_0^x (r+\lambda_2+\mu_1(s)) ds} dx \\ &\quad - \lambda_2 \int_0^L \mu_2(x) e^{-\int_0^x (r+\mu_2(s)) ds} dx \\ &\quad - \lambda_2 \lambda_1 \left( \int_0^L \mu_2(x) e^{-\int_0^x (r+\mu_2(s)) ds} dx \right) \left( \int_0^L e^{-\int_0^x (r+\lambda_2+\mu_1(s)) ds} dx \right) \end{aligned}$$

and

$$\begin{aligned} F_r(y) &= y_0 + \int_0^L \mu_1(x) \int_0^x e^{-\int_\tau^x (r+\lambda_2+\mu_1(s)) ds} y_1(\tau) d\tau dx \\ &\quad + \lambda_2 \left( \int_0^L \mu_2(x) e^{-\int_0^x (r+\mu_2(s)) ds} dx \right) \left( \int_0^L \int_0^x e^{-\int_\tau^x (r+\lambda_2+\mu_1(s)) ds} y_1(\tau) d\tau dx \right) \\ &\quad + \int_0^L \mu_2(x) \int_0^x e^{-\int_\tau^x (r+\mu_2(s)) ds} y_2(\tau) d\tau dx. \end{aligned} \quad (2.12)$$

Note that for any  $r \in \mathbb{C}$ ,

$$\begin{aligned} \int_0^L \mu_i(x) e^{-\int_0^x (r+\mu_i(s)) ds} dx &= - \int_0^L e^{-rx} d e^{-\int_0^x \mu_i(s) ds} \\ &= -(e^{-rL} e^{-\int_0^L \mu_i(s) ds} - 1) - r \int_0^L e^{-\int_0^x (r+\mu_i(s)) ds} dx \end{aligned} \quad (2.13)$$

$$= 1 - r \int_0^L e^{-\int_0^x (r+\mu_i(s)) ds} dx, \quad i = 1, 2, \quad (2.14)$$

where from (2.13) to (2.14) we used the assumption that  $\int_0^L \mu_i(s) ds = \infty, i = 1, 2$ . In particular, when  $r = 0$ ,

$$\int_0^L \mu_i(x) e^{-\int_0^x \mu_i(s) ds} dx = 1. \quad (2.15)$$

Thus

$$\begin{aligned} \Phi(r) &= r + \sum_{i=1}^2 \lambda_i - \lambda_1 \left( 1 - (r + \lambda_2) \int_0^L e^{-\int_0^x (r + \mu_1(s)) ds} dx \right) \\ &\quad - \lambda_2 \left( 1 - r \int_0^L e^{-\int_0^x (r + \mu_2(s)) ds} dx \right) \\ &\quad - \lambda_2 \lambda_1 \left( 1 - r \int_0^L e^{-\int_0^x (r + \mu_2(s)) ds} dx \right) \int_0^L e^{-\int_0^x (r + \mu_2(s) + \lambda_2) ds} dx \\ &= r \left( 1 + \lambda_1 \int_0^L e^{-\int_0^x (r + \mu_1(s)) ds} dx + \lambda_2 \int_0^L e^{-\int_0^x (r + \mu_2(s)) ds} dx \right. \\ &\quad \left. + \lambda_2 \lambda_1 \int_0^L e^{-\int_0^x (r + \mu_2(s)) ds} dx \int_0^L e^{-\int_0^x (r + \lambda_2 + \mu_1(s)) ds} dx \right). \end{aligned} \quad (2.16)$$

To understand  $F_r$  in (2.12), we have for any  $r \in \mathbb{C}$ ,

$$\begin{aligned} &\left| \int_0^L \mu_i(x) \int_0^x e^{-\int_\tau^x (r + \mu_i(s)) ds} y_i(\tau) d\tau dx \right| = \left| \int_0^L \left( \int_\tau^L \mu_i(x) e^{-\int_\tau^x (r + \mu_i(s)) ds} dx \right) y_i(\tau) d\tau \right| \\ &= \left| \int_0^L \left( - \int_\tau^L e^{-r(x-\tau)} d e^{-\int_\tau^x \mu_i(s) ds} \right) y_i(\tau) d\tau \right| \\ &= \left| \int_0^L \left( 1 - r \int_\tau^L e^{-\int_\tau^x r + \mu_i(s) ds} dx \right) y_i(\tau) d\tau \right| \\ &\leq \sup_{\tau \in [0, L]} \left| 1 - r \int_\tau^L e^{-\int_\tau^x r + \mu_i(s) ds} dx \right| \cdot \|y_i\|_{L^1(0, L)} \\ &\leq (1 + L|r| e^{L|\operatorname{Re}(r)|}) \|y_i\|_{L^1(0, L)}. \end{aligned} \quad (2.17)$$

Therefore, from (2.12) and (2.17) it is easy to see that  $F_r: X \rightarrow \mathbb{R}$  is a compact integral operator. Furthermore, if  $\Phi(r)$  is invertible, then

$$p_0 = \Phi(r)^{-1} F_r(\vec{y}). \quad (2.18)$$

It is clear that for any  $r \in \mathbb{C}$ ,  $r \in \rho(\mathcal{A})$  if and only if  $\Phi(r) \neq 0$ . In fact,  $\Phi(r)$  is an analytic function defined on the complex plane  $\mathbb{C}$  and thus there are at most countable isolated zeros of  $\Phi(r)$ . Moreover, from (2.16) it is easy to verify that  $\Phi(r) \neq 0$  if  $\operatorname{Re}(r) > 0$ , and zero is a simple root of  $\Phi(r)$  and the only real root, which implies that zero is a simple eigenvalue of  $\mathcal{A}$  and the only real eigenvalue of  $\mathcal{A}$ . In addition, from (2.10)–(2.11) it is easy to see that the resolvent operator  $\mathcal{R}(r, \mathcal{A})$  is a Volterra type of integral operators on  $X$ , and hence it

is compact for any  $r \in \rho(\mathcal{A})$ . We now have established the statements (2)–(3) and the first part of (1). It remains to show that there is no other spectra on the imaginary axis except zero. The proof is elementary yet takes some space. We will leave it in Appendix 5.  $\square$

With Proposition 2.1 at our disposal, we are in a position to establish the well-posedness of the system (2.1) using Phillips Theorem (e.g. [16, Theorem 2.1]).

**Theorem 2.1.** *The system operator  $\mathcal{A}$  with its domain  $D(\mathcal{A})$  defined in (2.2)–(2.3) generates a positive  $C_0$ -semigroup of contraction on  $X$ , denoted by  $\mathcal{T}(t) = e^{At}$ ,  $t \geq 0$ .*

*Proof.* According to Phillips Theorem (e.g. [16, Theorem 2.1]), it suffices to show that (1)  $D(\mathcal{A})$  is dense in  $X$ ; (2) The range  $R(I - \mathcal{A}) = X$ ; and (3)  $\mathcal{A}$  is dispersive.

(1) To show that  $\overline{D(\mathcal{A})} = X$ , we first let

$$S = \mathbb{R} \times C_0^\infty[0, L] \times C_0^\infty[0, L].$$

Since  $\overline{S} = X$ , it suffices to prove that  $S \subset \overline{D(\mathcal{A})}$ . Let  $\vec{y} = (y_0, y_1, y_2)^T \in S$  and consider the sequence  $\{\vec{p}_n = (p_{0,n}, p_{1,n}, p_{2,n})^T\}_{n \geq 1}$ , where  $p_{0,n} = y_0$ ,

$$p_{1,n}(x) := \begin{cases} \lambda_1 y_0 (1 - nx)^2 + y_1(x), & \text{for } x \in [0, \frac{1}{n}), \\ y_1(x), & \text{for } x \in [\frac{1}{n}, L], \end{cases}$$

and

$$p_{2,n}(x) := \begin{cases} (\lambda_2 y_0 + \lambda_2 \int_0^L y_1(x) dx)(1 - nx)^2 + y_2(x), & \text{for } x \in [0, \frac{1}{n}), \\ y_2(x), & \text{for } x \in [\frac{1}{n}, L]. \end{cases}$$

It is clear that  $\vec{p}_n \in \mathcal{D}(\mathcal{A})$  based on the assumption (1.7), for all  $n \in \mathbb{N}$ . Moreover,

$$\begin{aligned} \|\vec{p}_n - \vec{y}\|_X &= |p_{0,n} - y_0| + \int_0^L |p_{1,n}(x) - y_1(x)| dx + \int_0^L |p_{2,n}(x) - y_2(x)| dx \\ &\leq \int_0^{1/n} |\lambda_1 y_0 (1 - nx)^2| dx + \int_0^{1/n} |(\lambda_2 y_0 + \lambda_2 \int_0^L y_1(x) dx)(1 - nx)^2| dx \\ &\leq (\lambda_1 |y_0| + |(\lambda_2 y_0 + \lambda_2 \int_0^L y_1(x) dx)|) \frac{1}{3n} \end{aligned}$$

holds for all  $n \in \mathbb{N}$ . Therefore,  $S \subset \overline{D(\mathcal{A})}$ , and hence  $X = \overline{S} \subseteq \overline{D(\mathcal{A})} \subseteq X$ . It follows that  $\overline{D(\mathcal{A})} = X$ .

(2) From Proposition 2.1, we have  $1 \in \rho(\mathcal{A})$  and thus, for any  $\vec{y} \in X$ , there exist a unique  $\vec{p} \in \mathcal{D}(\mathcal{A})$  such that  $(I - \mathcal{A})\vec{p} = \vec{y}$ .

(3) It remains to show that  $\mathcal{A}$  is dispersive. For  $\vec{p} = (p_0, p_1, p_2)^T \in \mathcal{D}(\mathcal{A})$ , let

$$\vec{q}(x) = \left( \frac{[p_0]^+}{p_0}, \frac{[p_1(x)]^+}{p_1(x)}, \frac{[p_2(x)]^+}{p_2(x)} \right), \quad (2.19)$$



where

$$[p_0]^+ = \begin{cases} p_0, & \text{if } p_0 > 0, \\ 0, & \text{if } p_0 \leq 0; \end{cases} \quad [p_i(x)]^+ = \begin{cases} p_i(x), & \text{if } p_i(x) > 0, \\ 0, & \text{if } p_i(x) \leq 0, \end{cases} \quad i = 1, 2.$$

Note that the dual space of  $X$  is given by  $X^* = \mathbb{R} \times L^\infty(0, L) \times L^\infty(0, L)$  and  $\Psi \in X^*$ . Then the duality pairing

$$\begin{aligned} \langle \mathcal{A}\vec{p}, \vec{q} \rangle &= \left( -\sum_{i=1}^2 \lambda_i p_0 + \sum_{i=1}^2 \int_0^L \mu_i(x) p_i(x) dx \right) \frac{[p_0]^+}{p_0} \\ &\quad - \int_0^L \left( \frac{dp_1(x)}{dx} + \mu_1(x) p_1(x) + \lambda_2 p_1(x) \right) \frac{[p_1(x)]^+}{p_1(x)} dx \\ &\quad - \int_0^L \left( \frac{dp_2(x)}{dx} + \mu_2(x) p_2(x) \right) \frac{[p_2(x)]^+}{p_2(x)} dx. \end{aligned}$$

Let  $W_i = \{x \in [0, L] : p_i(x) > 0\}$  and  $W_i^c = \{x \in [0, L] : p_i(x) \leq 0\}$  for  $i = 1, 2$ . Then

$$\begin{aligned} \int_0^L \frac{dp_i(x)}{dx} \frac{[p_i(x)]^+}{p_i(x)} dx &= \int_{W_i} \frac{dp_i(x)}{dx} \frac{[p_i(x)]^+}{p_i(x)} dx + \int_{W_i^c} \frac{dp_i(x)}{dx} \frac{[p_i(x)]^+}{p_i(x)} dx \\ &= \int_{W_i} \frac{dp_i(x)}{dx} \frac{[p_i(x)]^+}{p_i(x)} dx \\ &= \int_0^L \frac{d[p_i]^+}{dx} dx = [p_i(L)]^+ - [p_i(0)]^+. \end{aligned}$$

Recall that  $\mu_i(x) \geq 0, i = 1, 2$ , for  $x \in [0, L]$ . Thus

$$\begin{aligned} \langle \mathcal{A}\vec{p}, \vec{q} \rangle &= -\sum_{i=1}^2 \lambda_i [p_0]^+ + \sum_{i=1}^2 \int_0^L \mu_i(x) p_i(x) dx \frac{[p_0]^+}{p_0} - [p_1(L)]^+ + [p_1(0)]^+ \\ &\quad - \int_0^L (\mu_1(x) [p_1(x)]^+ + \lambda_2 [p_1(x)]^+) dx \\ &\quad - [p_2(L)]^+ + [p_2(0)]^+ - \int_0^L \mu_2(x) [p_2(x)]^+ dx \\ &\leq -\sum_{i=1}^2 \lambda_i [p_0]^+ + \sum_{i=1}^2 \int_0^L \mu_i(x) [p_i(x)]^+ dx - [p_1(L)]^+ + \lambda_1 [p_0]^+ \\ &\quad - \int_0^L (\mu_1(x) [p_1(x)]^+ + \lambda_2 [p_1(x)]^+) dx \\ &\quad - [p_2(L)]^+ + \lambda_2 [p_0]^+ + \lambda_2 \int_0^L [p_1(x)]^+ dx - \int_0^L \mu_2(x) [p_2(x)]^+ dx \\ &= -\sum_{i=1}^2 [p_i(L)]^+ \leq 0, \end{aligned}$$

which indicates that  $\mathcal{A}$  is dispersive and this completes the proof.  $\square$

With the help of Theorem 2.1, the following results hold immediately.

**Corollary 2.1.** *For a non-negative initial datum  $\vec{p}_0 = (\phi_0, \phi_1, \phi_2)^T \in X$ , there exists a unique and non-negative solution given by  $\vec{p}(\cdot, t) = \mathcal{T}(t)\vec{p}_0$  to the Cauchy problem (2.1). Moreover, if  $\|\vec{p}_0\|_X = 1$ , then*

$$\|\vec{p}(\cdot, t)\|_X \leq 1, \quad \forall t \geq 0.$$

Next we address the asymptotic behavior of system (2.1). According to Proposition 2.1 (3), we know that zero is a simple eigenvalue of  $\mathcal{A}$ , thus setting

$$\mathcal{A}\vec{p} = 0,$$

one can easily solve the unique steady-state solution of system (2.1), which is the eigenfunction corresponding to the eigenvalue zero. Denote it by  $\vec{p}_e(x) = (p_{e0}, p_{e1}(x), p_{e2}(x))$ , where

$$p_{e1}(x) = \lambda_1 p_{e0} e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds}, \quad (2.20)$$

$$p_{e2}(x) = \lambda_2 p_{e0} e^{-\int_0^x \mu_2(s) ds} + \lambda_1 \lambda_2 p_{e0} e^{-\int_0^x \mu_2(s) ds} \int_0^L e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx, \quad (2.21)$$

and  $p_{e0}$  satisfies

$$p_{e0} = \frac{1}{(1 + \lambda_1 C_0)(1 + \lambda_2 C_1)} \quad (2.22)$$

with  $C_0 = \int_0^L e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx$  and  $C_1 = \int_0^L e^{-\int_0^x \mu_2(s) ds} dx$ .

When the maximum repair time  $L$  is finite, we can further show that the semigroup  $\mathcal{T}(t)$  is eventually compact, i.e., there exists  $t_0 > 0$  such that  $\mathcal{T}(t_0)$  is compact. Consequently, we can establish the exponential stability result.

**Proposition 2.2.** *The  $C_0$ -semigroup  $\mathcal{T}(t)$  is compact on  $X$  when  $t > 2L$ .*

*Proof.* Since the resolvent operator  $\mathcal{R}(r, \mathcal{A})$  for  $r \in \rho(\mathcal{A})$  is compact based on Proposition 2.1 (2), it remains to show that  $\mathcal{T}(t)$  is continuous in the uniform operator topology for  $t > 2L$  by [17, Cor. 3.4, p. 50], that is,

$$\lim_{h \rightarrow 0} \|\mathcal{T}(t+h) - \mathcal{T}(t)\|_{\mathcal{L}(X)} \rightarrow 0, \quad (2.23)$$

uniformly as  $h \rightarrow 0$ . To prove (2.23), we first solve the equations (1.1)–(1.4) using the method of characteristics and obtain that

$$\mathcal{T}(t)\vec{p}_0 = (p_0(t), p_1(\cdot, t), p_2(\cdot, t))^T,$$

for  $\vec{p}_0 = (\phi_0, \phi_1, \phi_2)^T \in X$ , where

$$p_0(t) = e^{-\sum_{i=1}^2 \lambda_i t} \phi_0 + \sum_{i=1}^2 \int_0^t \int_0^L e^{-\sum_{i=1}^2 \lambda_i (t-\tau)} \mu_i(x) p_i(x, \tau) dx d\tau, \quad (2.24)$$

$$p_1(x, t) = \begin{cases} \lambda_1 p_0(t-x) e^{-\int_0^x (\mu_1(\tau) + \lambda_2) d\tau}, & \text{if } t > x, \\ \phi_1(x-t) e^{-\int_{x-t}^x (\mu_1(\tau) + \lambda_2) d\tau}, & \text{if } t \leq x, \end{cases} \quad (2.25)$$

and

$$p_2(x, t) = \begin{cases} \left( \lambda_2 p_0(t-x) + \lambda_1 \lambda_2 \int_0^L e^{-\int_0^x (\mu_1(\tau) + \lambda_2) d\tau} p_0(t-2x) dx \right) e^{-\int_0^x \mu_2(\tau) d\tau}, & \text{if } t > 2x, \\ \left( \lambda_2 p_0(t-x) + \lambda_2 \int_0^L e^{-\int_{2x-t}^x (\mu_1(\tau) + \lambda_2) d\tau} \phi_1(2x-t) dx \right) e^{-\int_0^x \mu_2(\tau) d\tau}, & \text{if } x < t \leq 2x, \\ \phi_2(x-t) e^{-\int_{x-t}^x \mu_2(\tau) d\tau}, & \text{if } t \leq x. \end{cases} \quad (2.26)$$

To establish (2.23), we have

$$\begin{aligned} \|T(t+h)\vec{p}_0 - \mathcal{T}(t)\vec{p}_0\|_X &= |p_0(t+h) - p_0(t)| + \int_0^L |p_1(x, t+h) - p_1(x, t)| dx \\ &\quad + \int_0^L |p_2(x, t+h) - p_2(x, t)| dx, \end{aligned} \quad (2.27)$$

for any  $\vec{p}_0 \in X$  and  $h > 0$ . From (2.24), we have

$$\begin{aligned} |p_0(t+h) - p_0(t)| &\leq |e^{-\sum_{i=1}^2 \lambda_i (t+h)} - e^{-\sum_{i=1}^2 \lambda_i t}| \cdot |\phi_0(t)| \\ &\quad + \sum_{i=1}^2 \left( \int_0^{t+h} - \int_0^t \right) \left( e^{-\sum_{i=1}^2 \lambda_i (t+h-\tau)} \left| \int_0^L \mu_i(x) p_i(x, \tau) dx \right| \right) d\tau \\ &\quad + \sum_{i=1}^2 \int_0^t \left| (e^{-\sum_{i=1}^2 \lambda_i (t+h-\tau)} - e^{-\sum_{i=1}^2 \lambda_i (t-\tau)}) \right| \cdot \left| \int_0^L \mu_i(x) p_i(x, \tau) dx \right| d\tau \\ &\leq \left( \sum_{i=1}^2 \lambda_i \right) h |\phi_0(t)| + \sum_{i=1}^2 \int_t^{t+h} \left| \int_0^L \mu_i(x) p_i(x, \tau) dx \right| d\tau \\ &\quad + \sum_{i=1}^2 \int_0^t \left( \sum_{i=1}^2 \lambda_i \right) h e^{-\sum_{i=1}^2 \lambda_i (t-\tau)} \left| \int_0^L \mu_i(x) p_i(x, \tau) dx \right| d\tau, \end{aligned} \quad (2.28)$$

where from (2.25) for  $t > 2L$ , we get

$$\begin{aligned} \int_0^L \mu_1(x) p_1(x, \tau) dx d\tau &\leq \lambda_1 \int_0^L |p_0(\tau-x)| e^{-\lambda_1 x} \mu_1(x) e^{-\int_0^x \mu_1(s) ds} dx d\tau \\ &\leq \lambda_1 \sup_{t \geq 0} |p_0(t)| \end{aligned} \quad (2.29)$$

and from (2.26) for  $t > 2L$ , we get

$$\begin{aligned}
\int_0^L \mu_2(x) p_2(x, \tau) dx &\leq \lambda_2 \int_0^L |p_0(\tau - x)| \mu_2(x) e^{-\int_0^x \mu_2(\tau) d\tau} dx \\
&\quad + \lambda_1 \lambda_2 \left( \int_0^L e^{-\int_0^x (\mu_1(\tau) + \lambda_2) d\tau} |p_0(\tau - 2x)| dx \right) \cdot \left( \int_0^L \mu_2(x) e^{-\int_0^x \mu_2(\tau) d\tau} dx \right) \\
&\leq \lambda_2 \sup_{t \geq 0} |p_0(t)| + \lambda_1 \lambda_2 L \sup_{t \geq 0} |p_0(t)| \\
&= (\lambda_2 + \lambda_1 \lambda_2 L) \sup_{t \geq 0} |p_0(t)|.
\end{aligned} \tag{2.30}$$

Combining (2.28) with (2.29)–(2.30) yields

$$\begin{aligned}
|p_0(t+h) - p_0(t)| &\leq \left( \sum_{i=1}^2 \lambda_i \right) h \sup_{t \geq 0} |p_0(t)| + \lambda_1 h \sup_{t \geq 0} |p_0(t)| + (\lambda_2 + \lambda_1 \lambda_2 L) h \sup_{t \geq 0} |p_0(t)| \\
&\quad + (1 - e^{-\sum_{i=1}^2 \lambda_i t}) (\lambda_1 + \lambda_2 + \lambda_1 \lambda_2 L) h \sup_{t \geq 0} |p_0(t)| \\
&\leq c_0(\lambda_1, \lambda_2, L) h \sup_{t \geq 0} \|\mathcal{T} \vec{p}_0\|_X,
\end{aligned} \tag{2.31}$$

where  $c_0(\lambda_1, \lambda_2, L) = 3 \sum_{i=1}^2 \lambda_i + 2\lambda_1 \lambda_2 L$ .

For the second term in (2.27), we obtain

$$\begin{aligned}
\int_0^L |p_1(x, t+h) - p_1(x, t)| dx &\leq \int_0^L \lambda_1 e^{-\int_0^x (\mu_1(\tau) + \lambda_2) d\tau} |p_0(t+h-x) - p_0(t-x)| dx \\
&= \int_{t-L}^t \lambda_1 e^{-\int_0^{t-s} (\mu_1(\tau) + \lambda_2) d\tau} |p_0(s+h) - p_0(s)| ds \\
&\leq \lambda_1 L c_0(\lambda_1, \lambda_2, L) h \sup_{t \geq 0} \|\mathcal{T}(t) \vec{p}_0\|_X,
\end{aligned} \tag{2.32}$$

for  $t > 2L$ . Similarly, we can verify that

$$\int_0^L |p_2(x, t+h) - p_2(x, t)| dx \leq \lambda_2 L (1 + 4\lambda_1 L) c_0(\lambda_1, \lambda_2, L) h \sup_{t \geq 0} \|\mathcal{T} \vec{p}_0\|_X. \tag{2.33}$$

As a result of (2.31)–(2.33) and  $\|\mathcal{T}(t)\|_{\mathcal{L}(X)} \leq 1$  for  $t \geq 0$ , we have

$$\begin{aligned}
\|T(t+h) \vec{p}_0 - \mathcal{T}(t) \vec{p}_0\|_X &\leq c_1(\lambda_1, \lambda_2, L) h \sup_{t \geq 0} \|\mathcal{T}(t)\|_{\mathcal{L}(X)} \|\vec{p}_0\|_X, \\
&\leq c_1(\lambda_1, \lambda_2, L) h \|\vec{p}_0\|_X \rightarrow 0,
\end{aligned}$$

uniformly as  $h \rightarrow 0$ , where the constant  $c_1(\lambda_1, \lambda_2, L) > 0$  is independent of  $h$ . Therefore, (2.23) holds and this completes the proof.  $\square$

However, the eventual compactness of  $\mathcal{T}(t)$  does not hold when  $L = \infty$ .

**Remark 2.1.** Based on condition (1.6) and (2.24)–(2.26), it is clear that

$$p_1(L, t) = p_2(L, t) = 0, \quad \forall t > 0. \quad (2.34)$$

which implies that the probability density distributions of the system in degraded and failure modes become zero once the repair time reaches its maximum. As a result, one can derive that

$$\frac{dp_0(t)}{dt} + \sum_{i=1}^2 \frac{\partial \int_0^L p_i(x, t) dx}{\partial t} = 0, \quad \forall t > 0.$$

Therefore, if  $\vec{p}_0 = (\phi_0, \phi_1, \phi_2)^T \geq 0$  and  $\|\vec{p}_0\|_X = 1$ , then by the positivity of the semigroup  $\mathcal{T}(t)$ , we have  $\vec{p}(x, t) = \mathcal{T}(t)\vec{p}_0 \geq 0$  and

$$\|\vec{p}(\cdot, t)\|_X = \|\vec{p}_0\|_X = 1, \quad \forall t > 0. \quad (2.35)$$

In other words, our system (2.1) is conservative in terms of  $\|\cdot\|_X$ -norm. Moreover, it is easy to verify that

$$\vec{p}(\cdot, t) = \mathcal{T}(t)\vec{p}_0 \in D(\mathcal{A}) \quad \text{for } t > 2x, \quad (2.36)$$

$$\text{and } p_i(x, t) \in W^{1,1}(0, L) \quad \text{for } t \leq 2x, \quad \text{if } \phi_i(x) \in W^{1,1}(0, L), \quad i = 1, 2. \quad (2.37)$$

Finally, by eventual compactness and the fact that zero is a simple eigenvalue of the generator  $\mathcal{A}$  and the only spectrum on the imaginary axis established in Theorem 2.1 and Proposition 2.1, the exponential stability result follows immediately from (e.g. [18, Cor. 3.2, p. 330]).

**Theorem 2.2.** For  $\vec{p}_0 \in X$ , let  $\vec{p}(\cdot, t) = \mathcal{T}(t)\vec{p}_0$  be the solution to the Cauchy problem (2.1), then it converges exponentially to its steady-state solution  $\vec{p}_e = (p_{e0}, p_{e1}, p_{e2})^T$  given by (2.20)–(2.22), that is,

$$\|\vec{p}(\cdot, t) - \vec{p}_e(\cdot)\|_X \leq M_0 e^{-\varepsilon_0 t}, \quad (2.38)$$

for some constant  $\varepsilon_0 > 0$  and  $M_0 \geq 1$ .

### 3. BILINEAR CONTROLLABILITY VIA TIME-DEPENDENT REPAIR ACTIONS

In this section, we will focus on the investigation of bilinear controllability of system (2.1) via system repair actions. Our main objective is stated as follows.

**Problem Statement.** Given  $t_f > 0$ , let  $\vec{p}_0(\cdot) = (\phi_0, \phi_1(\cdot), \phi_2(\cdot))^T \in X$  and  $\vec{p}^*(\cdot) = (p_0^*, p_1^*(\cdot), p_2^*(\cdot))^T \in X$  be non-negative initial and desired states, respectively, with  $\|\vec{p}_0\|_X = \|\vec{p}^*\|_X = 1$ . Find a vector of space-time dependent repair rates  $\vec{\mu}(x, t) = (\mu_1(x, t), \mu_2(x, t))^T$  such that the solution  $\vec{p}(\cdot, t)$  to system (2.1) satisfies  $\vec{p}(x, t_f) = \vec{p}^*(x)$  for  $x \in [0, L]$ .

However the desired states can not be arbitrary. Due to the properties of non-negativity and conservation of the system, the desired states should also satisfy these attributes described by (2.34)–(2.37) and the boundary conditions (1.2)–(1.3). In addition, we assume that the desired probability density distribution of the system in degraded and failure modes are strictly decreasing functions. In other words, while under repair, it is not expected that the desired density distributions of these two modes increase. Specifically, we assume that

$$\vec{p}^* = (p_0^*, p_1^*, p_2^*)^T \in \mathbb{R} \times W^{1,1}(0, L) \times W^{1,1}(0, L) \quad (3.1)$$

and

$$p_1^*(0) = \lambda p_0^*, \quad p_2^*(0) = \lambda_2 p_0^* + \lambda_2 \int_0^L p_1^*(x) dx \quad (3.2)$$

$$p_i^*(L) = 0, \quad i = 1, 2, \quad (3.3)$$

where

$$p_0^* = 1 - \sum_{i=1}^2 \int_0^L p_i^*(x) dx. \quad (3.4)$$

Moreover,

$$p_i^*(x) \geq 0, \quad i = 1, 2, \quad \forall x \in [0, L], \quad (3.5)$$

$$\frac{dp_1^*(x)}{dx} \leq -\epsilon < 0 \quad \text{and} \quad \frac{dp_2^*(x)}{dx} < 0, \quad \forall x \in (0, L) \quad (3.6)$$

for some  $\epsilon > 0$ . Observe that if the repair rates are time-independent, then setting the steady-state solution given by (2.20)–(2.22) to be the desired distribution, that is, letting

$$p_0^* = p_{e0} \\ p_1^*(x) = \lambda_1 p_{e0} e^{-\int_0^x (\mu_1(s) + \lambda_2) ds}, \quad (3.7)$$

$$p_2^*(x) = e^{-\int_0^x \mu_2(\alpha) ds} \left( \lambda_2 p_{e0} + \lambda_2 \lambda_1 p_{e0} \int_0^L \left( e^{-\int_0^x (\mu_1(s) + \lambda_2) ds} \right) dx \right), \quad (3.8)$$

we can obtain from (3.7)–(3.8) that

$$\mu_1(x) = -\left( \frac{d}{dx} (\ln p_1^*(x)) + \lambda_2 \right) = -\left( \frac{p_{1x}^*}{p_1^*} + \lambda_2 \right) \quad (3.9)$$

and

$$\mu_2(x) = -\frac{d}{dx} (\ln p_2^*(x)) = -\frac{p_{2x}^*}{p_2^*}, \quad (3.10)$$

which satisfy (1.5)–(1.6). This observation implies that if the repair rates are set as (3.9)–(3.10), then the system solution converges to  $\vec{p}^*$  exponentially. On the other hand, one may possibly adjust the repair rates in time to steer the system to such a state at some final time. This motivates us to consider the space-time dependent repair rate design in the following section.

### 3.1. BILINEAR CONTROL DESIGN OF THE REPAIR ACTIONS

Now we investigate the bilinear controllability of the repair actions when they are allowed to depend on system running time  $t$ . Note that for any  $t_f > 0$  we can always choose a constant  $r_0 > 0$  such that  $r_0 \sum_{k=1}^{\infty} \frac{1}{k^2} = t_f$ . In fact,  $\sum_{k=1}^{\infty} \frac{1}{k^2} = \frac{\pi^2}{6}$  and hence  $r_0 = \frac{6t_f}{\pi^2}$ . Inspired by [19, 20], we consider the space-time dependent repair rates  $\mu_i(x, t)$ ,  $i = 1, 2$ , in the following feedback forms

$$\mu_1(x, t) = -\frac{1}{p_1(x, t)} \frac{\partial p_1(x, t)}{\partial x} + \alpha_1 j \frac{1}{p_1(x, t)} \frac{\partial (g_1(x) p_1(x, t))}{\partial x} - \lambda_2, \quad (3.11)$$

$$\mu_2(x, t) = -\frac{1}{p_2(x, t)} \frac{\partial p_2(x, t)}{\partial x} + \alpha_2 j \frac{1}{p_2(x, t)} \frac{\partial (g_2(x) p_2(x, t))}{\partial x}, \quad (3.12)$$

for  $t \in [r_0 \sum_{k=1}^{j-1} \frac{1}{k^2}, r_0 \sum_{k=1}^j \frac{1}{k^2})$  and  $i \in \mathbb{Z}^+$ , where  $g_i(x) = \frac{1}{p_i^*(x)}$ ,  $i = 1, 2$  and  $\alpha_i > 0$ ,  $i = 1, 2$  are some constants to be properly chosen. Here we set  $\sum_{k=1}^j \frac{1}{k^2} = 0$  if  $j = 0$  and let  $t_j = r_0 \sum_{k=1}^j \frac{1}{k^2}$ ,  $j \in \mathbb{Z}^+$ , in the rest of our discussion. Observe that in (3.11)–(3.12),  $\mu_i$ ,  $i = 1, 2$ , are weighted in time  $t$  by  $j$  on each interval  $[t_j, t_{j+1})$  and it is straightforward to verify that  $\mu_i \geq 0$  if  $\alpha_1 \geq \max\{\frac{\lambda_2}{\epsilon} p_1^{*2}(0), p_1^*(0)\}$ , for all  $t \geq 0$  and  $\alpha_2 \geq p_2^*(0)$ . In fact, to have  $\mu_1(x, t) \geq 0$  for  $x \in [0, L]$  and  $t \geq 0$ , we need

$$\alpha_1 j \frac{1}{p_1(x, t)} \frac{\partial (g_1(x) p_1(x, t))}{\partial x} \geq \frac{1}{p_1(x, t)} \frac{\partial p_1(x, t)}{\partial x} + \lambda_2,$$

where

$$\alpha_1 j \frac{1}{p_1(x, t)} \frac{\partial (g_1(x) p_1(x, t))}{\partial x} = \alpha_1 j g_{1_x}(x) + \alpha_1 j g_1(x) \frac{p_{1_x}(x, t)}{p_1(x, t)}$$

and

$$g_{1_x}(x) = -\frac{p_{1_x}^*(x)}{p_1^{*2}(x)} \geq \epsilon > 0.$$

Thus it suffices to have  $\alpha_1 j g_{1_x}(x) \geq \lambda_2$  and  $\alpha_1 j g_1(x) \frac{p_{1_x}(x, t)}{p_1(x, t)} \geq \frac{p_{1_x}(x, t)}{p_1(x, t)}$ . Since  $j \geq 1$ , it suffices to choose  $\alpha_1 \geq \max\{\sup_{x \in [0, L]} \frac{\lambda_2}{g_{1_x}(x)}, \sup_{x \in [0, L]} \frac{1}{g_1(x)}\}$ , i.e.,

$$\alpha_1 \geq \max\left\{ \sup_{x \in [0, L]} \left( -\lambda_2 \frac{p_1^{*2}(x)}{p_{1_x}^*} \right), \sup_{x \in [0, L]} p_1^*(x) \right\},$$

therefore, we take

$$\alpha_1 \geq \max\left\{ \frac{\lambda_2}{\epsilon} p_1^{*2}(0), p_1^*(0) \right\}. \quad (3.13)$$

Similarly, we set

$$\alpha_2 \geq p_2^*(0). \quad (3.14)$$

The assumptions (1.5)–(1.6) will be verified for after investigating the properties of the closed-loop system. The following two theorems establish the main controllability results of this work.

**Theorem 3.1.** *Given  $t_f > 0$ , let  $\vec{p}_0 = (\phi_0, \phi_1(\cdot), \phi_2(\cdot))^T \in X$  and  $\vec{p}^*(\cdot) = (p_0^*, p_1^*(\cdot), p_2^*(\cdot))^T \in X$  be non-negative initial and desired states, respectively, with  $\|\vec{p}_0\|_X = \|\vec{p}^*\|_X = 1$ . Assume that  $\vec{p}^*$  satisfies (3.1)–(3.6). Then there exists a vector of repair rates  $\vec{\mu}(x, t) = (\mu_1(x, t), \mu_2(x, t))^T$  in the feedback forms given by (3.11)–(3.12), such that the solution  $\vec{p}(\cdot, t)$  to our system (2.1) satisfies  $\vec{p}(\cdot, t_f) = (p_0^*, p_1^*(\cdot), p_2^*(\cdot))^T$ .*

Based on the feedback control designs (3.11)–(3.12), a natural question is that whether  $\vec{\mu}(x, t)$  stays bounded as  $j \rightarrow \infty$ , i.e.,  $t \rightarrow t_f$ , where  $x \in [0, l]$  with  $0 < l < L$ . Our answer is affirmative under appropriate conditions.

**Theorem 3.2.** *Let*

$$\alpha_1 \geq \max\left\{\frac{\lambda_2}{\epsilon} p_1^{*2}(0), p_1^*(0), \frac{1}{r_0}\right\} \quad \text{and} \quad \alpha_2 \geq \max\left\{p_2^*(0), \frac{1}{r_0}\right\}. \quad (3.15)$$

*If  $p_i^*(x) \in W^{1,\infty}(0, L)$ ,  $i = 1, 2$ , and  $t_f > 2 \sum_{i=1}^2 \tilde{p}_i^*(L)$ , then the feedback control law  $\vec{\mu}(x, t)$  is bounded for  $x \in [0, l]$  with  $0 < l < L$  and  $0 \leq t \leq t_f$ .*

### 3.2. PROOFS OF THEOREMS 3.1–3.2

The proofs of Theorems 3.1–3.2 mainly utilize the exponential convergence of the closed-loop system to its steady-state. To start with, incorporating the feedback laws in (3.11)–(3.12), we obtain the closed-loop system as follows

$$\begin{cases} \frac{dp_{0,j}(t)}{dt} = j \sum_{i=1}^2 \alpha_i \int_0^L \frac{\partial(g_i(x)p_{i,j}(x, t))}{\partial x} dx, \\ \frac{\partial p_{i,j}(x, t)}{\partial t} = -j \alpha_i \frac{\partial(g_i(x)p_{i,j}(x, t))}{\partial x}, \quad i = 1, 2, \end{cases} \quad (3.16)$$

where  $p_{0,j}(t) := p_0(t)$  and  $p_{i,j}(x, t) := p_i(x, t)$  for  $i = 1, 2$ , and  $(x, t) \in (0, L) \times (t_{j-1}, t_j)$  for  $j \in \mathbb{Z}^+$ , with boundary conditions

$$p_{1,j}(0, t) = \lambda_1 p_{0,j}(t), \quad (3.17)$$

$$p_{2,j}(0, t) = \lambda_2 p_{0,j}(t) + \lambda_2 \int_0^L p_{1,j}(x, t) dx, \quad (3.18)$$

and the initial conditions

$$p_{0,j}(0) = p_{0,j-1}(t_{j-1}), \quad p_{i,j}(x, 0) = p_{i,j-1}(x, t_{j-1}), \quad i = 1, 2. \quad (3.19)$$



We first apply the method of characteristics to analyze the transport equations in (3.16). To this end, we let  $\varphi_{0,j}(t) = p_{0,j}(t)$  and  $\varphi_{i,j}(x, t) = j\alpha_i g_i(x) p_{i,j}(x, t)$  for  $t \in (t_{j-1}, t_j)$  and  $j \in \mathbb{Z}^+$ . Then the closed-loop system (3.16)–(3.19) becomes

$$\begin{cases} \frac{d\varphi_{0,j}(t)}{dt} = \sum_{i=1}^2 \int_0^L \frac{\partial \varphi_{i,j}(x, t)}{\partial x} dx, \\ \frac{\partial \varphi_{i,j}(x, t)}{\partial t} = -j\alpha_i g_i(x) \frac{\partial \varphi_{i,j}(x, t)}{\partial x}, \quad i = 1, 2, \end{cases} \quad (3.20)$$

with boundary conditions

$$\varphi_i(0, t) = j\alpha_1 g_1(0) p_{i,j}(0, t), \quad i = 1, 2, \quad (3.21)$$

and initial conditions

$$\varphi_{0,j}(0) = p_{0,j}(0), \quad \varphi_{i,j}(x, 0) = j\alpha_i g_i(x) p_{i,j}(x, 0). \quad (3.22)$$

Let  $\frac{dx}{dt} = j\alpha_i g_i(x)$  with  $x(0) = x_0$ . Then  $\frac{dx}{\alpha_i g_i(x)} = \frac{1}{j\alpha_i} p_i^*(x) dx = dt$ . Let

$$\tilde{p}_{i,j}^*(x) = \frac{1}{j\alpha_i} \int_0^x p_i^*(s) ds, \quad i = 1, 2. \quad (3.23)$$

Then  $\tilde{p}_{i,j}^*(x) = t + \frac{1}{j\alpha_i} \int_0^{x_0} p_i^*(s) ds$ . Since  $\frac{d\tilde{p}_{i,j}^*}{dx} = \frac{1}{j\alpha_i} p_i^* > 0$  for  $x \in (0, L)$  by (3.5), this implies that  $\tilde{p}_{i,j}^*(x)$  is a monotonically increasing function for  $x \in [0, L]$ , and hence invertible. It is worth to point out that by (3.23), (3.6) and (3.13)–(3.14) we have

$$\tilde{p}_{i,j}^*(L) = \frac{1}{j\alpha_i} \int_0^L p_i^*(s) ds \leq L, \quad j \in \mathbb{N}^+, \quad i = 1, 2.$$

Now let  $\xi_{i,j} = \tilde{p}_{i,j}^*(x) - t$ . Then  $x = (\tilde{p}_{i,j}^*)^{-1}(t + \xi_{i,j})$ . Define

$$\Psi_i(t) = \varphi_i((\tilde{p}_i^*)^{-1}(t + \xi_{i,j}), t).$$

Then we have

$$\frac{d\Psi_{i,j}}{dt} = \frac{\partial \varphi_{i,j}}{\partial t} + \alpha_i g_i(x) \frac{\partial \varphi_{i,j}}{\partial x} = 0. \quad (3.24)$$

For  $\xi_i < 0$ , i.e.,  $\tilde{p}_{i,j}^*(x) < t$ , the solution to (3.24) is determined by the boundary conditions (3.21), so we integrate (3.24) from some  $t$  such that  $x = (\tilde{p}_{i,j}^*)^{-1}(t + \xi_{i,j}) = 0$ , i.e.,  $t + \xi_i = 0$ , and hence  $t = -\xi_{i,j}$ . Integrating (3.24) from  $-\xi_{i,j}$  to  $t$  follows

$$\Psi_{i,j}(t) = \varphi_{i,j}(0, -\xi_{i,j}) = \varphi_{i,j}(0, t - \tilde{p}_{i,j}^*(x)), \quad i = 1, 2. \quad (3.25)$$

For  $\xi_{i,j} \geq 0$ , i.e.,  $\tilde{p}_{i,j}^*(x) \geq t$ , the solution to (3.24) is determined by the initial conditions (3.22). So we integrate (3.24) from 0 to  $t$  and obtain

$$\begin{aligned} \Psi_{i,j}(t) &= \varphi_i((\tilde{p}_{i,j}^*)^{-1}(\xi_{i,j}), 0) \\ &= \varphi_{i,j}((\tilde{p}_{i,j}^*)^{-1}(\tilde{p}_{i,j}^*(x) - t), 0). \end{aligned} \quad (3.26)$$

To simplify the notation, we let

$$h_{i,j}(x, t) = (\tilde{p}_{i,j}^*)^{-1}(\tilde{p}_{i,j}^*(x) - t), \quad \tilde{p}_{i,j}^*(x) \geq t.$$

Therefore, according to the boundary and initial conditions (3.21)–(3.22), we have

$$\varphi_{i,j}(x, t) = \begin{cases} j\alpha_i g_i(0)p_{i,j}(0, t - \tilde{p}_{i,j}^*(x)), & \text{if } t > \tilde{p}_{i,j}^*(x); \\ j\alpha_i g_i(h_{i,j}(x, t))p_{i,j}(h_{i,j}(x, t), 0), & \text{if } t \leq \tilde{p}_{i,j}^*(x). \end{cases}$$

Solving  $\varphi_{0,j}(t)$  from (3.20) yields

$$\varphi_{0,j}(t) = \sum_{i=1}^2 \int_0^t (\varphi_i(L, \tau) - \varphi_i(0, \tau)) d\tau + \varphi_{0,j}(0).$$

Thus

$$\begin{aligned} p_{0,j}(t) &= \sum_{i=1}^2 \int_0^t (\varphi_{i,j}(L, \tau) - \varphi_i(0, \tau)) d\tau + p_{0,j}(0) \\ &= j \sum_{i=1}^2 \alpha_i \int_0^t (g_i(L)p_{i,j}(L, \tau) - g_i(0)p_{i,j}(0, \tau)) d\tau + p_{0,j}(0), \end{aligned} \quad (3.27)$$

$$p_{1,j}(x, t) = \frac{1}{j\alpha_1 g_1(x)} \varphi_1(x, t) = \begin{cases} \frac{g_1(0)}{g_1(x)} \lambda_1 p_{0,j}(t - \tilde{p}_{1,j}^*(x)), & \text{if } t > \tilde{p}_{1,j}^*(x); \\ \frac{g_1(h_1(x, t))}{g_1(x)} p_{1,j}(h_1(x, t), 0), & \text{if } t \leq \tilde{p}_{1,j}^*(x); \end{cases} \quad (3.28)$$

and

$$\begin{aligned} p_{2,j}(x, t) &= \frac{1}{j\alpha_2 g_2(x)} \varphi_2(x, t) = \begin{cases} \frac{g_2(0)}{g_2(x)} \lambda_2 \left( p_0(t - \tilde{p}_{2,j}^*(x)) + \int_0^L p_1(x, t - \tilde{p}_{2,j}^*(x)) dx \right), & \text{if } t > \tilde{p}_{2,j}^*(x), \\ \frac{g_2(h_2(x, t))}{g_2(x)} p_{2,j}(h_2(x, t), 0), & \text{if } t \leq \tilde{p}_{2,j}^*(x). \end{cases} \\ &= \begin{cases} \frac{g_2(0)}{g_2(x)} \lambda_2 \left( p_{0,j}(t - \tilde{p}_{2,j}^*(x)) + g_1(0) \lambda_1 \int_0^L \frac{p_{0,j}(t - \tilde{p}_{1,j}^*(x) - \tilde{p}_{2,j}^*(x))}{g_1(x)} dx \right), & \text{if } t > \tilde{p}_{1,j}^*(x) + \tilde{p}_{2,j}^*(x); \\ \frac{g_2(0)}{g_2(x)} \lambda_2 \left( p_{0,j}(t - \tilde{p}_{2,j}^*(x)) + \int_0^L \frac{g_1(h_1(x, t - \tilde{p}_{2,j}^*(x))) p_{1,j}(h_1(x, t - \tilde{p}_{2,j}^*(x)), 0)}{g_1(x)} dx \right), & \text{if } \tilde{p}_{2,j}^*(x) < t \leq \tilde{p}_{1,j}^*(x) + \tilde{p}_{2,j}^*(x), \\ \frac{g_2(h_2(x, t))}{g_2(x)} p_{2,j}(h_{2,j}(x, t), 0), & \text{if } t \leq \tilde{p}_{2,j}^*(x). \end{cases} \end{aligned} \quad (3.29)$$

By virtue of (3.28)–(3.29), it is easy to verify that  $\mu_i, i = 1, 2$ , in the feedback forms (3.11)–(3.12) satisfy (1.5)–(1.6) due to  $g_i(x) < \infty$  for  $x \in [0, l]$  and  $g_i(L) = \infty$ .

Since  $j$  is a weight parameter of the system in each time interval  $(t_{j-1}, t_j)$ ,  $j \in \mathbb{Z}^+$ , without loss of generality we first analyze the closed-loop system (3.16)–(3.19) for  $j = 1$ . In this case,

$$\tilde{p}_{i,1}^*(x) = \frac{1}{\alpha_i} \int_0^x p_i^*(s) ds, \quad i = 1, 2.$$

For simplicity, we denote  $\tilde{p}_{i,1}^*(x)$  by  $\tilde{p}_i^*(x)$ ,  $i = 1, 2$  in the following discussions.

Define the closed-loop system operator  $\mathcal{A}_c: D(\mathcal{A}_c) \subset X \rightarrow X$  by

$$\mathcal{A}_c = \begin{pmatrix} 0 & \alpha_1 \int_0^L \frac{d(g_1(x)\cdot)}{dx} dx & \alpha_2 \int_0^L \frac{d(g_2(x)\cdot)}{dx} dx \\ 0 & -\alpha_1 \frac{d(g_1(x)\cdot)}{dx} & 0 \\ 0 & 0 & -\alpha_2 \frac{d(g_2(x)\cdot)}{dx} \end{pmatrix}, \quad (3.30)$$

with domain

$$\begin{aligned} D(\mathcal{A}_c) = \{ \vec{p} = (p_0, p_1(\cdot), p_2(\cdot))^T \in X : p_i, g_i p_i \in W^{1,1}(0, L), \quad i = 1, 2, \\ \text{and } (p_1(0) \ p_2(0))^T = \Gamma_1 p_1(x) + \int_0^L \Gamma_2 p_2(x) dx \}, \end{aligned} \quad (3.31)$$

where  $\Gamma_i$ ,  $i = 1, 2$  are defined in (2.4). Note that  $g_i p_i \in W^{1,1}(0, L)$  implies  $g_i p_i \in C[0, L]$  by Sobolev imbedding, and hence

$$\int_0^L \frac{d(g_i(x)p_i(x))}{dx} dx = g_i(L)p_i(L) - g_i(0)p_i(0) < \infty. \quad (3.32)$$

We keep the integral forms in our formulation to better demonstrate the structure of the closed-loop system. Moreover, since  $\lim_{x \rightarrow L} g_i(x) = \lim_{x \rightarrow L} \frac{1}{p_i^*(x)} = \infty$ ,  $i = 1, 2$ , based on the assumption (3.3), we must have  $p_i(L) = 0$ ,  $i = 1, 2$  for  $p_i \in D(\mathcal{A})$ .

Now the closed-loop system (3.16) for  $j = 1$  can be formulated as

$$\begin{cases} \dot{\vec{p}}(t) = \mathcal{A}_c \vec{p}(t), \\ \vec{p}_0 = (\phi_0, \phi_1, \phi_2)^T. \end{cases} \quad (3.33)$$

It can be shown that (3.33) inherits the properties from the open-loop system (2.1). Specifically, the system is conserved in terms of  $\|\cdot\|_X$ -norm. Moreover, applying the similar procedures as in the proof of Theorem 2.1, we can establish the well-posedness of system (3.33) as follows.

**Proposition 3.1.** *The closed-loop system operator  $\mathcal{A}_c$  with its domain  $D(\mathcal{A}_c)$  defined in (3.30)–(3.31) generates a positive  $C_0$ -semigroup of contraction on  $X$ . Denote it by  $\mathcal{T}_c(t) = e^{\mathcal{A}_c t}$ ,  $t \geq 0$ . Then there exists a unique solution to system (3.16) given by  $\vec{p}(x, t) = (\mathcal{T}_c(t)\vec{p}_0)(x)$  for  $\vec{p}_0 \in X$ .*

It can be verified that zero is also a simple eigenvalue of  $\mathcal{A}_c$  and the only spectrum on the imaginary axis as in Theorem 2.1. Moreover,

$$\vec{p}_c = \left( p_0^*, \frac{1}{g_1(x)}, \frac{1}{g_2(x)} \right)^T = \left( p_0^*, p_1^*(x), p_2^*(x) \right)^T$$

is the eigenfunction corresponding to zero, where  $p_0^*$  satisfies (3.4). Furthermore, we can obtain the eventual compactness property of the closed-loop system as well.

**Proposition 3.2.** *The  $C_0$ -semigroup  $\mathcal{T}_c(t)$  is compact on  $X$  when  $t > 2 \sum_{i=1}^2 \tilde{p}_i^*(L)$ .*

*Proof.* Following the similar approaches as in the proof of Proposition 2.1, we can show that  $\mathcal{A}_c$  has compact resolvent. It remains to show that  $\mathcal{T}_c(t)$  is continuous in the uniform operator topology for  $t > 2 \sum_{i=1}^2 \tilde{p}_i^*(L)$ , that is,

$$\lim_{h \rightarrow 0} \|\mathcal{T}_c(t+h) - \mathcal{T}_c(t)\|_{\mathcal{L}(X)} \rightarrow 0. \quad (3.34)$$

Since  $\tilde{p}_i(x)$  is monotonically increasing for  $x \in [0, L]$ , if  $t \geq \tilde{p}_1^*(L) + \tilde{p}_2^*(L)$ , from (3.27) we have

$$\begin{aligned} |p_0(t+h) - p_0(t)| &= \left| \sum_{i=1}^2 \alpha_i \int_t^{t+h} (g_i(L)p_i(L, \tau) - g_i(0)p_i(0, \tau)) d\tau \right| \\ &\leq \alpha_1 g_1(0) \lambda_1 \int_t^{t+h} |p_0(\tau - \tilde{p}_1^*(L)) - p_0(0, \tau)| d\tau \\ &\quad + \alpha_2 \lambda_2 g_2(0) \int_t^{t+h} \left| \left( p_0(\tau - \tilde{p}_2^*(L)) + \frac{g_1(0)\lambda_1}{\alpha_1} \int_0^L \frac{p_0(\tau - \tilde{p}_1^*(x) - \tilde{p}_2^*(x))}{g_1(x)} dx \right) \right. \\ &\quad \left. - \left( p_0(\tau) + \int_0^T p_1(x, \tau) dx \right) \right| d\tau \\ &\leq 2\alpha_1 g_1(0) \lambda_1 h \sup_{t \geq 0} |p_0(t)| + 2\alpha_2 g_2(0) \lambda_2 h \sup_{t \geq 0} |p_0(t)| \\ &\quad + \alpha_2 g_2(0) \lambda_2 h \left( \frac{g_1(0)\lambda_1}{\alpha_1} \sup_{t \geq 0} |p_0(t)| + \sup_{t \geq 0} \|p_1\|_{L^1} \right) \\ &\leq C_0 h \sup_{t \geq 0} \|\mathcal{T}_c(t)\vec{p}_0\|_X, \end{aligned} \quad (3.35)$$

where  $C_0 = 2 \sum_{i=1}^2 \alpha_i g_i(0) \lambda_i + \alpha_2 g_2(0) \lambda_2 \max\{\frac{g_1(0)\lambda_1}{\alpha_1}, 1\}$ . Moreover, from (3.28), we have

$$\left| \int_0^L p_1(x, t+h) - p_1(x, t) dx \right| = g_1(0) \lambda_1 \left| \int_0^L \frac{1}{g_1(x)} \left( p_0(t+h - \tilde{p}_1^*(x)) - p_0(t - \tilde{p}_1^*(x)) \right) dx \right|. \quad (3.36)$$

Let  $\tilde{t} = t - \tilde{p}_1^*(x) > 0$ , then  $x = (\tilde{p}_1^*)^{-1}(t - \tilde{t})$  and  $d\tilde{t} = -p_1^*(x)dx$ , and hence (3.36) satisfies

$$\left| \int_0^L p_1(x, t+h) - p_1(x, t) dx \right| \leq \lambda_1 \int_{t-\tilde{p}_1^*(L)}^t \left| \left( p_0(\tilde{t}+h) - p_0(\tilde{t}) \right) \right| d\tilde{t}. \quad (3.37)$$

Furthermore, in light of (3.35) for  $t - \tilde{p}_1^*(L) > \tilde{p}_1^*(L) + \tilde{p}_2^*(L)$  we get

$$\left| \int_0^L p_1(x, t+h) - p_1(x, t) dx \right| \leq C_1 h \sup_{t \geq 0} \|\mathcal{T}_c(t)\vec{p}_0\|_X, \quad (3.38)$$

for  $C_1 = \lambda_1 \tilde{p}_1^*(L) C_0$ .

Using similar analysis, letting  $\tilde{t} = t - 2\tilde{p}_1^*(x)$  one can verify that

$$\begin{aligned} \left| \int_0^L p_2(x, t+h) - p_2(x, t) dx \right| &\leq g_2(0) \lambda_2 \left| \int_0^L \frac{1}{g_2(x)} \left( p_0(t+h - \tilde{p}_2^*(x)) - p_0(t - \tilde{p}_2^*(x)) \right) dt \right| \\ &\quad + g_2(0) \lambda_2 g_1(0) \lambda_1 \left| \int_0^L \int_0^L \frac{p_0(t+h - \tilde{p}_1^*(x) - \tilde{p}_2^*(x)) - p_0(t - \tilde{p}_1^*(x) - \tilde{p}_2^*(x))}{g_1(x)} dx dx \right| \\ &\leq \lambda_2 \int_{t-\tilde{p}_2^*(L)}^t \left| p_0(\tilde{t}+h) - p_0(\tilde{t}) \right| d\tilde{t} + g_2(0) \lambda_2 \lambda_1 L \int_{t-\tilde{p}_1^*(L)-\tilde{p}_2^*(L)}^t \left| p_0(\tilde{t}+h) - p_0(\tilde{t}) \right| dx \\ &\leq C_2 h \sup_{t \geq 0} \|\mathcal{T}_c(t)\vec{p}_0\|_X, \end{aligned} \quad (3.39)$$

$$\leq C_2 h \sup_{t \geq 0} \|\mathcal{T}_c(t)\vec{p}_0\|_X, \quad (3.40)$$

for some constant  $C_2 > 0$ , where from (3.39) to (3.40) we need  $t > 2\tilde{p}_1^*(L) + 2\tilde{p}_2^*(L)$  in order to apply the estimate in (3.35).

As a result of (3.35)–(3.40) we have that for  $t > 2 \sum_{i=1}^2 \tilde{p}_i^*(L)$ ,

$$\|\mathcal{T}_c(t+h)\vec{p}_0 - \mathcal{T}_c(t)\vec{p}_0\|_X \leq Ch \sup_{t \geq 0} \|\mathcal{T}_c(t)\vec{p}_0\|_X \leq Ch \|\vec{p}_0\|_X \rightarrow 0$$

uniformly as  $h \rightarrow 0$  for any  $\vec{p}_0 \in X$ , where  $C > 0$  is a constant independent of  $h$ . This completes the proof.  $\square$

**Corollary 3.1.** *For  $\vec{p}_0 \in X$ , let  $\vec{p}(\cdot, t) = \mathcal{T}_c(t)\vec{p}_0$  be the solution to the closed-loop system (3.33), then it converges exponentially to its steady-state solution  $\vec{p}^* = (p_0^*, p_1^*, p_2^*)^T$  satisfying (3.1)–(3.6), that is,*

$$\|\vec{p}(\cdot, t) - \vec{p}^*(\cdot)\|_X \leq M_c e^{-\varepsilon_c t}, \quad (3.41)$$

for some constant  $\varepsilon_c = \varepsilon_c(\alpha_1, \alpha_2) > 0$  and  $M_c \geq 1$ .

Note that the decay rate  $\varepsilon_c$  depends on  $\alpha_1$  and  $\alpha_2$ . One can increase  $\varepsilon_c$  by increasing both of these parameters. With the result of Corollary 3.1, we are ready to prove our main Theorems 3.1–3.2.

*Proof of Theorem 3.1.* According to (3.16), the closed-loop system is now weighted by  $j$  for  $t \in [t_{j-1}, t_j)$ ,  $j \in \mathbb{Z}^+$ , and hence the decay rate of the system solution to its steady-state

becomes  $j\varepsilon_c$  for  $t \in [t_{j-1}, t_j)$ . Further note that  $t_j - t_{j-1} = \frac{r_0}{j^2}$ . Consequently, by Corollary 3.1 we have

$$\|\bar{p}(\cdot, r_0 \sum_{k=1}^j \frac{1}{k^2}) - \bar{p}^*(\cdot)\|_X \leq M_c e^{-\sum_{k=1}^j k\varepsilon_c \frac{r_0}{k^2}} \leq M_c e^{-\varepsilon_c r_0 \sum_{k=1}^j \frac{1}{k}}. \quad (3.42)$$

Since  $t_f = r_0 \sum_{k=1}^{\infty} \frac{1}{k^2}$  and  $\lim_{j \rightarrow \infty} \sum_{k=1}^j \frac{1}{k}$  diverges, we conclude that

$$\bar{p}(\cdot, t_f) = \bar{p}^*(x),$$

which completes the proof.  $\square$

To show the boundedness of the feedback law  $\bar{\mu}(x, t)$  as stated in Theorem 3.2, we first note that  $p_{i,j}(x, t) \rightarrow p_i^*(x)$  as  $j \rightarrow \infty$ , where  $p_i^*(x)$  is strictly positive and bounded for  $x \in [0, l]$ . Thus  $p_{i,j}(x, t)$  is strictly positive in  $[0, l]$  for  $j$  sufficiently large. Moreover, if  $p_1^* \in W^{1,\infty}(0, L)$ , then  $\frac{p_{i,j_x}(x,t)}{p_{i,j}(x,t)}$  converges to  $\frac{p_{ix}^*}{p_i^*}$ ,  $i = 1, 2$ , as  $j \rightarrow \infty$ , which are in  $L^\infty[0, l]$ . Therefore, from (3.11)–(3.12) it suffices to show that  $j\alpha_i \sup_{x \in [0, l]} \left| \frac{\partial(g_i(x)p_i(x, t))}{\partial x} \right|$  is finite for  $j \in \mathbb{Z}^+$  sufficiently large. To this end, we establish the following result.

**Proposition 3.3.** *Let  $\alpha_1$  and  $\alpha_2$  satisfy (3.15). For  $t_f > 2 \sum_{i=1}^2 \tilde{p}_i^*(L)$ , the solution  $\bar{p}(\cdot, t) = (p_0(t), p_1(\cdot, t), p_2(\cdot, t))^T$  to the closed-loop system (3.33) satisfies:*

$$\lim_{j \rightarrow \infty} \left( j\alpha_i \sup_{x \in [0, l]} \left| \frac{\partial(g_i(x)p_i(x, t))}{\partial x} \right| \right) < \infty, \quad i = 1, 2.$$

*Proof.* For  $t_f > 2 \sum_{i=1}^2 \tilde{p}_i^*(L)$ , there exists a  $j \in \mathbb{Z}^+$  large enough such that  $t_{j-1} \geq 2 \sum_{i=1}^2 \tilde{p}_i^*(L)$ . Thus for  $t > t_{j-1}$  we have  $t > 2 \sum_{i=1}^2 \tilde{p}_i^*(L)$ , and hence by (3.28)–(3.29),

$$\begin{aligned} p_{1,j}(x, t) &= \frac{g_1(0)}{g_1(x)} \lambda_1 p_0(t - \tilde{p}_{1,j}^*(x)), \\ p_{2,j}(x, t) &= \frac{g_2(0)}{g_2(x)} \lambda_2 \left( p_0(t - \tilde{p}_{2,j}^*(x)) + g_1(0) \lambda_1 \int_0^L \frac{p_0(t - \tilde{p}_{1,j}^*(x) - \tilde{p}_{2,j}^*(x))}{g_1(x)} dx \right). \end{aligned}$$

Note that the integral term in  $p_{2,j}(x, t)$  only depends on  $t$ . Therefore,

$$\begin{aligned} j\alpha_i \frac{\partial(g_i(x)p_{i,j}(x, t))}{\partial x} &= j\alpha_i g_i(0) \lambda_i \frac{dp_0(t - \tilde{p}_{i,j}^*(x))}{dt} \left( -\frac{p_i^*(x)}{j\alpha_i} \right) \\ &= -g_i(0) \lambda_i \frac{dp_0(t - \tilde{p}_{i,j}^*(x))}{dt} p_i^*(x). \end{aligned} \quad (3.43)$$

Since  $p_i^*(x)$ ,  $i = 1, 2$ , are bounded for  $x \in [0, l]$ , it remains to show that

$$\sup_{x \in [0, l]} \left| \frac{dp_{0,j}(t - \tilde{p}_{i,j}^*(x))}{dt} \right| < \infty, \quad i = 1, 2, \quad \text{as } j \rightarrow \infty. \quad (3.44)$$

With the help of (3.27), we get

$$\sup_{x \in [0, l]} \left| \frac{dp_{0,j}(t - \tilde{p}_{i,j}^*(x))}{dt} \right| \leq j \sum_{n=1}^2 \alpha_n \sup_{x \in [0, l]} \left| g_n(L) p_{n,j}(L, t - \tilde{p}_{i,j}^*(x)) - g_n(0) p_{n,j}(0, t - \tilde{p}_{i,j}^*(x)) \right|,$$

for  $i = 1, 2$ . Combining the exponential decay result in (3.42) together with (3.28)–(3.29) for  $t_f > 2 \sum_{i=1}^2 \tilde{p}_i^*(L)$ , we have

$$\begin{aligned} & \sup_{x \in [0, l]} \left| g_1(L) p_1(L, t - \tilde{p}_{i,j}^*(x)) - g_1(0) p_1(0, t - \tilde{p}_{i,j}^*(x)) \right| \\ &= \sup_{x \in [0, l]} \left| g_1(0) \lambda_1 p_{0,j}(t - \tilde{p}_{i,j}^*(x) - \tilde{p}_{i,j}^*(L)) - g_1(0) \lambda_1 p_0(t - \tilde{p}_{i,j}^*(x)) \right| \\ &\leq g_1(0) \lambda_1 \sup_{x \in [0, l]} \left( \left| p_{0,j}(t - \tilde{p}_{i,j}^*(x) - \tilde{p}_{i,j}^*(L)) - p_0^* \right| + \left| p_{0,j}(t - \tilde{p}_{i,j}^*(x)) - p_0^* \right| \right) \\ &\leq g_1(0) \lambda_1 \left( \sup_{\tau \in [t - \tilde{p}_{i,j}^*(l) - \tilde{p}_{i,j}^*(L), t - \tilde{p}_{i,j}^*(L)]} \left| p_{0,j}(\tau) - p_0^* \right| + \sup_{\tau \in [t - \tilde{p}_{i,j}^*(l), t]} \left| p_{0,j}(\tau) - p_0^* \right| \right) \\ &\leq 2g_1(0) \lambda_1 \sup_{\tau \in [t - 2\tilde{p}_{i,j}^*(L), t]} \left| p_{0,j}(\tau) - p_0^* \right| \\ &\leq 2g_1(0) \lambda_1 \|\tilde{p}(\cdot, t - 2\tilde{p}_{i,j}^*(L)) - \tilde{p}^*\|_X. \end{aligned} \quad (3.45)$$

Following the same approach as in (3.45), we have

$$\begin{aligned} & \sup_{x \in [0, l]} \left| g_2(L) p_2(L, t - \tilde{p}_{i,j}^*(x)) - g_2(0) p_2(0, t - \tilde{p}_{i,j}^*(x)) \right| \\ &\leq 2g_2(0) \lambda_2 \|\tilde{p}(\cdot, t - 2\tilde{p}_{i,j}^*(L)) - \tilde{p}^*\|_X. \end{aligned} \quad (3.46)$$

Thus from (3.45)–(3.46) it follows

$$\sup_{x \in [0, l]} \left| \frac{dp_{0,j}(t - \tilde{p}_{i,j}^*(x))}{dt} \right| \leq 2j \left( \sum_{n=1}^2 \alpha_n g_n(0) \lambda_n \right) \|\tilde{p}(\cdot, t - 2\tilde{p}_{i,j}^*(L)) - \tilde{p}^*\|_X, \quad i = 1, 2. \quad (3.47)$$

Recall that  $\int_0^L p_i^*(x) dx \leq 1$  and  $\alpha_i \geq \frac{1}{r_0}$ ,  $i = 1, 2$ , by (3.15). We have

$$\tilde{p}_{i,j}^*(L) = \frac{1}{j\alpha_i} \int_0^L p_i^*(x) dx \leq \frac{r_0}{j}, \quad i = 1, 2.$$

Let  $j \geq 2$ . Then  $t - 2\tilde{p}_{i,j}^*(L) \geq t_{j-1} - \frac{2r_0}{j}$ . In light of Corollary 3.1 and (3.42) we get

$$\begin{aligned} \|\tilde{p}(\cdot, t - 2\tilde{p}_{i,j}^*(L)) - \tilde{p}^*\|_X &\leq M_c e^{-\int_0^{t-2\tilde{p}_{i,j}^*(L)} \varepsilon_j(\tau) d\tau} \\ &\leq M_c e^{-\int_0^{t_{j-1} - \frac{2r_0}{j}} \varepsilon_j(\tau) d\tau} \\ &= M_c \left( e^{-\int_0^{t_{j-1}} \varepsilon_j(\tau) d\tau} \cdot e^{\int_{t_{j-1} - \frac{2r_0}{j}}^{t_{j-1}} \varepsilon_j(\tau) d\tau} \right) \\ &\leq M_c e^{-\varepsilon_c r_0 \sum_{k=1}^{j-1} \frac{1}{k}} \cdot e^{(j-1)\varepsilon_c \frac{2r_0}{j}}, \end{aligned}$$

where  $\varepsilon_j(\tau) = j\varepsilon_c$  for  $\tau \in [t_{j-1}, t_j], j \in \mathbb{N}^+$ . Consequently,

$$\sup_{x \in [0, l]} \left| \frac{dp_{0,j}(t - \tilde{p}_{i,j}^*(x))}{dt} \right| \leq 2j \left( \sum_{n=1}^2 \alpha_n g_n(0) \lambda_n \right) M_c e^{-\varepsilon_c r_0 \sum_{k=1}^{j-1} \frac{1}{k}} \cdot e^{(j-1)\varepsilon_c \frac{2r_0}{j}}, \quad (3.48)$$

where

$$\lim_{j \rightarrow \infty} e^{(j-1)\varepsilon_c \frac{2r_0}{j}} = e^{2r_0\varepsilon_c}. \quad (3.49)$$

It remains to analyze the property of  $j e^{-\varepsilon_c r_0 \sum_{k=1}^{j-1} \frac{1}{k}}$  when  $j$  is sufficiently large. Let  $J = j - 1$ .

Then

$$\begin{aligned} j e^{-\varepsilon_c r_0 \sum_{k=1}^{j-1} \frac{1}{k}} &= (J + 1) e^{-\varepsilon_c r_0 \sum_{k=1}^J \frac{1}{k}} \\ &= J e^{-\varepsilon_c r_0 \sum_{k=1}^J \frac{1}{k}} + e^{-\varepsilon_c r_0 \sum_{k=1}^J \frac{1}{k}} \\ &= e^{-(\ln J + \varepsilon_c r_0 \sum_{k=1}^J \frac{1}{k})} + e^{-\varepsilon_c r_0 \sum_{k=1}^J \frac{1}{k}}. \end{aligned}$$

Since  $\lim_{J \rightarrow \infty} (-\ln J + \sum_{k=1}^J \frac{1}{k}) = \gamma > 0$  is the Euler-Mascheroni constant [21, Sec.1.5], if  $\varepsilon_c \geq \frac{1}{r_0}$ , then

$$\lim_{J \rightarrow \infty} (e^{-(\ln J + \varepsilon_c r_0 \sum_{k=1}^J \frac{1}{k})} + e^{-\varepsilon_c r_0 \sum_{k=1}^J \frac{1}{k}}) \leq e^{-\gamma}. \quad (3.50)$$

The condition  $\varepsilon_c \geq \frac{1}{r_0}$  can be always achieved by increasing both  $\alpha_1$  and  $\alpha_2$ . Finally, combining (3.48) with (3.49)–(3.50) yields the claim (3.44). It is worth to point that if  $\varepsilon_c r_0 = 1 + \eta$  for some  $\eta > 0$ , then (3.50) converges to zero as  $J \rightarrow \infty$ , and hence (3.44) converges to zero. Consequently,

$$\mu_i(x, t) \rightarrow -\frac{p_{i_x}^*(x)}{p_i^*(x)} \quad \text{as } j \rightarrow \infty, \text{ i.e., } t \rightarrow t_f, \quad i = 1, 2,$$

and this completes the proof.  $\square$

As a result of Proposition 3.3, Theorem 3.2 holds immediately and this concludes our current work.

#### 4. CONCLUSION

In this work, we have established the well-posedness of a repairable system with a degraded state and its bilinear controllability via system repair rates. The repair rates are constructed in feedback forms. Our approach essentially makes use of the exponential convergence of the closed-loop system solution to its steady-state and then weights the repair actions in time as to steer the system to the desired distribution in a finite time interval. It is worth to point out that there are many other ways of choosing the control weights in time in (3.11)–(3.12), as long as the series in (3.42) diverges. Our analysis mainly employs the classic method of characteristics and the  $C_0$ -semigroup tools. The control design is generic and applicable to a general family of repairable systems that share the similar attributes.



## 5. APPENDIX

*Proof of Proposition 2.1 (1):*  $ia \in \rho(\mathcal{A})$  for  $a \neq 0$ .

Suppose that there exists  $r = ia$  with  $a \neq 0$ , such that  $\phi(r) = 0$ . Then by (2.16),

$$\begin{aligned} & 1 + \lambda_1 \int_0^L (\cos(ax) - i \sin(ax)) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx \\ & + \lambda_2 \int_0^L (\cos(ax) - i \sin(ax)) e^{-\int_0^x \mu_2(s) ds} dx \\ & + \lambda_1 \lambda_2 \left( \int_0^L (\cos(ax) - i \sin(ax)) e^{-\int_0^x \mu_2(s) ds} dx \right) \\ & \quad \cdot \left( \int_0^L (\cos(ax) - i \sin(ax)) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx \right) = 0, \end{aligned}$$

where the real components satisfy

$$\begin{aligned} & 1 + \lambda_1 \int_0^L \cos(ax) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx + \lambda_2 \int_0^L \cos(ax) e^{-\int_0^x \mu_2(s) ds} dx \\ & + \lambda_1 \lambda_2 \left( \int_0^L \cos(ax) e^{-\int_0^x \mu_2(s) ds} dx \right) \left( \int_0^L \cos(ax) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx \right) \\ & - \lambda_1 \lambda_2 \left( \int_0^L \sin(ax) e^{-\int_0^x \mu_2(s) ds} dx \right) \left( \int_0^L \sin(ax) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx \right) = 0, \end{aligned}$$

or

$$\begin{aligned} & \left( 1 + \lambda_2 \int_0^L \cos(ax) e^{-\int_0^x \mu_2(s) ds} dx \right) \left( 1 + \lambda_1 \int_0^L \cos(ax) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx \right) \\ & - \lambda_1 \lambda_2 \left( \int_0^L \sin(ax) e^{-\int_0^x \mu_2(s) ds} dx \right) \left( \int_0^L \sin(ax) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx \right) = 0, \end{aligned} \quad (5.1)$$

and the imaginary components satisfy

$$\begin{aligned} & \lambda_1 \int_0^L \sin(ax) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx + \lambda_2 \int_0^L \sin(ax) e^{-\int_0^x \mu_2(s) ds} dx \\ & + \lambda_1 \lambda_2 \int_0^L \sin(ax) e^{-\int_0^x \mu_2(s) ds} dx \left( \int_0^L \cos(ax) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx \right) \\ & + \lambda_1 \lambda_2 \int_0^L \cos(ax) e^{-\int_0^x \mu_2(s) ds} dx \left( \int_0^L \sin(ax) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx \right) = 0. \end{aligned} \quad (5.2)$$

From (5.2) we further have

$$\begin{aligned} & \lambda_1 \left( 1 + \lambda_2 \int_0^L \cos(ax) e^{-\int_0^x \mu_2(s) ds} dx \right) \left( \int_0^L \sin(ax) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx \right) \\ & + \lambda_2 \left( \int_0^L \sin(ax) e^{-\int_0^x \mu_2(s) ds} dx \right) \left( 1 + \lambda_1 \int_0^L \cos(ax) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx \right) = 0. \end{aligned} \quad (5.3)$$

To simplify the formulations, we let

$$I_1 = 1 + \lambda_2 \int_0^L \cos(ax) e^{-\int_0^x \mu_2(s) ds} dx, \quad I_2 = 1 + \lambda_1 \int_0^L \cos(ax) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx$$

$$I_3 = \int_0^L \sin(ax) e^{-\int_0^x \mu_2(s) ds} dx, \quad \text{and} \quad I_4 = \int_0^L \sin(ax) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx.$$

Using (2.15) and integration by parts we have

$$I_3 = \frac{1}{a} \int_0^L (1 - \cos(ax)) \mu_2(x) e^{-\int_0^x \mu_2(s) ds} dx, \quad (5.4)$$

$$I_4 = \frac{1}{a} \int_0^L (1 - \cos(ax)) (\lambda_2 + \mu_1(x)) e^{-\int_0^x (\lambda_2 + \mu_1(s)) ds} dx. \quad (5.5)$$

Combining (5.1) with (5.4)–(5.5) follows that

$$I_1 I_2 = \lambda_1 \lambda_2 I_3 I_4 > 0, \quad (5.6)$$

for  $a \neq 0$ . However, from (5.3) we have

$$\frac{I_1}{I_2} = -\frac{\lambda_2}{\lambda_1} \frac{I_3}{I_4} < 0,$$

which contradicts with (5.6). Therefore,  $\phi(r) \neq 0$  for  $r = ia$  where  $a \neq 0$ , and thus  $r \in \rho(\mathcal{A})$ . This completes the proof.  $\square$

## REFERENCES

- [1] G. H. Sandler, *System Reliability Engineering*, Literary Licensing, LLC, 2012.
- [2] A. Jardine and A. Tsang, *Maintenance, replacement, and reliability: theory and applications*, CRC press, 2013.
- [3] N. Boardman, W. Hu and R. Mishra, Optimal Maintenance Design for a Simple Repairable System, *2019 IEEE 58th Conference on Decision and Control (CDC)*, pp. 3098–3103, 2019.
- [4] J. Moubray, *Reliability centered maintenance*, Industrial Press, 1997.
- [5] W. K. Chung, *A repairable multi-state device with arbitrarily distributed repair times*, *Micro. Reliab.*, Vol. 21, pp. 255–256, 1981.
- [6] D. R. Cox, *The analysis of non-Markovian stochastic processes by the inclusion of supplementary variables*, *Mathematical Proceedings of the Cambridge Philosophical Society*, 51(3), pp. 433–441, 1955.

- [7] G. Gupur, *Functional analysis methods for reliability models*, Vol. 6, Springer Science & Business Media, 2011.
- [8] P. P. Gupta and S. C. Agarwal, *Cost Function Analysis of a 3-State Repairable System*, *Microelectronics Reliability*, 24(1), 51–53, 1984.
- [9] A. Jardine and A. Tsang, *Maintenance, replacement, and reliability: theory and applications*, CRC press, 2013.
- [10] J. Moubray, *Reliability centered maintenance*, Industrial Press, 1997.
- [11] W. Hu, A. Tepper, B. Xie and Q. Zhang *Failure Rate Identification of a Repairable System Governed by Coupled ODE-PDEs and Deep Learning based Implementation*, 2023 American Control Conference (ACC), 961–966, 2023.
- [12] W. Hu, H. Xu, J. Yu and G.-T. Zhu, *Exponential stability of a repairable multi-state device*, *Jrl. Syst. Sci. Complexity*, Vol. 20, No. 3, pp. 437-443, 2007.
- [13] W. Hu, Z. Shen, Y. Xin, and G.-T. Zhu, *Exponential stability of a repairable system with imperfect switching mechanism*, *Asymptotic Analysis*, 54(1-2), 93–102, 2007.
- [14] W. Hu, *Differentiability and compactness of the  $C_0$ -semigroup generated by the repairable system with finite repair time*, *J. Math Anal. Appl.*, Vol. 433, No. 2, pp. 1614–1625, 2016.
- [15] W. Hu and J. Liu, *Optimal bilinear control of a repairable multi-state system*, *International Journal of Control*, 95(4), 851–866, 2022.
- [16] R. S. Phillips, *Semi-groups of Positive Contraction Operators*, *Czechoslovak Mathematical Journal*, 12(2), 294–313, 1962.
- [17] A. Pazy, *Semigroups of Linear Operator and Applications to Partial Differential Equations*. New York, 1983. Springer-Verlag.
- [18] K.-J. Engel R. Nagel, and S. Brendle, *One-Parameter Semigroups for Linear Evolution Equations*, Vol., 194, 2000.
- [19] K. Elamvazhuthi, H. Kuiper, and S. Berman, *Controllability to Equilibria of the 1-D Fokker-Planck Equation with Zero-Flux Boundary Condition*, 2017 IEEE 56th Annual Conference on Decision and Control (CDC), 2485–2491, 2017.

- [20] K. Elamvazhuthi, H. Kuiper, M. Kowski and S. Berman, *Bilinear Controllability of a Class of Advection–Diffusion–Reaction Systems*, IEEE Transactions on Automatic Control, 64(6), 2282–2297, 2018.
- [21] S. R. Finch, *Mathematical constants*, 2003, Cambridge university press.
- [22] C. Gao and X.-M. Chen, *Stability analysis of a standby system with an unreliable server and switching failure*, IMA J. Appl. Math., 87(2), 207–230, 2022.
- [23] W. Hu, H. Xu, J. Yu, and G. Zhu, *Exponential stability of a reparable multi-state device*, J. Stst. Sci. Complexity, Vol. 20, pp. 437-443, (2007).
- [24] L. Guo, H. Xu, G. Cao, and G. Zhu, *Stability analysis of a new kind series system*, IMA J. Appl. Math., 75(3), 439–460, 2010.
- [25] G. Gupur, *Functional analysis methods for reliability models*, Vol. 6, 2011, Springer Science & Business Media
- [26] G. Gupur, *Well-posedness of a reliability model*, Acta Anal. Funct. Appl., No. 5, pp. 193–209, 2003.
- [27] A. Haji and G. Gupur, *Asymptotic property of the solution of a reliability model*, Int. J. Math. Sci. No. 3, pp. 161–195, 2004.
- [28] A. Haji and A. Radl, *Asymptotic stability of the solution of the M/MB/1 queueing models*, Comput. Math. Appl., No. 53, pp. 1411–1420, 2007.
- [29] A. Haji and A. Radl, *A semigroup approach to the queueing systems*, Semigroup Forum, No. 75, pp. 610–624, 2007.
- [30] H. Xu, J. Yu, and G. Zhu, *Asymptotic property of a reparable multi-state device*, Quart. Appl., Vol. 63, No. 4, pp. 779-789, 2005.
- [31] W. Hu, H. Xu, J. Yu and G.-T. Zhu, *Exponential stability of a reparable multi-state device*, Jrl. Syst. Sci. Complexity, Vol. 20, No. 3, pp. 437-443, 2007.