

Pointwise-Sparse Actuator Scheduling for Linear Systems With Controllability Guarantee

Luca Ballotta, Geethu Joseph, and Irawati Rahul Thete

Abstract—In this paper, we address optimal scheduling of control inputs given a hard constraint on the number of input channels active at any time. For a sparsely controllable system, we characterize the sparse actuator schedules that make the system controllable, and then devise a greedy selection algorithm that guarantees controllability while heuristically providing low control effort. We further show how to enhance our greedy algorithm via Markov chain Monte Carlo-based optimization.

I. INTRODUCTION

Sparsity constraints in control inputs arise in several large-scale systems. For example, sparse control inputs admit compact representations [1], conserving bandwidth in networked control systems [2], [3]. In large-scale social networks, influencers or marketers promote their products or ideas by influencing a few (sparse) individuals and relying on word-of-mouth effects [4], [5]. Similarly, sparse high-voltage DC line scheduling for wide-area damping control in electrical power grids stabilizes fluctuations and synchronizes generators with reduced costs and energy depletion [6]. In biological networks characterized by model reactions and/or metabolites, drugs target a small number of nodes via sparse control to minimize adverse side effects [7], [8]. Motivated by these applications, we address the challenge of designing control with fewer actuators without significantly compromising performance.

Sparse input strategies have existed in control theory for many years [9], especially motivated by networked and large-scale systems, but gained prominence following the emergence of compressed sensing [1]. Closely related to sparse actuator control, sparsity-promoting optimization of the feedback gain matrix has been proposed as an effective method to trade controller complexity for performance, with actuator selection as a special case that enjoys convexity [10], [11]. Furiieri *et al.* [12] studied a convex problem formulation based on pre-defined sparsity patterns. Matni and Chandrasekaran [13] proposed a regularization for design that can encode various constraints, such as communication locality. Anderson *et al.* [14] introduced the design framework System Level Synthesis, where sparsity patterns can be imposed directly on the closed-loop matrices. The authors in [15], [16] revealed a fundamental performance tradeoff arising with architecture-dependent delays and that sparse feedback can be optimal. Another important control paradigms focused on sparse design is maximum hands-off control,

which reduces active (nonzero) control periods [17]–[19]. Some works have investigated sparsity directly in actuator use. An early approach selects a few inputs, which remain constant over time, to ensure controllability, tightly constraining the system [8]. Recent work minimizes the average number of inputs over a time horizon, allowing for time-varying inputs [6]. However, this strategy can lead to non-sparse inputs at certain times, which is unsuitable for applications like networked systems with bandwidth constraints. Alternatively, this work limits the number of control inputs active at any given time [20], referred to as *sparse actuator control*.

The theoretical foundation of sparse actuator control, covering the necessary and sufficient conditions for controllability and stabilizability, has been studied in [20]–[23], but sparse control input design is not well-studied in the literature. A straightforward method uses sparse recovery algorithms to drive the system from a given state to a desired state [23]. It requires distinct designs for state deviations and lacks broad applicability. The standard, naive greedy algorithm identifies a sparse actuator schedule that enables a sparse control input sequence following the schedule to transition the system from any initial state to any desired state [24]. Due to its heuristic nature, it does not assure controllability for all systems that are controllable under sparsity constraints. We address this literature gap and propose efficient algorithms for the design of sparse control inputs that formally guarantee controllability.

Our contributions are as follows. We first show that the naive greedy algorithm may fail to ensure controllability (**Section III-A**), which motivates our study. Then, we analytically characterize sparse actuator schedules that make the system controllable (**Section III-B**) and devise an improved greedy algorithm that searches among such schedules (**Section III-C**), thus guaranteeing controllability if the system is controllable under the sparsity constraint. Also, we propose to improve the algorithm using a Markov chain Monte Carlo (MCMC)-based approach, albeit with increased computational complexity (**Section III-D**). Finally, in **Section IV**, we numerically study the performance of our greedy algorithm on two use cases where the naive greedy algorithm fails, as well as the improvement provided by MCMC.

II. SPARSE ACTUATOR SCHEDULING PROBLEM

Consider the discrete-time linear dynamical system (A, B) with matrices $A \in \mathbb{R}^{n \times n}$, $B \in \mathbb{R}^{n \times m}$ and state evolution

$$\mathbf{x}(k+1) = A\mathbf{x}(k) + B\mathbf{u}(k), \quad (1)$$

where $\mathbf{x}(k) \in \mathbb{R}^n$ and $\mathbf{u}(k) \in \mathbb{R}^m$ respectively denote state and control input at time k . The system (A, B) is

L. Ballotta is with the Delft Center for Systems and Control, and G. Joseph, and I. R. Thete are with the Electrical Engineering, Mathematics, and Computer Science, all at the Delft University of Technology, Netherlands. E-mail: {l.ballotta,g.joseph}@tudelft.nl, irawati.thete@gmail.com.

s -sparse controllable if it is controllable under the constraint $\|\mathbf{u}(k)\|_0 \leq s \forall k \geq 0$ — in words, if at most s input channels are active (nonzero) at any time, where a channel represents an element of $\mathbf{u}(k)$. We aim to design a sparse control strategy to drive the system from any initial state to a desired one. Before formulating this problem, we review the existing literature.

A. Preliminaries

A simple test for s -sparse controllability is as follows:

Theorem 1 ([20, Theorem 1]). *A system (\mathbf{A}, \mathbf{B}) , with $\mathbf{A} \in \mathbb{R}^{n \times n}$ and $\mathbf{B} \in \mathbb{R}^{n \times m}$, is s -sparse controllable if and only if the system is controllable and $s \geq \max\{n - \text{rk}\{\mathbf{A}\}, 1\}$.*

Theorem 1 guarantees the existence of s -sparse control inputs that can drive the system from any initial state to a given desired state. The next result guarantees the existence of sparse control inputs that utilize the same set of nonzero input channels, regardless of the initial and desired states, defined as an *actuator schedule*. Given a time horizon $h \in \mathbb{N}$, an actuator schedule gathers the indices of the input channels that take nonzero values over the horizon. Specifically, we define actuator schedule as the ordered tuple $\mathcal{S} \in \mathcal{T}_m^h$, where

$$\mathcal{T}_m^h \doteq \{\mathcal{S} = (\mathcal{S}_0, \mathcal{S}_1, \dots, \mathcal{S}_{h-1}) : \mathcal{S}_k \subseteq [m]\}. \quad (2)$$

Here $[m] \doteq \{1, 2, \dots, m\}$ with $[0] = \emptyset$. Moreover, for a given sparsity level $s \in [m]$, a *sparse actuator schedule* imposes the condition $|\mathcal{S}_k| \leq s$ for each index $k \in \{0, \dots, h-1\}$. Here, the i th input channel $\mathbf{u}_i(k)$ is active at time k only if $i \in \mathcal{S}_k$, and at most s input channels are active at each time.

If the i th entry of $\mathbf{u}(k)$ is zero, then the i th column of \mathbf{B} does not affect the state $\mathbf{x}(k+1)$. Therefore, under the actuator schedule \mathcal{S} , the actual state evolution is

$$\mathbf{x}(k+1) = \mathbf{A}\mathbf{x}(k) + \mathbf{B}_{\mathcal{S}_k}\mathbf{u}_{\mathcal{S}_k}(k), \quad k = 0, \dots, h-1, \quad (3)$$

where $\mathbf{B}_{\mathcal{I}}$ denotes the submatrix of \mathbf{B} composed by columns with index in set \mathcal{I} and $\mathbf{u}_{\mathcal{S}_k}(k)$ stacks the elements of $\mathbf{u}(k)$ with index in \mathcal{I} . We define the *\mathcal{S} -reachability matrix* as

$$\Phi_{\mathcal{S}}^h \doteq [\mathbf{A}^{h-1}\mathbf{B}_{\mathcal{S}_0} \quad \mathbf{A}^{h-2}\mathbf{B}_{\mathcal{S}_1} \quad \dots \quad \mathbf{B}_{\mathcal{S}_{h-1}}]. \quad (4)$$

Clearly, the system is s -sparse controllable if $\text{rk}\{\Phi_{\mathcal{S}}^h\} = n$. The next result shows that the converse is also true.

Theorem 2 ([25, Theorems 2.4 and 2.13]). *For an s -sparse controllable system (\mathbf{A}, \mathbf{B}) with $\mathbf{A} \in \mathbb{R}^{n \times n}$ and $\mathbf{B} \in \mathbb{R}^{n \times m}$, there exists a schedule $\mathcal{S} \in \mathcal{T}_m^h$ such that $|\mathcal{S}_k| \leq s$ and $\text{rk}\{\Phi_{\mathcal{S}}^h\} = n$, where $\Phi_{\mathcal{S}}^h$ is defined in (4). Moreover, the shortest horizon h^* required for such a schedule to exist is bounded by*

$$\frac{n}{\min\{\text{rk}\{\mathbf{B}\}, s\}} \leq h^* \leq n - \min\{\text{rk}\{\mathbf{B}\}, s\} + 1. \quad (5)$$

Building on the insights from the above results, we next formulate our sparse control design problem.

B. Problem Formulation

Designing sparse control inputs is challenging due to the nonconvex, combinatorial nature of sparsity constraints. However, as shown in Theorem 2, there exists a sparse actuator

TABLE I
COMMON ENERGY-AWARE CONTROL PERFORMANCE METRICS [26]

$\frac{1}{n} \text{Tr}(\mathbf{W}^{-1})$	average energy to reach a unit-norm state
$(\lambda_{\min}(\mathbf{W}))^{-1}$	maximal energy to reach a unit-norm state
$\sqrt[n]{\det(\mathbf{W})}$	volume of ellipsoid reached with unit energy

schedule that ensures controllability and is independent of the system's initial and final states. We address sparsity by devising an actuator schedule that determines the support of the control input, thus removing the sparsity constraint. During operation, the control inputs can be designed using the least squares method. Thus, our goal is to find a schedule $\mathcal{S} = (\mathcal{S}_0, \mathcal{S}_1, \dots, \mathcal{S}_{h-1}) \in \mathcal{T}_m^h$ such that $|\mathcal{S}_k| \leq s$ and $\text{rk}\{\Phi_{\mathcal{S}}^h\} = n$, where $\Phi_{\mathcal{S}}^h$ is defined in (4).

A sparse actuator schedule satisfying controllability need not be unique, so we introduce a metric to measure the control effort of a given schedule. To this end, we define the *\mathcal{S} -controllability Gramian* $\mathbf{W}_{\mathcal{S}}^h = (\Phi_{\mathcal{S}}^h)^\top \Phi_{\mathcal{S}}^h$. We note that $\text{rk}\{\mathbf{W}_{\mathcal{S}}^h\} = \text{rk}\{\Phi_{\mathcal{S}}^h\}$. Also, $\mathbf{W}_{\mathcal{S}}^h$ relates to the control energy required to reach a target state through (3) in h steps [26]. We denote the control metric as ρ , and some common energy-aware performance metrics are listed in Table I. Therefore, our design problem is as follows.

Problem 1 (Sparsity schedule design). *Given a system (\mathbf{A}, \mathbf{B}) with $\mathbf{A} \in \mathbb{R}^{n \times n}$ and $\mathbf{B} \in \mathbb{R}^{n \times m}$, a time horizon h , a sparsity level s , and a cost function ρ , find an s -sparse schedule \mathcal{S}^* as*

$$\mathcal{S}^* \in \arg \min_{\mathcal{S} \in \mathcal{T}_m^h} \rho(\mathbf{W}_{\mathcal{S}}^h) \quad (6a)$$

$$\text{s.t.} \quad |\mathcal{S}_k| \leq s \quad k = 0, \dots, h-1, \quad (6b)$$

$$\text{rk}\{\mathbf{W}_{\mathcal{S}}^h\} = n. \quad (6c)$$

In problem (6), the combinatorial constraint (6b) makes the control inputs point-wise s -sparse, and the rank constraint (6c) ensures that the chosen schedule makes the system s -sparse controllable. Problem (6) is combinatorial in nature and can be solved by exhaustive search, whose computational complexity does not scale with the sparsity constraint s and the horizon h . In fact, the authors in [6] suggest that (6) is NP-hard, although no proof is given. Next, we provide the conditions under which the problem is feasible using Theorems 1 and 2.

Remark 1. Given matrices $\mathbf{A} \in \mathbb{R}^{n \times n}$ and $\mathbf{B} \in \mathbb{R}^{n \times m}$, a time horizon h , and a sparsity constraint s , Problem 1 is feasible if the system (\mathbf{A}, \mathbf{B}) is controllable, the sparsity level satisfies $s \geq \max\{n - \text{rk}\{\mathbf{A}\}, 1\}$, and the time horizon $h \geq n$.

In the following, we assume that Remark 1 holds and present design algorithms with polynomial complexity to solve Problem 1 ensuring the constraints (6b)–(6c) are met.

III. DESIGN ALGORITHMS

This section addresses Problem 1 with a computationally tractable approach. First, we explain why the naive greedy algorithm may fail to meet the constraints in (6). In Section III-B, we characterize sparse schedules, ensuring controllability, and building on the analysis, we devise our main design algorithm with formal guarantees of constraint satisfaction in Section III-C. Finally, we propose a stochastic optimization approach to improve our algorithm in Section III-D.

A. Drawback of the Naive Greedy Algorithm

A classic approach to reduce cost (6a) subject to a budget constraint on the inputs is greedy selection, which we refer to as a naive greedy algorithm [24], [26]. It selects columns from the reachability matrix Φ^h until the budget is exhausted or the cost cannot be reduced. This method typically performs well in practice and enjoys quantifiable suboptimality guarantees if ρ is supermodular [27], [28]. Also, the seminal work [8] shows that greedy selection enjoys the lowest computational complexity required to find the tightest approximate minimal number of control inputs that ensure controllability in polynomial time. However, imposing the point-wise s -sparsity constraint in (6b) to the greedy selection may yield an uncontrollable system, as in the example below.

Example 1. We choose a system with $n = 5$, $m = 7$ where

$$\mathbf{A} = \begin{bmatrix} 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 0 \end{bmatrix}, \mathbf{B} = \begin{bmatrix} 0 & 0 & 1 & 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 & 0 & 1 & 0 \\ 1 & 0 & 0 & 0 & 1 & 0 & 1 \\ 1 & 1 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 \end{bmatrix}. \quad (7)$$

The system is s -sparse controllable with $s = n - \text{rk}\{\mathbf{A}\} = 1$. We choose time horizon $h = n = 5$ and cost function $\rho(\cdot) = \text{Tr}((\cdot)^{-1})$. To avoid singular matrix inversion, the cost is computed as $\text{Tr}((\mathbf{W}_S^h)^{-1} + \epsilon \mathbf{I})$ with a small slack $\epsilon > 0$ [6], [24]. To trade robustness for accuracy, we start with a default slack $\epsilon = 10^{-10}$ that is progressively increased till the cost can be computed. In the first iteration, the last column of the reachability matrix Φ^h gives the lowest cost, so the algorithm selects $\mathcal{S}_4 = 7$. Due to the sparsity constraint, subsequent iterations restrict the greedy search to the first 28 columns of Φ^h . However, the last row of these columns is entirely zero. Thus, the last row of Φ_S^h has only zeros, yielding an uncontrollable system and failure of the naive greedy algorithm.

In short, the naive greedy algorithm need not output a feasible solution of the control design problem (6). We next examine the feasible set of (6) to guide a greedy selection.

B. Characterizing Feasible Actuator Schedules

We start with a necessary condition for feasibility.

Lemma 1. *Let \mathcal{S} be a feasible solution of Problem 1 satisfying Remark 1. Then, for $k = 1, \dots, h - 1$,*

$$\text{rk}\{\mathbf{A}^k \quad \mathbf{A}^{k-1}\mathbf{B}_{\mathcal{S}_{h-k}} \quad \dots \quad \mathbf{B}_{\mathcal{S}_{h-1}}\} = n. \quad (8)$$

Proof. From the rank condition, we deduce that

$$\begin{aligned} n &= \text{rk}\{\mathbf{A}^{h-1}\mathbf{B}_{\mathcal{S}_0} \quad \dots \quad \mathbf{B}_{\mathcal{S}_{h-1}}\} \\ &\leq \text{rk}\{\mathbf{A}^k \quad \mathbf{A}^{k-1}\mathbf{B}_{\mathcal{S}_{h-k}} \quad \dots \quad \mathbf{B}_{\mathcal{S}_{h-1}}\} \leq n, \end{aligned} \quad (9)$$

and the equality (8) immediately follows by comparison. \square

Based on the above lemma, we explore the feasibility set further. From the relation (8) with $k = 1$, we derive

$$\mathbb{R}^n = \text{Col}\{\mathbf{A} \mathbf{B}_{\mathcal{S}_{h-1}}\} = \text{Col}\{\mathbf{A}\} \oplus \text{Col}\{\mathbf{B}_{\mathcal{S}_{h-1}}\}, \quad (10)$$

where $\text{Col}\{\cdot\}$ denotes the column space and \oplus denotes the sum of subspaces. Further, since the column space and the left null space of a matrix are orthogonal, we have

$$\text{Col}\{\mathbf{A}\} \oplus \ker\{\mathbf{A}^\top\} = \text{Col}\{\mathbf{A}\} \oplus \text{Col}\{\mathbf{B}_{\mathcal{S}_{h-1}}\}, \quad (11)$$

where $\ker\{\cdot\}$ denote the null space. Consequently, we get

$$\ker\{\mathbf{A}^\top\} = \text{proj}_{\ker\{\mathbf{A}^\top\}}\{\text{Col}\{\mathbf{B}_{\mathcal{S}_{h-1}}\}\}, \quad (12)$$

where $\text{proj}_{\mathcal{C}}\{\mathcal{D}\}$ denotes the projection of the (sub)space \mathcal{D} onto the subspace \mathcal{C} . For $k = 2$, we write the relation (8) as

$$\begin{aligned} \ker\{(\mathbf{A}^2)^\top\} &= \text{proj}_{\ker\{(\mathbf{A}^2)^\top\}}\{\text{Col}\{\mathbf{A}\mathbf{B}_{\mathcal{S}_{h-2}}\}\} \\ &\quad \oplus \text{proj}_{\ker\{(\mathbf{A}^2)^\top\}}\{\text{Col}\{\mathbf{B}_{\mathcal{S}_{h-1}}\}\}. \end{aligned} \quad (13)$$

Nonetheless, we have $\ker\{\mathbf{A}^\top\} \subseteq \ker\{(\mathbf{A}^2)^\top\}$. Therefore, combining (12) and (13), we get

$$\begin{aligned} \ker\{(\mathbf{A}^2)^\top\} \ominus \ker\{\mathbf{A}^\top\} &= \\ &\text{proj}_{\ker\{(\mathbf{A}^2)^\top\} \ominus \ker\{\mathbf{A}^\top\}}\{\text{Col}\{\mathbf{A}\mathbf{B}_{\mathcal{S}_{h-2}}\}\} \\ &\quad \oplus \text{proj}_{\ker\{(\mathbf{A}^2)^\top\} \ominus \ker\{\mathbf{A}^\top\}}\{\text{Col}\{\mathbf{B}_{\mathcal{S}_{h-1}}\}\}, \end{aligned} \quad (14)$$

where, for any two subspaces $\mathcal{C} \subseteq \mathcal{D}$, $\mathcal{D} \ominus \mathcal{C} \subseteq \mathcal{D}$ denotes the orthogonal complement to \mathcal{C} in \mathcal{D} . The dimension of the subspace $\ker\{(\mathbf{A}^2)^\top\} \ominus \ker\{\mathbf{A}^\top\}$ is the difference between the dimensions of $\ker\{(\mathbf{A}^2)^\top\}$ and $\ker\{\mathbf{A}^\top\}$, given by

$$\begin{aligned} n - \text{rk}\{\mathbf{A}^2\} - (n - \text{rk}\{\mathbf{A}\}) &= \text{rk}\{\mathbf{A}^2\} - \text{rk}\{\mathbf{A}\} \\ &\leq n - \text{rk}\{\mathbf{A}\} \leq s, \end{aligned} \quad (15)$$

where we use the Sylvester rank inequality. Hence, we can find a set \mathcal{S}_{h-2} such that

$$\begin{aligned} \ker\{(\mathbf{A}^2)^\top\} \ominus \ker\{\mathbf{A}^\top\} &= \\ &\text{proj}_{\ker\{(\mathbf{A}^2)^\top\} \ominus \ker\{\mathbf{A}^\top\}}\{\text{Col}\{\mathbf{A}\mathbf{B}_{\mathcal{S}_{h-2}}\}\}. \end{aligned} \quad (16)$$

Extending the same idea for all values of k , we obtain the following sufficient conditions to achieve controllability.

Lemma 2. *Let s and h satisfy Remark 1. Also, let $R \doteq \min\{k \geq 0 : \text{rk}\{\mathbf{A}^k\} = \text{rk}\{\mathbf{A}^{k+1}\}\}$. Then, for all $k \in [R]$,*

there exists an index set \mathcal{S}_{h-k} such that the following holds:

$$\ker \left\{ \left(\mathbf{A}^k \right)^\top \right\} \ominus \ker \left\{ \left(\mathbf{A}^{k-1} \right)^\top \right\} = \text{proj}_{\ker \left\{ \left(\mathbf{A}^k \right)^\top \right\} \ominus \ker \left\{ \left(\mathbf{A}^{k-1} \right)^\top \right\}} \left\{ \text{Col} \left\{ \mathbf{A}^{k-1} \mathbf{B}_{\mathcal{S}_{h-k}} \right\} \right\}. \quad (17)$$

Further, if $R > 0$, the sets satisfy

$$\ker \left\{ \left(\mathbf{A}^R \right)^\top \right\} = \text{proj}_{\ker \left\{ \left(\mathbf{A}^R \right)^\top \right\}} \left\{ \text{Col} \left\{ \left[\mathbf{A}^{R-1} \mathbf{B}_{\mathcal{S}_{h-R}} \quad \mathbf{A}^{R-2} \mathbf{B}_{\mathcal{S}_{h-R+1}} \quad \dots \quad \mathbf{B}_{\mathcal{S}_{h-1}} \right] \right\} \right\}. \quad (18)$$

Proof. See Appendix I. \square

If \mathbf{A} is invertible, then $R = 0$ and the result is trivial. Lemma 2 leads to a sufficient condition for feasibility, as established by the following result.

Theorem 3. Consider a linear dynamical system ($\mathbf{A} \in \mathbb{R}^{n \times n}$, $\mathbf{B} \in \mathbb{R}^{n \times m}$) and sparsity level s and time horizon h satisfying Remark 1. Also, let $R = \min\{k \geq 0 : \text{rk}\{\mathbf{A}^k\} = \text{rk}\{\mathbf{A}^{k+1}\}\}$. Then, there exists a feasible solution \mathcal{S} of Problem 1 that satisfies (17) for $k \in [R]$.

Proof. See Appendix II. \square

Theorem 3 provides two key insights for design. One, it shows that the sparse controllability index, *i.e.*, the schedule length, is at least R . Second, it establishes the structure of the schedule \mathcal{S}_k for $k = h - R, \dots, h - 1$. Based on the above result, we devise our optimized greedy algorithm, as presented next.

C. Improved s -Sparse Greedy Algorithm

We outline our selection procedure in Algorithm 1. The schedule is initialized full, *i.e.*, all input channels scheduled at all times (Line 1). This allows us to robustly compute the cost and avoid almost-singular \mathcal{S} -controllability Gramian during the first selection, which ensures that all channels necessary for controllability are scheduled and is implemented in the “for” loop at Line 5. Specifically, for each time step $k > 1$, Line 8 computes the subspace \mathcal{K}_k that has to be spanned by input channels active at time k , and Line 9 greedily selects the best channels among the candidates. For example, at time $k = h - 1$, $\mathcal{K}_{h-1} = \ker\{\mathbf{A}^\top\}$ and Line 9 populates \mathcal{S}_{h-1} until condition (12) is met. The feasibility of this selection is formally supported by Theorem 3, which states that it is possible to find a schedule \mathcal{S}_k that spans \mathcal{K}_k at all times k .

The selection at Line 9 of Algorithm 1 is executed by the subroutine `greedy_k` outlined in Algorithm 2, where we define the contribution of channel c scheduled at time k as $\phi_c^k \doteq (\mathbf{A}^{h-1-k} \mathbf{B}_c)^\top \mathbf{A}^{h-1-k} \mathbf{B}_c$. Here, after a channel is selected (Line 3), the candidate channels that are not independent of those already selected are removed (Lines 5 and 6), guaranteeing that the schedule \mathcal{S}_k spans one more direction of \mathcal{K}_k after each iteration of the “while” loop of Algorithm 2 and eventually spans all of \mathcal{K}_k so as to fulfill (8). By the initialization of \mathcal{S} , the parameter ϵ in Algorithm 2

Algorithm 1: s -sparse greedy selection

Input: Matrices \mathbf{A}, \mathbf{B} , sparsity s , horizon h , cost ρ .
Output: Schedule \mathcal{S} .

```

1  $\mathcal{S} \leftarrow [[m]] * h$ ; // initialize full schedule
2  $\text{rk}_W \leftarrow 0$ ; // rank of controllability Gramian
3  $\mathbf{C} \leftarrow []$ ; // range of controllability Gramian
4  $\text{cand} \leftarrow [\emptyset] * h$ ; // channels to be selected later
5 for  $k = 1, \dots, h-1$  do // input at  $k = 0$  is unconstrained
6    $\mathcal{S}_k \leftarrow \emptyset$ ; // select necessary channels at time  $k$ 
7   if  $\text{rk}_W < n$  then
8      $\mathcal{K}_k \leftarrow \ker\{(\mathbf{A}^{h-k})^\top\} \ominus \ker\{(\mathbf{A}^{h-1-k})^\top\}$ ;
9      $\mathcal{S}_k \leftarrow \text{greedy\_k}(\{j : \mathbf{B}_j \not\in \mathcal{K}_k\}, k, \mathcal{S}, \epsilon)$ ;
10     $\text{rk}_W \leftarrow \text{rk}_W + |\mathcal{S}_k|$ ;
11     $\mathbf{C} \leftarrow [\mathbf{A}^{h-1-k} \mathbf{B}_{\mathcal{S}_k} \quad \mathbf{C}]$ ;
12    if  $|\mathcal{S}_k| < s$  then
13       $\text{cand}[k] \leftarrow [m] \setminus \mathcal{S}_k$ ;
14  $\mathcal{S}_0 \leftarrow \emptyset$ ;  $\text{cand}[0] \leftarrow [m]$ ; // reset schedule at time 0
15 for  $i = 1, \dots, n - \text{rk}_W$  do // ensure controllability
16    $\text{cand}, \mathcal{S} \leftarrow \text{greedy}(\text{cand}, \mathcal{S}, \epsilon, \text{rk})$ ;
17 while  $\exists k : |\mathcal{S}_k| < s$  do // decrease cost
18    $\text{cand}, \mathcal{S} \leftarrow \text{greedy}(\text{cand}, \mathcal{S}, 0)$ ;
19   if  $\mathcal{S}$  doesn't change then
20     break;
21 return  $\mathcal{S}$ .
```

can be zero if \mathcal{K}_k has dimension one, but it must be positive otherwise to avoid a singular matrix in ρ .

Algorithm 2: Subroutine `greedy_k`

Input: Channels cand , step k , schedule \mathcal{S} , $\epsilon \geq 0$.
Output: Updated schedule \mathcal{S}_k at time step k .

```

1 while  $\text{cand} \neq \emptyset$  do
2    $c^* \leftarrow \arg \min_{c \in \text{cand}} \rho(\mathbf{W}_{\mathcal{S}}^h + \phi_c^k + \epsilon \mathbf{I})$ ;
3    $\mathcal{S}_k \leftarrow \mathcal{S}_k \cup \{c^*\}$ ;  $\text{cand} \leftarrow \text{cand} \setminus \{c^*\}$ ;
4   foreach  $c \in \text{cand}$  do
5     if  $\text{proj}_{\mathcal{K}_k} \{ \mathbf{A}^{h-1-k} \mathbf{B}_c \} \parallel \text{proj}_{\mathcal{K}_k} \{ \mathbf{A}^{h-1-k} \mathbf{B}_{\mathcal{S}_k} \}$  then
6        $\text{cand} \leftarrow \text{cand} \setminus \{c\}$ ;
7 return  $\mathcal{S}_k$ .
```

After including all necessary input channels to span the kernels of $\mathbf{A}, \mathbf{A}^2, \dots, \mathbf{A}^{h-1}$, Algorithm 1 ensures controllability through the selected schedule with the “for” loop at Line 15. This is achieved via the subroutine `greedy` in Algorithm 3, which is the classic greedy selection but with the option to check the rank of the controllability Gramian through the flag `rk`. When `rk` is raised (Line 5), all candidate channels that cannot increase the rank of the controllability Gramian accrued so far are removed at Lines 8 and 9. This ensures that the “for” loop at Line 15 of Algorithm 1 eventually makes the \mathcal{S} -controllability Gramian full rank.

Algorithm 3: Subroutine *greedy*

Input: Channels cand , schedule \mathcal{S} , $\epsilon \geq 0$, flag rk .
Output: Updated cand , \mathcal{S} .

- 1 $k^*, c^* \leftarrow \arg \min_{k: |\mathcal{S}_k| < s, c \in \text{cand}[k]} \rho(\mathbf{W}_{\mathcal{S}}^h + \phi_c^k + \epsilon \mathbf{I});$
- 2 **if not** rk **and** $\rho(\mathbf{W}_{\mathcal{S}}^h + \phi_{c^*}^{k^*} + \epsilon \mathbf{I}) \geq \rho(\mathbf{W}_{\mathcal{S}}^h + \epsilon \mathbf{I})$ **then**
- 3 \lfloor **return** $\text{cand}, \mathcal{S};$
- 4 $\mathcal{S}_{k^*} \leftarrow \mathcal{S}_{k^*} \cup \{c^*\}; \text{cand}[k^*] \leftarrow \text{cand}[k^*] \setminus \{c^*\};$
- 5 **if** rk **then**
- 6 $\mathbf{C} \leftarrow [\mathbf{A}^{h-1-k^*} \mathbf{B}_{c^*} \mathbf{C}];$
- 7 **foreach** $k: |\mathcal{S}_k| < s, c \in \text{cand}[k]$ **do**
- 8 **if** $\text{rk}\{[\mathbf{A}^{h-1-k} \mathbf{B}_c \mathbf{C}]\} = \text{rk}\{\mathbf{C}\}$ **then**
- 9 \lfloor $\text{cand}[k] \leftarrow \text{cand}[k] \setminus \{c\};$

10 **return** $\text{cand}, \mathcal{S}.$

Finally, the last “while” loop at Line 17 adds channels till the cost cannot be further decreased or the selected schedule has reached the s -sparsity limit.¹ Notably, this last selection need not care about the rank of the controllability Gramian, and the cost can be computed exactly by setting $\epsilon = 0$.

D. s -Sparse Markov Chain Monte Carlo

MCMC is a randomized algorithm that can approximately solve combinatorial optimization problems. We summarize its workflow in Algorithm 4. MCMC draws samples from a Markov chain supported on the domain of the optimization variable which, at the limit when the parameter T goes to zero and the iterations it go to infinity, has the optimizer(s) as the invariant distribution(s), ensuring optimality with infinite samples. In practice, T is progressively reduced (Line 21) while the Markov chain is traversed and it samples are drawn for each value of T . Every sample \mathcal{S}' is a candidate solution that replaces the current solution \mathcal{S} with a probability that decreases exponentially with the cost gap (Line 16). The interested reader is referred to [29] for details. We adapt MCMC to our s -sparse actuator design problem using the output of Algorithm 1 as warm start \mathcal{S}_0 . To enforce s -sparsity, we restrict samples \mathcal{S}' to differ from the current solution \mathcal{S} by only one channel in the same time slot k (Line 9).

An important drawback of MCMC is that its convergence is generally slow, and it may require a huge number of samples to achieve good solutions for large systems. Moreover, due to its randomized nature, it does not offer controllability guarantees and the output may violate constraint (6c). This issue can be overcome by imposing that candidate samples do not decrease the rank of the current controllability Gramian (Line 11), but at a higher computational cost that may significantly slow down the algorithm. Moreover, if the initial schedule \mathcal{S}_0 does not yield controllability (e.g., it is output from the naive greedy algorithm or it is random), it is not

¹Because the greedy selection is suboptimal, if the cost cannot be decreased in one step, one could randomly select channels that do not immediately decrease the cost, which can potentially provide a cost drop after more than one selection. We do not explore this possibility in the current paper and leave a more comprehensive numerical evaluation for future work.

Algorithm 4: s -sparse MCMC

Input: Matrices \mathbf{A}, \mathbf{B} , sparsity s , horizon h , cost ρ , parameters $\epsilon \geq 0$, $T_{\text{in}} > 0$, $T_{\text{min}} > 0$, $\alpha \in (0, 1)$, it , initial schedule \mathcal{S}_0 .
Output: Schedule \mathcal{S} .

- 1 $\mathcal{S} \leftarrow \mathcal{S}_0;$
- 2 $\rho_{\text{min}} \leftarrow \rho(\mathbf{W}_{\mathcal{S}}^h + \epsilon \mathbf{I});$
- 3 $\text{rk}_W \leftarrow \text{rk}\{\mathbf{W}_{\mathcal{S}}^h\};$ // optional, to check controllability
- 4 $T \leftarrow T_{\text{in}};$
- 5 **while** $T > T_{\text{min}}$ **do**
- 6 **for** $i = 1, \dots, \text{it}$ **do**
- 7 $\mathcal{S}' \leftarrow \mathcal{S};$
- 8 $k, c_k \sim U(\mathcal{S});$ // sample from current schedule
- 9 $c'_k \sim U([m] \setminus \mathcal{S}_k);$ // sample candidate channel
- 10 $\mathcal{S}'_k \leftarrow (\mathcal{S}_k \setminus \{c_k\}) \cup \{c'_k\};$
- 11 **if check rank then**
- 12 **while** $\text{rk}\{\mathbf{W}_{\mathcal{S}'}^h\} < \text{rk}_W$ **do**
- 13 \lfloor **go to** Line 8 **or continue;**
- 14 $\rho_{\text{curr}} \leftarrow \rho(\mathbf{W}_{\mathcal{S}'}^h + \epsilon \mathbf{I});$
- 15 $p \leftarrow e^{-\frac{1}{T}(\rho_{\text{curr}} - \rho_{\text{min}})};$
- 16 **if** $p > n \sim U([0, 1])$ **then** // w.p. $\min\{1, p\}$
- 17 $\mathcal{S}_k \leftarrow \mathcal{S}'_k;$
- 18 $\rho_{\text{min}} \leftarrow \rho_{\text{curr}};$
- 19 **if check rank then**
- 20 $\text{rk}_W \leftarrow \text{rk}\{\mathbf{W}_{\mathcal{S}'}^h\};$
- 21 $T \leftarrow \alpha T;$
- 22 **return** $\mathcal{S}.$

TABLE II
SCHEDULES AND COSTS FOR EXAMPLE 1.

	\mathcal{S}_0	\mathcal{S}_1	\mathcal{S}_2	\mathcal{S}_3	\mathcal{S}_4	$\text{Tr}((\mathbf{W}_{\mathcal{S}}^h)^{-1})$
fully actuated	[7]	[7]	[7]	[7]	[7]	1.7
naive greedy	1	4	1	2	7	uncontrollable
s -sparse greedy	1	4	4	4	4	5.0

possible to formally ensure that the output schedule \mathcal{S} makes the system controllable.

IV. NUMERICAL EXPERIMENTS

We evaluate the proposed sparsity schedule design algorithms on two illustrative problem instances.

A. Revisited Example 1

We apply Algorithm 1 to the system (7) with the same settings $s = 1$ and $h = 5$. The obtained sparsity schedule and cost are reported in Table II, together with the schedule output by the naive greedy algorithm and the cost of the fully actuated system for the sake of comparison. Our proposed s -sparse greedy algorithm picks the key input channel 4 that guarantees controllability according to the necessary

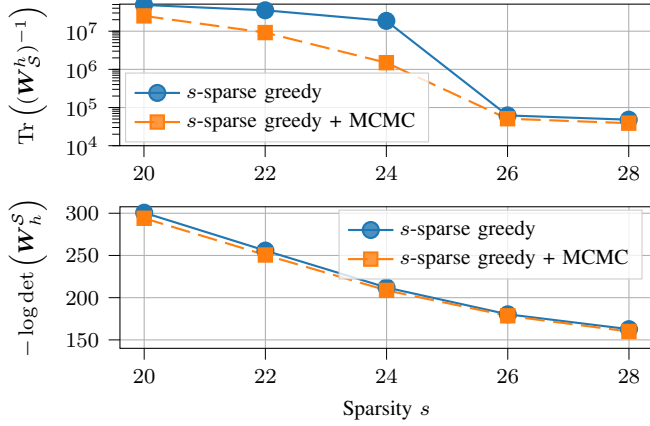


Fig. 1. Costs obtained for experiment on large-scale network. The parameters of s -sparse MCMC are $T_{\text{in}} = 1$, $T_{\text{min}} = 10^{-7}$, $\alpha = 0.1$, $i_t = 5000$.

condition (8) for all time steps $k = 1, 2, 3, 4$, thanks to the smart pre-selection at Lines 8 and 9 of Algorithm 1.

B. Experiment with Large-Scale Network

We next benchmark our s -sparse greedy algorithm on a large-scale system with $n = m = 50$, where \mathbf{A} is the adjacency matrix of a random geometric graph scaled by the number of nodes and \mathbf{B} is the identity matrix. This setup mimics a network system where each node i is a subsystem that can be directly controlled through the i th column of \mathbf{B} . We generate sparse random geometric graphs with nodes in the unit square $[0, 1]^2$ and radius 0.1, and choose again time horizon $h = n = 50$. The nullity of \mathbf{A} so obtained is generally between 10 and 20, and also $\ker\{\mathbf{A}\} = \ker\{\mathbf{A}^k\} \forall k \geq 1$, meaning that $R = 1$ and the critical time step for controllability is only the last one $k = 49$ based on Lemma 2. Nonetheless, the naive greedy algorithm always fails to produce controllable systems when choosing the minimal admissible sparsity $s = n - \text{rk}\{\mathbf{A}\}$, and this remains true even when refining its output with s -sparse MCMC. In contrast, our s -sparse greedy algorithm successfully yields controllable systems on all tried instances.

To show how the algorithms perform with increasing number of inputs, we compare the objective costs achieved with the s -sparse greedy selection (Algorithm 1) and s -sparse MCMC (Algorithm 4) as s varies. Figure 1 illustrates the results for a system with $n - \text{rk}\{\mathbf{A}\} = 20$, where we increase s from the minimal value that ensures s -sparse controllability $s = 20$. Both cost curves are decreasing, meaning that selecting more input channels reduces the control effort, which is intuitive. MCMC yields smaller cost thanks to its exploratory approach. However, the costs obtained with the s -sparse greedy are relatively close to the ones obtained with s -sparse MCMC, especially with $\rho(\cdot) = -\log \det(\cdot)$, which suggests that the s -sparse greedy selection is quite effective.

APPENDIX I PROOF OF LEMMA 2

We define the matrix $\mathbf{K}^{(k)} = \mathbf{I} - \mathbf{A}^k (\mathbf{A}^k)^\dagger$, where $(\cdot)^\dagger$ denotes the pseudoinverse of a matrix, as the projection matrix onto $\ker\{(\mathbf{A}^k)^\top\}$. As the subspace orthogonal to $\ker\{(\mathbf{A}^k)^\top\}$ is $\text{Col}\{\mathbf{A}^k\}$, we get

$$\ker\left\{\left(\mathbf{A}^k\right)^\top\right\} \ominus \ker\left\{\left(\mathbf{A}^{k-1}\right)^\top\right\} = \text{Col}\left\{\mathbf{K}^{(k)} \mathbf{A}^{k-1}\right\}. \quad (19)$$

We note that (17) trivially holds if $R = 0$ by setting $k = R + 1$. Then, from (19), to prove (17) for all $k \in [R]$ it suffices to prove that there exists an index set \mathcal{S}_{h-k} for each $k \in [R]$ such that

$$\text{Col}\left\{\mathbf{K}^{(k)} \mathbf{A}^{k-1}\right\} = \text{Col}\left\{\mathbf{K}^{(k)} \mathbf{A}^{k-1} \mathbf{B}_{\mathcal{S}_{h-k}}\right\}. \quad (20)$$

Since the system is controllable, it holds

$$\begin{aligned} \text{Col}\left\{\mathbf{K}^{(k)} \mathbf{A}^{k-1}\right\} &= \text{Col}\left\{\mathbf{K}^{(k)} \mathbf{A}^{k-1} \Phi^n\right\} \\ &= \text{Col}\left\{\mathbf{K}^{(k)} \mathbf{A}^{k-1} \mathbf{B}\right\}, \end{aligned} \quad (21)$$

because $\mathbf{K}^{(k)} \mathbf{A}^{k-1} \mathbf{A}^i = [\mathbf{I} - \mathbf{A}^k (\mathbf{A}^k)^\dagger] \mathbf{A}^k \mathbf{A}^{i-1} = \mathbf{0}$, for $i > 0$. Applying the Sylvester rank inequality to (19) yields

$$\begin{aligned} \text{rk}\left\{\mathbf{K}^{(k)} \mathbf{A}^{k-1}\right\} &= \left[n - \text{rk}\left\{\mathbf{A}^k\right\}\right] - \left[n - \text{rk}\left\{\mathbf{A}^{k-1}\right\}\right] \\ &= \text{rk}\left\{\mathbf{A}^{k-1}\right\} - \text{rk}\left\{\mathbf{A}^k\right\} \leq n - \text{rk}\{\mathbf{A}\} \leq s. \end{aligned} \quad (22)$$

Thus, from (21), we conclude that there exist s columns in $\mathbf{K}^{(k)} \mathbf{A}^{k-1} \mathbf{B}$, indexed by \mathcal{S}_{h-k} , such that (20) holds. Also, for any $\mathbf{z} \in \ker\{(\mathbf{A}^R)^\top\}$, we have $\mathbf{z} = [\mathbf{I} - \mathbf{K}^{(1)}] \mathbf{z} + \mathbf{K}^{(1)} \mathbf{z}$. Here, $\mathbf{K}^{(1)} \mathbf{z} = \mathbf{K}^{(1)} \mathbf{B}_{\mathcal{S}_{h-1}} \mathbf{v}(h-1)$ for some $\mathbf{v}(h-1)$ due to (20) with $k = 1$. Hence, defining $\bar{\mathbf{z}}(1) \doteq [\mathbf{I} - \mathbf{K}^{(1)}] \mathbf{z} - \mathbf{B}_{\mathcal{S}_{h-1}} \mathbf{v}(h-1)$, we have

$$\mathbf{z} = \bar{\mathbf{z}}(1) + \mathbf{B}_{\mathcal{S}_{h-1}} \mathbf{v}(h-1). \quad (23)$$

Recursively using (20), there exist $\{\mathbf{v}(k)\}_{k=1}^R$ such that

$$\begin{aligned} \mathbf{z} &= \left[\mathbf{I} - \mathbf{K}^{(2)}\right] \bar{\mathbf{z}}(1) + \mathbf{K}^{(2)} \bar{\mathbf{z}}(1) + \mathbf{B}_{\mathcal{S}_{h-1}} \mathbf{v}(h-1) \\ &= \bar{\mathbf{z}}(2) + \sum_{k=1}^2 \mathbf{A}^{k-1} \mathbf{B}_{\mathcal{S}_{h-k}} \mathbf{v}(h-2) \\ &= \bar{\mathbf{z}}(R) + \sum_{k=1}^R \mathbf{A}^{k-1} \mathbf{B}_{\mathcal{S}_{h-k}} \mathbf{v}(h-k), \end{aligned} \quad (24)$$

where $\bar{\mathbf{z}}(k) = \left[\mathbf{I} - \mathbf{K}^{(k)}\right] \left[\bar{\mathbf{z}}(k-1) - \mathbf{B}_{\mathcal{S}_{h-k}} \mathbf{v}(h-k)\right]$. Since $\mathbf{z} \in \ker\{(\mathbf{A}^R)^\top\}$, multiplying the above relation with $\mathbf{K}^{(R)}$ gives

$$\mathbf{K}^{(R)} \mathbf{z} = \mathbf{z} = \mathbf{K}^{(R)} \sum_{k=1}^R \mathbf{A}^{k-1} \mathbf{B}_{\mathcal{S}_{h-k-1}} \mathbf{v}(k), \quad (25)$$

proving the desired result (18).

APPENDIX II
PROOF OF THEOREM 3

We begin by noting that $\mathbb{R}^n = \ker\{(A^R)^\top\} \oplus \mathcal{A}_R$, where $\mathcal{A}_R \doteq \text{Col}\{A^R\}$. From Lemma 2, it suffices to prove that there exists an s -sparse schedule $\mathcal{S} \in \mathcal{T}_m^h$ such that

$$\mathcal{A}_R = \text{Col} \left\{ \left[A^{h-1} B_{\mathcal{S}_0} \quad A^{h-2} B_{\mathcal{S}_1} \dots A^R B_{\mathcal{S}_{h-R-1}} \right] \right\}. \quad (26)$$

To this end, let the real Jordan canonical of A be

$$A = P^{-1} \begin{bmatrix} J & 0 \\ 0 & N \end{bmatrix} P = \begin{bmatrix} P^{(1)} \\ P^{(2)} \end{bmatrix}^{-1} \begin{bmatrix} J & 0 \\ 0 & N \end{bmatrix} \begin{bmatrix} P^{(1)} \\ P^{(2)} \end{bmatrix}, \quad (27)$$

where $P = \begin{bmatrix} P^{(1)\top} & P^{(2)\top} \end{bmatrix}^\top$ is an invertible matrix, and the square matrices $J \in \mathbb{R}^{J \times J}$ and N are formed by the Jordan blocks of A corresponding to its nonzero and zero eigenvalues, respectively. We see that $N^R = 0$, for any $k \geq R$. As a result, $J \doteq \text{rk}\{J\} \leq n - R$, and we deduce

$$\mathcal{A}_R = \text{Col} \left\{ P^{-1} \begin{bmatrix} J^R & 0 \\ 0 & 0 \end{bmatrix} P \right\} = \text{Col} \left\{ \begin{bmatrix} J^R \\ 0 \end{bmatrix} \right\}. \quad (28)$$

Further, premultiplying (1) with $P^{(1)}$ gives

$$P^{(1)} x(k+1) = J P^{(1)} x(k) + P^{(1)} B u(k). \quad (29)$$

The linear dynamical system (J, \bar{B}) with $\bar{B} \doteq P^{(1)} B$ is s -sparse controllable for any $s \geq 1$, because (A, B) is controllable and J is invertible. Hence, by Theorem 2, there exist sets $\mathcal{S}_0, \mathcal{S}_1, \dots, \mathcal{S}_{J-1}$ such that $|\mathcal{S}_k| \leq s$ and

$$\mathbb{R}^J = \text{Col} \left\{ \left[J^{J-1} \bar{B}_{\mathcal{S}_0} \quad J^{J-2} \bar{B}_{\mathcal{S}_1} \quad \dots \quad \bar{B}_{\mathcal{S}_{J-1}} \right] \right\}. \quad (30)$$

Consequently, from (28), we have

$$\begin{aligned} \mathcal{A}_R &= \text{Col} \left\{ \begin{bmatrix} J^{R+J-1} \bar{B}_{\mathcal{S}_0} & J^{R+J-2} \bar{B}_{\mathcal{S}_1} & \dots & J^R \bar{B}_{\mathcal{S}_{J-1}} \\ 0 & 0 & \dots & 0 \end{bmatrix} \right\} \\ &= \text{Col} \left\{ \begin{bmatrix} A^{R+J-1} B_{\mathcal{S}_0} & A^{R+J-2} B_{\mathcal{S}_1} & \dots & A^R B_{\mathcal{S}_{J-1}} \end{bmatrix} \right\}. \end{aligned} \quad (31)$$

Due to the condition $h \geq n$, we have $h - R \geq n - R \geq J$ and thus $R + J \leq h$, implying (26) holds, and the proof is complete.

REFERENCES

- [1] S. Foucart, H. Rauhut, S. Foucart, and H. Rauhut, *An invitation to compressive sensing*. Springer, 2013.
- [2] W. M. H. Heemels, A. R. Teel, N. Van de Wouw, and D. Nešić, "Networked control systems with communication constraints: Tradeoffs between transmission intervals, delays and performance," *IEEE Trans. Automat. Control*, vol. 55, no. 8, pp. 1781–1796, 2010.
- [3] M. Nagahara, D. E. Quevedo, and D. Nesic, "Maximum Hands-Off Control: A Paradigm of Control Effort Minimization," *IEEE Trans. Automat. Control*, vol. 61, no. 3, pp. 735–747, Mar. 2016.
- [4] S. Liu, C. Jiang, Z. Lin, Y. Ding, R. Duan, and Z. Xu, "Identifying effective influencers based on trust for electronic word-of-mouth marketing: A domain-aware approach," *Information Sciences*, vol. 306, pp. 34–52, 2015.
- [5] G. Joseph, B. Nettasinghe, V. Krishnamurthy, and P. K. Varshney, "Controllability of network opinion in Erdős-Rényi graphs using sparse control inputs," *SIAM J. Control Optim.*, vol. 59, no. 3, pp. 2321–2345, 2021.
- [6] M. Siami, A. Olshevsky, and A. Jadbabaie, "Deterministic and Randomized Actuator Scheduling With Guaranteed Performance Bounds," *IEEE Trans. Automat. Control*, vol. 66, no. 4, pp. 1686–1701, Apr. 2021.

- [7] I. Rajapakse, M. Groudine, and M. Mesbahi, "What can systems theory of networks offer to biology?" *PLoS Comput. Biol.*, vol. 8, no. 6, p. e1002543, 2012.
- [8] A. Olshevsky, "Minimal Controllability Problems," *IEEE Control Netw. Syst.*, vol. 1, no. 3, pp. 249–258, Sep. 2014.
- [9] M. Athans, "On the determination of optimal costly measurement strategies for linear stochastic systems," *Automatica*, vol. 8, no. 4, pp. 397–412, 1972.
- [10] M. R. Jovanović and N. K. Dhingra, "Controller architectures: Tradeoffs between performance and structure," *European J. Control*, vol. 30, pp. 76–91, Jul. 2016.
- [11] M. Bahavarnia and N. Motee, "Sparse Memoryless LQR Design for Uncertain Linear Time-Delay Systems," *IFAC-PapersOnLine*, vol. 50, no. 1, pp. 10395–10400, Jul. 2017.
- [12] L. Furieri, Y. Zheng, A. Papachristodoulou, and M. Kamgarpour, "Sparsity Invariance for Convex Design of Distributed Controllers," *IEEE Contr. Netw. Syst.*, vol. 7, no. 4, pp. 1836–1847, Dec. 2020.
- [13] N. Matni and V. Chandrasekaran, "Regularization for Design," *IEEE Trans. Automat. Contr.*, vol. 61, no. 12, pp. 3991–4006, Dec. 2016.
- [14] J. Anderson, J. C. Doyle, S. H. Low, and N. Matni, "System level synthesis," *Annu. Rev. Control*, vol. 47, pp. 364–393, Jan. 2019.
- [15] L. Ballotta, M. R. Jovanović, and L. Schenato, "Can Decentralized Control Outperform Centralized? The Role of Communication Latency," *IEEE Contr. Netw. Syst.*, vol. 10, no. 3, pp. 1629–1640, Sep. 2023.
- [16] L. Ballotta and V. Gupta, "Faster Consensus via a Sparser Controller," *IEEE Control Syst. Lett.*, vol. 7, pp. 1459–1464, 2023.
- [17] T. Ikeda and K. Kashima, "Sparsity-constrained controllability maximization with application to time-varying control node selection," *IEEE Control Syst. Lett.*, vol. 2, no. 3, pp. 321–326, 2018.
- [18] K. Ito, T. Ikeda, and K. Kashima, "Sparse optimal stochastic control," *Automatica*, vol. 125, p. 109438, 2021.
- [19] M. Nagahara, *Sparsity methods for systems and control*. now Publishers, 2020.
- [20] G. Joseph and C. R. Murthy, "Controllability of Linear Dynamical Systems Under Input Sparsity Constraints," *IEEE Trans. Automat. Control*, vol. 66, no. 2, pp. 924–931, Feb. 2021.
- [21] G. Joseph, "Output controllability of a linear dynamical system with sparse controls," *IEEE Control Netw. Syst.*, vol. 10, no. 1, pp. 147–156, 2023.
- [22] —, "Controllability of a linear system with nonnegative sparse controls," *IEEE Trans. Automat. Control*, vol. 67, no. 1, pp. 468–473, 2022.
- [23] C. Sriram, G. Joseph, and C. R. Murthy, "Stabilizability of Linear Dynamical Systems Using Sparse Control Inputs," *IEEE Trans. Automat. Contr.*, vol. 68, no. 8, pp. 5014–5021, Aug. 2023.
- [24] K. P. V. S. Kondapi, C. Sriram, G. Joseph, and C. R. Murthy, "Sparse actuator scheduling for discrete-time linear dynamical systems," *arXiv e-prints*, p. arXiv:2407.00385, 2024.
- [25] G. Joseph, "Sparse actuator control of discrete-time linear dynamical systems," *Foundations and Trends® in Systems and Control*, vol. 11, no. 3, p. 186–284, 2024.
- [26] G. Baggio, F. Pasqualetti, and S. Zampieri, "Energy-Aware Controllability of Complex Networks," *Annu. Rev. Control Robot. Auton. Syst.*, vol. 5, no. 1, pp. 465–489, May 2022.
- [27] T. H. Summers, F. L. Cortesi, and J. Lygeros, "On Submodularity and Controllability in Complex Dynamical Networks," *IEEE Control Netw. Syst.*, vol. 3, no. 1, pp. 91–101, Mar. 2016.
- [28] A. Olshevsky, "On (Non)Supermodularity of Average Control Energy," *IEEE Control Netw. Syst.*, vol. 5, no. 3, pp. 1177–1181, Sep. 2018.
- [29] C. Sammut, "Markov chain Monte Carlo," in *Encyclopedia of Machine Learning*, C. Sammut and G. I. Webb, Eds., Boston, MA, 2010, pp. 639–642.