Design of diffractive neural networks solving different classification problems at different wavelengths

GEORGY A. MOTZ,^{1,2} LEONID L. DOSKOLOVICH,^{1,2,*} DANIIL V. SOSHNIKOV,^{1,2} EGOR V. BYZOV,^{1,2} EVGENI A. BEZUS,^{1,2} NIKITA V. GOLOVASTIKOV,^{1,2} AND DMITRY A. BYKOV^{1,2}

¹Samara National Research University, 34 Moskovskoye shosse, Samara 443086, Russia
²Image Processing Systems Institute, National Research Centre "Kurchatov Institute", 151
Molodogvardeyskaya st., Samara 443001, Russia
*leonid@ipsiras.ru

Abstract: We consider the problem of designing a diffractive neural network (DNN) consisting of a set of sequentially placed phase diffractive optical elements (DOEs) and intended for the optical solution of several given classification problems at different operating wavelengths, so that each classification problem is solved at the corresponding wavelength. The problem of calculating the DNN is formulated as the problem of minimizing a functional that depends on the functions of the diffractive microrelief height of the DOEs constituting the DNN and represents the error in solving the given classification problems at the operating wavelengths. We obtain explicit and compact expressions for the derivatives of this functional and, using them, formulate a gradient method for the DNN calculation. Using this method, we design DNNs for solving the following three classification problems at three different wavelengths: the problem of classifying handwritten digits from the MNIST database, the problem of classifying ten handwritten letters from the EMNIST database. The presented simulation results of the designed DNNs demonstrate high performance of the proposed method.

1. Introduction

In recent years, the design of photonic structures for optical computing and optical information processing has attracted great interest. These structures are considered as a promising platform for the further development of computing systems and are intended for creating an alternative to electronic components or supplementing them [1-4]. Optical neural networks [5-9], and, in particular, diffractive neural networks (DNNs) comprising a cascade of sequentially placed phase diffractive optical elements (DOEs) [10–26] are considered as one of the most promising and rapidly developing areas in the field of optical information processing. It should be noted that DOEs (both single and cascaded) have a long history and are widely used for solving a large class of problems of steering laser radiation [27-33]. At the same time, the use of cascaded DOEs for optical solution of machine learning problems was first demonstrated only in 2018 in the seminal paper [10]. In this work, the authors pointed out several analogies between a cascade of DOEs and "conventional" artificial neural networks and introduced the term "diffractive deep neural network". The possibility of the optical solution of classification problems using cascaded DOEs was theoretically and experimentally demonstrated in [10]. Subsequent works considered the use of DNNs (cascaded DOEs) for solving various classification problems [11-15, 17, 25, 26], object and video recognition [13, 15], salient object detection [11], implementing multispectral imaging [22], and performing matrix multiplication, as well as implementing other linear operators [12, 18, 20, 21]. The main method for designing DNNs is the stochastic gradient descent method, as well as "improved" first-order methods based on it [34]. These methods have become widely used and have shown their high efficiency in beam shaping problems traditionally

solved using DOEs [35, 36].

In most works, DNNs are calculated to work with radiation of a single operating wavelength. At the same time, the problem of calculating DNNs designed to work with radiation of various wavelengths is of great scientific and practical interest. In what follows, we will refer to such DNNs as spectral DNNs (or cascaded spectral DOEs). Spectral DNNs can be used to process spectral data, carry out parallel computations by simultaneously solving several machine learning problems at different wavelengths, change their functionality (i.e., the problem being solved) depending on the wavelength of the incident radiation, etc. In particular, the works [23, 24] considered the calculation of DNNs for spectral filtering and spectral analysis of the incident radiation. In [21,22], spectral DNNs were considered for the optical implementation of various linear transformations at different wavelengths (each transformation being carried out at its "own" wavelength), as well as for multispectral imaging. One of the main problems, in which DNNs have demonstrated high efficiency, is the problem of optical image classification. In the opinion of the present authors, the problem of calculating spectral DNNs for solving several different classification problems at different wavelengths has not yet been sufficiently studied. In particular, although the solution of classification problems using the radiation of several different wavelengths was considered in recent works [25, 26], several wavelengths were used only to improve the quality of the solution of a single fixed classification problem. Thus, the solution of several different classification problems at different wavelengths has not been considered in [25, 26] and, to the best of our knowledge, in the other existing works.

In this work, we consider the design of spectral DNNs (cascaded spectral DOEs) for solving several different classification problems at several different wavelengths. We formulate the problem of calculating a spectral DNN as the problem of minimizing a functional representing the error of solving the given classification problems at the operating wavelengths. This functional depends on the functions defining the diffractive microrelief height of the DOEs constituting the DNN. Explicit and compact expressions are obtained for the derivatives of the error functional and on this basis, a gradient method for the DNN design is presented. Using the proposed gradient method, we calculate several examples of spectral DNNs for solving the following three problems: classification of handwritten digits from the MNIST database at the wavelength of 457 nm, classification of fashion products from the Fashion MNIST database at 532 nm, and classification of ten handwritten letters from A to J (lowercase and uppercase) from the EMNIST database at 633 nm. The presented numerical simulation results demonstrate good classification accuracy provided by the designed spectral DNNs.

2. Design of spectral DNNs for solving several classification problems

Let us consider the problem of calculating a spectral DNN (a cascaded DOE) intended for solving several classification problems P_q , q = 1, ..., Q at different wavelengths λ_q , q = 1, ..., Q, so that each classification problem P_q is solved at the corresponding wavelength λ_q . We assume that the cascaded DOE consists of n phase DOEs located in the planes $z = f_1, ..., z = f_n$ ($0 < f_1 < \cdots < f_n$) and defined by the functions of diffractive microrelief height $h_1(\mathbf{u}_1), ..., h_n(\mathbf{u}_n)$, where $\mathbf{u}_j = (u_j, v_j)$ are Cartesian coordinates in the planes $z = f_j$ (Fig. 1).

Let us first describe the required operation of the DNN at a certain single wavelength λ_q . We assume that in the input plane z = 0, amplitude images of objects from N_q different classes corresponding to the classification problem P_q are sequentially generated. Each generated image is illuminated by a plane wave with wavelength λ_q . Let us denote by $w_{0,q,j}(\mathbf{u}_0)$ the complex amplitude of the light field generated in this way in the input plane. Here and in what follows, the subscript of a certain complex amplitude of the field $w_{m,q,j}(\mathbf{u}_m)$ contains the index *m* of the plane, in which this amplitude is defined, the wavelength index *q* (which is also the index of the corresponding classification problem), and the class number *j* of the input image.

The light field $w_{0,q,i}(\mathbf{u}_0)$ generated at z = 0 then propagates through the cascaded DOE to

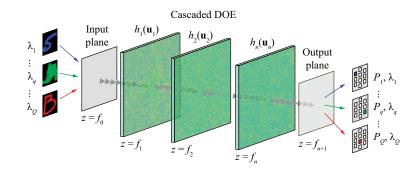


Fig. 1. Geometry of the problem of calculating a DNN for solving different classification problems at different wavelengths.

the output plane $z = f_{n+1}$. We assume that the light propagation in the free space (between the planes, in which the DOEs are located) is described by the Fresnel–Kirchhoff diffraction integral, and that the transmission of the light field through a DOE can be described in the thin optical element approximation as the multiplication of the beam complex amplitude by the complex transmission function (CTF) of this DOE. The CTF of the *m*-th DOE is wavelength-dependent and for the wavelength λ_a has the form

$$T_{m,q}(\mathbf{u}_m) = \exp\left\{\mathrm{i}\varphi_{m,q}(\mathbf{u}_m)\right\} = \exp\left\{\mathrm{i}\frac{2\pi}{\lambda_q}[n(\lambda_q) - 1]h_m(\mathbf{u}_m)\right\},\tag{1}$$

where $\varphi_{m,q}(\mathbf{u}_m)$ is the phase function of the DOE (the phase shift introduced by the DOE) at the wavelength λ_q and $n(\lambda_q)$ is the refractive index of the DOE material. Under the made assumptions, the propagation of the input beam $w_{0,q,j}(\mathbf{u}_0)$ from the input plane z = 0 through the cascaded DOE to the output plane $z = f_{n+1}$ is described by the following recurrent formula:

$$w_{1,q,j}(\mathbf{u}_{1}) = C_{q,1} \iint w_{0,q,j}(\mathbf{u}_{0}) \exp\left\{i\frac{\pi}{\lambda_{q}d_{1}}(\mathbf{u}_{1} - \mathbf{u}_{0})^{2}\right\} d^{2}\mathbf{u}_{0},$$

$$w_{m,q,j}(\mathbf{u}_{m}) = C_{q,m} \iint w_{m-1,q,j}(\mathbf{u}_{m-1})T_{m-1,q}(\mathbf{u}_{m-1}) \cdot \exp\left\{i\frac{\pi}{\lambda_{q}d_{m}}(\mathbf{u}_{m} - \mathbf{u}_{m-1})^{2}\right\} d^{2}\mathbf{u}_{m-1},$$

$$m = 2, \dots, n+1,$$
(2)

where $w_{m,q,j}(\mathbf{u}_m)$, m = 1, ..., n are the complex amplitudes of the fields incident on the corresponding (*m*-th) DOEs having the CTFs $T_{m,q}(\mathbf{u}_m)$, $C_{q,m} = (i\lambda_q d_m)^{-1} \exp\{i2\pi d_m/\lambda_q\}$, and $d_m = f_m - f_{m-1}$ are the distances between the adjacent planes.

We assume that in the output plane $z = f_{n+1}$, N_q spatially separated target regions $G_{q,k}$, $k = 1, \ldots, N_q$ are defined, which correspond to N_q different classes of the problem P_q (see Fig. 1). At each input image, a certain "energy" distribution $E_{q,k}$, $k = 1, \ldots, N_q$ is generated in these regions, which corresponds to the integrals of the generated intensity distribution $I_{n+1,q,j}(\mathbf{u}_{n+1}) = |w_{n+1,q,j}(\mathbf{u}_{n+1})|^2$ over these regions:

$$E_{q,k} = \iint I_{n+1,q,j}(\mathbf{u}_{n+1})\chi_{q,k}(\mathbf{u}_{n+1}) \,\mathrm{d}^2\mathbf{u}_{n+1}, \ k = 1,\dots,N_q, \tag{3}$$

where $\chi_{q,k}(\mathbf{u}_{n+1})$ is the indicator function of the region $G_{q,k}$. For solving the classification problem P_q , it is necessary for the cascaded DOE to generate such an intensity distribution in the output plane for the "input signal" of the *j*-th class $w_{0,q,j}(\mathbf{u}_0)$, so that the maximum of the generated energies $E_{q,k}$, $k = 1, \ldots, N_q$ is reached in the corresponding target region $G_{q,j}$ [10, 12]. Above, we described the required operation of the DNN at a single wavelength λ_q . The problem of designing a DNN for solving several different classification problems $P_q, q = 1, \ldots, Q$ at different wavelengths λ_q can be formulated as the problem of calculating such functions of the diffractive microrelief height $h_1(\mathbf{u}_1), \ldots, h_n(\mathbf{u}_n)$ of the cascaded DOE, so that at each wavelength λ_q and an input signal being an image of a certain object of the problem P_q solved at this wavelength, the DNN provides the maximum energy in the target region corresponding to the class of the input image.

3. Gradient method for designing spectral DNNs

For solving the described problem of calculating a spectral DNN, we will use a stochastic gradient descent method in the way, in which it is typically used for training artificial neural networks. Let us first present a general description of the method. We assume that for the calculation (training) of the DNN (cascaded DOE), a training set $S = S_1 \cup \cdots \cup S_Q$ is used, which consists of training subsets S_q for the considered classification problems $P_q, q = 1, \dots, Q$. Each training set S_q contains a number of input distributions (complex amplitudes of the fields) generated from the images of the objects of the problem P_q at the wavelength λ_q . At each step of the method, a set of distributions (referred to as a batch) is randomly chosen from the training set S. For this batch, we calculate the derivatives of a certain error functional $\varepsilon(h_1,\ldots,h_n)$, which depends on the functions of the diffractive microrelief height and evaluates the DNN performance. Then, a step in the direction of the anti-gradient is performed, which gives the updated microrelief heights. Since the mathematical expectations of the derivatives calculated over a batch are proportional to the derivatives of the functional calculated for the whole training set, such an approach corresponds to the stochastic gradient descent method. Without loss of generality, we will assume that the batch corresponds to the following set of input distributions: $w_{0,q,j}(\mathbf{u}_0), q = 1, \dots, Q, j = 1, \dots, N_q$. Thus, we assume that the batch contains $N_1 + N_2 + \ldots + N_Q$ input distributions, and for each $q \in \{1, \ldots, Q\}$, it includes N_q images of the objects of different classes from the training set S_q generated at the corresponding wavelength λ_q . In order to describe the calculations carried out for the batch, let us write the error functional in an explicit form. Let the classification error of an incident beam $w_{0,q,i}(\mathbf{u}_0)$ representing an object from the j-th class from the problem P_q be described by a certain error functional $\varepsilon_{q,j}(h_1,\ldots,h_n)$. Since the classification is carried out by analyzing the energies $E_{q,k}$ in the regions $G_{q,k}$ [see Eq. (3)], the functional $\varepsilon_{q,j}(h_1,\ldots,h_n)$ in the general case has the form

$$\varepsilon_{q,j}(h_1,\ldots,h_n) = D_{q,j}(E_{q,1},\ldots,E_{q,N_q}),\tag{4}$$

where $D_{q,j}$ is a certain function describing the deviation of the generated energy distribution (3) from the required distribution, in which the energy is concentrated in the required *j*-th target region. Then, the error functional for a batch containing the distributions $w_{0,q,j}(\mathbf{u}_0)$, $q = 1, \ldots, Q$, $j = 1, \ldots, N_q$ can be represented as a sum of the presented functionals:

$$\varepsilon(h_1,\ldots,h_n) = \sum_{q=1}^{Q} \sum_{j=1}^{N_q} \varepsilon_{q,j}(h_1,\ldots,h_n).$$
(5)

For the functional (5), it is easy to find the Fréchet derivatives $\delta \varepsilon / \delta h_m$. Indeed, since the functional (5) is equal to the sum of functionals, its derivatives have the form

$$\frac{\delta\varepsilon(h_1,\ldots,h_n)}{\delta h_m} = \sum_{q=1}^Q \sum_{j=1}^{N_q} \frac{\delta\varepsilon_{q,j}(h_1,\ldots,h_n)}{\delta h_m}, \ m = 1,\ldots,n.$$
(6)

Let us consider the calculation of the derivative $\delta \varepsilon_{q,j} / \delta h_m$ in Eq. (6) with respect to the

function h_m . To do this, let us first denote by

$$\Delta_m \varepsilon_{q,j}(h_1, \dots, h_n) = \varepsilon_{q,j}(h_1, \dots, h_m + \Delta h_m, \dots, h_n) - \varepsilon_{q,j}(h_1, \dots, h_m, \dots, h_n)$$
(7)

the increment of this functional caused by an increment Δh_m of the microrelief height function h_m . According to Eqs. (4) and (3), this increment reads as

$$\Delta_{m}\varepsilon_{q,j}(h_{1},\ldots,h_{n}) = \sum_{k=1}^{N_{q}} \frac{\partial D_{q,j}}{\partial E_{q,k}} (\Delta_{m}E_{q,k})$$

$$= \sum_{k=1}^{N_{q}} \frac{\partial D_{q,j}}{\partial E_{q,k}} \iint \left[\Delta_{m}I_{n+1,q,j}(\mathbf{u}_{n+1}) \right] \cdot \chi_{q,k}(\mathbf{u}_{n+1}) d^{2}\mathbf{u}_{n+1}$$

$$= \sum_{k=1}^{N_{q}} \frac{\partial D_{q,j}}{\partial E_{q,k}} \iint \Delta_{m} \left[w_{n+1,q,j}(\mathbf{u}_{n+1}) w_{n+1,q,j}^{*}(\mathbf{u}_{n+1}) \right] \cdot \chi_{q,k}(\mathbf{u}_{n+1}) d^{2}\mathbf{u}_{n+1}$$

$$= 2 \operatorname{Re} \iint \left[\Delta_{m}w_{n+1,q,j}(\mathbf{u}_{n+1}) \right] \cdot F_{n+1,q,j}^{*}(\mathbf{u}_{n+1}) d^{2}\mathbf{u}_{n+1},$$
(8)

where $\Delta_m E_{q,k}$, $\Delta_m I_{n+1,q,j}(\mathbf{u}_{n+1})$, and $\Delta_m w_{n+1,q,j}(\mathbf{u}_{n+1})$ are the increments of the energy, intensity distribution, and complex amplitude, respectively, caused by an increment of the height Δh_m , and

$$F_{n+1,q,j}(\mathbf{u}_{n+1}) = w_{n+1,q,j}(\mathbf{u}_{n+1}) \cdot \sum_{k=1}^{N_q} \chi_{q,k}(\mathbf{u}_{n+1}) \frac{\partial D_{q,j}}{\partial E_{q,k}}.$$
(9)

By denoting the scalar product of complex functions with angle brackets, we arrive at

$$\Delta_m \varepsilon_{q,j}(h_1, \dots, h_n) = 2 \operatorname{Re} \left\langle \Delta_m w_{n+1,q,j}(\mathbf{u}_{n+1}), F_{n+1,q,j}(\mathbf{u}_{n+1}) \right\rangle.$$
(10)

One can easily show that the operator describing the forward propagation of the light field through a set of phase DOEs [see Eq. (2)] as well as the operator of the backpropagation of the field are unitary and conserve the scalar product [16]. Using this conservation property, we can represent the increment of the error functional (10) as

$$\Delta_m \varepsilon_{q,j}(\varphi_1, \dots, \varphi_n) = 2 \operatorname{Re} \left\langle \operatorname{Pr}_{f_{n+1} \to f_m^+}(\Delta_m w_{n+1,q,j}), \operatorname{Pr}_{f_{n+1} \to f_m^+}(F_{n+1,q,j}) \right\rangle,$$
(11)

where $\Pr_{f_{n+1}\to f_m^+}$ is the backpropagation operator of the field from the output plane $z = f_{n+1}$ to the plane $z = f_m^+$ located immediately after the plane of the *m*-th DOE $z = f_m$. Note that the backpropagation of the field in the free space is described by the same Fresnel-Kirchhoff integral, in which, in contrast to the forward propagation, the propagation distance is taken with a minus sign. The "backward propagation" of the beam through a phase DOE is described by the multiplication of the complex amplitude of the beam by the complex conjugate of the CTF of the DOE. Thus, at m = n, the field $F_{m,q,j}(\mathbf{u}_{n+1}) = \Pr_{f_{n+1}\to f_m^+}(F_{n+1,q,j})$ has the form

$$F_{n,q,j}(\mathbf{u}_n) = C_{q,n+1}^* \iint F_{n+1,q,j}(\mathbf{u}_{n+1}) \exp\left\{ i\pi \frac{(\mathbf{u}_n - \mathbf{u}_{n+1})^2}{\lambda_q \cdot (-d_{n+1})} \right\} d^2 \mathbf{u}_{n+1}.$$
 (12)

Then, at m < n, the field $F_{m,q,i}(\mathbf{u}_{n+1})$ is calculated recursively using the following formula:

$$F_{l-1,q,j}(\mathbf{u}_{l-1}) = C_{q,l}^* \iint F_{l,q,j}(\mathbf{u}_l) T_{q,j}^*(\mathbf{u}_l) \exp\left\{ i\pi \frac{(\mathbf{u}_{l-1} - \mathbf{u}_l)^2}{\lambda_q \cdot (-d_l)} \right\} d^2 \mathbf{u}_l,$$
(13)
$$l = n, \dots, m+1.$$

Let us note that since $\Pr_{f_{n+1}\to f_m^+}(\Delta_m w_{n+1,q,j}) = \Delta_m(w_{m,q,j}T_{m,q})$, where $w_{m,q,j}(\mathbf{u}_m)T_{m,q}(\mathbf{u}_m)$ is the complex amplitude of the field immediately after the plane of the *m*-th DOE upon the forward propagation, the increment (11) can be transformed as

$$\Delta_m \varepsilon_{q,j}(h_1, \dots, h_n) = 2 \operatorname{Re} \left\langle \Delta_m(w_{m,q,j} T_{m,q}), F_{m,q,j} \right\rangle$$

= 2 Re $\iint w_{m,q,j}(\mathbf{u}_m) \Delta T_{m,q}(\mathbf{u}_m) F_{m,q,j}^*(\mathbf{u}_m) d^2 \mathbf{u}_m.$ (14)

Since

$$\Delta T_{m,q} = \exp\{i\gamma_q(h_m + \Delta h_m)\} - \exp\{i\gamma_q h_m\}$$

= $T_{m,q}i\gamma_q\Delta h_m + o(\Delta h_m),$ (15)

where $\gamma_q = 2\pi [n(\lambda_q) - 1]/\lambda_q$, then the principal linear part of the increment (14) can be written as the following scalar product:

$$\delta_m \varepsilon_{q,j}(h_1, \dots, h_n) = -2\gamma_q \iint \Delta h_m(\mathbf{u}_m) \operatorname{Im}[w_{m,q,j}(\mathbf{u}_m)T_{m,q}(\mathbf{u}_m)F^*_{m,q,j}(\mathbf{u}_m)] \,\mathrm{d}^2 \mathbf{u}_m$$

$$= -2\gamma_q \left\langle \Delta h_m, \operatorname{Im}[w_{m,q,j}T_{m,q}F^*_{m,q,j}] \right\rangle.$$
(16)

According to Eq. (16), the Fréchet derivative of the functional (4) has the form

$$\frac{\delta \varepsilon_{q,j}(h_1,\ldots,h_n)}{\delta h_m} = -2\gamma_q \operatorname{Im}[w_{m,q,j}(\mathbf{u}_m)T_{m,q}(\mathbf{u}_m)F^*_{m,q,j}(\mathbf{u}_m)].$$
(17)

Thus, the calculation of the gradient of the functional for a batch can be performed using Eqs. (6) and (17).

Above, the functional $\varepsilon_{q,j}(h_1, \ldots, h_n)$ describing the classification error of an object of the *j*-th class in the problem P_q was written in a general form (4), where $D_{q,j}(E_{q,1}, \ldots, E_{q,N_q})$ is a certain error function depending on the energy distribution (3) generated at the functions h_1, \ldots, h_n . Let us consider a particular example of the functional. For correct classification of an input image of the *j*-th class, it is necessary for the energy $E_{q,j}$ in the corresponding region $G_{q,j}$ to have a "large" value E_{max} and for the energies in the other regions to be close to zero. Accordingly, as an error functional for recognizing an input distribution of the *j*-th class, one can, for example, use the following quadratic functional [19]:

$$\varepsilon_{q,j}(h_1,\ldots,h_n) = \sum_{k=1}^{N_q} \left(E_{q,k} - E_{\max}\delta_{k,j} \right)^2, \qquad (18)$$

where $\delta_{k,j}$ is the Kronecker delta. The derivatives of the functional (18) are calculated using the general formula (17), where, according to Eq. (9), the function $F_{m,q,j}(\mathbf{u}_m)$ is calculated through the backpropagation of the field

$$F_{n+1,q,j}(\mathbf{u}_{n+1}) = 2w_{n+1,q,j}(\mathbf{u}_{n+1}) \sum_{k=1}^{N_q} \chi_{q,k}(\mathbf{u}_{n+1}) \cdot (E_{q,k} - E_{\max}\delta_{k,j}).$$
(19)

Let us note that in the design of a cascaded DOE, the functions of the diffractive microrelief height $h_1(\mathbf{u}_1), \ldots, h_n(\mathbf{u}_n)$ are usually assumed to be bounded and take values from a certain interval $[0, h_{\text{max}})$, where h_{max} is the maximum microrelief height (the h_{max} value is defined by the technology used for the DOE fabrication). The presence of constraints $0 \le h_m(\mathbf{u}_1) \le$ h_{max} , $i = 1, \ldots, n$ makes the problem of designing a cascaded DOE a conditional optimization problem. For taking into account these constraints, it is necessary to introduce the following projection operator on the set of bounded height functions into the iterative calculation process:

$$P(h) = \begin{cases} 0, & h < 0, \\ h, & h \in [0, h_{\max}), \\ h_{\max}, & h \ge h_{\max}. \end{cases}$$
(20)

In particular, the introduction of such an operator to the gradient method for designing cascaded DOEs leads to the gradient projection method, in which the height functions are updated as

$$h_m^k(\mathbf{u}_m) = \mathbf{P}\left[h_m^{k-1}(\mathbf{u}_m) - t\frac{\delta\varepsilon}{\delta h_m}(\mathbf{u}_m)\right], \ m = 1, \dots, n,$$
(21)

where the superscript k denotes the iteration number and t is the step of the gradient method. Note that instead of the simplest version of the gradient method of Eq. (21), one can utilize its various extensions, e. g., the widely used ADAM method [34].

4. Design examples of spectral DNNs

Let us consider the calculation of a spectral DNN for solving three different classification problems P_q , q = 1, 2, 3 at the following three operating wavelengths: $\lambda_1 = 457$ nm, $\lambda_2 = 532$ nm, and $\lambda_3 = 633$ nm. As the problems being solved, let us choose the following ones: the problem of classifying handwritten digits from the MNIST dataset at the wavelength $\lambda_1 = 457$ nm (problem P_1), the problem of classifying fashion products from the Fashion MNIST dataset at $\lambda_2 = 532$ nm (problem P_2), and, finally, the problem of classifying handwritten letters from A to J (lowercase and uppercase) from the EMNIST dataset at $\lambda_3 = 633$ nm (problem P_3). Note that each of the chosen classification problems contains the objects of ten classes, i. e., $N_1 = N_2 = N_3 = 10$.

For the DNN design, let us use the following parameters. We assume the input images for the classification problems P_q , q = 1, 2, 3 in the input plane to be defined on a 56 × 56 square grid with the step of $d = 10 \ \mu$ m. The distances between the input plane to the first DOE, between the DOEs, and from the last DOE to the output plane are the same and equal 160 mm. The microrelief height functions in the DOE planes are defined on 512×512 square grids with the step of $10 \ \mu$ m. In this case, the side length of the DOE aperture amounts to 5.12 mm. We set the maximum height of the diffractive microrelief to be $h_{\text{max}} = 6 \ \mu$ m. Note that DOEs with such height can be fabricated using the standard direct laser writing technique [37,38]. For the sake of simplicity, as the refractive indices of the DOE material, we will use the same value $n(\lambda_1) = n(\lambda_2) = n(\lambda_3) = 1.46$, which, nevertheless, is quite close to the refractive index of fused silica at the operating wavelengths.

4.1. Sequential solution of the classification problems

Let us first assume that the images of the objects from different classification problems P_q , q = 1, 2, 3 are generated in the input plane z = 0 sequentially and that each image from the problem P_q is illuminated by a normally incident plane wave (propagating along the z axis) with the wavelength λ_q . Since each of the considered problems P_q contains the objects of 10 classes, which, as we assumed, are generated in the input plane z = 0 in a sequential way, it is sufficient to use a single set of 10 target regions G_k , k = 1, ..., 10 in the output plane for all three problems. In this case, the DNN will enable changing the classification problem being solved by changing the wavelength λ_q of the incident radiation. The target regions, in which energy maxima have to be generated for different classes, are shown in Fig. 2(a) and have a square shape with the side of 0.125 mm. The classes numbered as 0, ..., 9 in Fig. 2(a) correspond to the digits 0, ..., 9 in

problem P_1 , different fashion products (T-shirt/top, trouser, pullover, dress, coat, sandal, shirt, sneaker, bag, ankle boot) in problem P_2 , and the letters from A to J in problem P_3 .

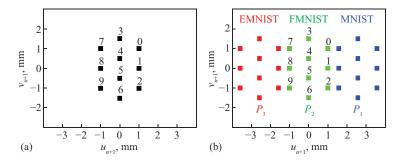


Fig. 2. Target regions in the cases of sequential (a) and parallel (b) solution of the classification problems.

First, using the developed gradient method [Eqs. (5), (6), (17)–(21)], a DNN consisting of a single DOE was calculated. Let us note that the calculation of the derivatives of the error functionals was performed numerically using the angular spectrum method [39, 40]. For the DOE calculation, we used a training set *S* containing 60000 images of handwritten digits from the MNIST dataset, 60000 images of fashion products from the Fashion MNIST dataset, and 48000 images of handwritten letters from the EMNIST dataset. As the initial function of the microrelief height, a realization of a white noise with uniform distribution of the values in the [0, h_{max}) range was used. The training, which was carried out until reasonable convergence of the value of the error functional, took approximately 4 hours on an NVIDIA RTX 3060 12 Gb graphics card utilized for the computations. The obtained microrelief height function of the designed DOE is shown in Fig. 3(a).

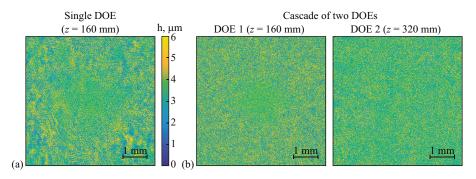


Fig. 3. Microrelief height functions of the designed DNNs consisting of a single DOE (a) and a cascade of two DOEs (b) for sequential solution of three classification problems at three wavelengths.

After the training, the performance of the calculated DOE was evaluated using a test set containing 10000 images for each of the problems P_1 and P_2 and 8000 images for problem P_3 (the images from the test set were not included in the training set). The obtained values of the classification accuracies of the objects from different classes (such values are often referred to as recall) for the three considered classification problems are shown with circles in Fig. 4(a), which are connected with solid lines as a guide to the eye. The overall classification accuracy (i. e., the ratio of the quantity of correctly recognized objects to the size of the test set) amounts to 96.41% for problem P_1 , 84.11% for problem P_2 , and 90.87% for problem P_3 . The full confusion

matrices for the three considered classification problems describing the obtained results in more detail are given in the supplementary material (see Fig. S1). Let us note that a relatively low classification accuracy for the objects of the 6-th class of problem P_2 (shirt) in Fig. 4(a) is caused by the fact that these objects are visually close to the objects of the classes 0, 2, and 4 (T-shirt/top, pullover, coat) (see Fig. S1). This effect is also present for the latter classes, albeit in this case, it is not so pronounced (see Figs. 4(a) and S1). Note that this feature is in agreement with the results of other works, in which this classification problem was considered [10, 17].

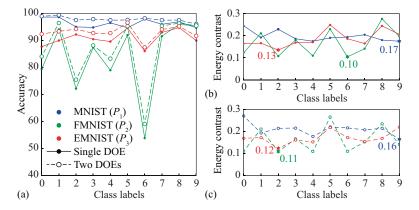


Fig. 4. (a) Classification accuracy for single-DOE (solid lines) and two-DOE (dashed lines) DNNs in the case of sequential solution of three classification problems at three wavelengths. (b), (c) Contrast for single-DOE (b) and two-DOE (c) DNNs. The stars show the minimum contrast values.

In addition to the classification accuracy, another important parameter is the energy distribution in the target regions generated by the DOE. Let us denote by $\overline{E}_{q,j\rightarrow k}$ the average energy calculated for the test set, which is directed to the *k*-th target region for the input objects of the *j*-th class from the problem P_q . These average energy values are shown in Fig. S1 in the supplementary material in the form of the so-called energy distribution matrices. From the practical point of view, an important characteristic is the contrast value, which shows, how much the energy in the region of the class under consideration exceeds the energy in the regions corresponding to the other classes. Let us introduce the contrast for the objects of the *j*-th class in problem P_q as

$$CR_{q,j} = \frac{\overline{E}_{q,j\to j} - \max_{k\neq j} \overline{E}_{q,j\to k}}{\overline{E}_{q,j\to j} + \max_{k\neq i} \overline{E}_{q,j\to k}}.$$
(22)

In the opinion of the authors, for robust identification of "true maxima" of the energy in the experimental implementation of the DNN, it is necessary for the theoretical values of $CR_{q,j}$ to exceed at least 0.1. The obtained contrast values for the three considered problems are shown in Fig. 4(b). The minimum contrast values $CR_{min,q} = \min_j CR_{q,j}$ for problems $P_q, q = 1, 2, 3$ amount to 0.17, 0.10, and 0.13, respectively, and are not less than the chosen "critical" value of 0.1.

It is worth benchmarking the performance of the designed spectral single-DOE DNN solving three classification problems at three different wavelengths against separate DOEs, each of which solves a single classification problem P_q at the corresponding operating wavelength λ_q . These DOEs were calculated using the gradient method with the parameters given above. For the calculated DOEs (not shown here for the sake of brevity), the values of the overall accuracy and minimum contrast obtained using the corresponding test set amount to 96.88% and 0.19 (problem P_1), 86.64% and 0.11 (problem P_2), and 93.3% and 0.13 (problem P_3). As one would expect, the spectral DOE [Fig. 3(a)], which enables solving all three classification problems, provides lower classification accuracies as compared to "reference" DOEs designed separately for each of the problems. At the same time, the decrease in accuracy is relatively small and, for the considered problems P_q , q = 1, 2, 3, amounts to 0.47%, 2.53%, and 2.36%, respectively. The decrease in the minimum contrast for the three classification problems is also rather small.

It is also interesting to compare the performance of the calculated spectral DOE of Fig. 3(a) with the performance of a DOE solving the same three classification problems, but at a single operating wavelength. This DOE was calculated using the gradient method for the wavelength $\lambda_1 = 457$ nm at the parameters given above. For this DOE (not presented for brevity), the overall accuracy and minimum contrast amount to 92.69% and 0.12 (problem P_1), 81.96% and 0.07 (problem P_2), and 84.9% and 0.10 (problem P_3). One can see that the single DOE solving three classification problems at the same wavelength exhibits inferior performance as compared to the spectral DOE. The decrease in the overall classification accuracy occurring when a single operating wavelength is used instead of three different wavelengths amounts to 3.72% (problem P_1), 2.15% (problem P_2), and 5.97% (problem P_3). A better performance of the spectral DOE operating at three different wavelengths can be explained by the fact that the phase shifts introduced by the DOE at different wavelengths are different [see Eq. (1)]. In comparison with a DOE designed for a single working wavelength, this gives additional degrees of freedom in the optimization.

Having discussed the properties of a single spectral DOE, let us now move to a DNN comprising two DOEs. The microrelief height functions of the calculated DOEs are shown in Fig. 3(b). The obtained values of the classification accuracy in the three considered problems for this DNN are shown in Fig. 4(a) with circles connected by dashed lines. The corresponding contrast plots are shown in Fig. 4(c). The resulting values of the overall classification accuracy and minimum contrast for the designed cascade of two DOEs equal 97.86% and 0.16 (problem P_1), 86.93% and 0.11 (problem P_2), and 93.07% and 0.12 (problem P_3). Full confusion matrices and energy distribution matrices for this structure are given in the supplementary material (Fig. S2). It is evident that the cascade of two DOEs, as compared to the single DOE, provides better performance. In particular, the increase in the overall classification accuracy amounts to 1.45% (problem P_1), 2.82% (problem P_2), and 2.2% (problem P_3) at virtually the same contrast. In order to illustrate the operation of a DNN consisting of two DOEs, in Fig. 5, particular examples of input images from the classification problems P_q , q = 1, 2, 3 are shown, as well as the corresponding energy distributions generated by the DNN in the output plane.

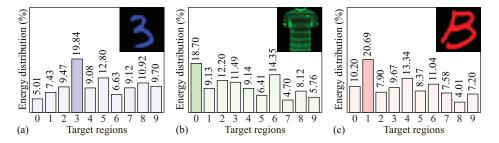


Fig. 5. Examples of input images: digit "3" (a), object "T-shirt/top" (b), and letter "B" (c) from the classification problems P_q , q = 1, 2, 3 and generated energy distributions in the target regions for a DNN consisting of two DOEs.

In addition, we also designed a spectral DNN containing three DOEs (microrelief height functions are not shown in the paper for the sake of brevity). For ease of comparison of the designed DNNs, Table 1 presents the values of the overall classification accuracy and minimum

contrast for the single DOE and the cascades of two and three DOEs. One can see that the values of the overall accuracy and minimum contrast for the cascade of three DOEs are 97.89% and 0.20 (problem P_1), 89.75% and 0.11 (problem P_2), and 93.22% and 0.19 (problem P_3). In comparison with the cascade of two DOEs, the cascade of three DOEs provides better values of the minimum contrast for problems P_1 and P_3 , and a noticeably higher overall classification accuracy for problem P_2 (the classification accuracy increases by almost 3%). At the same time, the classification accuracy values for problems P_1 , P_3 remain almost unchanged.

Number	Classification	Wavelength	Sequential	regime	Parallel regime					
of DOEs	problem	λ (nm)	Overall accuracy (%)	Minimum contrast	Overall accuracy (%)	Minimum contrast				
	<i>P</i> ₁ : MNIST	457	96.41	0.17	96.25	0.18				
One	<i>P</i> ₂ : FMNIST	532	84.11	0.10	83.71	0.11				
	P ₃ : EMNIST	633	90.87	0.13	90.56	0.14				
	<i>P</i> ₁ : MNIST	457	97.86	0.16	97.38	0.19				
Two	<i>P</i> ₂ : FMNIST	532	86.93	0.11	87.96	0.11				
	P ₃ : EMNIST	633	93.07	0.12	92.93	0.16				
	<i>P</i> ₁ : MNIST	457	97.89	0.20	97.41	0.21				
Three	P ₂ : FMNIST	532	89.75	0.11	89.10	0.13				
	<i>P</i> ₃ : EMNIST	633	93.22	0.19	92.95	0.17				

Table 1. Overall accuracy and minimum contrast provided by spectral DNNs consisting of one, two, and three DOEs solving three classification problems in sequential and parallel regimes.

4.2. Parallel solution of the classification problems

In the previous subsection, we assumed that the input fields corresponding to objects from different classification problems P_q , q = 1, 2, 3 are generated in the input plane z = 0 one after another, so that the DNN solves the corresponding classification problems in a sequential way. In this case, it was sufficient to use one set of 10 target regions G_k , k = 1, ..., 10 for all three classification problems [Fig. 2(a)]. Let us now consider the case of parallel solution of the same classification problems P_q , q = 1, 2, 3. We will assume that at each moment, three input fields with the wavelengths λ_q are simultaneously generated in the input plane. These fields correspond to certain objects from the considered problems of classifying handwritten digits (problem P_1), fashion products (problem P_2), and 10 handwritten letters (problem P_3). Since the problems P_q have to be solved simultaneously, it is necessary to define three spatially separated sets of target regions $G_{q,k}$, k = 1, ..., 10 corresponding to the problems being solved. The geometry of the target regions used in the present example is shown in Fig. 2(b).

Let the images of the objects from the classification problems P_q in the input plane be defined on 56 × 56 grids with the $d = 10 \ \mu m$ step, the centers of which for different problems P_q are shifted along the u_0 axis by different distances and are located at the points $\mathbf{s}_1 = (-2.56, 0) \ mm$ (problem P_1), $\mathbf{s}_2 = (0, 0)$ (problem P_2), and $\mathbf{s}_3 = (2.56, 0) \ mm$ (problem P_3). These input images are schematically shown in Fig. 1. We will assume that, in contrast to the previous case, the generated images are illuminated by obliquely incident plane waves with the wavelengths λ_q and the propagation directions "aimed" from the points \mathbf{s}_q at the center of the first DOE. As before, in the considered DNN examples, the distances between the adjacent planes involved in the DNN design problem are the same and equal 160 mm.

For the considered geometry of parallel solution of the classification problems using the developed gradient method of Eqs. (5), (6), (17)–(21), spectral DNN were calculated consisting of a single DOE and cascades of two and three DOEs. As an example, Fig. 6 shows the microrelief height functions of the designed single DOE and cascade of two DOEs. In Fig. 7, the corresponding plots of the classification accuracy and contrast are shown. The full confusion and energy distribution matrices are shown in the supplementary material in Figs. S3 and S4. For ease of comparison of the performance of the designed DNNs operating in the sequential and parallel regimes, the values of the overall classification accuracy and minimum contrast for the parallel case are shown in the right part of Table 1. By comparing Figs. 4 and 7 and the left and right parts of Table 1, one can see the classification accuracy values in the sequential and parallel regimes are approximately the same. The accuracy increase "rate" with an increase in the number of DOEs constituting the DNN is also very similar for the sequential and parallel geometries.

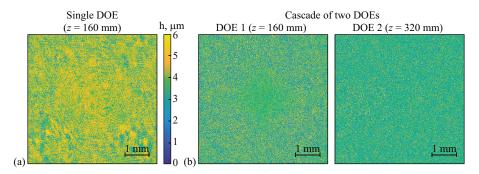


Fig. 6. Microrelief height functions of the designed DNNs consisting of a single DOE (a) and a cascade of two DOEs (b) for parallel solution of three classification problems at three wavelengths.

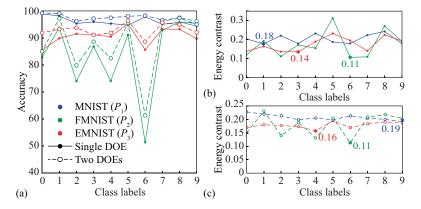


Fig. 7. (a) Classification accuracy for single-DOE (solid lines) and two-DOE (dashed lines) DNNs in the case of parallel solution of three classification problems at three wavelengths. (b), (c) Contrast for single-DOE (b) and two-DOE (c) DNNs. The stars show the minimum contrast values.

Let us note that the terms "sequential" and "parallel" used for the two considered geometries are somewhat arbitrary. In particular, the first (sequential) geometry, which corresponds to the case of normal incidence of the input beams and a single set of target regions for all classification problems being solved, can also be applied in the case of parallel processing. In this case, similarly to work [21], it should be assumed that in the optical setup implementing the solution of the classification problems, in addition to the DNN, there are additional optical elements that perform wavelength multiplexing of the incident beams in the input plane and wavelength demultiplexing of the resulting field distributions in the output plane. At the same time, the second (parallel) geometry discussed in this subsection does not require the use of additional multiplexing and demultiplexing devices due to the spatial separation of input and output fields with different wavelengths.

5. Conclusion

We presented an approach for designing spectral DNNs (cascaded spectral DOEs) intended for solving several given classification problems at several different wavelengths, with each classification problem being solved at its "own" wavelength of the incident radiation. In this approach, the problem of calculating the spectral DNN was formulated as the problem of minimizing a functional that depends on the functions of the diffraction microrelief height of the cascaded DOE and represents the error of solving the given classification problems at the design wavelengths. Explicit and compact expressions were obtained for the derivatives of the functional and were used for formulating a gradient method for the DNN calculation. Using the proposed method, spectral DNNs were designed for solving the following three problems: the problem of classifying handwritten digits from the MNIST database at a wavelength of 457 nm (problem P_1), the problem of classifying fashion products from the Fashion MNIST database at a wavelength of 532 nm (problem P_2), and the problem of classifying ten handwritten letters from A to J (lowercase and uppercase) form the EMNIST database at a wavelength of 633 nm (problem P_3). DNNs were designed for two geometries assuming sequential and parallel solution of different classification problems. The presented numerical simulation results of the designed DNNs demonstrate high performance of the proposed approach. In particular, in the parallel regime of solving the classification problems, a cascade of three DOEs provides the overall classification accuracy values of 97.41%, 89.1%, and 92.95% for the problems P_1, P_2, P_3 , respectively.

Funding. Ministry of Science and Higher Education of the Russian Federation (State assignment to Samara University, project FSSS-2024-0016; development of a gradient method for calculating spectral DNNs and its application for solving different classification problems); State assignment of NRC "Kurchatov Institute" (software development for simulating the operation of cascaded DOEs); Russian Science Foundation (project 24-19-00080; general methodology for calculating the Fréchet derivatives of the error functionals based on the unitarity property of light propagation operators).

Appendix. Supplementary material

Figures S1–S4 show the confusion matrices and energy distribution matrices for the designed spectral diffractive neural networks consisting of a single DOE (Figs. S1 and S3) and a cascade of two DOEs (Figs. S2 and S4) operating in sequential (Figs. S1 and S2) and parallel (Figs. S3 and S4) regimes.

References

- 1. A. Silva, F. Monticone, G. Castaldi, *et al.*, "Performing mathematical operations with metamaterials," Science **343**, 160–163 (2014).
- Y. Zhou, H. Zheng, I. I. Kravchenko, and J. Valentine, "Flat optics for image differentiation," Nat. Photonics 14, 316–323 (2020).

					Cor	fusion	Matrix	ĸ					E	inergy	Distrib	oution 1	Matrix	(%)				
							0	verall	accura							I	Minim	um co	ntrast	= 0.17		
	0	98.7	0	0.7	0.1	0.1	0.5	0.9	0	0.6	0.8	0	16.8	7.4	9.7	9.1	8.7	9.4	10.1	8.8	10	9
	1	0	98.7	0	0	0.2	0	0.2	0.2	0	0.5	₂ 1	8.4	18.7	5.9	5.9	8.6	4.7	7.1	8.2	6.4	7
	2	0	0.4	95.1	1	0.2	0.2	0	1.6	0.1	0	5 plar	10	8.4	18	10.8	8.1	8.2	10.5	10.1	9.7	7.5
	slbels	0	0.3	0.6	94.9	0	1.4	0	0.2	0.6	1.5	output plane	8.7	7.9	11.3	17.9	7	12.2	7	10.2	10.1	9.9
ST	Predicted Labels	0.2	0	0.4	0	96.5	0	0.2	0.1	0.3	0.9	no ə	9.4	12.7	9.2	7.7	17.5	7.8	12.1	9.4	9.1	11.6
MNIST	5 licte	0.1	0	0	1.1	0	94.7	0.6	0.1	0.2	0.2	in the	9.7	6.9	8.6	12.3	7.6	17.9	9.6	8.6	10.6	9.2
	6 Prec	0.4	0.2	0.5	0.1	0.6	0.5	97.9	0	0.5	0.3	i su 6	9.8	8.8	9.3	7	10.4	8.8	17.9	4.6	9.3	7.5
	7	0.1	0.1	1.2	0.9	0.2	0.2	0	96	0.4	0.4	Regions	8.2	11.2	9.2	7.7	10.1	8.5	6.2	18.9	7.5	11.1
	8	0.4	0.5	1.6	1.3	0.3	1.4	0.2	0.4	96.9	0.6	≈ ₈	10.2	9.9	10.5	11.5	9.7	12.2	10.3	8.7	16.1	10.7
	9	0.1	0	0.1	0.8	1.8	0.5	0	1.4	0.3	94.7	9	8.8	8.1	8.3	10.1	12.3	10.3	9.2	12.5	11.2	16.5
		0	1	2	3	4 Input I	5 .abels	6	7	8	9		0	1	2	3	4 Input l	5 Labels	6	7	8	9
	Overall accuracy = 84.11%																	l	Minim	um co	ntrast	= 0.10
	0	79.5	0.4	0.7	1.8	0.1	0	15.7	0	0.1	0	0	18	10.9	10	12.3	9	6.8	11.3	7	8.9	5.8
	1	0.1	94.1	0.1	1	0.1	0	0.1	0	0.3	0	2 1	8.6	20.4	7.5	11.3	7.8	6.8	7.7	6.1	5.2	8.4
	2	1.3	1.4	72.2	1.1	8.4	0	10.4	0	0.3	0	1 2 2	11.9	9.1	17.2	10.3	13.6	8	13	7.1	9.8	7.3
_	abel S	7.3	2.6	0.9	87.4	4.4	0.1	5.4	0	0.5	0.2	tput 3	11.8	13.3	9.1	17.7	9.5	6.8	10.1	5.5	8	7.1
FMNIST	Predicted Labels	0.6	1	15.4	3.4	79	0.1	11.4	0	0.6	0	the output	8.7	12.1	13.9	10	16.9	8.1	12.9	9.6	10.9	9.3
FM	dicte	0.7	0	0.1	0	0	92	0	2.5	0.3	0.9	n th	6.7	7.5	7	6.3	7.2	20.9	7.3	14.4	8.8	12.3
	Pre 6	8.7	0.2	9.6	4.7	7.5	0	53.9	0	1.5	0	suc 6	14.1	9.8	13.9	10.9	13.6	7.6	16	6.7	10.4	8.2
	7	0	0	0	0	0	3.6	0	91.6	0.3	3.3	Regions in	4.9	3.9	5.1	5.2	5.2	13.1	5.3	19.1	9.2	12.3
	8	1.8	0.3	1	0.6	0.5	0.5	3.1	0.1	95.9	0.1	^m 8	8.3	5.3	9.2	8	9.7	10.5	9.3	12	19.2	11
	9	0	0	0	0	0	3.7	0	5.8	0.2	95.5	9									9.6	18.3
		0 1 2 3 4 5 6 7 8 9 Input Labels								0 1 2 3 4 5 6 7 8 Input Labels										9		
			_		_		0	verall	accura	cy = 9	0.87%							I	Minim	um co	ntrast	= 0.13
	0	87.8	1.3	1.4	3.9	2.6	0.8	5.4	2.9	0.6	0.3	0	16	9.2	10.4	10.5	10.3	9.8	11.2	11.9	8.6	8.7
	1	0.5	90	0.3	2.9	1.1	0.5	2.8	1.9	0.4	0.9	<u>ి</u>	9.9	16.2	9.2	11.4	10.8	9.6	10.7	12.5	8.8	9.1
	2	0.5	0.4	92.3	0.1	3.8	0.9	1.8	0.4	0.4	0	plan 5	8.6	7.7	17.3	7.6	12	7.3	9.6	5.5	5.9	8.4
<u> </u>	bels	3.3	2.5	0.8	90.5	0.1	0.6	0.8	1.1	0.3	2.8	output plane	10.2	11.6	9	16	9.6	8.3	9.3	10.9	10.2	11.8
LSINME	q Fa	0.8	1.3	3.9	0.4	89.6	0.6	0.6	0	0.3	0.1	tno a	9.1	9.6	13.2	9	16.9	10.6	9.6	7	6.9	7.1
EMD	icte	0.3	0.1	0.1	0.3	1.4	94.6	0.9	0.1	0.6	0.8	n the	8.8	7.9	7.1	6.9	9	17.6	9.4	9.1	10.8	8.1
	Predicted Labels	4.6	2	0.8	0.8	0.9	1.1	86.1	0.4	0.6	1.1	Regions in 8 2 9	11.5	10.7	10.7	9.5	10.5	10.6	16.3	9.4	8.9	11.1
	7	2.4	2.3	0	0.3	0	0.1	0.3	93	0.8	0.3	egio 2	11.3	10.8	6.8	10.1	7.4	8.8	7.4	17.4	11	7.2
	8	0	0.3	0.5	0.3	0.4	0.4	0.3	0.3	94.8	3.9	0	7.1	7.9	7.8	8.3	6.7	9.4	7.1	8.7	18.1	10.6
	9	0	0	0.1	0.8	0.1	0.4	1.3	0	1.4	90	9	7.5	8.4	8.5	10.7	6.8	8	9.4	7.6	10.8	17.9
		0	1	2	3	4 Input l	5 Labels	6	7	8	9		0	1	2	3	4 Input	5 Labels	6	7	8	9

Fig. S1. Confusion and energy distribution matrices in the problems P_1, P_2, P_3 for a single DOE in the sequential geometry.

	Confusion Matrix Overall accuracy = 97.86%														E	Inergy	Distrib	oution 1	Matrix	(%)		
							0	erall :	accura							I	Minim	um co	ntrast	= 0.16		
	0		0	0.5	0	0.1	0.4	0.8	0	0.5	0.8	0	18.3	6.8	8.7	7.6	7.4	8.3	10.2	7.7	8.6	7.5
	1	0	99.4	0.1	0	0.1	0	0.2	0.2	0	0.5	ں 1	6.8	17.6	8.3	7.8	8.4	6.2	8.1	8.1	7.6	6.8
	2	0	0.3	97.6	0.3	0.4	0	0	0.9	0.2	0.1	1 5 blane	10.5	9.3	18.4	10.7	8.6	8.4	10.8	11.7	10.1	7.8
	s pels	0.1	0	0.3	97.9	0	0.6	0.1	0.2	0.4	0.7	tindino 4	8.5	8.6	11.9	18.6	7.1	12.2	7.5	11	11	10
ST	4 Tal	0	0	0.2	0	97.6	0	0.2	0.1	0.3	0.7		8	11.9	8	7.2	18.3	7.5	11.6	8.7	8.6	12.4
MNIST	Predicted Labels	0	0	0.1	0.4	0	97.6	0.4	0	0.2	0	in the	9.7	6.3	8.1	12	7.5	19.1	10	8.2	10.2	8.7
~	pred	0.4	0.1	0.1	0	0.5	0.3	98.2	0	0.2	0.1	us is	10.4	8.8	9.1	6.5	9.7	8.6	18	4.5	8.5	6.8
	7	0.2	0	0.4	0.5	0.1	0.2	0	97.6	0.3	0.3	Regions	8.5	11.9	9	8.3	10.6	8.2	6.4	19.2	7.5	11.8
	8	0.3	0.3	0.8	0.3	0.2	0.4	0	0.2	97.5	0.6	× 8	10.1	10.6	10.7	11.2	9.6	11.8	9.5	8.3	17	10.9
	9	0	0	0	0.6	1	0.2	0	0.9	0.3	96.1	9	9.2	8.2	7.8	10.1	12.8	9.7	7.9	12.6	10.9	17.3
		0	1	2	3	4 Input I	5 .abels	6	7	8	9		0	1	2	3	4 Input l	5 Labels	6	7	8	9
							0	erall :	accura	cy = 8	6.93%							1	Minim	um co	ntrast	= 0.11
	0	84.1	0.4	1.5	2.6	0	0.1	14.1	0	0	0	0	17.1	11.9	10	12	9.3	7.6	11.3	7.4	9.4	7.4
	1	0	96.5	0	0.7	0	0	0.1	0	0.1	0	<u>ں</u> 1	10.2	19.5	9.5	11.3	9.6	5.4	9.3	4.8	6.8	5.8
	2	1.1	0.2	75.5	0.9	7.4	0	9.8	0	0.5	0	plan 5	11.2	9.2	16.3	9.1	13	7.6	12.4	7.1	10.3	7.1
	bels	3.5	2	1	88.2	3.3	0	2.9	0	0.5	0.1	th 3	11.9	12.7	9.5	16.8	9.6	5.4	10.3	4.7	7.3	5.6
IST	eT 4	0.7	0.6	14.8	4	83.3	0	11.8	0	0.2	0	no 4	9.1	12.2	13.1	11.1	16.2	7.6	12.6	7.3	10.9	7.6
FMNIST	Predicted Label	0.4	0	0	0	0	95.3	0	2.2	0.2	0.5	n the	6.3	6.4	7.1	6.7	7.2	22.4	6.9	15	10.1	14.3
щ	Prec	9	0.1	6.5	3	5.5	0	59.1	0	1.6	0.1	Regions in the output plane 2 9 5 7 5 1	13.7	8.8	13.1	10.9	13	7.4	15.7	7	10.4	7.9
	7	0	0	0	0	0	2.8	0	95.4	0.5	3.8	egic	5.6	5.8	5.1	6.8	5.7	13	5.5	20.4	8.6	13.7
	8	1.2	0.2	0.7	0.6	0.5	0.1	2.2	0	96.4	0	[∞] 8	8.9	6.9	10	8.5	10.3	11.1	9.9	12.5	17.6	11.6
	9	0	0	0	0	0	1.7	0	2.4	0	95.5	9	6	6.6	6.3	6.8	6.1	12.5	6.1	13.8	8.6	19
		0	1	2	3	4 Input I	5 Labels	6	7	8	9		0	1	2	3	4 Input	5 Labels	6	7	8	9
							0	erall :	accura	cy = 93	3.07%							ľ	Minim	um co	ntrast	= 0.12
	Overall accuracy = 93.07% 0 92.4 0.9 0.8 3.4 1.9 0.4 4.9 2.3 0.5 0.4												15.9	9.4	10.2	10.8	10.4	9.7	11.5	11.7	8.3	9.5
	1	0.1	93.4	0.4	1.5	0.6	0.3	2.9	1.3	0.3	0.4	g 1	9.8	16.3	8.9	11.7	10.9	9.3	10.7	12.3	9.2	9.1
	2	0.5	0	94.3	0.4	2.9	0.4	0.9	0.5	0.4	0	1 5 1 2	8.8	7.8	17.3	7.7	12.5	7.5	8.7	6.2	7.5	7.9
<u> </u>	Predicted Labels	1.5	1.4	0.5	92.8	0	0.4	0.5	1.1	0.3	2	output 4	10.1	11.5	9.1	16.2	9	7.3	9.2	10.8	10.1	11.7
LSINWE	Tp 4	0.8	0.8	3.1	0.3	92.8	0.4	0.8	0	0.3	0.1	no 9	9.2	9.8	13.5	8.6	17	11.1	9.4	7.6	6.6	6.8
EMI	1 tete	0.8	0.1	0	0.3	0.9	96.6	1.4	0.4	0.4	0.6	in the e	8.8	8	7.5	7	9.3	17.3	9.6	9.2	10.4	8
	Prec	2.4	1.3	0.8	0.3	0.4	0.8	87.5	0.1	0.5	0.8	i suc	11.3	10.9	10.5	9.5	10	10.7	16.3	9.3	8.3	10.9
	7	1.6	2	0	0.3	0	0.3	0	94.1	0.4	0.1	Regions 2 9	10.9	10.7	6.7	10	7.6	9	7.6	16.8	11	6.9
	8	0	0.3	0.3	0.1	0.5	0.4	0.1	0.3	95.3	3.9	[∞] 8	7.8	7.7	8.2	8	7.3	8.9	8	9.1	16.7	10.9
	9	0	0	0	0.9	0.1	0.3	1.1	0	1.9	91.8	9	7.4	7.9	8.1	10.5	6	9.2	9	7	11.9	18.3
		0	1	2	3	4 Inmut I	5 Lahala	6	7	8	9		0	1	2	3	4	5 Loholo	6	7	8	9
	0 1 2 3 4 5 6 / 8 9 Input Labels																input	Labels				

Fig. S2. Confusion and energy distribution matrices in the problems P_1, P_2, P_3 for a cascade of two DOEs in the sequential geometry.

	Confusion Matrix														E	Energy	Distrib	oution 1	Matrix	(%)			
	Overall accuracy = 96.25%																	l	Minim	um co	ntrast	= 0.18	
	0	98.9	0.1	0.7	0	0.1	0.5	0.8	0	0.6	0.9	0	17.1	6.1	9.6	8.5	7.7	8.7	9.2	8.9	9.1	8.4	
	1	0	98.1	0	0	0.2	0	0.3	0.4	0	0.5	<u>ں</u> 1	7.4	19.9	5.2	5.1	7.6	5.1	7.7	7.2	6.1	5.9	
		0	0.4	95.3	1	0.2	0.2	0.2	1.7	0.3	0	5 plar	9.3	7.7	17.7	10.1	7.9	8.1	10.1	9.8	8.7	6.6	
	slədi 3	0	0.2	0.9	95.9	0	1.6	0	0.4	0.7	1.4	output plane	8.8	7.5	10.8	18.1	7	11.6	6.4	11.3	10	10.2	
\mathbf{ST}	Predicted Labels	0.4	0.1	0.5	0.1	95.3	0	0.1	0.4	0.6	0.3	no 4	9.8	13.9	9.8	8.3	19.3	8	12.8	9.6	10	12.1	
LSINM	5 te	0	0	0.1	1.1	0	94.7	0.6	0.1	0.6	0.2	in the	10.6	7.1	9.4	12.6	8.6	19.3	9.9	8.9	10.9	9.3	
	Prec	0.1	0.4	0.5	0	0.6	0.5	97.8	0	0.5	0.2	i su 6	9.9	8.4	10	7	10.2	8.7	18.4	4.2	9.3	7.4	
	7	0.1	0.2	0.9	0.7	0.1	0.3	0	95	0.3	0.4	Regions	7.6	9.8	8.8	8.5	8.7	8.1	5.5	18.6	7.3	10.9	
	8	0.4	0.7	1	1	0.5	1.3	0.2	0.3	95.8	0.6	[∞] 8	11.3	11.8	11.3	12.4	11	13.2	11.2	9.7	17.9	11.8	
	9	0.1	0	0.2	0.3	2.9	0.3	0	1.7	0.6	95.4	9	8.2	7.8	7.4	9.4	12	9.2	8.8	11.8	10.7	17.4	
		0	1	2	3	4 Input	5 Labels	6	7		0	1	2	3	4 Input l	5 Labels	6	7	8	9			
							0	verall :	accura	cy = 8	3.71%]	Minim	um co	ntrast	= 0.11	
	0	82.8	0.5	1.3	2.5	0.1	0	16.8	0	0	0	0	17.4	11.1	10.2	12.5	9.7	7.2	11.6	7	8.8	5.5	
	1	0	93.8	0.2	1	0.3	0.1	0.2	0	0.3	0	<u>و</u> 1	8.9	19.8	7.2	11.9	7.7	5.8	7.5	5.6	4.3	6.5	
	2	1.8	1.1	74	1.6	12.1	0	12.3	0	0.4	0	2 plar	10.3	10	13.5	9.2	12.4	6.9	11.7	5.4	9.9	6.2	
L	slbels	4.5	2.9	1	86.8	4.8	0	4.7	0	0.6	0.2	tput 3	12.4	13.4	9.4	17.7	9.8	6.5	10.5	5.7	7.3	7.3	
LSINME	Predicted Labels	0.9	1.1	13.3	3.5	74.1	0	11.4	0	0.4	0	no a	10.6	13.3	16.9	11.4	17.9	9.5	13	10.1	11.5	10.4	
FMD	licte	0.7	0	0.1	0	0	91.1	0.1	1.9	0.3	0.8	di fi	6.5	6.8	7.5	6.8	7.6	21.8	7.5	14.7	10.3	13.1	
_	Prec	7.4	0.3	8.9	3.8	8.1	0	51.4	0	1.6	0	Regions in the output plane	13.7	10.5	13.3	10.8	13.1	8.3	16.1	8	10.6	8.2	
	7	0	0	0	0	0	4.1	0	92.8	0.4	4.5	, tegi	4.7	2.8	4.4	4.2	4.3	11.4	4.8	18.3	8.8	11.6	
	8	1.9	0.3	1.2	0.8	0.5	1.1	3.1	0.1	95.9	0.1	۳ 8	9.4	6.1	11.1	8.3	11.1	11.2	10.8	13.1	20.1	11.9	
	9	0	0	0	0	0	3.6	0	5.2	0.1	94.4	9	6.1										
		0 1 2 3 4 5 6 7 8 9 Input Labels									0 1 2 3 4 5 6 7 Input Labels									8	9		
							0	erall a	nccura	cy = 9	0.56%							l	Minim	um co	ntrast	= 0.14	
	0 85.5 1.1 1 3.3 2 0.6 4.9 2.8 0.6 0.5												15.6	8.7	9.8	10.1	9.9	9.6	10.9	11.5	8.5	8.4	
	1	0.5	89.9	0.4	2.5	1.5	0.5	2.6	1.9	0.3	0.6	_ی 1	10.3	16.3	9.2	12.1	10.8	9.3	10.7	12.8	8.9	9.3	
	2	0.9	0.1	91.5	0.4	3.5	0.4	2	0.4	0.3	0	plan 5	8.5	7.8	17.1	7.6	11.8	7.6	9.6	6	6.5	8.3	
r .	bels	4	2.1	0.6	91.1	0	0.5	0.9	1.1	0.4	2.8	tn 3	10.4	11.7	9.6	15.9	9.8	8.5	9.1	11.1	11.2	11.9	
LSINME	е 4	0.8	1.4	5.1	0.4	90.5	0.8	1	0	0.3	0.1	tno 4	9.2	9.9	13	9.2	17.3	10.7	9.8	7.3	6.8	7.3	
EMD	icted	0.6	0.3	0.3	0.4	1.4	95.3	1.1	0.3	1	0.8	5 the	9	8	7.6	6.9	9.3	17.5	9.7	9	10.8	8.1	
I	Predicted Labels	5.1	2	0.5	0.6	0.8	1.1	85.6	0.3	0.6	1.8	Regions in the output plane	11.8	10.9	10.6	9.8	10.6	10.9	16.2	9.9	9	11.4	
	¹¹ 7	2.4	2.6	0	0.3	0	0.3	0.1	93.3	0.4	0.3	- 6gio	11	10.9	6.5	9.8	7.2	8.8	7.6	17	10.1	6.8	
	8	0	0.4	0.5	0.1	0.4	0.4	0.1	0.1	93.3	3.5	~ ₈	7	7.9	8.7	8.4	7.1	9.3	7.5	8.4	17.7	10.9	
	9	0.3	0.1	0.1	1	0	0.3	1.6	0	3	89.8	9	7.2	7.9	7.9	10.2	6.2	7.8	8.9	7	10.5	17.6	
		0	1	2	3	4 Input	5 Labels	6	7	8	9		0	1	2	3	4 Input	5 Labels	6	7	8	9	

Fig. S3. Confusion and energy distribution matrices in the problems P_1, P_2, P_3 for a single DOE in the parallel geometry.

	Confusion Matrix Overall accuracy = 97.38%														E	nergy	Distrib	ution 1	Matrix	(%)		
							0	verall a	nccura							I	Minim	um co	ntrast	= 0.19		
	0	99.2	0	0.6	0	0.1	0.3	0.7	0	0.2	0.7	0	15.1	9.4	9.5	9.5	9.5	9.5	9.6	9.3	9.5	9.5
	1	0.1	- 99	0	0	0	0	0.2	0.4	0	0.2	_ی 1	9.4	15	9.5	9.4	9.3	9.5	9.5	9.5	9.5	9.4
	2	0	0.3	96.1	0.7	0.7	0	0	1.3	0.5	0.1	2 an	9.5	9.5	14.8	9.7	9.5	9.5	9.5	9.7	9.6	9.5
	slos	0	0	0.5	97.1	0	0.7	0	0.3	0.5	1.1	output plane	9.5	9.3	9.5	14.5	9.4	9.7	9.4	9.5	9.5	9.5
IST	4 Lal	0	0.3	0.2	0	97.5	0	0.1	0.3	0.4	1.3	tno 4	9.4	9.6	9.4	9.4	14.7	9.4	9.4	9.5	9.5	9.7
MNIST	Predicted Labels	0	0	0	0.8	0	98	0.6	0.1	0.2	0.7	the 2	9.4	9.4	9.4	9.7	9.4	14.5	9.6	9.4	9.6	9.5
_	ped 6	0.2	0.4	0.3	0	0.4	0.4	98.2	0.1	0.3	0	ns is	9.5	9.4	9.4	9.4	9.5	9.5	14.8	9.4	9.5	9.4
	۳ 7	0.1	0	0.8	0.7	0	0.2	0	96.6	0.4	0.6	Regions in the	9.4	9.5	9.6	9.4	9.5	9.4	9.4	14.7	9.4	9.6
	8	0.3	0.1	1.6	0.6	0.3	0.2	0.2	0.3	97.3	0.5	æ 8	9.4	9.5	9.5	9.5	9.5	9.6	9.4	9.4	14.4	9.6
	9	0.1	0	0	0.2	1	0	0	0.6	0.1	94.9	9	9.4	9.4	9.4	9.5	9.7	9.4	9.4	9.6	9.5	14.3
	0 1 2 3 4 5 6 7 8 9 Input Labels													1	2	3	4 Input I	5 Labels	6	7	8	9
							0	verall	accura	cy = 8	7.96%							1	Minim	um co	ntrast	= 0.11
	0		0.2	2.1	2.3	0	0.1	14.2	0	0.1	0	0	13.8	9.4	9.6	9.6	9.5	9.5	10.2	9.4	9.5	9.4
	1	0.3	97.2	0.2	0.9	0.1	0	0.3	0	0.1	0	ء 1 1	9.5	15.2	9.6	9.7	9.6	9.5	9.5	9.4	9.5	9.5
	2	0.7	0	79.8	1.2	8.8	0	10.8	0	0.5	0	plane	9.5	9.4	13.5	9.5	10.3	9.3	10	9.4	9.4	9.4
	ubels S	2.8	1.8	1.1	88.6	3.4	0	2.5	0	0.5	0	th 3	9.6	9.5	9.5	14.2	9.6	9.4	9.6	9.4	9.5	9.4
IST	eT 4	0.5	0.3	11.3	3.6	82.4	0	8.4	0	0.5	0	no 4	9.5	9.4	10.2	9.6	13.4	9.4	10.1	9.4	9.5	9.4
FMNIST	Predicted Label	0.5	0	0	0.1	0	95.5	0.2	1	0.1	0.4	di fi	9.4	9.4	9.4	9.4	9.5	14.7	9.5	9.7	9.5	9.5
щ	9 Prec	8.6	0.3	5.1	2.7	4.6	0	61.3	0	0.3	0.1	Regions in the output	10.2	9.5	10	9.6	9.9	9.4	12.8	9.3	9.4	9.4
	7	0	0	0	0	0	2.6	0	96.1	0.4	3.3	, tegi	9.5	9.4	9.4	9.5	9.4	9.7	9.4	14.8	9.5	9.8
	8	1.6	0.2	0.4	0.6	0.7	0	2.3	0	97.5	0	[∞] 8	9.6	9.4	9.4	9.5	9.4	9.5	9.5	9.5	14.8	9.4
	9	0	0	0	0	0	1.8	0	2.9	0	96.2	9	9.4 9.4 9.4 9.4 9.4 9.6 9.4 9.7								9.4	14.8
		0	1	2	3	4 Input	5 Labels	6	7	8	9		0	1	2	3	4 Input l	5 Labels	6	7	8	9
							0	erall a	iccura	cy = 92	2.93%							I	Minim	um co	ntrast	= 0.16
	0	91.9	0.8	0.9	3	1.1	0.3	3.4	1.3	0.4	0	0	13.8	9.5	9.6	9.7	9.5	9.5	9.8	9.8	9.5	9.5
	1	0	93.3	0.3	2.1	0.5	0.1	3.1	0.9	0.3	0.3	<u>ا ۾</u>	9.5	14.1	9.4	9.8	9.6	9.5	9.8	9.8	9.4	9.3
	ي 2 ج	1	0	93.8	0.8	4.6	0.3	1.4	0.4	0.4	0	1 2 2	9.6	9.4	14.3	9.5	10.2	9.5	9.6	9.4	9.5	9.4
Ĺ	abel 3	1.8	1.4	0.3	91.1	0	0.3	0	1.1	0.1	2.1	tput 3	9.7	9.7	9.5	13.9	9.5	9.2	9.4	9.6	9.5	9.7
ISINME	Predicted Label	0.9	0.9	3.3	0.4	91.9	0.3	0.9	0.1	0.1	0	no 9	9.5	9.6	10	9.4	14	9.6	9.5	9.4	9.4	9.4
EM	dicte	0.6	0.1	0.1	0.5	1	96.4	1.5	0.1	0.4	0.3	th 2	9.5	9.4	9.4	9.4	9.6	14.4	9.7	9.5	9.5	9.5
	9 Pree	1.4	1.1	0.8	0.5	0.4	1	88.6	0.3	0.5	1.3	suc 6	9.8	9.7	9.6	9.5	9.6	9.7	13.8	9.4	9.4	9.7
	7	2.1	2.1	0	0.5	0	0.1	0	95.6	0.3	0.1	Regions in the output 2 9 2 4 2	9.8	9.8	9.4	9.6	9.4	9.5	9.4	14.2	9.6	9.4
	8	0.3	0.1	0.6	0	0.5	0.8	0.1	0.3	94.9	4	8	9.4	9.4	9.4	9.4	9.4	9.5	9.4	9.5	14.4	9.8
	9	0.1	0.3	0.1	1.1	0	0.6	1	0	2.8	92	9	9.4	9.4	9.4	9.8	9.2	9.6	9.6	9.4	9.8	14.3
		0	1	2	3	4 Input	5 Labels	6	7	8	9		0	1	2	3	4 Input 1	5 Labels	6	7	8	9

Fig. S4. Confusion and energy distribution matrices in the problems P_1 , P_2 , P_3 for a cascade of two DOEs in the parallel geometry.

- N. M. Estakhri, B. Edwards, and N. Engheta, "Inverse-designed metastructures that solve equations," Science 363, 1333–1338 (2019).
- K.-i. Kitayama, M. Notomi, M. Naruse, *et al.*, "Novel frontier of photonics for data processing—Photonic accelerator," APL Photonics 4, 090901 (2019).
- 5. Y. Shen, N. C. Harris, S. Skirlo, *et al.*, "Deep learning with coherent nanophotonic circuits," Nat. Photonics **11**, 441–446 (2017).
- N. C. Harris, J. Carolan, D. Bunandar, *et al.*, "Linear programmable nanophotonic processors," Optica 5, 1623–1631 (2018).
- 7. H. H. Zhu, J. Zou, H. Zhang, *et al.*, "Space-efficient optical computing with an integrated chip diffractive neural network," Nat. Commun. **13**, 1044 (2022).
- H. Zhang, M. Gu, X. D. Jiang, *et al.*, "An optical neural chip for implementing complex-valued neural network," Nat. Commun. 12, 457 (2021).
- J. Zhang, B. Wu, J. Cheng, *et al.*, "Compact, efficient, and scalable nanobeam core for photonic matrix-vector multiplication," Optica 11, 190–196 (2024).
- X. Lin, Y. Rivenson, N. T. Yardimci, *et al.*, "All-optical machine learning using diffractive deep neural networks," Science 361, 1004–1008 (2018).
- 11. T. Yan, J. Wu, T. Zhou, et al., "Fourier-space diffractive deep neural network," Phys. Rev. Lett. 123, 023901 (2019).
- T. Zhou, L. Fang, T. Yan, *et al.*, "In situ optical backpropagation training of diffractive optical neural networks," Photon. Res. 8, 940–953 (2020).
- T. Zhou, X. Lin, J. Wu, *et al.*, "Large-scale neuromorphic optoelectronic computing with a reconfigurable diffractive processing unit," Nat. Photonics 15, 367–373 (2021).
- 14. H. Chen, J. Feng, M. Jiang, et al., "Diffractive deep neural networks at visible wavelengths," Engineering 7, 1483–1491 (2021).
- B. Ferdman, A. Saguy, D. Xiao, and Y. Shechtman, "Diffractive optical system design by cascaded propagation," Opt. Express 30, 27509–27530 (2022).
- 16. S. Zheng, S. Xu, and D. Fan, "Orthogonality of diffractive deep neural network," Opt. Lett. 47, 1798–1801 (2022).
- 17. M. Zheng, L. Shi, and J. Zi, "Optimize performance of a diffractive neural network by controlling the Fresnel number," Photon. Res. 10, 2667–2676 (2022).
- T. Wang, S.-Y. Ma, L. G. Wright, *et al.*, "An optical neural network using less than 1 photon per multiplication," Nat. Commun. 13, 123 (2022).
- D. V. Soshnikov, L. L. Doskolovich, G. A. Motz, *et al.*, "Design of cascaded diffractive optical elements for optical beam shaping and image classification using a gradient method," Photonics 10, 766 (2023).
- O. Kulce, D. Mengu, Y. Rivenson, and A. Ozcan, "All-optical synthesis of an arbitrary linear transformation using diffractive surfaces," Light. Sci. & Appl. 10, 196 (2021).
- J. Li, T. Gan, B. Bai, et al., "Massively parallel universal linear transformations using a wavelength-multiplexed diffractive optical network," Adv. Photonics 5, 016003 (2023).
- 22. D. Mengu, A. Tabassum, M. Jarrahi, and A. Ozcan, "Snapshot multispectral imaging using a diffractive optical network," Light. Sci. & Appl. 12, 86 (2023).
- Y. Luo, D. Mengu, N. T. Yardimci, et al., "Design of task-specific optical systems using broadband diffractive neural networks," Light. Sci. & Appl. 8, 112 (2019).
- Y. Zhu, Y. Chen, and L. D. Negro, "Design of ultracompact broadband focusing spectrometers based on diffractive optical networks," Opt. Lett. 47, 6309–6312 (2022).
- J. Shi, Y. Chen, and X. Zhang, "Broad-spectrum diffractive network via ensemble learning," Opt. Lett. 47, 605–608 (2022).
- J. Feng, H. Chen, D. Yang, *et al.*, "Multi-wavelength diffractive neural network with the weighting method," Opt. Express 31, 33113–33122 (2023).
- 27. J. R. Fienup, "Phase retrieval algorithms: a comparison," Appl. Opt. 21, 2758-2769 (1982).
- V. A. Soifer, V. Kotlyar, and L. Doskolovich, *Iterative Methods for Diffractive Optical Elements Computation* (CRC Press, 1997).
- O. Ripoll, V. Kettunen, and H. P. Herzig, "Review of iterative Fourier-transform algorithms for beam shaping applications," Opt. Eng. 43, 2549–2556 (2004).
- T. Latychevskaia, "Iterative phase retrieval in coherent diffractive imaging: practical issues," Appl. Opt. 57, 7187– 7197 (2018).
- X. Deng and R. T. Chen, "Design of cascaded diffractive phase elements for three-dimensional multiwavelength optical interconnects," Opt. Lett. 25, 1046–1048 (2000).
- A. A. Gülses and B. K. Jenkins, "Cascaded diffractive optical elements for improved multiplane image reconstruction," Appl. Opt. 52, 3608–3616 (2013).
- 33. H. Wang and R. Piestun, "Dynamic 2D implementation of 3D diffractive optics," Optica 5, 1220–1228 (2018).
- 34. D. P. Kingma and J. Ba, "Adam: A method for stochastic optimization," (2014). ArXiv:1412.6980.
- J. Shi, D. Wei, C. Hu, *et al.*, "Robust light beam diffractive shaping based on a kind of compact all-optical neural network," Opt. Express 29, 7084–7099 (2021).
- P. Buske, A. Völl, M. Eisebitt, *et al.*, "Advanced beam shaping for laser materials processing based on diffractive neural networks," Opt. Express 30, 22798–22816 (2022).

- L. L. Doskolovich, A. A. Mingazov, E. V. Byzov, *et al.*, "Hybrid design of diffractive optical elements for optical beam shaping," Opt. Express 29, 31875–31890 (2021).
- L. L. Doskolovich, R. V. Skidanov, E. A. Bezus, *et al.*, "Design of diffractive lenses operating at several wavelengths," Opt. Express 28, 11705–11720 (2020).
- 39. J. D. Schmidt, Numerical Simulation of Optical Wave Propagation with Examples in MATLAB (SPIE, 2010).
- 40. M. Cubillos and E. Jimenez, "Numerical simulation of optical propagation using sinc approximation," J. Opt. Soc. Am. A **39**, 1403–1413 (2022).