

Play to the Score: Stage-Guided Dynamic Multi-Sensory Fusion for Robotic Manipulation

Ruoxuan Feng¹ Di Hu^{1,*} Wenke Ma² Xuelong Li³

¹Gaoling School of Artificial Intelligence, Renmin University of China

²Shenzhen Taobotics Co., Ltd.

³Institute of Artificial Intelligence (TeleAI), China Telecom

{fengruoxuan, dihu}@ruc.edu.cn, wenke@taobotics.com, xuelong_li@ieee.org

Abstract: Humans possess a remarkable talent for flexibly alternating to different senses when interacting with the environment. Picture a chef skillfully gauging the timing of ingredient additions and controlling the heat according to the colors, sounds, and aromas, seamlessly navigating through every stage of the complex cooking process. This ability is founded upon a thorough comprehension of task stages, as achieving the sub-goal within each stage can necessitate the utilization of different senses. In order to endow robots with similar ability, we incorporate the task stages divided by sub-goals into the imitation learning process to accordingly guide dynamic multi-sensory fusion. We propose MS-Bot, a stage-guided dynamic multi-sensory fusion method with coarse-to-fine stage understanding, which dynamically adjusts the priority of modalities based on the fine-grained state within the predicted current stage. We train a robot system equipped with visual, auditory, and tactile sensors to accomplish challenging robotic manipulation tasks: pouring and peg insertion with keyway. Experimental results indicate that our approach enables more effective and explainable dynamic fusion, aligning more closely with the human fusion process than existing methods.

Keywords: Multi-Sensory, Robotic Manipulation, Multi-Stage

1 Introduction

Humans are blessed with the ability to flexibly use various sensors to perceive and interact with the world. Over the years, endowing robots with this potent capability has remained a dream for humanity. Fortunately, with the advancement of computing devices and sensors [1, 2], building a multi-sensory robot system capable of assisting humans has gradually become achievable. We have witnessed the emergence of some exciting multi-sensory robots, such as *Optimus* and *Figure 01*.

One challenge in tasks that robots assist humans with is the complex object manipulation task, which requires achieving a series of sub-goals. These sub-goals naturally divide a complex task into multiple stages. Many efforts attempt to make models comprehend these task stages, whether through hierarchical learning [3, 4, 5] or employing LLMs [6, 7, 8]. However, when incorporated into multi-sensory robots, this challenge becomes more profound. We need to not only understand the stages themselves but also rethink multi-sensory fusion from the fresh perspective of task stages.

Completing sub-goals within a complex task may require different senses, with varying modality importance at each stage. Thus, stage transitions may entail changes in modality importance. To illustrate this, we build a multi-sensory robot system (Fig. 1, left). We then use imitation learning to train a MULSA [9] model with self-attention fusion to complete pouring task and record the testing confidence (Fig. 1, right). We observe correlations between the confidence and task stages after masking one modality. For example, vision is most important in the aligning stage, and masking it causes a notable confidence drop. We also note minor modality confidence changes inside stages.

* Corresponding author. “Play to the score” is slang for adjusting actions to fit current circumstances.

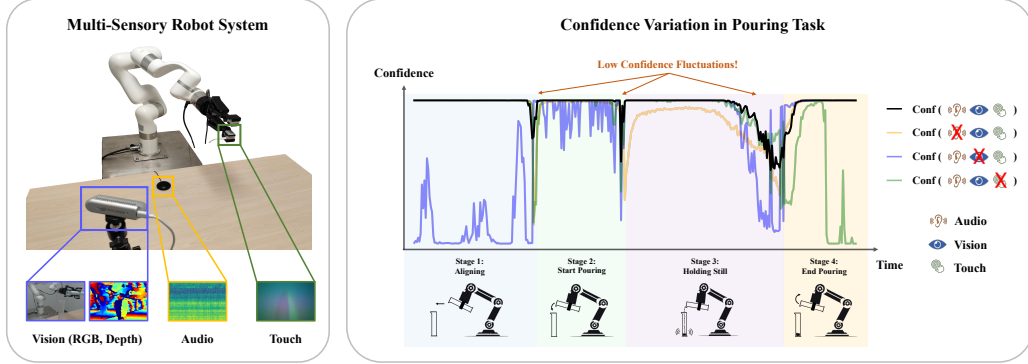


Figure 1: **An illustration for our multi-sensory robot system and a visualization of Modality Temporality in a multi-stage task: pouring.** We show confidence in action prediction when using the inputs of all modalities and selectively masking uni-modal features. Due to the changing importance of modalities, both evident inter-stage (coarse-grained) and minor intra-stage (fine-grained) changes in confidence are observed when masking uni-model features. The low confidence fluctuations near stage boundaries also reflect insufficient task stage understanding.

These indicate that modality importance undergoes both inter-stage changes and intra-stage adjustments. We summarize this as a challenge in multi-sensory imitation learning: *Modality Temporality*.

The key to addressing this challenge is understanding the current task stage and its concrete internal state, *i.e.*, coarse-to-fine stage comprehension. Multi-sensory features should be dynamically fused to meet the needs of the coarse-grained stage and adjust to the fine-grained internal state. However, most of the existing works that utilize multiple sensors [10, 11, 12, 13] essentially use static fusion like concatenating. They lack the adaptability to dynamic changes of modality importance in complex manipulation tasks. Some recent works [14, 9] attempt to use attention for dynamic fusion, but they still fail to break out the paradigm of fusion based solely on current observations. They neglect the importance of stage understanding in multi-sensory fusion.

In light of this key insight, we incorporate the stages divided by sub-goals into multi-sensory fusion. To perform coarse-to-fine stage understanding, we first encode current observations and historical actions into a state token and identify the current stage based on it. We then inject the stage information into the state token by weighting learnable stage tokens. For fusion, we propose a dynamic **Multi-Sensory** fusion method for **roBot** (MS-Bot) to allocate modality weights based on the state within current stage. Using cross-attention [15] with stage-injected state token as query, we dynamically select multi-sensory features of interest based on the fine-grained internal state. The dynamic allocation of attention score to feature tokens ensures effective fusion aligned with requirements.

To evaluate our MS-Bot method in the real world, we build a robot system that can perceive the environment with audio, visual and tactile sensors. We test it on two challenging manipulation tasks: *pouring*, where the robot needs to pour tiny beads of specific quality, and *peg insertion with keyway*, where robot needs to rotate the peg with a key to align the keyway during the insertion.

To summarize, our contributions are as follows:

- We summarize *Modality Temporality* as a key challenge and identify the coarse-to-fine stage comprehension as a crucial point to handle the changing modality importance in complex tasks.
- Based on the above insight, we propose a dynamic multi-sensory fusion method guided by the prediction of fine-grained state within the identified task stage.
- We build a multi-sensory robot system and evaluate our method on two challenging robotic manipulation tasks: pouring and peg insertion with keyway.

Experimental results show that MS-Bot better comprehends the fine-grained state in current task stage and dynamically adjusts modality attention as needed, outperforming prior methods in both tasks. We hope this work opens up a new perspective on multi-sensor fusion, inspiring future works.

2 Related Work

Multi-Sensory Robot Learning. Recent works have extensively integrated visual, auditory, and tactile sensors into robot systems. The two common visual modalities, RGB and depth, are widely combined and applied in grasping [16, 17, 18, 19], navigation [20, 21], and pose estimation [22, 23, 24] tasks. In recent years, the development of tactile sensors has sparked interest in the study of tactile modality. Fine-grained tactile data can assist in tasks such as grasping [25, 26, 10, 11], shape reconstruction [27, 28] and peg insertion [29, 13]. Audio modalities are typically applied in tasks such as pouring [9, 12], object tracking [30, 31], and navigation [32, 33, 34]. Some works even attempt to jointly use visual, audio, and tactile modalities to manipulate objects [35, 36, 9]. Based on these efforts, we further explore effective multi-sensory fusion in complex manipulation tasks.

Robot Learning for Multi-Stage Tasks. Complex multi-stage tasks have always been a focal point of research in robot manipulation. Previous works hierarchically decompose the multi-stage tasks, where upper-level models predict the next sub-goal, and lower-level networks predict specific actions based on the sub-goal. Following this paradigm, many hierarchical reinforcement learning [5, 37, 38, 39, 40, 41] and imitation learning [3, 4, 42, 43, 44] methods have demonstrated their effectiveness across various tasks. [6, 7, 8] use LLMs or VLMs to decompose long-horizon tasks. Recently, [45] introduces Chain-of-Thought into robot control. While these works primarily focus on uni-sensory scenarios, we aim to investigate the impact of stage changes on multi-sensory fusion.

Dynamic Multi-Modal Fusion. Dynamic multi-modal fusion essentially adapts the fusion process based on the input data by assigning different weights to the uni-modal features. A simple and effective way to assign weights is to train a gate network that scores based on the quality of uni-modal features [46, 47, 48, 49]. Another approach to assessing the quality of modalities and dynamically fusing them is uncertainty-based fusion [50, 51, 52]. With the introduction of the transformer [15], self-attention provides a natural mechanism to connect multi-modal signals [53]. Hence, attention-based fusion methods rapidly become a focal point of research [9, 54, 55]. However, these methods primarily perform dynamic fusion based solely on the inputs themselves, while we design dynamic fusion from the perspective of task stages in robotic scenarios.

3 Method

3.1 Challenges in Multi-Sensory Imitation learning

Imitation learning is a data-efficient robot learning algorithm where a robot learns a task by mimicking the behavior demonstrated by an expert. However, directly applying it to complex tasks with multi-sensory data could encounter issues, such as low confidence fluctuations and changing modality importance shown in Fig. 1. We attribute the causes of these issues to two key challenges:

Non-Markovity. Training data for imitation learning is typically derived from human demonstrations, usually collected through teleoperation devices. However, when humans manipulate robots, their actions are not solely based on data observed by robot sensors, but are also influenced by memory. This becomes particularly significant in more complex multi-stage tasks, as memory can provide cues about the task stages. Identifying the current stage solely based on current multi-sensory observations can be much more challenging. This challenge is not brought by the introduction of multiple sensors. Some works have already relaxed the Markov assumption and utilized action history as an additional input or leveraged sequence models to enhance performance [56, 57]. We identify the action history as a crucial cue for understanding the current stage and the fine-grained state within the stage, and use it to predict stages rather than directly predicting the next action.

Modality Temporality. In a complex manipulation task, the importance of various uni-modal features could change over stages. At timesteps from different stages, a particular modality may contribute significantly to the prediction, or serve as a supplementary role to the primary modality, or provide little useful information. Moreover, different states within a stage, such as the beginning and end, may also exhibit minor changes in modality importance. We distinguish them as coarse-grained and fine-grained importance change. However, previous works typically treated each modality equally and did not consider the issue of changing modality importance in method design.

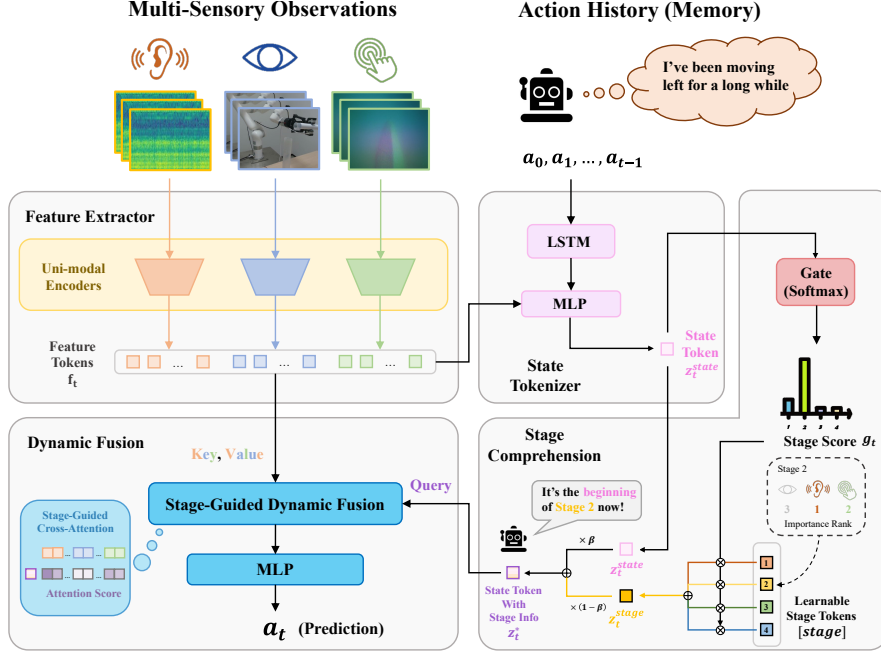


Figure 2: **The pipeline of our method MS-Bot.** It consists of four parts: feature extractor, state tokenizer, stage comprehension module, and dynamic fusion module.

This could lead to sub-optimal outcomes as uni-modal features with low quality could disrupt the overall prediction. On the contrary, we utilize task stage information to guide multi-sensory fusion, dynamically assigning weights of modalities based on the fine-grained state in the current stage.

3.2 Stage-Guided Dynamic Multi-Sensory Fusion for Robot (MS-Bot)

In this section, we introduce how our method MS-Bot addresses the above challenges. Considering *Non-Markovity*, we use action history as input to assist the model in assessing the current task state. For *Modality Temporality*, we establish a coarse-to-fine stage comprehension, decomposing the task state into coarse-grained stages and fine-grained states within a stage. Dynamic fusion guided by the fine-grained state within the current stage is employed to handle the changing modality importance.

To introduce the understanding of stages into the process of imitation learning, we incorporate task stages divided by sub-goals into the training samples. Given a sample (\mathbf{X}_t, a_t) at timestep t in a trajectory where $\mathbf{X}_t = \{X_t^1, X_t^2, \dots, X_t^M\}$ is the observation of M modalities and a_t is the corresponding action, a stage label $s_t \in \{1, 2, \dots, S\}$ is added, where S is the number of stages in the task divided by different sub-goals. The sample at timestep t is then represented as (\mathbf{X}_t, a_t, s_t) . Based on the sample with stage division, we then introduce the four main components of our method MS-Bot:

Feature extractor. This component consists of several uni-modal encoders. Each encoder takes a brief history of observations $X_t^m \in \mathbb{R}^{T \times H_m \times W_m \times C_m}$ of the modality m as input, where T is the timestep number of the brief history and H_m, W_m, C_m indicates the input shape of modality m . These observations are then encoded into feature tokens $\mathbf{f}_t \in \mathbb{R}^{M \times T \times d}$ where d denotes dimension.

State tokenizer. This component aims to encode the observations and action history $(a_1, a_2, \dots, a_{t-1})$ into a token that can represent the current state. Action history is similar to human memory and can help to indicate the current state within the whole task. We input the action history as a one-hot sequence into an LSTM [58], then concatenate the output with the feature tokens and encode them into a state token z_t^{state} through a Multi-Layer Perceptron (MLP).

Stage comprehension module. Merely using the state token alone is insufficient for achieving a comprehensive understanding of the task stages. This module aims to perform coarse-to-grained stage understanding by injecting stage information into the state token. For a task with S stages,

we use S learnable stage tokens $[stage_1], \dots, [stage_S]$ to represent each stage. Each stage token is initialized with the mean of all state tokens on samples within the stage after warmup. Next, we use a gate network (MLP) to predict the current stage, *i.e.*, coarse-grained stage comprehension. The S -dimensional output scores \mathbf{g}_t of the gate are softmax-normalized and multiplied by each of the S stage tokens, followed by summing up the results to obtain the stage token z_t^{stage} at timestep t via:

$$\mathbf{g} = (g_t^1, \dots, g_t^S) = \text{softmax}(MLP(z_t^{state})),$$

$$z_t^{stage} = \frac{1}{S} \sum_{j=1}^S (g_t^j \cdot [stage_j]). \quad (1)$$

We use a softmax score instead of one-hot encoding because the transition of stages is a continuous and gradual process. Finally, we compute the weighted sum of the state token z_t^{state} and the current stage token z_t^{stage} using a weight β to obtain the stage-injected state token z_t^* :

$$z_t^* = \beta \cdot z_t^{state} + (1 - \beta) \cdot z_t^{stage}. \quad (2)$$

Different from the old state token z_t^{state} , the new state token z_t^* represents the fine-grained state within a stage. In this case, z_t^{stage} is regarded as an anchor stage, while z_t^{state} can indicate the shift inside the stage, thereby achieving coarse-to-fine stage comprehension.

During the training process, we utilize stage labels to supervise the stage scores output by the gate net. Specifically, we penalize scores that do not correspond to the current stage. Additionally, for samples within a range near the stage boundaries, we do not penalize its score on the nearest stage, achieving a soft constraint effect. The loss for the gate net \mathcal{L}_{gate} on the i -th sample is as follows:

$$\mathcal{L}_{gate,i} = \sum_{j=1}^S (w_i^j \cdot g_i^j), \quad j \in \{1, 2, \dots, S\},$$

$$w_i^j = \begin{cases} 1, & (s_i = j) \text{ or } (\exists k, |k - i| \leq \gamma, s_i \neq s_k), \\ 0, & \text{otherwise,} \end{cases} \quad (3)$$

where k indicates a nearby sample in the same trajectory, s_i and s_k represent stage labels and γ is a hyper-parameter used to determine the range near the stage boundaries. This soft constraint allows for smoother variations in the predicted stage scores.

Dynamic fusion module. Due to variations in modality importance across different stages and the minor importance changes within a stage, we aim for the model to dynamically select the modalities of interest based on the fine-grained state within the current stage. We use the state token with stage information z_t^* as query, and the feature tokens \mathbf{f}_t as key and value for cross-attention [15]. This mechanism dynamically allocates attention scores to feature tokens based on the state token z_t^* , thereby achieving dynamic multi-sensory fusion over time. It also contributes to a more stable multi-sensory fusion, as the anchor z_t^{stage} changes minimally within a stage. The features from all modalities are integrated into a fusion token z_t^{fus} based on the current stage’s requirements. Finally, the fusion token z_t^{fus} is fed into an MLP to predict the next action a_t .

In order to prevent the model from simply memorizing the actions corresponding to attention score patterns, we also introduce *random attention blur* mechanism. For each input, we replace the attention scores on feature tokens with the same average value $\frac{1}{M \times T}$ with a probability p . We encourage the model to simultaneously learn both stage information and feature information in the fusion token.

The loss during training consists of two components: the classification loss for action prediction \mathcal{L}_{cls} and the penalty on the scores of the gate network \mathcal{L}_{gate} . The total training loss \mathcal{L} is as follows:

$$\mathcal{L} = \mathcal{L}_{cls} + \lambda \mathcal{L}_{gate}, \quad (4)$$

where λ is a hyper-parameter to control the intensity of the score penalty.

4 Experiments

In this section, we explore the answers to the following questions through experiments: **(Q1)** Compared to previous methods, how much performance improvement does stage-guided dynamic multi-sensory fusion provide? **(Q2)** Why is stage-based dynamic fusion superior to fusion based solely



Figure 3: An illustration of the task setup for peg insertion with keyway and pouring task.

on the input itself? How does stage comprehension help? **(Q3)** Can stage-guided dynamic fusion maintain its advantage over static fusion in out-of-distribution settings?

4.1 Task Setup

Pouring. For the pouring task, the robot needs to pour tiny steel beads of specific quality from the cylinder in the hand into another cylinder. This task consists of four stages [41]: 1) *Aligning*, where the robot needs to move a graduated cylinder containing beads and align it with the target cylinder, 2) *Start Pouring*, where the robot rotates the end effector to pour out the beads at an appropriate speed, 3) *Holding Still*, where the robot maintains its posture to continue pouring out beads steadily, and 4) *End Pouring*, where the robot rotates the end effector at the appropriate time to stop the flow of beads. The initial mass of the beads is 90g/120g, while the target mass for pouring out is 40g/60g, both indicated by prompts. We use audio, vision (RGB) and touch modalities in this task.

Peg Insertion with Keyway. This task is an upgraded version of peg insertion, where the robot needs to align a peg with a key to the keyway on the base by rotating and then insert the peg fully. The alignment primarily relies on tactile feedback, as the camera cannot observe inside the hole. This task consists of three stages: 1) *First Insertion*, where the robot aligns the peg with the hole and inserts it until the key collides with the base, 2) *Rotating*, where the robot aligns the key with the keyway on the base by rotating the peg based on tactile feedback, and 3) *Second Insertion*, where the robot further inserts the peg to the bottom. We use RGB, depth and touch modalities in this task.

Fig. 3 briefly shows the two tasks. See Sec. A for a more detailed task setup for both tasks.

4.2 Physical Setup and Experimental Details

Robot Setup and Data Collection. We use a 6-DoF UFACTORY xArm 6 robotic arm equipped with a Robotiq 2F-140 gripper in all experiments. For both tasks, we generate Cartesian space displacement commands at a policy frequency of 5 Hz. We use an Intel RealSense D435i camera to record visual data (RGB and depth) with a resolution of 640×480 at a frequency of 30Hz. We use a desktop microphone to record audio at a sampling rate of 44.1kHz. Tactile data are recorded by a GelSight [1] mini sensor with a resolution of 400×300 and a frequency of 15Hz.

Baselines. We compare our method with three baselines in both tasks: 1) the concat model which directly concatenates all the uni-modal features, 2) Du et al. [59] that uses LSTM to fuse the uni-modal features and the additional proprioceptive information, and 3) MULSA [9] which fuses the uni-modal features via self-attention. We also compare our method with two variants in each task: MS-Bot (w/o A/D) and MS-Bot (w/o T/R) where one modality in the task is removed (audio and touch for pouring while depth and RGB for peg insertion).

4.3 How much improvement does stage-guided dynamic multi-sensory fusion provide?

To evaluate how much improvement MS-Bot brings compared to previous methods, we conduct comparative experiments on the two tasks. For each task (considering changing initial weight and

Methods	Pouring Initial (g)		Pouring Target (g)		Insertion Success Rate
	90	120	40	60	
Concat	4.80 ± 1.14	8.72 ± 2.39	8.40 ± 2.21	6.54 ± 2.14	5/10
Du et al. [59]	4.32 ± 1.22	7.79 ± 2.11	8.54 ± 2.04	6.26 ± 2.01	5/10
MULSA [9]	3.05 ± 1.01	6.42 ± 1.98	7.12 ± 1.66	4.19 ± 1.24	6/10
MS-Bot (w/o A/D)	10.55 ± 2.25	15.76 ± 3.18	15.64 ± 3.25	13.02 ± 3.13	5/10
MS-Bot (w/o T/R)	8.32 ± 1.74	12.99 ± 3.04	13.02 ± 3.13	9.77 ± 1.65	5/10
MS-Bot	1.60 ± 1.10	5.58 ± 1.79	6.48 ± 1.55	1.80 ± 0.95	8/10

Table 1: Comparison of performance on pouring (mean \pm standard deviation) and peg insertion with keyway (**Q1**). A: Audio, D: Depth, T: Touch, R: RGB.

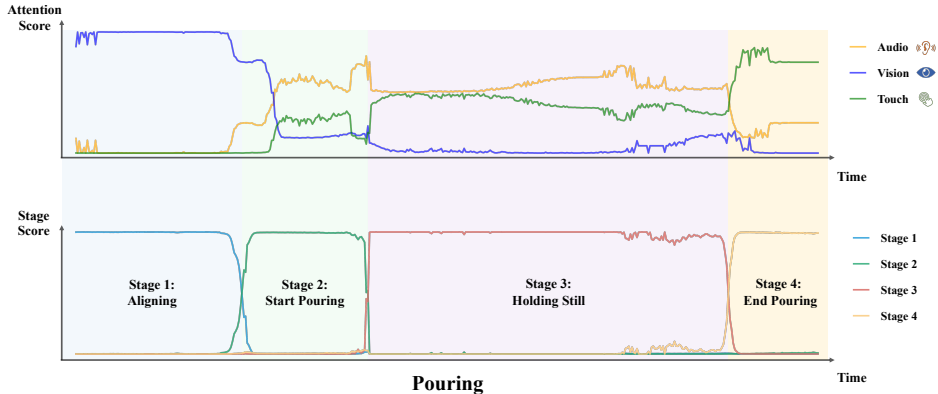


Figure 4: Visualization of the aggregated attention scores for each modality and stage scores in the pouring task (**Q2**). At each timestep, we average the attention scores on all feature tokens of each modality separately. The stage score is the output of the gate network after softmax normalization.

target weight as two tasks), we collect 30 human demonstrations and use 20 of them as the training set, leaving the remaining 10 as the validation set. For both tasks, we conduct 10 real-world tests.

Tab. 1 shows the performance of baselines and our method on two tasks. Our MS-Bot outperforms all baselines in both the pouring task and peg insertion task, demonstrating the superiority of stage-guided dynamic multi-sensory fusion. Despite using proprioceptive information, the improvement of Du et al. [59] over the concat model is minimal, indicating that the inadequate understanding of the coarse-grained and fine-grained modality importance change is the critical barrier. Moreover, these two baselines exhibit delayed responses to stage changes, causing excessive pouring in the pouring task and misalignment in the insertion task. MULSA employs self-attention for dynamic fusion, but its lack of a thorough stage understanding prevents it from fully leveraging the advantages of dynamic fusion. Our MS-Bot achieves the best performance by better allocating modality weights during fusion based on the understanding of the fine-grained state within the current stage (**Q1**).

The notable performance drop when one modality is removed indicates that each modality contributes significantly. In the pouring task, removing audio and tactile modalities degrades the model’s ability to assess the quality of poured beads. The impact is more significant when the audio modality is removed, corresponding to the notable decrease in confidence observed after masking the audio features in Stage 3 as shown in Fig. 1. In the peg insertion task, removing either the RGB or depth modality will degrade the alignment performance. It is worth noting that even without the assistance of the depth or RGB modality, our MS-Bot achieves an equal success rate compared to concat model and Du et al. [59], demonstrating the superiority of stage comprehension and dynamic fusion (**Q1**).

4.4 Why is stage-based dynamic fusion superior to fusion based solely on the input itself?

To better understand the working principles of MS-Bot and the reasons for performance improvement, we visualize the attention scores of each modality and the scores of the stage tokens. As shown in Fig. 4, MS-Bot accurately predicts the rapid stage changes. Due to the model’s coarse-

Methods	Overall
MS-Bot	3.88 ± 2.55
- Attention Blur	4.01 ± 2.54
- Stage Comprehend	4.62 ± 2.34
- State Tokenizer	5.19 ± 2.21

Table 2: Impact of each component of our method in pouring task (Q2). ‘-’ indicates further removing the module from the model in the previous line. Overall error on all settings is shown.

Methods	Pouring Color	Insertion	
		Color	Mess
Concat	8.75 ± 2.02	2/10	3/10
Du et al. [59]	8.04 ± 1.85	3/10	3/10
MULSA [9]	5.56 ± 1.13	4/10	5/10
MS-Bot	2.41 ± 1.47	6/10	6/10

Table 3: Comparison of models in scenes with visual distractors (Q3). ‘Color’ indicates the color of the cylinder or the base is changed and ‘Mess’ indicates there are some clutter near the base.

to-fine task stage comprehension, the aggregated attention scores of the three modalities remain relatively stable, exhibiting clear inter-stage changes and minor intra-stage adjustment (Q2). Vision initially dominates during the first stage. Upon entering the second stage, the model begins to use the sound of beads to find the appropriate angle and distinguishes this stage from the last stage through touch. During the holding still stage, the model primarily relies on audio and tactile deformation to assess the mass of beads. In the final stage, the model discerns the completion of the pouring based on tactile deformation and the rise of tactile attention scores is observed. The changes in attention scores for the peg insertion task (see Fig. 9b) also follow a similar pattern, demonstrating the validity and explainability of the proposed stage-guided dynamic multi-sensory fusion (Q2).

We also conduct ablation experiments on the pouring task to examine the contributions of each module, as shown in Tab. 2. We observe significant contributions to performance from both the state tokenizer and the stage comprehension module (Q2). These two modules provide critical task state understanding and coarse-to-fine stage comprehension. In addition, removing random attention blur results in a minor performance decline. The complete ablation results are located in Tab. 4.

4.5 Can stage-guided dynamic fusion maintain its advantage in out-of-distribution settings?

To verify the generalization of our method to distractors, we conduct experiments with visual distractors in both tasks. In the pouring task, the cylinder’s color was changed from white to red. For the peg insertion task, alterations included changing the base color from black to green (referred to as ‘Color’), and placing clutter around the base (referred to as ‘Mess’). As shown in Tab. 3, our method exhibits minimal impact across various scenarios with distractors and consistently maintains performance superiority, demonstrating the generalizability of stage comprehension (Q1, Q3). Two baseline methods, the concat model and Du et al. [59], suffer from performance degradation when the visual modality (including RGB and depth) is disturbed. Due to their lack of ability to understand the stages and dynamically adjust modality weights, even when information from visual modality is not needed in a particular stage, the model is still affected by distractors. This leads to unsatisfying performance. Our method dynamically allocates modality weights based on the understanding of the current stage, thereby reducing the impact of visual distractors on the fused features (Q2, Q3). Consequently, it outperforms the two baseline methods using static fusion and the MULSA that solely relies on the current observation for dynamic fusion.

5 Conclusion and Limitations

We present MS-Bot, a stage-guided dynamic multi-sensory fusion method with coarse-to-fine stage comprehension, which dynamically focuses on relevant modalities based on the state within the current stage. Evaluated on the challenging pouring and peg insertion with keyway tasks, our method outperforms previous static and dynamic fusion methods. We find that stage comprehension can be generalized to scenes with various distractors, reducing the impact of interference from one modality on multi-sensory fusion. We hope our work can inspire future work on multi-sensory robots.

Limitations: The stage division in this work involves human factors. A potential improvement could involve using unsupervised algorithms or leveraging LLMs for stage labeling. Additionally, proposing more challenging multi-sensory manipulation tasks would be interesting for future works.

References

- [1] W. Yuan, S. Dong, and E. H. Adelson. Gelsight: High-resolution robot tactile sensors for estimating geometry and force. *Sensors*, 17(12):2762, 2017.
- [2] P. Schmidt, J. Scaife, M. Harville, S. Liman, and A. Ahmed. Intel® realsense™ tracking camera t265 and intel® realsense™ depth camera d435-tracking and depth. *Real Sense*, 2019.
- [3] J. Luo, C. Xu, X. Geng, G. Feng, K. Fang, L. Tan, S. Schaal, and S. Levine. Multi-stage cable routing through hierarchical imitation learning. *IEEE Transactions on Robotics*, 2024.
- [4] P. Sharma, D. Pathak, and A. Gupta. Third-person visual imitation learning via decoupled hierarchical controller. *Advances in Neural Information Processing Systems*, 32, 2019.
- [5] O. Nachum, S. S. Gu, H. Lee, and S. Levine. Data-efficient hierarchical reinforcement learning. *Advances in neural information processing systems*, 31, 2018.
- [6] S. Belkhale, T. Ding, T. Xiao, P. Sermanet, Q. Vuong, J. Tompson, Y. Chebotar, D. Dwibedi, and D. Sadigh. Rt-h: Action hierarchies using language. *arXiv preprint arXiv:2403.01823*, 2024.
- [7] W. Huang, F. Xia, T. Xiao, H. Chan, J. Liang, P. Florence, A. Zeng, J. Tompson, I. Mordatch, Y. Chebotar, et al. Inner monologue: Embodied reasoning through planning with language models. In *Conference on Robot Learning*, pages 1769–1782. PMLR, 2023.
- [8] P. Sermanet, T. Ding, J. Zhao, F. Xia, D. Dwibedi, K. Gopalakrishnan, C. Chan, G. Dulac-Arnold, N. J. Joshi, P. Florence, et al. Robovqa: Multimodal long-horizon reasoning for robotics. In *2nd Workshop on Language and Robot Learning: Language as Grounding*, 2023.
- [9] H. Li, Y. Zhang, J. Zhu, S. Wang, M. A. Lee, H. Xu, E. Adelson, L. Fei-Fei, R. Gao, and J. Wu. See, hear, and feel: Smart sensory fusion for robotic manipulation. In *Conference on Robot Learning*, pages 1368–1378. PMLR, 2023.
- [10] Y. Han, K. Yu, R. Batra, N. Boyd, C. Mehta, T. Zhao, Y. She, S. Hutchinson, and Y. Zhao. Learning generalizable vision-tactile robotic grasping strategy for deformable objects via transformer. *arXiv preprint arXiv:2112.06374*, 2021.
- [11] I. Guzey, B. Evans, S. Chintala, and L. Pinto. Dexterity from touch: Self-supervised pre-training of tactile representations with robotic play. In *Conference on Robot Learning*, pages 3142–3166. PMLR, 2023.
- [12] H. Liang, C. Zhou, S. Li, X. Ma, N. Hendrich, T. Gerkmann, F. Sun, M. Stoffel, and J. Zhang. Robust robotic pouring using audition and haptics. In *2020 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 10880–10887. IEEE, 2020.
- [13] L. Fu, H. Huang, L. Berscheid, H. Li, K. Goldberg, and S. Chitta. Safe self-supervised learning in real of visuo-tactile feedback policies for industrial insertion. In *2023 IEEE International Conference on Robotics and Automation (ICRA)*, pages 10380–10386. IEEE, 2023.
- [14] C. Sferrazza, Y. Seo, H. Liu, Y. Lee, and P. Abbeel. The power of the senses: Generalizable manipulation from vision and touch through masked multimodal learning. 2023.
- [15] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- [16] H.-S. Fang, C. Wang, M. Gou, and C. Lu. Graspnet-1billion: A large-scale benchmark for general object grasping. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 11444–11453, 2020.

- [17] S. Yu, D.-H. Zhai, Y. Xia, H. Wu, and J. Liao. Se-resunet: A novel robotic grasp detection method. *IEEE Robotics and Automation Letters*, 7(2):5238–5245, 2022.
- [18] Y. Song, J. Wen, D. Liu, and C. Yu. Deep robotic grasping prediction with hierarchical rgb-d fusion. *International Journal of Control, Automation and Systems*, 20(1):243–254, 2022.
- [19] R. Qin, H. Ma, B. Gao, and D. Huang. Rgb-d grasp detection via depth guided learning with cross-modal attention. In *2023 IEEE International Conference on Robotics and Automation (ICRA)*, pages 8003–8009. IEEE, 2023.
- [20] L. Wellhausen, R. Ranftl, and M. Hutter. Safe robot navigation via multi-modal anomaly detection. *IEEE Robotics and Automation Letters*, 5(2):1326–1333, 2020.
- [21] C. Huang, O. Mees, A. Zeng, and W. Burgard. Visual language maps for robot navigation. In *2023 IEEE International Conference on Robotics and Automation (ICRA)*, pages 10608–10615. IEEE, 2023.
- [22] C. Xu, J. Chen, M. Yao, J. Zhou, L. Zhang, and Y. Liu. 6dof pose estimation of transparent object from a single rgb-d image. *Sensors*, 20(23):6790, 2020.
- [23] M. Tian, L. Pan, M. H. Ang, and G. H. Lee. Robust 6d object pose estimation by learning rgb-d features. In *2020 IEEE International Conference on Robotics and Automation (ICRA)*, pages 6218–6224. IEEE, 2020.
- [24] Y. He, H. Huang, H. Fan, Q. Chen, and J. Sun. Ffb6d: A full flow bidirectional fusion network for 6d pose estimation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 3003–3013, 2021.
- [25] S. Cui, R. Wang, J. Wei, J. Hu, and S. Wang. Self-attention based visual-tactile fusion learning for predicting grasp outcomes. *IEEE Robotics and Automation Letters*, 5(4):5827–5834, 2020.
- [26] S. Cui, R. Wang, J. Wei, F. Li, and S. Wang. Grasp state assessment of deformable objects using visual-tactile fusion perception. In *2020 IEEE International Conference on Robotics and Automation (ICRA)*, pages 538–544. IEEE, 2020.
- [27] E. Smith, R. Calandra, A. Romero, G. Gkioxari, D. Meger, J. Malik, and M. Drozdal. 3d shape reconstruction from vision and touch. *Advances in Neural Information Processing Systems*, 33: 14193–14206, 2020.
- [28] Y. Wang, W. Huang, B. Fang, F. Sun, and C. Li. Elastic tactile simulation towards tactile-visual perception. In *Proceedings of the 29th ACM International Conference on Multimedia*, pages 2690–2698, 2021.
- [29] M. A. Lee, Y. Zhu, K. Srinivasan, P. Shah, S. Savarese, L. Fei-Fei, A. Garg, and J. Bohg. Making sense of vision and touch: Self-supervised learning of multimodal representations for contact-rich tasks. In *2019 International Conference on Robotics and Automation (ICRA)*, pages 8943–8950. IEEE, 2019.
- [30] J. Wilson and M. C. Lin. Avot: Audio-visual object tracking of multiple objects for robotics. In *2020 IEEE International Conference on Robotics and Automation (ICRA)*, pages 10045–10051. IEEE, 2020.
- [31] X. Qian, Z. Wang, J. Wang, G. Guan, and H. Li. Audio-visual cross-attention network for robotic speaker tracking. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 31:550–562, 2022.
- [32] C. Gan, Y. Zhang, J. Wu, B. Gong, and J. B. Tenenbaum. Look, listen, and act: Towards audio-visual embodied navigation. In *2020 IEEE International Conference on Robotics and Automation (ICRA)*, pages 9701–9707. IEEE, 2020.

- [33] C. Chen, U. Jain, C. Schissler, S. V. A. Gari, Z. Al-Halah, V. K. Ithapu, P. Robinson, and K. Grauman. Soundspaces: Audio-visual navigation in 3d environments. In *Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part VI 16*, pages 17–36. Springer, 2020.
- [34] A. Younes, D. Honerkamp, T. Welschhold, and A. Valada. Catch me if you hear me: Audio-visual navigation in complex unmapped environments with moving sounds. *IEEE Robotics and Automation Letters*, 8(2):928–935, 2023.
- [35] R. Gao, Y.-Y. Chang, S. Mall, L. Fei-Fei, and J. Wu. Objectfolder: A dataset of objects with implicit visual, auditory, and tactile representations. In *Conference on Robot Learning*, pages 466–476. PMLR, 2022.
- [36] R. Gao, Z. Si, Y.-Y. Chang, S. Clarke, J. Bohg, L. Fei-Fei, W. Yuan, and J. Wu. Objectfolder 2.0: A multisensory object dataset for sim2real transfer. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10598–10608, 2022.
- [37] X. Yang, Z. Ji, J. Wu, Y.-K. Lai, C. Wei, G. Liu, and R. Setchi. Hierarchical reinforcement learning with universal policies for multistep robotic manipulation. *IEEE Transactions on Neural Networks and Learning Systems*, 33(9):4727–4741, 2021.
- [38] B. Beyret, A. Shafti, and A. A. Faisal. Dot-to-dot: Explainable hierarchical reinforcement learning for robotic manipulation. In *2019 IEEE/RSJ International Conference on intelligent robots and systems (IROS)*, pages 5014–5019. IEEE, 2019.
- [39] M. M. Botvinick. Hierarchical reinforcement learning and decision making. *Current opinion in neurobiology*, 22(6):956–962, 2012.
- [40] Z. Yang, K. Merrick, L. Jin, and H. A. Abbass. Hierarchical deep reinforcement learning for continuous action control. *IEEE transactions on neural networks and learning systems*, 29(11):5174–5184, 2018.
- [41] D. Zhang, Q. Li, Y. Zheng, L. Wei, D. Zhang, and Z. Zhang. Explainable hierarchical imitation learning for robotic drink pouring. *IEEE Transactions on Automation Science and Engineering*, 19(4):3871–3887, 2021.
- [42] F. Xie, A. Chowdhury, M. De Paolis Kaluza, L. Zhao, L. Wong, and R. Yu. Deep imitation learning for bimanual robotic manipulation. *Advances in neural information processing systems*, 33:2327–2337, 2020.
- [43] B. Li, J. Li, T. Lu, Y. Cai, and S. Wang. Hierarchical learning from demonstrations for long-horizon tasks. In *2021 IEEE International Conference on Robotics and Automation (ICRA)*, pages 4545–4551. IEEE, 2021.
- [44] K. Hakhmaneshi, R. Zhao, A. Zhan, P. Abbeel, and M. Laskin. Hierarchical few-shot imitation with skill transition models. In *International Conference on Learning Representations*, 2021.
- [45] Z. Jia, F. Liu, V. Thumhuri, L. Chen, Z. Huang, and H. Su. Chain-of-thought predictive control. *arXiv preprint arXiv:2304.00776*, 2023.
- [46] J. Arevalo, T. Solorio, M. Montes-y Gómez, and F. A. González. Gated multimodal units for information fusion. *arXiv preprint arXiv:1702.01992*, 2017.
- [47] J. Kim, J. Koh, Y. Kim, J. Choi, Y. Hwang, and J. W. Choi. Robust deep multi-modal learning based on gated information fusion network. In *Asian Conference on Computer Vision*, pages 90–106. Springer, 2018.
- [48] S. Wang, J. Zhang, and C. Zong. Learning multimodal word representation via dynamic fusion methods. In *Proceedings of the AAAI conference on artificial intelligence*, volume 32, 2018.

- [49] J. Arevalo, T. Solorio, M. Montes-y Gomez, and F. A. González. Gated multimodal networks. *Neural Computing and Applications*, 32:10209–10228, 2020.
- [50] Z. Han, F. Yang, J. Huang, C. Zhang, and J. Yao. Multimodal dynamics: Dynamical fusion for trustworthy multimodal classification. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 20707–20717, 2022.
- [51] Q. Zhang, H. Wu, C. Zhang, Q. Hu, H. Fu, J. T. Zhou, and X. Peng. Provable dynamic fusion for low-quality multimodal data. In *International conference on machine learning*, pages 41753–41769. PMLR, 2023.
- [52] M. K. Tellamekala, S. Amiriparian, B. W. Schuller, E. André, T. Giesbrecht, and M. Valstar. Cold fusion: Calibrated and ordinal latent distribution fusion for uncertainty-aware multimodal emotion recognition. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2023.
- [53] A. Nagrani, S. Yang, A. Arnab, A. Jansen, C. Schmid, and C. Sun. Attention bottlenecks for multimodal fusion. *Advances in neural information processing systems*, 34:14200–14213, 2021.
- [54] S. Li, C. Zou, Y. Li, X. Zhao, and Y. Gao. Attention-based multi-modal fusion network for semantic scene completion. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 11402–11409, 2020.
- [55] V. Chudasama, P. Kar, A. Gudmalwar, N. Shah, P. Wasnik, and N. Onoe. M2fnet: Multi-modal fusion network for emotion recognition in conversation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4652–4661, 2022.
- [56] P.-L. Guhur, S. Chen, R. G. Pinel, M. Tapaswi, I. Laptev, and C. Schmid. Instruction-driven history-aware policies for robotic manipulations. In *Conference on Robot Learning*, pages 175–187. PMLR, 2023.
- [57] X. Li, M. Liu, H. Zhang, C. Yu, J. Xu, H. Wu, C. Cheang, Y. Jing, W. Zhang, H. Liu, et al. Vision-language foundation models as effective robot imitators. In *The Twelfth International Conference on Learning Representations*, 2023.
- [58] S. Hochreiter and J. Schmidhuber. Long short-term memory. *Neural computation*, 9(8):1735–1780, 1997.
- [59] M. Du, O. Y. Lee, S. Nair, and C. Finn. Play it by ear: Learning skills amidst occlusion through audio-visual imitation learning. *arXiv preprint arXiv:2205.14850*, 2022.
- [60] K. He, X. Zhang, S. Ren, and J. Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- [61] D. P. Kingma and J. Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.

Appendix

A Details of the Task Setup

In Sec. 4.1 of the main paper, we briefly introduced the basic information of the pouring task and the peg insertion with keyway task, including the task objectives and stage divisions. In this section, we provide a more detailed introduction to the setup of these two tasks. We control the robot arm through a keyboard to complete the tasks and collect human demonstrations.

A.1 Pouring

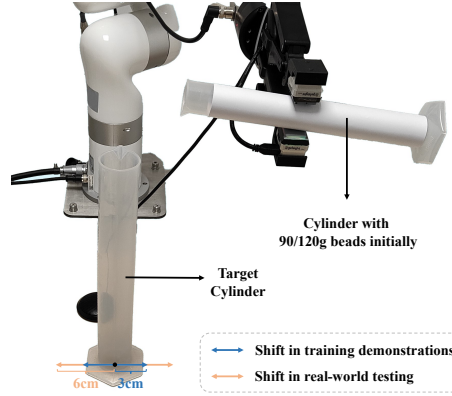


Figure 5: **Illustration of the pouring task.** We randomly shift the fixed target cylinder sideways by $0 \sim 3\text{cm}$ (indicated by the blue arrow) in training demonstrations, and shift by $0 \sim 6\text{cm}$ (indicated by the orange arrow) during testing.

Setup details. For the pouring task, the robot needs to pour tiny steel beads of specific quality from the cylinder in the hand into another cylinder. In the demonstrations, we randomly shift the fixed target cylinder sideways by $0 \sim 3\text{cm}$, while during testing, this range expands to $0 \sim 6\text{cm}$, as illustrated in Fig. 5. Following the previous work [9], we use small beads with a diameter of 1mm to simulate liquids. The initial mass of the beads is $90\text{g}/120\text{g}$, while the target mass for pouring out is $40\text{g}/60\text{g}$, both indicated by prompts. Since the camera cannot capture the interior of the target cylinder, other modalities are needed to assess whether the poured-out quantity meets the target. Hence, we use vision (RGB), audio and touch modalities in this task.

Robot action space. In this task, the robot can act in a 2-dimensional action space along the axis x and ϕ , where x represents the horizontal movement and ϕ represents the rotation of the gripper. The action step size is $\Delta x = 0.5\text{mm}$ and $\Delta\phi = 0.12^\circ$. There are a total of 5 possible actions ($\pm\Delta x$, $\pm\Delta\phi$ and 0), corresponding to the two directions of the two dimensions of (x, ϕ) and holding still.

Stage division. This task consists of four stages [41]: 1) *Aligning*, where the robot needs to move a graduated cylinder containing beads and align it with the target cylinder, 2) *Start Pouring*, where the robot rotates the end effector to pour out the beads at an appropriate speed, 3) *Holding Still*, where the robot maintains its posture to continue pouring out beads steadily, and 4) *End Pouring*, where the robot rotates the end effector at the appropriate time to stop the flow of beads. In trajectories, we consider the timesteps of the first downward rotation of the gripper ($-\Delta\phi$), the first holding still after rotation, and the first upward rotation of the gripper ($+\Delta\phi$) as stage transition points.

A.2 Peg Insertion with Keyway.

Setup details. This task is an upgraded version of peg insertion, where the robot needs to first align a peg with a key to the keyway on the base by rotating, and then insert the peg fully. The alignment between the key and the keyway in this task primarily relies on tactile feedback, as the

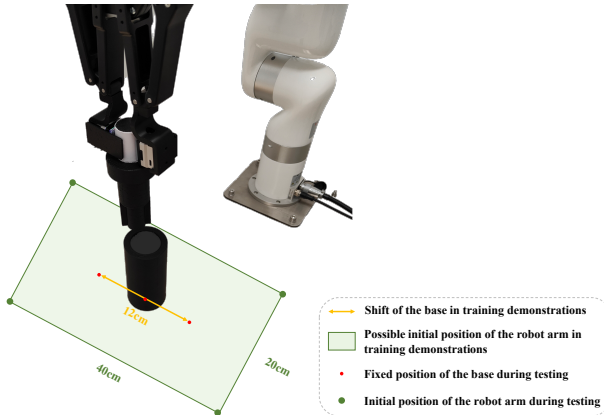


Figure 6: **Illustration of the peg insertion with keyway task.** We randomly shift the fixed base along a 12cm-long parallel line on the desktop (the yellow arrow), and randomly initialize the position of the robot arm inside a 40cm \times 20cm rectangular area (the green rectangle) in training demonstrations. During testing, we fix the position of the base (the red points) and the robot arm (the green points) to several pre-defined points.

camera cannot observe inside the hole. Hence, we use RGB, depth and touch modalities in this task. Considering generalization, we randomly fix the base at any position along a 12cm-long parallel line on the desktop in demonstrations, as illustrated in Fig. 6. The robot arm holding the peg can also be initialized inside a 40cm \times 20cm rectangular area around the base. During testing, to ensure fairness, the positions of the base and the robot arm are several pre-defined points.

Robot action space. In this task, the robot arm can move on the three axes x, y, z of Cartesian coordinate, where x, y represents the horizontal movement and z represents the vertical movement. The gripper can also rotate along axis ϕ to align the key with the keyway. Since the vertical movement of the robot arm ($-\Delta z$) and the rotation of the gripper ($+\Delta\phi$) are both unidirectional, there are a total of 7 possible actions ($\pm\Delta x, \pm\Delta y, -\Delta z, +\Delta\phi$ and 0).

Stage division. This task consists of three stages: 1) *First Insertion*, where the robot aligns the peg with the hole and inserts it until the key collides with the base, 2) *Rotating*, where the robot aligns the key with the keyway on the base by rotating the peg based on tactile feedback, and 3) *Second Insertion*, where the robot further inserts the peg to the bottom. Similar to the pouring task, we consider the timesteps of the first gripper rotation ($+\Delta\phi$) and the first downward movement ($-\Delta z$) after rotation as stage transition points.

A.3 Generalization Experiments with Distractors

To verify the generalization of our framework to distractors in the environment, we conduct experiments with visual distractors on both tasks. For the pouring task, we change the color of the cylinder from white to red. As for the peg insertion task, we respectively change the color of the base from black to green, and scatter some clutter around the base. These task settings are illustrated in Fig. 7. The distractors only exist during testing. Besides introducing distractors, the settings for these tasks remain consistent with the main experiments.

B Implementation Details

Following [9], we resize visual and tactile frames to 140×105 and randomly crop them to 128×96 during training. We also use color jitter for image augmentation. For audio modality, we resample the wave signal at 16kHz and generate a 64×50 mel-spectrogram through short-time Fourier transform, with 400 FFT windows, hop length of 160, and mel bin of 64. We employ ResNet-18 [60] network as the uni-modal encoder. Each encoder takes a brief history of observations spanning

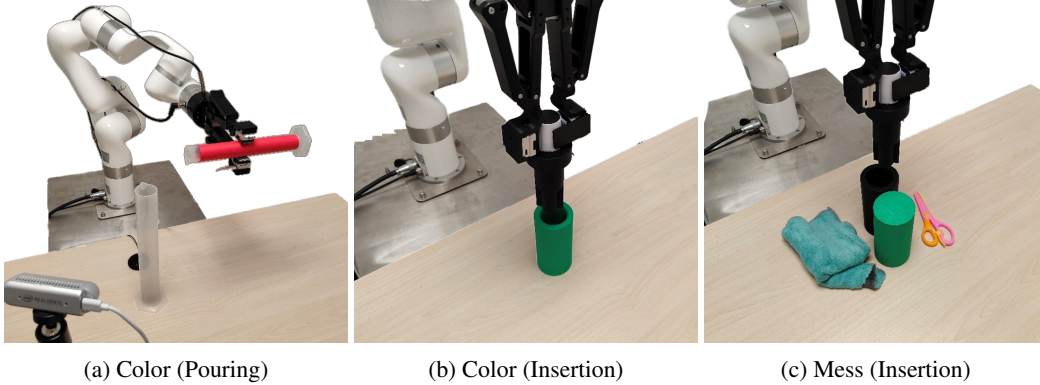


Figure 7: **Illustration of tasks with distractors.** For the pouring task, we change the color of the cylinder from white to red (denoted as “Color (Pouring)”). For the peg insertion with keyway task, we respectively change the color of the base from black to green (denoted as “Color (Insertion)”), and scatter some clutter around the base (denoted as “Mess (Insertion)”).

$T = 6$ timesteps. We train all the models using Adam [61] with a learning rate of 10^{-4} for 75 epochs. We perform linear learning rate decay every two epochs, with a decay factor of 0.9.

For action history, we use a buffer of length 200 to store actions. Each action is encoded using one-hot encoding. Action sequences shorter than 200 are padded with zeros. For both tasks, we consider the 15 timesteps near the stage transition point as the soft constraint range ($\gamma = 15$). We set $\lambda = 5.0$ for both tasks to control the intensity of the penalty. For the learnable stage token $[stage_i]$, we initialize it with the mean of all state tokens on samples within the i -th stage after warmup training for 1 epoch. We use $\beta = 0.5$ for the calculation of the stage-injected state token z_t^* . Moreover, to prevent gradients from becoming too large, we also truncated the gradients of the stage score penalty, restricting them to solely influencing the gate network.

C Random Attention Blur

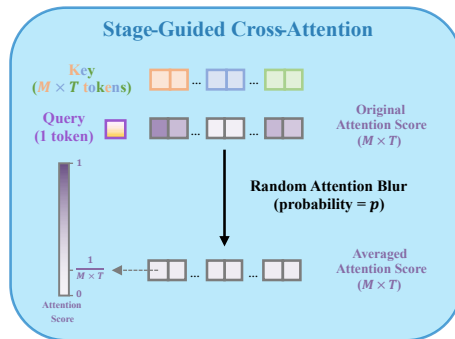


Figure 8: **Illustration of random attention blur in the stage-guided dynamic fusion module.** We randomly replace the attention scores on all feature tokens with the same average value $\frac{1}{M \times T}$ with a probability p , which is a hyper-parameter.

In order to prevent the model from simply memorizing the actions corresponding to attention score patterns, we introduce a random attention blur mechanism to the stage-guided dynamic fusion module. For each input, we replace the attention scores on all feature tokens with the same average value $\frac{1}{M \times T}$ with a probability p , where M is the number of modalities and T is the timestep number of the brief observation history, as illustrated in Fig. 8. We set $p = 0.25$ in both tasks.

We introduce this mechanism due to the potential overfitting issue in the model, where the policy head (MLP in the dynamic fusion module) learns the correspondence between the distribution of

attention scores and actions. For instance, when using the trained MS-Bot model (without random attention blur) to complete pouring tasks, manually increasing the attention scores on tactile feature tokens invariably leads the model to predict the next action as upward rotation ($+\Delta\phi$), regardless of the current stage of the task. This phenomenon suggests that the stage comprehension module in the model partially assumes the role of action prediction rather than focusing solely on stage understanding. Therefore, randomly blurring attention scores can compel the policy head to focus on the information from the feature tokens and better decouple the stage comprehension module from the dynamic fusion module.

D Comparison of Attention Scores between MULSA and MS-BOT

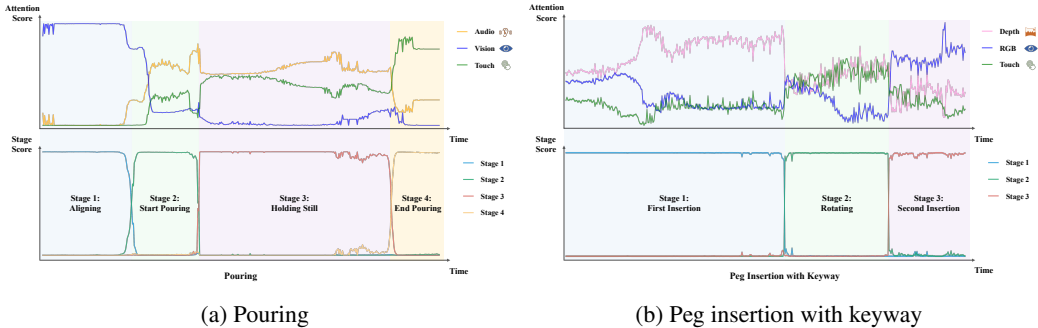


Figure 9: **Visualization of the aggregated attention scores for each modality and stage scores of MS-Bot in both tasks.** At each timestep, we average the attention scores on all feature tokens of each modality separately. The stage score is the softmax normalized output of the gate network.

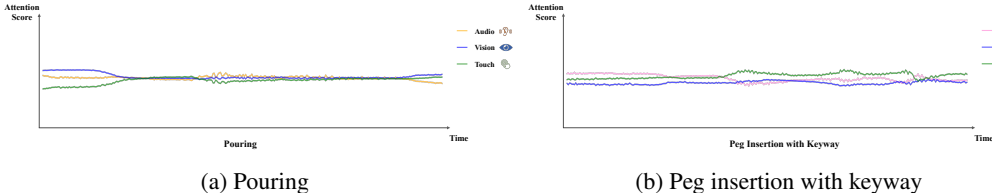


Figure 10: **Visualization of the aggregated attention scores of MULSA for each modality in both tasks.** At each timestep, we average the attention scores on all feature tokens of each modality separately. The range of the attention score axis in the figure is consistent with Fig. 9.

In Sec. 4.4 of the main paper, we illustrate the aggregated attention scores for each modality and the stage scores of MS-Bot in the pouring task, as shown in Fig. 9a. We also record the changes in attention scores and stage scores in the peg insertion with keyway task, as shown in Fig. 9b. The results in the figure demonstrate that our model accurately predicts the rapid changes in stages for both tasks. As a result, the attention scores across modalities guided by stage comprehension are also relatively stable, exhibiting clear inter-stage changes and minor intra-stage adjustment.

As a comparison, we also visualize the attention scores of another baseline MULSA [9] with self-attention fusion, as shown in Fig. 10. The range of the attention score axis in the figure is consistent with Fig. 9 (0.0 ~ 1.0). It is evident that the attention scores of the modalities in the MULSA model are close and exhibit a small variation along the time axis, lacking clear stage characteristics. This indicates that the MULSA model fails to fully leverage the advantages of dynamic fusion compared to the concat model.

Methods	Pouring Initial (g)		Pouring Target (g)	
	90	120	40	60
MS-Bot	1.60 ± 1.10	5.58 ± 1.79	6.48 ± 1.55	1.80 ± 0.95
- Attention Blur	1.72 ± 1.09	5.70 ± 1.74	6.55 ± 1.38	1.95 ± 1.32
- Stage Comprehension	2.52 ± 1.12	6.15 ± 1.64	6.80 ± 1.59	2.92 ± 1.40
- State Tokenizer	3.05 ± 1.01	6.42 ± 1.98	7.12 ± 1.66	4.19 ± 1.24

Table 4: Impact of each component of our framework in the pouring task (mean ± standard deviation). ‘-’ indicates further removing the module from the model in the previous line.

Methods	Pouring Initial (g)		Pouring Target (g)	
	90	120	40	60
Concat	8.75 ± 2.02	10.69 ± 2.45	10.72 ± 2.35	8.46 ± 2.03
Du et al. [59]	8.51 ± 1.79	9.54 ± 2.10	9.98 ± 2.20	8.04 ± 1.85
MULSA [9]	4.72 ± 1.30	7.83 ± 1.71	8.45 ± 1.50	5.56 ± 1.13
MS-Bot	2.04 ± 1.40	6.10 ± 1.49	7.62 ± 1.94	2.41 ± 1.47

Table 5: Comparison of performance in scenes with visual distractors in the pouring task (mean ± standard deviation). We change the color of the cylinder from white to red during testing.

E Detailed Experimental Results of Pouring

In Sec. 4.4 and 4.5 of the main paper, we show the overall error on all settings of the pouring task. In this section, we comprehensively present the detailed result of the component ablation and the distractor experiment on all the settings of the pouring task in Tab. 4 and 5. As shown in Tab. 4, the contributions from both the state tokenizer and the stage comprehension module on all settings demonstrate the importance of the coarse-to-fine stage comprehension. The consistent lead of MS-BOT across all settings of the pouring task in Tab. 3 also demonstrates the generalizability of stage comprehension.

F Evaluation of Hyper-parameter Settings

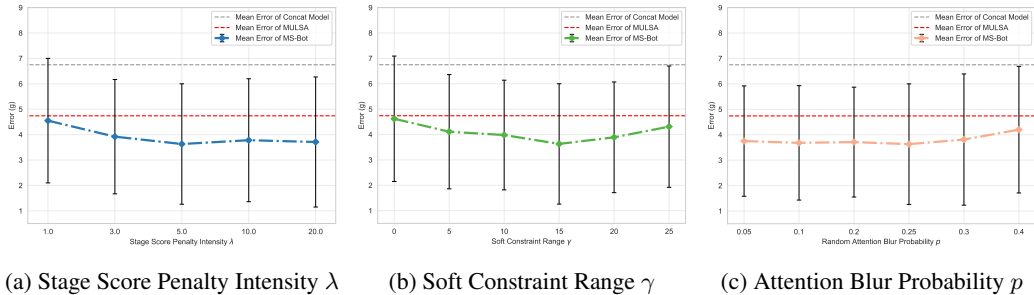


Figure 11: **Performance of MS-Bot on one setting of the pouring task when changing the hyper-parameters λ , γ and p .** We fix the others when changing one hyper-parameter. We report the mean error of the concat model, MULSA and MS-Bot. The error bars represent the standard deviation of errors for MS-Bot.

In this section, we test the sensitivity of MS-Bot to different hyper-parameter settings. Specifically, we test the performance of MS-Bot under different penalty intensity λ , soft constraint range γ and probability of random attention blur p in one setting of the pouring task. We train all the models to pour out 40g of small beads with different initial masses (90g/120g). We set $\lambda = 5.0$, $\gamma = 15$ and $p = 0.25$ by default, and keep the others fixed when we modify one of the hyper-parameters.

We present the evaluation results in Fig. 11. Our MS-Bot consistently outperforms both the concat model and MULSA across various hyper-parameter settings, indicating that the performance of our MS-Bot is relatively stable to hyper-parameter variations. However, we also observe that when setting λ and γ to small values ($\lambda = 1.0$ in Fig. 11a and $\gamma = 0$ in Fig. 11b), the performance of MS-Bot drops and becomes closer to MULSA with simple self-attention fusion. This is because when λ is too small, the prediction of the current stage becomes inaccurate due to the insufficient training. When γ is too small, the model is forced to make drastic changes in the stage score prediction within very few timesteps, leading to unstable stage predictions. Both of these factors weaken the efficacy of stage comprehension within MS-Bot. We also find that setting too large p ($p > 0.3$ in Fig. 11c) can bring negative impacts as the attention blur truncates the gradients backpropagated to the stage comprehension module and the state tokenizer. Excessive attention blur can impair the training of these two modules.