

Physics-informed graph neural networks for flow field estimation in carotid arteries

Julian Suk, Dieuwertje Alblas, Barbara A. Hutten, Albert Wiegman, Christoph Brune, Pim van Ooij and Jelmer M. Wolterink

Abstract—Hemodynamic quantities are valuable biomedical risk factors for cardiovascular pathology such as atherosclerosis. Non-invasive, in-vivo measurement of these quantities can only be performed using a select number of modalities that are not widely available, such as 4D flow magnetic resonance imaging (MRI). In this work, we create a surrogate model for hemodynamic flow field estimation, powered by machine learning. We train graph neural networks that include priors about the underlying symmetries and physics, limiting the amount of data required for training. This allows us to train the model using moderately-sized, in-vivo 4D flow MRI datasets, instead of large in-silico datasets obtained by computational fluid dynamics (CFD), as is the current standard. We create an efficient, equivariant neural network by combining the popular PointNet++ architecture with group-steerable layers. To incorporate the physics-informed priors, we derive an efficient discretisation scheme for the involved differential operators. We perform extensive experiments in carotid arteries and show that our model can accurately estimate low-noise hemodynamic flow fields in the carotid artery. Moreover, we show how the learned relation between geometry and hemodynamic quantities transfers to 3D vascular models obtained using a different imaging modality than the training data. This shows that physics-informed graph neural networks can be trained using 4D flow MRI data to estimate blood flow in unseen carotid artery geometries.

Index Terms—4D flow MRI, geometric deep learning, physics-informed machine learning, carotid arteries.

I. INTRODUCTION

CARDIOVASCULAR disease is the leading cause of death worldwide. In many cases, it is characterised by an accumulation of plaque in the arterial wall, which results in narrowing of the blood vessel. In extreme cases, such

J. Suk, D. Alblas, C. Brune and J. M. Wolterink are with the Department of Applied Mathematics and Technical Medical Center, University of Twente, 7522 NB, Enschede, The Netherlands (e-mail: {j.m.suk;d.alblas;c.brune;j.m.wolterink}@utwente.nl).

B. A. Hutten is with the Department of Epidemiology and Data Science, Amsterdam UMC Location University of Amsterdam and Research Institute Amsterdam Cardiovascular Sciences, Diabetes & Metabolism, Amsterdam, The Netherlands (e-mail: b.a.hutten@amsterdamumc.nl).

A. Wiegman is with Department of Pediatrics, Amsterdam UMC Location University of Amsterdam and Research institute Amsterdam Cardiovascular Sciences, Diabetes & Metabolism, Amsterdam, The Netherlands (e-mail: a.wiegman@amsterdamumc.nl).

P. v. Ooij is with the Department of Radiology & Nuclear Medicine, Amsterdam University Medical Center, Meibergdreef 9, 1105 AZ, Amsterdam, The Netherlands (e-mail: p.vanooij@amsterdamumc.nl).

stenosis causes a shortage of oxygenated blood supply to downstream organs which can lead to myocardial infarction, peripheral artery disease, or ischemic stroke [2]. Ischemic stroke is often the result of atherosclerosis in the carotid arteries. Carotid artery geometry has been identified as an indicator for atherosclerosis [3] and disturbed blood flow [4]. Arterial blood flow, together with derived quantities like wall shear stress and oscillatory shear index, has been shown to correlate with initiation and progression of atherosclerosis [5]. Thus, insight into patient-specific blood flow is invaluable for diagnosis, treatment and prevention of cardiovascular disease.

Information about patient-specific hemodynamics can be clinically obtained in-vivo, via invasive measurements such as pressure sensors in catheterisation or via non-invasive imaging such as Doppler ultrasound, particle image velocimetry [6] or 4D flow magnetic resonance imaging (MRI) [2]. In particular, 4D flow MRI allows for the quantification of directional blood flow and has emerged as a leading technique for in-vivo hemodynamics measurement [7]. However, 4D flow requires expensive, specialised software and expert knowledge, in particular for the setting of scan parameters. More importantly, the number of patients for whom hemodynamics measurements could potentially provide additional diagnostic information commonly exceeds a hospital’s capacity for performing 4D flow MRI, making the number of available scanners a bottleneck. Furthermore, 4D flow MRI is prone to measurement noise and inaccurate electrocardiogram (ECG) gating [7].

Alternatively, information about patient-specific hemodynamics can be obtained in-silico via computational fluid dynamics (CFD) based on anatomical computed tomography (CT) [8] or MRI [9]. CFD simulation based on 3D vascular models extracted from anatomical imaging is a powerful tool to estimate hemodynamic quantities in-silico. CFD allows for accurate, physics-conforming blood flow estimation. Its downside are long runtimes and high computational demand, as well as sensitivity to modelling choices, such as discretisation and boundary conditions, making it difficult to compare results across practitioners. Indeed, it has been shown that there is high variability across CFD simulations performed by different research groups [10]. This underlines the fact that while being a powerful model for blood flow estimation, CFD is not comparable to in-vivo measurement and must be validated via reference measurements, like 4D flow MRI. These limitations can be prohibitive for widespread use in clinical practice.

In this work, we aim to address the individual shortcomings of 4D flow MRI and CFD by creating an in-silico surrogate

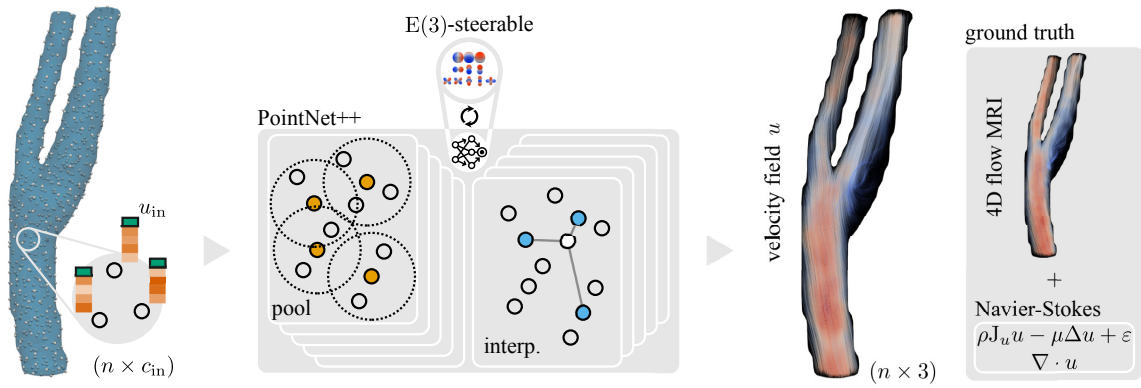


Fig. 1. Overview. We represent the carotid artery by n un-ordered points with c_{in} -dimensional input features, one of which is patient-specific inflow u_{in} (shown in green). PointNet++ learns to map the input features to 3D velocity vectors using hierarchical down-sampling (pooling) and up-sampling (interpolation) layers. PointNet++ is comprised of learnable functions which we choose as vanilla multilayer perceptrons (MLP) or $E(3)$ -steerable [1] MLPs. We train PointNet++ with ground truth velocity fields obtained in-vivo via 4D flow MRI. Based on the Navier-Stokes equations for incompressible fluids that govern arterial blood flow, we regularise the training loss with residuals using discretised differential operators.

model for hemodynamic flow field estimation. Based on the observation that hemodynamics largely depend on artery shape and flow conditions, we propose a machine learning model that estimates patient-specific blood flow from personalised 3D vascular models. We demonstrate this approach in the carotid artery and train our machine learning model on 4D flow measurements in the carotid bifurcation of 234 subjects. We employ a powerful class of neural networks based on the PointNet++ architecture, which has been shown to excel at dealing with large point clouds [11], [12]. Similarly as in CFD simulation [13], our machine-learning-based flow predictions are conditioned on patient-specific boundary conditions. Once trained, our model can quickly produce flow field estimates for vascular anatomy based on boundary conditions that can be cheaply obtained, e.g., via the widely available Doppler ultrasound. An overview of our method is provided in Fig. 1.

Learning a relation between vascular geometry and hemodynamics from in-vivo data has the clear advantage that the estimated flow fields, unlike those obtained from CFD, do not depend on geometric and physical modelling choices. However, it poses the practical challenges that (1) training data is limited because 4D flow MRI is not performed on large cohorts of subjects and (2) measurement noise results in data pollution which can make training challenging. To address the former, we incorporate group equivariance by embedding steerable $E(3)$ -equivariant layers [1] in the PointNet++ architecture, which has been shown to facilitate extracting knowledge out of small hemodynamic datasets [14]. To address the latter, we include Navier-Stokes-based loss regularisation to mitigate the effect of un-physical noise in the training data. We perform experiments using conservation of mass as training loss regularisation alongside conservation of momentum where we find it to be independently beneficial for accuracy. We achieve this via discretisation of differential operators for which we derive a novel discretisation scheme using computationally efficient neighbourhood queries. The resulting model is fast, patient-specific and produces physics-conforming estimates.

The contributions of our work are as follows: (1) we propose a novel, powerful neural network for biomechanical surrogate

modelling, (2) we propose an efficient way to include Navier-Stokes-based training regularisation and evaluation metrics and (3) we show how to train the machine learning (ML) model to perform volumetric velocity field estimation using in-vivo 4D flow MRI velocity fields and (5) we demonstrate how the learned relation between geometry and flow generalises to 3D shapes extracted from black-blood MRI, a different, much faster and widely-used MRI acquisition technique.

II. RELATED WORKS

Recently, considerable attention has been placed on machine learning methods for hemodynamics estimation. These approaches can be divided into two categories: (1) transductive instance optimisation with physics-informed regularisation (similar in scope to CFD) and (2) inductive, generalising feed-forward methods that learn a relation between anatomy and hemodynamics from training data. Methods in the first category can incorporate personalised boundary conditions but lack the ability to generalise and require re-training for each case. In such, they can be useful in settings where the hemodynamic parameters are partially known [15]–[17]. In contrast, methods in the latter category learn to generalise to unseen data and aim to create fast, compute-efficient surrogate models which may replace compute-intensive CFD.

In this work we focus on the second category: learning a relation between subjects’ vascular geometry and hemodynamics using neural networks. These neural networks operate on 3D representations of the vessels and estimate blood-flow-related quantities on the vessel wall or flow fields in the interior of the vessel. Besides efforts to estimate surface quantities like wall shear stress [18] and endothelial cell activation potential [12], previous works have focussed on the estimation of volumetric (vector) fields. Among these, Liang et al. [19] and Wang et al. [20] trained fully-connected neural networks operating on 3D point-cloud representations of the carotid artery and thoracic aorta, respectively, to estimate pressure and velocity fields. Maul et al. [21] employed an octree-based neural network followed by trilinear interpolation to learn a continuous solution operator for the Navier-Stokes equations

in synthetic vascular trees. Li *et al.* [22] used a PointNet-like [23] architecture to estimate pressure and velocity fields in the coronary artery and synthetic cerebral aneurysm, respectively. Zhang *et al.* [11] composed PointNet++ [24] and a Navier-Stokes physics-informed neural network (PINN) which learned to estimate the velocity field in 3D models of the abdominal aorta. In an earlier study [14], we used a multiscale steerable $E(3)$ -equivariant graph neural network (SEGNN) [1] to estimate velocity fields in synthetic coronary arteries.

All aforementioned works are supervised learning methods, which are trained using reference labels in the form of hemodynamic ground truth acquired in-silico via CFD. While the use of CFD as ground truth facilitates acquiring large amounts of labelled data, this also implies that a properly trained model can at best mimic the results of the used CFD solver. As stated above, CFD solutions are sensitive to inaccuracies in the input geometry and faithful modelling of the boundary conditions and depend on the employed discretisation scheme.

III. MATERIALS AND METHOD

A. 4D flow MRI dataset

We included data of 234 subjects. All subjects participated in a long-term follow-up study evaluating cardiovascular risk in patients with familial hypercholesterolemia (FH) in whom statin treatment was initiated in childhood and in their unaffected siblings [25]. All procedures were approved by the local institutional review board (METC) of the Amsterdam University Medical Center and were carried out according to the declaration of Helsinki. In all subjects, 4D flow MRI and 3D black blood MRI volumes were acquired.

4D flow scans were acquired using the following parameters: TR = 7.8 ms, TE = 4.6 ms, flip angle = 8° , VENC = $150 \frac{\text{cm}}{\text{s}}$, $0.8 \times 0.8 \times 0.8 \text{ mm}^3$ spatial and 80 ms temporal resolution. Retrospective ECG-triggering was used for cardiac synchronisation. Phase-offset corrections were performed during reconstruction. The 4D flow scan was accelerated using a k-t undersampling scheme of factor $R = 8$ and a k-t PCA reconstruction [26]. Images were reconstructed using CRecon (Gyrotools, Zurich, Switzerland) with a regularisation factor of $r = 0.1$. The total scan time was 10 minutes. An nnU-Net model [27] was used to automatically segment a region-of-interest from an estimated 3 cm below to 2 cm above the carotid bifurcation. Triangular meshes for the carotid arteries were obtained from this segmentation and used to mask the velocity vector data. We chose the peak systolic time-frame as target in this study, which was defined as the time-frame with the highest spatially averaged velocity.

Black blood MRI scans were performed using the following parameters: TR = 10 ms, TE = 3.4 ms, flip angle = 6° and $0.5 \text{ mm} \times 0.5 \text{ mm} \times 0.5 \text{ mm}$ spatial resolution. The k-space was under-sampled $R = 5$ times with a Poisson disk pattern and reconstructed using a compressed sensing algorithm for which the previously developed PROUD scanner software patch was used [28], [29]. Reconstruction was carried out in MATLAB, using MRecon (Gyrotools, Zurich, Switzerland) and the BART reconstruction toolbox. In all 3D black blood MRI volumes, the internal carotid artery (ICA), external

carotid artery (ECA) and common carotid artery (CCA) were automatically segmented using a previously developed deep learning-based algorithm [30]. Meshes were subsequently cut at 3 cm below and 2 cm above the carotid bifurcation to match the region-of-interest obtained from 4D flow MRI.

After visual inspection of the meshes obtained from 4D flow MRI we excluded 162 arteries for the current study. Reasons were incompleteness of the triangular mesh, inclusion of arteries other than the carotid artery and meshing errors beyond repair, that would affect downstream analysis. Hence, the final dataset consisted of 128 left and 154 right carotid arteries, for which paired meshes were available from 4D flow MRI and black blood MRI. For both 4D flow and black blood MRI, we obtained centerline points by binning and averaging geodesic segments of the artery surface, computed via the vector heat method [31]. Connecting these centerline points by line elements allows us to query the distance to the centerline and thus vessel radius using trigonometry.

B. Machine learning model

In the following section we introduce our machine learning model for learning to predict velocity fields in 3D artery models. We propose a neural network that maps a collection of input features, defined on a set of points, which describe (local) artery geometry within the artery lumen, to a collection of output features representing 3D velocity vectors of blood flow. Note that neither rotation nor translation of the input geometry should influence the relative structure of the predicted vector field. We address this by a steerable, $SE(3)$ -equivariant neural network that processes descriptive, geometric features independent of orientation in ambient space. Furthermore, we include the Navier-Stokes equations as loss regularisation.

1) Input features:

a) *Geometric descriptors*: We describe arterial geometry locally by point-wise feature vectors $f^p \in \mathbb{R}^c$ for each point $p \in \mathcal{P}_0$, where c is the channel size and \mathcal{P}_0 a finite set of points within the artery lumen. We describe each point by its relative position (compare [14]) to the artery inlet, lumen wall, outlets and centerline. We additionally encode relative position to the ICA outlet, ECA outlet and append a field of zeros (or ones) if the artery is a left (or right) carotid artery (respectively). We do so to account for possible physiological differences with respect to upstream or downstream vasculature and their effect on the flow field. All these features represent relative positions and are thus invariant under translation of the 3D geometry.

b) *Inflow conditioning*: Furthermore, we include boundary condition features, as constant scalar fields extended over all points, namely mean velocity and standard deviation over the artery inlet. The latter is to simulate velocity measurements in an axial slice of the artery. Such measurements are commonly used in CFD to get subject-specific flow boundary conditions, often via ultrasound [13]. Conditioning on different inflow velocities is important because boundary conditions vary between subjects and greatly influence blood flow.

2) *Architecture*: We propose an encoder-decoder model (following PointNet++ [24]) with a contracting and expanding pathway. Given an un-ordered set $\mathcal{P}_0 = \{p^1, \dots, p^n\}$ of point

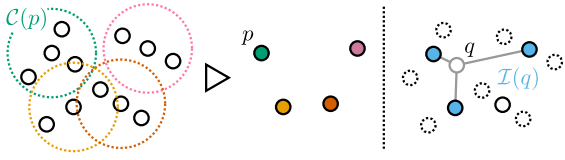


Fig. 2. Pooling and interpolation. We use message passing layers to pool clusters $\mathcal{C}(p)$ of fine-scale to coarse-scale features in the contracting pathway (left) and interpolation to expand coarse-scale features back to original resolution (right). For simplicity, we visualise interpolation in 2D based on three closest points.

coordinates $p = (p_1, p_2, p_3)^\top \in \mathbb{R}^3$ within a subject’s artery lumen, we build a nested hierarchy of h sub-sampled sets

$$\mathcal{P}_0 \supset \dots \supset \mathcal{P}_h.$$

Pair-wise, each coarse-scale point $p \in \mathcal{P}_{i+1} := \mathcal{P}_{i,\text{coarse}}$ is assigned to a cluster of fine-scale points $\mathcal{C}(p) \subset \mathcal{P}_i := \mathcal{P}_{i,\text{fine}}$ (see Fig. 2). We let the point features traverse the multiscale hierarchy $\mathcal{P}_0 \supset \dots \supset \mathcal{P}_h$ in a contracting and expanding pathway (see Fig. 1) with skip connections f^{skip} .

a) *Contracting pathway:* We use message passing layers with learned functions ϕ for pooling from fine to coarse scales

$$\begin{aligned} m^{p,q} &= \phi(f^q, q - p), & (\text{message from } q \text{ to } p) \\ f^p &\leftarrow \bigoplus_{q \in \mathcal{C}(p)} m^{p,q} & (\text{coarse point feature update}) \end{aligned}$$

where \bigoplus is either the maximum or mean operator.

b) *Expanding pathway:* We use interpolation layers with learned functions ψ with which we unpool from the coarse- to the fine-scale points $q \in \mathcal{P}_{i,\text{fine}}$

$$f^q \leftarrow \psi \left(\frac{\sum_{p \in \mathcal{I}(q)} \alpha_{p,q} f^p}{\sum_{p \in \mathcal{I}(q)} \alpha_{p,q}}, f^{\text{skip}} \right), \quad \alpha_{p,q} := \frac{1}{\|p - q\|_2^2 + \epsilon}$$

where $\mathcal{I}(q) \subset \mathcal{P}_{i,\text{coarse}}$ contains the four closest points to q in $\mathcal{P}_{i,\text{coarse}}$ (compare Fig. 2) and ϵ is a small number. The learned functions ϕ and ψ are parametrised as multilayer perceptrons (MLP) composed of linear layers, activation functions and batch normalisation layers.

3) *Steerable equivariant PointNet++:* We introduce an equivariant extension of PointNet++ using steerable representations. Generally, a function is called equivariant to a symmetry group, if group actions applied to the inputs result in the equivalent transformation of the outputs. By choosing ϕ , ψ as steerable MLPs we, in turn, render our PointNet++ $O(3)$ -equivariant. Steerable MLPs that are equivariant under transformations of the orthogonal group $O(3)$ (rotations and reflections) can be constructed by interleaving Clebsch-Gordan tensor products, gated activation functions and batch normalisation [1]. They require expressing feature vectors throughout the network as steerable tensors (e.g. collections of scalars s and 3D vectors v)

$$f^p = (s_1, s_2, \dots, (v^1)^\top, (v^2)^\top, \dots)^\top$$

whose rotation under $R \in O(3)$ is well-defined:

$$R: f^p \mapsto (s_1, s_2, \dots, (Rv^1)^\top, (Rv^2)^\top, \dots)^\top.$$

We call this model steerable equivariant (SE-)PointNet++.

4) *Physics-based loss regularisation:* Hemodynamics in the carotid arteries can be modelled by the Navier-Stokes equations. In particular, the divergence $\nabla \cdot u$ of the velocity field u describes conservation of mass and is a recommended quality control in 4D flow MRI [7]. Both conservation of mass and momentum can additionally function as training loss regularisation and accuracy metrics, promoting and measuring the conformity with the underlying physics.

In the context of numerical methods for partial differential equations (PDE) as well as machine learning, spatial discretisation of such differential operators is predominantly done via the finite element method [32] or graph exterior calculus [33]. Both require a mesh of the *volumetric*, spatial domain consisting of simplices (e.g. tetrahedra) which poses two problems for our application. Firstly, velocity field measurements from 4D flow MRI, which we use as training data, do not come with a volumetric mesh and algorithmic mesh creation is a non-trivial task. Secondly, tetrahedral meshes typically feature a lot more tetrahedra than vertices. Finite-element-discretised operators are sparse matrices containing basis function coefficients defined on the mesh elements, which means their number of non-zero entries scales with the number of tetrahedra. This scaling is reflected in high memory footprint and compute overhead. To circumvent these challenges, we derive a novel, compute-efficient discretisation scheme, which uses neighbourhood queries.

a) *Discretised Navier-Stokes equations:* In the Navier-Stokes equations for incompressible fluids with velocity field u , conservation of mass simplifies to the continuity equation

$$\nabla \cdot u = \frac{\partial u_1}{\partial x_1} + \frac{\partial u_2}{\partial x_2} + \frac{\partial u_3}{\partial x_3} = 0,$$

Given a discrete velocity field, we approximate the continuity equation using (2) which we will derive below. Let u^p denote the velocity at $p \in \mathcal{P}_0$ and let $\mathcal{N}(p) \subset \mathcal{P}_0$ be a local neighbourhood around p . Then

$$(\nabla \cdot u)^p \approx \frac{1}{|\mathcal{N}(p)|} \sum_{q \in \mathcal{N}(p)} \frac{u^q - u^p}{\|q - p\|_2} \cdot \frac{q - p}{\|q - p\|_2}$$

where \cdot denotes the dot product between vectors. Conservation of momentum (neglecting gravity) is described by the equation

$$\rho \left(\frac{\partial u}{\partial t} + J_u u \right) = -\nabla P + \mu \Delta u,$$

where ρ, μ are density and dynamic viscosity, P is the pressure field, J_u the Jacobian of u and Δ the Laplacian operator. Analogously to the divergence operator, we approximate

$$\begin{aligned} (J_u)^p &\approx \frac{1}{|\mathcal{N}(p)|} \sum_{q \in \mathcal{N}(p)} \frac{(u^q - u^p)(q - p)^\top}{\|q - p\|_2^2} & \text{and} \\ (\Delta u)^p &\approx \frac{1}{|\mathcal{N}(p)|} \sum_{q \in \mathcal{N}(p)} \frac{((J_u)^q - (J_u)^p)(q - p)}{\|q - p\|_2^2}. \end{aligned}$$

b) *Discretisation of derivatives:* For the construction of our discretisation scheme, consider a tetrahedral mesh (which we will not actually have to create) endowed with a set of piecewise linear basis functions that allow barycentric interpolation of nodal degrees of freedom $u^p \in \mathbb{R}^3$ (see Fig. 3 b)). Since the

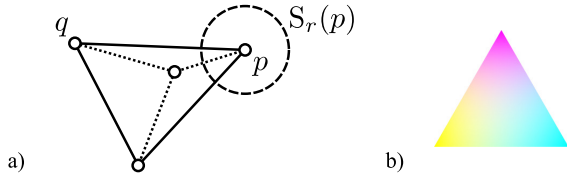


Fig. 3. Operator discretisation. We visualise a) an element of a tetrahedral mesh used in our construction and b) colouring of a triangle using barycentric coordinates, as a visualisation of barycentric basis functions. Note that there is a linear gradient between just two colours along each of the three sides of the triangle.

basis functions are piecewise linear, the resulting vector field $u: \mathbb{R}^3 \rightarrow \mathbb{R}^3$ is not differentiable at node locations. Consider a sphere $S_r(p)$ of radius r around p . We extend the derivative of u to node locations p by taking a surface integral over $S_r(p)$ for some small r :

$$\frac{\partial u_i}{\partial x_j}(p) := \frac{1}{|S_r(p)|} \int_{S_r(p)} \frac{\partial u_i}{\partial x_j}(s) ds \quad (1)$$

where $|S_r(p)|$ denotes the surface area of the sphere. In the tetrahedral mesh, p is connected to the vertex q (see Fig. 3 a)) by an edge $\xi = p + \lambda(\xi)(q - p)$, where $\lambda(x) = \frac{\|x-p\|_2}{\|q-p\|_2}$. Due to the barycentric basis functions, u is linear on the edge:

$$u_i(\xi) = u_i^p + \lambda(\xi)(u_i^q - u_i^p).$$

By the chain rule, we have

$$\frac{\partial u_i}{\partial x_j}(\xi) = \frac{\partial u_i}{\partial \lambda} \frac{\partial \lambda}{\partial x_j}(\xi) = \frac{u_i^q - u_i^p}{\|q-p\|_2} \frac{\xi_j - p_j}{\|\xi-p\|_2}.$$

Now let $r < \lambda$. We can approximate the surface integral in (1) by quadrature over the sphere where we let the grid points be induced by vertices from a neighbourhood $\mathcal{N}(p)$ around p :

$$\int_{S_r(p)} \frac{\partial u_i}{\partial x_j}(s) ds \approx \sum_{q \in \mathcal{N}(p)} \frac{u_i^q - u_i^p}{\|q-p\|_2} \frac{q_j - p_j}{\|q-p\|_2}.$$

Substituting in (1), the derivatives become

$$\frac{\partial u_i}{\partial x_j}(p) \approx \frac{1}{|\mathcal{N}(p)|} \sum_{q \in \mathcal{N}(p)} \frac{u_i^q - u_i^p}{\|q-p\|_2} \frac{q_j - p_j}{\|q-p\|_2}. \quad (2)$$

For second-order derivatives we can derive a similar discretisation scheme. Assume, for a different set of basis functions, that $\frac{\partial u_i}{\partial x_j} =: \partial_{x_j} u_i$ are piecewise linear on ξ :

$$\partial_{x_j} u_i(\xi) = \partial_{x_j} u_i(p) + \lambda(\xi)(\partial_{x_j} u_i(q) - \partial_{x_j} u_i(p))$$

Analogously to above, this yields the approximation

$$\frac{\partial^2 u_i}{\partial x_j \partial x_k}(p) \approx \frac{1}{|\mathcal{N}(p)|} \sum_{q \in \mathcal{N}(p)} \frac{(\partial_{x_j} u_i(q) - \partial_{x_j} u_i(p))}{\|q-p\|_2} \frac{q_k - p_k}{\|q-p\|_2}.$$

Note that these discretisation schemes are mesh-free and can be computed at any point in space using simple neighbourhood queries. Furthermore, their computational complexity depends linearly on the number of vertices.

c) *Overall training loss:* With the above, we can define

$$L_{\text{continuity}} := \text{mean}_{p \in \mathcal{P}_0} |(\nabla \cdot u)^p| \quad (3)$$

and

$$L_{\text{momentum}} := \text{mean}_{p \in \mathcal{P}_0} \|\rho(\mathbf{J}_u)^p u^p - \mu(\Delta u)^p\|_2 \quad (4)$$

We combine these with L^1 loss for the data term in the training loss. We balance the loss terms by multiplying a constant, such that loss term values roughly coincide at model initialisation.

C. Evaluation metrics

To train and evaluate our neural network, we must compare velocity vector fields, i.e., point-wise model predictions u^p and ground truth \bar{u}^p . We do so via the following metrics. Given an unordered set of points \mathcal{P}_0 , we define approximation disparity

$$\text{Approx. disp.} := \sum_{p \in \mathcal{P}_0} \|\bar{u}^p - u^p\|_2^2 / \sum_{p \in \mathcal{P}_0} \|\bar{u}^p\|_2^2$$

which measures the similarity between two vector fields. Furthermore, we use mean cosine similarity of two vector field

$$\text{Cos. similarity} := \text{mean}_{p \in \mathcal{P}_0} \cos(\angle \bar{u}^p, u^p)$$

which ranges between -1 (opposite) and 1 (proportional) and measures directional agreement independent of magnitude.

1) *Regularised optimal transport distance:* Both approximation disparity and cosine similarity are useful metrics if point-wise comparison between velocity fields is possible. Beyond this case, we can only rely on comparison between local neighbourhoods of velocity vectors. A metric measuring the difference between local sets of vectors may be more robust to extreme outliers (as in noisy measurements) and can be used to compare discrete flow fields where the spatial positions do not coincide. To this end, we propose to use a regularised optimal transport distance, measuring the divergence between distributions of vectors. We compute the metric using an efficient implementation of the Sinkhorn divergence [34] for approximating optimal transport cost, which is effectively a relaxation of the *Wasserstein distance*. Our metric takes into account the spatial position as well as direction and magnitude of two velocity vector fields.

IV. EXPERIMENTS AND RESULTS

All neural networks were implemented in Python using PyTorch [35] and PyTorch Geometric [36], had approximately 1 million trainable parameters and were trained on an NVIDIA A100 (40 GB) GPU for 1000 epochs using Adam optimiser (learning rate $8 \cdot 10^{-4}$ with exponential decay of 0.9955) with gradient clipping. Training PointNet++ took 11:13 s per epochs compared to 19:20 s for the equivariant SE-PointNet++. Runtime overhead of the physics-informed loss regularisation was negligible. The regularised Wasserstein distance computation (see Section III-C.1) was implemented via GeomLoss [34]. We evaluated our neural networks via cross-validation. Our implementation is publicly available.¹

¹github.com/sukjulian (coming soon)

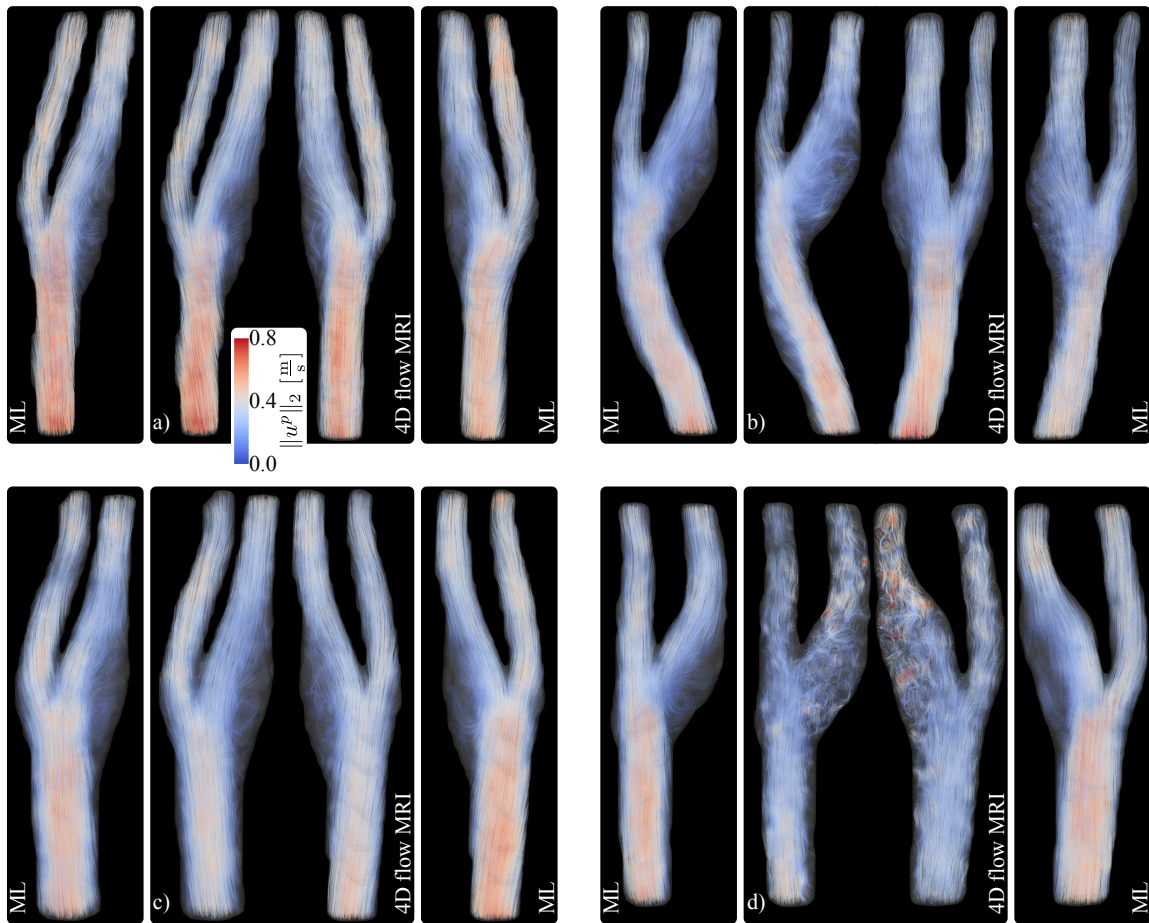


Fig. 4. Results of neural network predictions (“ML”) by PointNet++ compared with 4D flow MRI in the left and right carotid artery of subjects in the test split. We visualise the velocity field via 3D streamlines and render a projection image. Shown are examples of relatively a) good, b) average and c) poor performance. Additionally, we d) show an example where the ground truth is noisy, yet the model predicts a visually sound velocity field.

We partitioned the 282 subject-specific 4D flow MRI measurements ten-fold into 254 training and 28 evaluation samples, so that all subjects appeared in exactly one evaluation split (excluding two remainders). Left and right carotid artery of the same subject were considered separate samples, but we made sure that both were contained in the same fold.

A. Velocity field estimation in 4D flow MRI

1) *PointNet++*: In Table I we compare test split predictions u^p of PointNet++ to the corresponding 4D flow MRI measurements \bar{u}^p via Wasserstein distance (see Section III-C.1), approximation disparity and cosine similarity across all test-split subjects simultaneously. Since some of the 4D flow MRI measurements were noisy (compare Fig. 4 d)) we assess correspondence to the Navier-Stokes equations via continuity (3) and momentum residual (4). PointNet++ achieves good correspondence to 4D flow MRI, indicated by cosine similarity close to one. Fig. 4 visualises the reference velocity field computed via 4D flow MRI in the left and right carotid artery of four subjects from the combined cross-validation test splits. Comparison with the estimated velocity fields by PointNet++ shows good overall qualitative agreement to the reference. Even for the case where the 4D flow MRI velocity field is noisy (Fig. 4 d)) PointNet++ produces a plausible estimate.

2) *SE-PointNet++*: SE-PointNet++ obtained slightly higher approximation disparity than PointNet++, but we did not find the difference to be statistically significant ($p < 0.05$) in a one-way ANOVA test. SE-PointNet++ estimates had better conservation of mass and momentum than PointNet++ which is also supported by visual inspection. Fig. 5 shows a comparison between velocity field estimates by PointNet++ and by SE-PointNet++ and thus the influence of group equivariance. We found that SE-PointNet++ produced slightly smoother estimates while skipping over noise present in the PointNet++ estimate, e.g. in the ICA of the right carotid artery in Fig. 5 a).

3) *Physics-informed extensions*: Using physics-informed loss regularisation (Section III-B.4), we found that continuity and momentum residuals decreased even further. Additionally, we observed a slight, albeit statistically insignificant, decrease in approximation disparity for both neural networks. We conclude that physics-based loss regularisation is independently beneficial for accuracy, i.e., does not compete with the training objective of fitting the data. SE-PointNet++^{PIGN} performs best w.r.t. correspondence to the continuity and momentum residual. In Fig. 6 we compare velocity field estimates of SE-PointNet++ trained with and without physics-informed loss regularisation (SE-PointNet++^{PIGN}) based on the Navier-Stokes equations, as described in Section III-B.4. We found

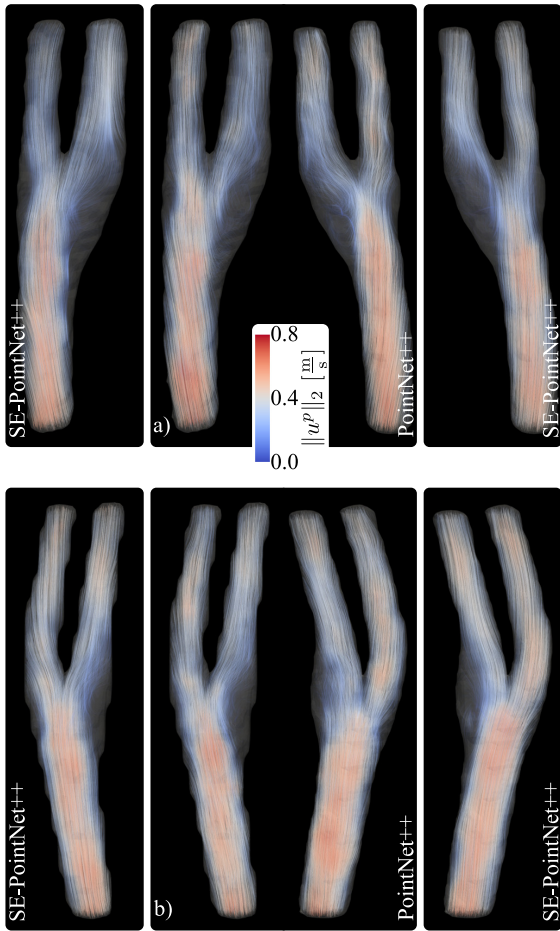


Fig. 5. Effect of group equivariance of SE-PointNet++ compared to PointNet++. We show the left and right carotid artery of subjects in the test split and visualise the velocity field via streamlines.

that this further smoothed the flow field, e.g. in the ECA of the right carotid artery in Fig. 6 a).

4) Ablation studies: We created three ablated models to investigate the task-specific drivers of performance in PointNet++. Firstly, we trained a simple MLP that maps the input features of each point to a velocity vector, without local or global interaction between points. Secondly, we trained an “empty” PointNet++ without geometric input features, i.e. point-wise description of relative geometry (see Section III-B.1), which learned only from message passing between points (and boundary conditions). Thirdly, we trained a PointNet++ with geometric input features but without inflow conditioning (see Section III-B.1). Performance metrics are given in Table I. We found that all three variants achieve significantly worse approximation disparity than the baseline PointNet++. MLP achieved lower approximation disparity than the “empty” PointNet++ pointing to the importance of the geometric input features. Training time per epoch was 11:02 s for the MLP and thus runtime was comparable to PointNet++. Furthermore, we found that without inflow conditioning, PointNet++ significantly dropped in accuracy. This is expressed in higher approximation disparity but not lower cosine similarity, pointing towards magnitude rather than direction of predicted estimates.

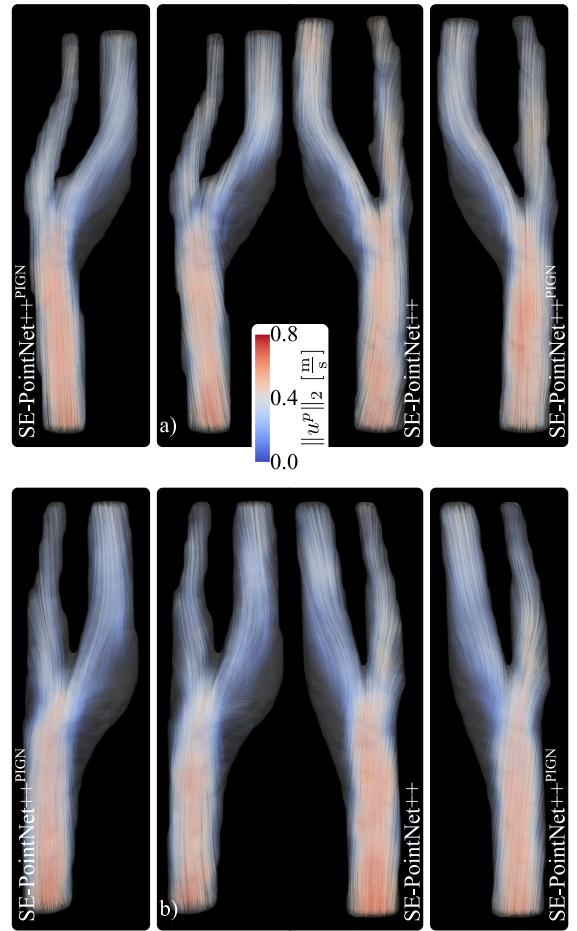


Fig. 6. Effect of physics-informed training (“PIGN”) for the example of SE-PointNet++. We show the left and right carotid artery of subjects in the test split and visualise the velocity field via streamlines.

B. Generalisation to black-blood MRI

We investigate our neural networks’ capabilities to generalise between vascular models obtained using different imaging protocols, by training the neural networks on the 4D flow MRI dataset and letting them estimate velocity fields in 3D models of the *same artery* but obtained via black-blood MRI. We pass the inflow boundary conditions extracted from the inlet region of the 4D flow MRI measurements (see Section III-B.1) to the machine learning model, simulating in-vivo measurements via e.g. ultrasound. Note that black blood MRI in itself does not allow for velocity measurements, since it is not a temporal imaging method and does not measure blood flow or contains flow-encoding sequence parts. Since black-blood MRI by itself does not allow for velocity measurements, we quantify our neural networks’ accuracy by Wasserstein distance (see Section III-C.1) to the patient-specific 4D flow measurements as well as continuity and momentum residual (see Section III-B.4). Table I lists the results. PointNet++ achieves the lowest mean Wasserstein distance, but the differences are not significant. As above, SE-PointNet++^{PIGN} achieves the lowest continuity and momentum residuals. These are slightly higher than for the 4D flow MRI data. Nevertheless, $L_{\text{continuity}}$ is substantially lower in flow field estimates produced by SE-PointNet++^{PIGN} than in those

TABLE I

QUANTITATIVE EVALUATION WITH RESPECT TO THE 4D FLOW MRI MEASUREMENTS AND FLOW PHYSICS (NAVIER-STOKES), EVALUATED VIA 10-FOLD CROSS-VALIDATION. WE SHOW MEAN \pm STANDARD DEVIATION (ACROSS SUBJECTS) OF THE STATISTICS. SINCE THERE IS NO POINT-TO-POINT CORRESPONDENCE BETWEEN BLACK BLOOD MRI AND 4D FLOW MRI, APPROX. DISP. AND COS. SIMILARITY ARE OMITTED. WE DENOTE IN **BOLD** SUPERIOR PERFORMANCE WHERE IT SIGNIFICANTLY ($p < 0.05$) DIFFERS ACCORDING TO A ONE-WAY ANOVA TEST.

Imaging modality	Neural network	Wasserst. dist. $\cdot 1e3 \downarrow$	Approx. disp. \downarrow	Cos. similarity \uparrow	$L_{\text{continuity}} \downarrow$	$L_{\text{momentum}} \cdot 1e-3 \downarrow$
4D flow MRI	MLP	17.6 \pm 42.0	0.59 \pm 0.16	0.72 \pm 0.14	16.0 \pm 1.6	4.1 \pm 0.5
	PointNet++*	18.0 \pm 41.2	0.61 \pm 0.15	0.71 \pm 0.14	16.3 \pm 1.1	4.8 \pm 0.6
	PointNet++ [†]	18.0 \pm 42.4	0.58 \pm 0.17	0.73 \pm 0.14	16.6 \pm 1.3	5.2 \pm 0.7
	PointNet++	17.0 \pm 41.7	0.56 \pm 0.16	0.73 \pm 0.14	12.5 \pm 1.1	3.7 \pm 0.6
	SE-PointNet++	18.2 \pm 43.9	0.55 \pm 0.16	0.74 \pm 0.14	9.8 \pm 1.0	2.9 \pm 0.5
	PointNet++ ^{PIGN}	17.6 \pm 43.2	0.53 \pm 0.16	0.74 \pm 0.14	7.2 \pm 0.7	2.5 \pm 0.4
	SE-PointNet++ ^{PIGN}	18.7 \pm 44.5	0.54 \pm 0.16	0.75 \pm 0.14	5.8 \pm 0.7	2.0 \pm 0.4
Black-blood MRI	PointNet++	22.8 \pm 48.3	–	–	16.1 \pm 1.3	4.6 \pm 0.6
	SE-PointNet++	24.3 \pm 50.5	–	–	11.6 \pm 0.9	3.1 \pm 0.5
	PointNet++ ^{PIGN}	23.3 \pm 50.0	–	–	10.4 \pm 0.9	3.2 \pm 0.5
	SE-PointNet++ ^{PIGN}	24.5 \pm 51.6	–	–	7.8 \pm 0.6	2.3 \pm 0.3

*no geometric input features, only message passing, [†]no inflow conditioning

of PointNet++, SE-PointNet++ and PointNet++^{PIGN}. Fig. 7 shows a comparison between ground truth 4D flow MRI and machine learning estimates (denoted “black blood & ML”) in 3D carotid artery models of subjects from the test split obtained via black blood MRI. We use SE-PointNet++ for this, since it, unlike PointNet++, does not require alignment of the black blood MRI geometry with the 4D flow MRI due to its roto-translation equivariance. This is to simulate a realistic scenario where 4D flow MRI would not be available. We find good agreement of the machine learning model with the ground truth, e.g. in the left carotid artery in Fig. 7 a) and the right carotid artery in Fig. 7 b). For several cases the machine learning model underestimates the magnitude of the flow (Fig. 7 d)). Nevertheless, we find overall good qualitative agreement in the estimated and measured flow fields.

V. DISCUSSION AND CONCLUSION

In this work, we present a novel deep learning approach for modelling hemodynamics by generating velocity fields for unseen subject-specific carotid artery geometries. We build upon the PointNet++ [24] architecture and infuse it with steerable equivariant [1] MLPs. We show how this symmetry consideration implicitly leads to stronger adherence to the underlying flow physics. Our neural network architecture allows for global context aggregation via cascading of pooling and interpolation layers and bypasses the need for message passing for each point in the original resolution, which would be computationally prohibitive. Thus, we are able to effectively learn features mapped to the original point cloud at low computational cost. We complement our deep learning approach by including domain knowledge, specifically about the differential structure of the velocity field, by regularising the training loss with discretised residuals based on the Navier-Stokes equations. To this end, we derive a computationally efficient, mesh-free discretisation scheme whose complexity

is linear in the number of points. Ultimately, we demonstrate how our method can learn to estimate velocity fields in unseen subjects after being trained exclusively on 4D flow MRI data.

The approach we propose addresses some important limitations of the state-of-the-art methods in machine-learning-based flow field estimation (Section II). Compared to single-case instance optimisation methods for fluid flow estimation [15]–[17], our approach is able to generalise beyond the training data while still respecting the governing PDEs. Compared to previous works on multiple-case generalising feed-forward methods [11], [14], [19]–[22], our model gains independence of the variability of the CFD-based training data, because we train it on in-vivo flow field measurements from 4D flow MRI.

Although we used 4D flow MRI training data to train and validate our method, we also demonstrate that we can train machine learning models on 4D flow MRI velocity fields and transfer the learned relations to vascular models obtained from anatomical black blood MRI images. This could be valuable in practice, as anatomical imaging modalities might be more widely available than 4D flow MRI and 3D vascular models can be obtained from these modalities automatically, e.g., in black blood MRI [30], CT [8], and 3D ultrasound. We envision this approach to be used in clinical practice for fast estimation of patient-specific blood flow, but backed up by 4D flow MRI for cases in which complications are suspected. This would still require personalised boundary conditions, which could be non-invasively obtained using, e.g., Doppler ultrasound. Note however, that even though these geometries are of the same patient, different imaging modalities produce slightly different geometries which is a source of error in our method.

In 4D flow MRI, velocity cannot be accurately computed very close to the artery wall which results in high levels of noise. In our experiments, even though the training data was noisy in some cases, our neural networks did not reproduce the noise but implicitly smoothed over it in their estimations. We attribute this to the fact that the noise cannot be explained

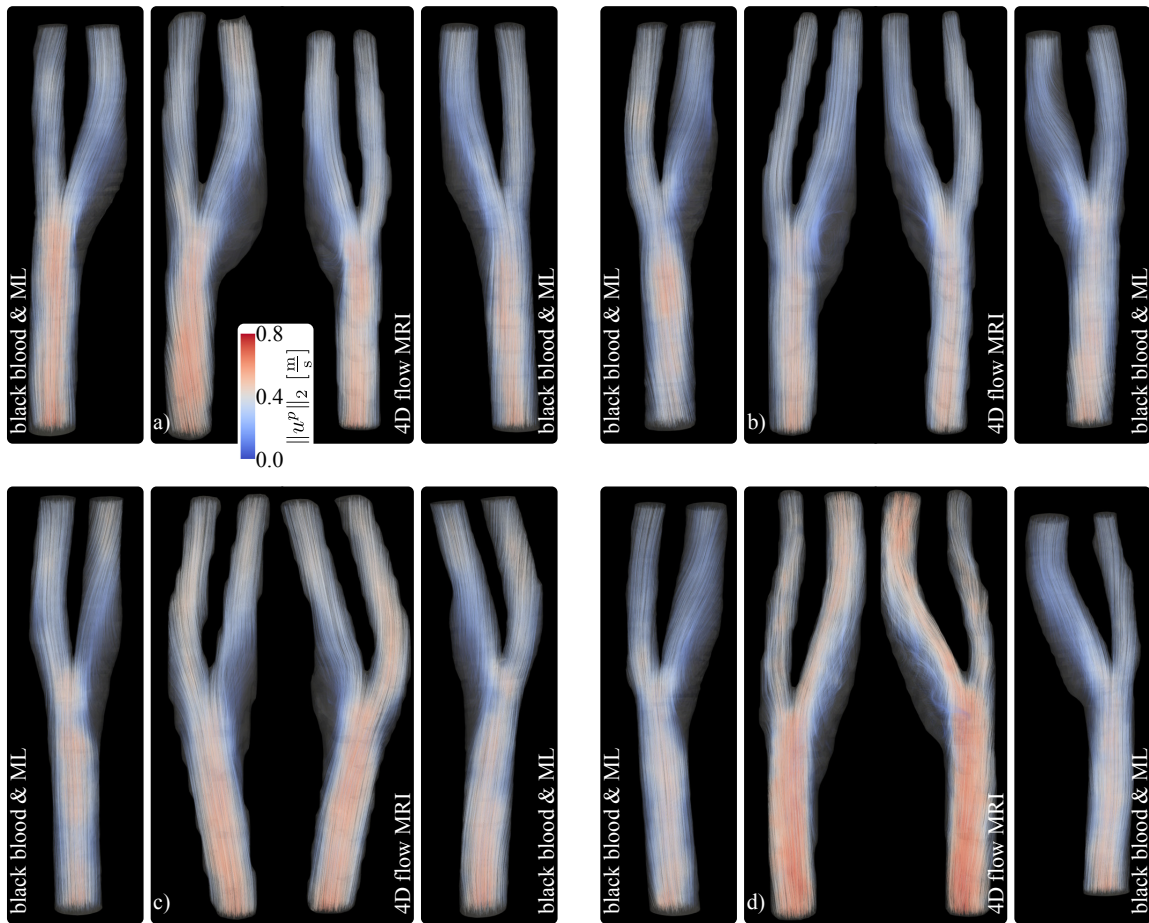


Fig. 7. Generalisation to black-blood MRI in the left and right carotid bifurcation of subjects from the test split. We compare 4D flow MRI with application of a pre-trained machine learning model on geometries obtained via black blood MRI (denoted “black blood & ML”). Note that black blood MRI itself does not provide measurements of the flow field.

by the input anatomy in a meaningful way and our neural networks treat it as constant error term. This has potential implications for the estimation of wall shear stress which requires noise-free velocity estimates close to the artery wall.

Since our method is a data-driven approach, the quality of the results largely depends on the extent to which the training data represents the data distribution during inference. In contrast to comparable studies using synthetic flow data generated by CFD [11], [14], [19]–[22], we have access to a small dataset in this work. This poses no major challenge because the carotid bifurcation across different subjects in our data were of a relatively similar shape. However, it would be interesting to see what happens for larger variations in the data. Besides stenotic cardiovascular disease (CVD), aneurysmatic CVD, in the form of intracranial and abdominal aneurysms, is also a dangerous disease which depends on blood flow. Thus, aneurysmatic CVD also provides potential applications of our methods in determination of hemodynamic quantities in these kinds of diseases. Even though we focussed on the carotid arteries in this work, we expect our approach to apply to other arteries as well, as long as there is a sufficiently representative dataset relative to the artery complexity (e.g. stenoses, aneurysms or increased tortuosity). What is more, the quantitative evaluation in our experiments is held back

by the measurement noise present in some of the test cases since it obfuscates the expressiveness of the evaluation metrics. We address this by performing statistical significance tests to discern differences in the numerical results. Lastly, our analysis in this work is limited to time-averaged instead of pulsatile hemodynamics estimation, even though 4D flow MRI does enable transient quantification of blood flow.

In conclusion, physics-informed graph neural networks can be trained using 4D flow MRI data to cheaply estimate blood flow in new and unseen carotid artery geometries.

REFERENCES

- [1] J. Brandstetter, R. Hesselink, E. van der Pol, E. J. Bekkers, and M. Welling, “Geometric and physical quantities improve E(3) equivariant message passing,” in *Proceedings of the 10th International Conference on Learning Representations*, 2022.
- [2] L. Saba, C. Loewe, T. Weikert, M. Williams, N. Galea, R. Budde, R. Vliegthart, B. Velthuis, M. Francone, J. Bremerich, L. Natale, K. Nikolaou, J. Dacher, C. Peebles, F. Caobelli, A. Redheuil, M. Dewey, K. Kreitner, and R. Salgado, “State-of-the-art CT and MR imaging and assessment of atherosclerotic carotid artery disease: standardization of scanning protocols and measurements—a consensus document by the European Society of Cardiovascular Radiology (ESCR),” *European Radiology*, vol. 33, no. 2, pp. 1063–1087, Feb. 2023.
- [3] C. Strecker, A. Krafft, L. Kaufhold, M. Hüllebrandt, S. Weber, U. Ludwig, M. Wolkewitz, A. Hennemuth, J. Hennig, and A. Harloff, “Carotid geometry is an independent predictor of wall thickness - a 3D cardiovascular magnetic resonance study in patients with high cardiovascular

- risk.” *Journal of cardiovascular magnetic resonance*, vol. 22, p. 67, 09 2020.
- [4] S.-W. Lee, L. Antiga, J. D. Spence, and D. A. Steinman, “Geometry of the carotid bifurcation predicts its exposure to disturbed flow,” *Stroke*, vol. 39, no. 8, pp. 2341–2347, 2008.
 - [5] M. Cibis, W. V. Potters, M. Selwaness, F. J. Gijssen, O. H. Franco, A. M. Arias Lorza, M. de Bruijne, A. Hofman, A. van der Lugt, A. J. Nederveen, and J. J. Wentzel, “Relation between wall shear stress and carotid artery wall thickening MRI versus CFD,” *Journal of Biomechanics*, vol. 49, no. 5, pp. 735–741, 2016.
 - [6] S. Engelhard, J. Voorneveld, H. J. Vos, J. J. M. Westenberg, F. J. H. Gijssen, P. Taimr, M. Versluis, N. de Jong, J. G. Bosch, M. M. P. J. Reijnen, and E. Groot Jebbink, “High-frame-rate contrast-enhanced US particle image velocimetry in the abdominal aorta: First human results,” *Radiology*, vol. 289, no. 1, pp. 119–125, 2018, PMID: 30015586.
 - [7] M. Bissell, F. Raimondi, L. Ait Ali, B. Allen, A. Barker, A. Bolger, N. Burris, C.-J. Carhäll, J. Collins, T. Ebberts, C. Francois, A. Frydrychowicz, P. Garg, J. Geiger, H. Ha, A. Hennemuth, M. Hope, A. Hsiao, K. Johnson, S. Kozerke, L. Ma, M. Markl, D. Martins, M. Messina, T. Oechtering, P. van Ooij, C. Rigsby, J. Rodriguez-Palomares, A. Roest, A. Roldán-Alzate, S. Schnell, J. Sotelo, M. Stuber, A. Syed, J. Töger, R. van der Geest, J. Westenberg, L. Zhong, Y. Zhong, O. Wieben, and P. Dwyerfeldt, “4D flow cardiovascular magnetic resonance consensus statement: 2023 update,” *Journal of Cardiovascular Magnetic Resonance*, vol. 25, no. 1, Dec. 2023.
 - [8] X. Li, X. Ouyang, J. Zhang, Z. Ding, Y. Zhang, Z. Xue, F. Shi, and D. Shen, “Carotid vessel wall segmentation through domain aligner, topological learning, and segment anything model for sparse annotation in mr images,” *IEEE Transactions on Medical Imaging*, pp. 1–1, 2024.
 - [9] C. A. Taylor, K. Petersen, N. Xiao, M. Sinclair, Y. Bai, S. R. Lynch, A. UpdePac, and M. Schaap, “Patient-specific modeling of blood flow in the coronary arteries,” *Computer Methods in Applied Mechanics and Engineering*, vol. 417, p. 116414, 2023, a Special Issue in Honor of the Lifetime Achievements of T. J. R. Hughes.
 - [10] K. Valen-Sendstad, A. Bergersen, Y. Shimogonya, L. Goubergrits, J. Bruening, J. Pallares, S. Cito, S. Piskin, K. Pekkan, A. Geers, I. Larra-bide, S. Rapaka, V. Mihalef, W. Fu, A. Qiao, K. Jain, S. Roller, K.-A. Mardal, R. Kamakoti, T. Spirka, N. Ashton, A. Revell, N. Aristokleous, J. Houston, M. Tsuji, F. Ishida, P. Menon, L. Browne, S. Broder-ick, M. Shojima, S. Koizumi, M. Barbour, A. Aliseda, H. Morales, T. Lefevre, S. Hodis, Y. Al-Smadi, J. Tran, A. Marsden, S. Vaippum-madhom, G. Einstein, A. Brown, K. Debus, K. Niizuma, S. Rashad, S. ichiro Sugiyama, M. Khan, A. Updegrove, S. Shadden, B. Cornelis-sen, C. Majoie, P. Berg, S. Saalfeld, K. Kono, and D. Steinman, “Real-world variability in the prediction of intracranial aneurysm wall shear stress: The 2015 international aneurysm cfd challenge,” *Cardiovascular engineering and technology*, vol. 9, no. 4, pp. 544–564, Dec. 2018.
 - [11] X. Zhang, B. Mao, Y. Che, J. Kang, M. Luo, A. Qiao, Y. Liu, H. Anzai, M. Ohta, Y. Guo, and G. Li, “Physics-informed neural networks (PINNs) for 4D hemodynamics prediction: An investigation of optimal framework based on vascular morphology,” *Computers in Biology and Medicine*, vol. 164, p. 107287, 2023.
 - [12] X. Morales Ferez, J. Mill, K. A. Juhl, C. Acebes, X. Iriart, B. Legghe, H. Cochet, O. De Backer, R. R. Paulsen, and O. Camara, “Deep learning framework for real-time estimation of in-silico thrombotic risk indices in the left atrial appendage,” *Frontiers in Physiology*, vol. 12, 2021.
 - [13] D. Lopes, H. Puga, J. Teixeira, and R. Lima, “Blood flow simulations in patient-specific geometries of the carotid artery: A systematic review,” *Journal of Biomechanics*, vol. 111, p. 110019, 2020.
 - [14] J. Suk, C. Brune, and J. M. Wolterink, “SE(3) symmetry lets graph neural networks learn arterial velocity estimation from small datasets,” in *Functional Imaging and Modeling of the Heart*. Cham: Springer Nature Switzerland, 2023, pp. 445–454.
 - [15] M. Raissi, A. Yazdani, and G. E. Karniadakis, “Hidden fluid mechanics: learning velocity and pressure fields from flow visualizations,” *Science*, vol. 367, 2020.
 - [16] M. F. Fathi, I. Perez-Raya, A. Baghaie, P. Berg, G. Janiga, A. Arzani, and R. M. D’Souza, “Super-resolution and denoising of 4D-flow MRI using physics-informed deep neural nets,” *Computer Methods and Programs in Biomedicine*, vol. 197, p. 105729, 2020.
 - [17] A. Kontogiannis and M. P. Juniper, “Physics-informed compressed sensing for PC-MRI: An inverse Navier-Stokes problem,” *IEEE Transactions on Image Processing*, vol. 32, pp. 281–294, 2022.
 - [18] J. Suk, P. de Haan, P. Lippe, C. Brune, and J. M. Wolterink, “Mesh neural networks for SE(3)-equivariant hemodynamics estimation on the artery wall,” *Computers in Biology and Medicine*, vol. 173, p. 108328, 2024.
 - [19] L. Liang, W. Mao, and W. Sun, “A feasibility study of deep learning for predicting hemodynamics of human thoracic aorta,” *Journal of Biomechanics*, vol. 99, p. 109544, 2020.
 - [20] S. Wang, D. Wu, G. Li, Z. Zhang, W. Xiao, R. Li, A. Qiao, L. Jin, and H. Liu, “Deep learning-based hemodynamic prediction of carotid artery stenosis before and after surgical treatments,” *Frontiers in Physiology*, vol. 13, p. 1094743, 01 2023.
 - [21] N. Maul, K. Zinn, F. Wagner, M. Thies, M. Rohleder, L. Pfaff, M. Kowarschik, A. Birkhold, and A. Maier, “Transient hemodynamics prediction using an efficient octree-based deep learning model,” in *Information Processing in Medical Imaging*, A. Frangi, M. de Bruijne, D. Wassermann, and N. Navab, Eds. Cham: Springer Nature Switzerland, 2023, pp. 183–194.
 - [22] G. Li, H. Wang, M. Zhang, S. Tupin, A. Qiao, Y. Liu, M. Ohta, and H. Anzai, “Prediction of 3D cardiovascular hemodynamics before and after coronary artery bypass surgery via deep learning,” *Communications Biology*, vol. 4, 01 2021.
 - [23] C. Qi, H. Su, K. Mo, and L. J. Guibas, “PointNet: Deep learning on point sets for 3D classification and segmentation,” *2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 77–85, 2016.
 - [24] C. R. Qi, L. Yi, H. Su, and L. J. Guibas, “PointNet++: Deep hierarchical feature learning on point sets in a metric space,” in *Proceedings of the 31st International Conference on Neural Information Processing Systems*, ser. NIPS’17. Red Hook, NY, USA: Curran Associates Inc., 2017, p. 5105–5114.
 - [25] I. K. Luirink, A. Wiegman, D. M. Kusters, M. H. Hof, J. W. Groothoff, E. de Groot, J. J. Kastelein, and B. A. Hutten, “20-year follow-up of statins in children with familial hypercholesterolemia,” *New England Journal of Medicine*, vol. 381, no. 16, pp. 1547–1556, 2019.
 - [26] H. Pedersen, S. Kozerke, S. Ringgaard, K. Nehrke, and W. Y. Kim, “k-t PCA: Temporally constrained k-t BLAST reconstruction using principal component analysis,” *Magnetic Resonance in Medicine*, vol. 62, no. 3, pp. 706–716, 2009.
 - [27] F. Isensee, P. F. Jaeger, S. A. A. Kohl, J. Petersen, and K. Maier-Hein, “nnU-Net: a self-configuring method for deep learning-based biomedical image segmentation,” *Nature Methods*, vol. 18, pp. 203 – 211, 2020.
 - [28] E. Peper, L. Gottwald, Q. Zhang, B. Coolen, P. Ooij, A. Nederveen, and G. Strijkers, “Highly accelerated 4D flow cardiovascular magnetic resonance using a pseudo-spiral cartesian acquisition and compressed sensing reconstruction for carotid flow and wall shear stress,” *Journal of Cardiovascular Magnetic Resonance*, vol. 22, 01 2020.
 - [29] L. M. Gottwald, E. S. Peper, Q. Zhang, B. F. Coolen, G. J. Strijkers, A. J. Nederveen, and P. van Ooij, “Pseudo-spiral sampling and compressed sensing reconstruction provides flexibility of temporal resolution in accelerated aortic 4D flow MRI: A comparison with k-t principal component analysis,” *NMR in Biomedicine*, vol. 33, no. 4, p. e4255, 2020.
 - [30] D. Alblas, C. Brune, and J. M. Wolterink, “Deep-learning-based carotid artery vessel wall segmentation in black-blood MRI using anatomical priors,” in *Medical Imaging*, 2021.
 - [31] K. Crane, C. Weischedel, and M. Wardetzky, “The heat method for distance computation,” *Commun. ACM*, vol. 60, no. 11, pp. 90–99, Oct. 2017.
 - [32] H. Gao, M. J. Zahr, and J.-X. Wang, “Physics-informed graph neural Galerkin networks: A unified framework for solving pde-governed forward and inverse problems,” *Computer Methods in Applied Mechanics and Engineering*, vol. 390, p. 114502, 2022.
 - [33] K. Shukla, M. Xu, N. Trask, and G. E. Karniadakis, “Scalable algorithms for physics-informed neural and graph networks,” *Data-Centric Engineering*, vol. 3, p. e24, 2022.
 - [34] J. Feydy, T. Séjourné, F. Vialard, S. Amari, A. Trounev, and G. Peyré, “Interpolating between optimal transport and MMD using Sinkhorn divergences,” in *The 22nd International Conference on Artificial Intelligence and Statistics, AISTATS 2019, 16-18 April 2019, Naha, Okinawa, Japan*, ser. Proceedings of Machine Learning Research, K. Chaudhuri and M. Sugiyama, Eds., vol. 89. PMLR, 2019, pp. 2681–2690.
 - [35] A. Paszke, S. Gross, F. Massa, A. Lerer, J. Bradbury, G. Chanan, T. Killeen, Z. Lin, N. Gimelshein, L. Antiga, A. Desmaison, A. Kopf, E. Yang, Z. DeVito, M. Raison, A. Tejani, S. Chilamkurthy, B. Steiner, L. Fang, J. Bai, and S. Chintala, “PyTorch: An imperative style, high-performance deep learning library,” in *Advances in Neural Information Processing Systems 32*. Curran Associates, Inc., 2019, pp. 8024–8035.
 - [36] M. Fey and J. E. Lenssen, “Fast graph representation learning with PyTorch Geometric,” in *ICLR Workshop on Representation Learning on Graphs and Manifolds*, 2019.