

# Numerical simulations of internal shocks in spherical geometry: hydrodynamics and prompt emission

A. Charlet<sup>1,2</sup>, J. Granot<sup>1,3,4</sup>, and P. Beniamini<sup>1,3,4</sup>

<sup>1</sup> Astrophysics Research Center of the Open University (ARCO), The Open University of Israel, 1 University Road, PO Box 808, Raanana 4353701, Israel

<sup>2</sup> Centre de Recherche Astrophysique de Lyon (CRAL), ENS de Lyon, UMR 5574, Université Claude Bernard Lyon 1, CNRS, Lyon 69007, France

<sup>3</sup> Department of Natural Sciences, The Open University of Israel, P.O. Box 808, Ra'anana 4353701, Israel

<sup>4</sup> Department of Physics, The George Washington University, 725 21st Street NW, Washington, DC 20052, USA

Received October XX, 2024; accepted Month XX, 202Y

## ABSTRACT

*Context.* Among the models used to explain the prompt emission of gamma-ray bursts (GRBs), internal shocks is a leading one. Its most basic ingredient is a collision between two cold shells of different Lorentz factors in an ultra-relativistic outflow, which forms a pair of shock fronts that accelerate electrons in their wake. The optically-thin synchrotron emission from the high-energy electrons at both shock fronts explains key features of the prompt GRB emission and their diversity without fine-tuning of the physical conditions.

*Aims.* We investigate the internal shocks model as mechanism for prompt emission based on a full hydrodynamical analytic derivation in planar geometry by Rahaman et al. (2024a,b), extending this approach to spherical geometry using hydrodynamic simulations.

*Methods.* We used the moving mesh relativistic hydrodynamics code GAMMA to study the collision of two ultra-relativistic cold shells of equal kinetic energy (and power). Using the built-in shock detection, we calculate the corresponding synchrotron emission by the relativistic electrons accelerated into a power-law energy distribution behind the shock, in the fast cooling regime.

*Results.* During the first dynamical time after the collision, the spherical effects cause the shock strength to decrease with radius. The observed peak frequency decreases faster than expected by other models in the rising part of the pulse, and the peak flux saturates even for moderately short pulses. This is likely caused by the very sharp edges of the shells in our model, while smoother edges will probably mitigate this effect. Our model traces the evolution of the peak frequency back to the source activity time scales.

**Key words.** Gamma-ray burst: general – Hydrodynamics – Radiation mechanisms: non-thermal – Methods: numerical

## 1. Introduction

Relativistic outflows are common to astrophysical phenomena featuring accretion and/or explosions. Such outflows are observed as sources of bright non-thermal emission, indicating conversion of their kinetic energy into radiation. Internal shocks, collisions between parts of the outflow with different velocities, are one of the proposed dissipation mechanism in many astrophysical contexts. They were first introduced by Rees (1978) to explain the “knots” – resolved inhomogeneities in the jet of galaxy M87, and were subsequently invoked to explain emission of radio-loud quasars (Spada et al. 2001), microquasars (Kaiser et al. 2000; Malzac 2014), and GRBs (Rees & Mészáros 1994; Sari & Piran 1997; Kobayashi et al. 1997; Daigne & Mochkovitch 1998). Internal shocks arise naturally when assuming inhomogeneities in the (proper) velocity of the outflow. In this scenario, a faster shell catches up with a slower one ejected at an earlier time by the central engine. The shells collide, and under the right conditions (see e.g. Pe’er 2014, for a review) two shock fronts will form: a forward shock (FS) propagating into the slow shell and a reverse shock (RS) propagating into the faster one. Particle acceleration is expected at these shock fronts, which consequently powers the emission from the outflow.

A common approach used to calculate the dissipation efficiency and calculate the emissions from internal shocks assumes plastic collisions: shells merge inelastically and continue

propagating as a single shell (Daigne & Mochkovitch 1998; Beloborodov 2000; Spada et al. 2000; Guetta et al. 2001; Bošnjak et al. 2009; Malzac 2014; Bustamante et al. 2017; Rudolph et al. 2022, 2023). The energy dissipation is associated to a FS if the Lorentz factor (LF) of the fused shell is closer to the fast shell, or to a RS otherwise. While providing a useful approximation that allows to reproduce a number of features associated with internal shocks, this approach crudely approximates the location of the shock front and washes away any features linked to the second shock front. Few studies focused on the shock physics (e.g. Kino et al. 2004; Pe’er et al. 2017) but did not study the temporal evolution for a generic parameter space. Such a work was done in Rahaman et al. (2024a) (hereafter R24a), who provided an analytical framework for internal shocks between two cold, homogeneous, unmagnetized shells of arbitrary proper velocities in planar geometry.

Genet & Granot (2009) parametrized the optically-thin synchrotron emission of a single shock front propagating over a range of radii. They found an analytical solution for the observed flux using integration over the equal arrival time surface (EATS) for a Band function spectral shape. Rahaman et al. (2024b) (hereafter R24b) built their model on this basis, adding refinements such as the ratio between shock front LF and downstream fluid LF, and considering contribution from both shock fronts using the estimates obtained in R24a. This allowed them to self-consistently calculate the flux of a single shock at any

observed frequency, which can then be used as a building block for full lightcurves and/or spectra of relativistic outflows. The hydrodynamical solution is significantly simplified in the planar case, which is a decent approximation as long as the dissipation radius varies by a factor  $\lesssim 2$  during the shock propagation. In particular, the shock strengths remain fixed with time or radius in that case. Because of this R24a determined all quantities in planar geometry, and R24b introduced spherical effects on the peak frequencies and luminosities in an approximated manner by neglecting variation of the shock fronts LF and shock strength with time. Considering that such effects may modify the emission signature significantly, a fully consistent spherical approach is necessary to properly quantify the applicability of R24b results.

The present study focuses on the construction of the thin-shell synchrotron emission corresponding to the thin cooling layer behind the shock in the fast cooling regime of spherical colliding shells through numerical simulations. In § 2 we introduce the physical framework of this studies, beginning with a summary of the main results from R24a (§ 2.1), following with a presentation of the numerical code (§ 2.2), the model used to derive observed flux from our simulation results (§ 2.3), and finishing with the numerical setups for this study (§ 2.4). We present the results in § 3, starting with the comparison of our fiducial spherical run with the planar case (§ 3.1) before exploring the fully spherical regime over the doubling radius (§ 3.2). Our calculated observed flux is presented in § 3.3 before we study the behavior of its peaks (§ 3.4), and then try to derive informations on the source activity from a few selected GRBs using those results (§ 3.5). We conclude and discuss our results in § 4.

## 2. Physical scenario and numerical methods

### 2.1. Hydrodynamical framework

In R24a, the authors show that the collision of two homogeneous cold relativistic shells is determined by seven basic parameters presented Table 1: the time  $t_{\text{off}}$  between the ejection of the two shells, their proper speeds ( $u_1, u_4$ ), where  $u \equiv \Gamma\beta$ , initial radial widths ( $\Delta_{0,1}, \Delta_{0,4}$ ) and initial kinetic energies ( $E_{k0,1}, E_{k0,4}$ ). Here and elsewhere, subscript 0 denotes the initial values of properties, i.e. at ejection or at the collision radius. Alternatively, the activity time ( $t_{\text{on},1}, t_{\text{on},4}$ ) and the power ( $L_1, L_4$ ) of the source during the emission of the shells may be used in place of the shells width and kinetic energy for a set of parameters focused on the source activity. The two are easily related through  $\Delta_{0,i} = \beta_i c t_{\text{on},i}$  and  $E_{k0,i} = L_i t_{\text{on},i}$ , assuming constant jet power and outflow velocity within each ejection interval. In particular, the assumption of no velocity spread within a shell means that all fluid elements move at the same velocity and its width doesn't change during propagation. As shown in Table 2, those seven parameters can be combined into four derived parameters required to describe the post-collision shock hydrodynamics: the collision radius  $R_0$ , the shells' radial widths ratio  $\chi$ , the proper velocities ratio  $a_u$ , and the proper density ratio  $f$ . We also introduce the collision time  $t_0 = R_0/\beta_4 c$  in the source frame, where we implicitly choose  $t = 0$  at the ejection of the front of shell 4. The shells are assumed to be cold,  $p_1 = p_4 = 0$ , and the proper density of shell  $i$  is obtained from

$$\rho'_i = \frac{1}{\Gamma_i(\Gamma_i - 1)} \frac{E_{k0,i}}{4\pi R_0^2 \Delta_{0,i} c^2}, \quad (1)$$

where primes denote quantities measured in the rest frames of the corresponding fluids. The collision of the two shells produces a pair of shocks: a reverse shock (RS) propagating into

**Table 1.** Physical parameters of the setup.

Symbol	Definition
$E_{k0,i}$	Available kinetic energy in shell $i$ just before collision
$\Delta_{0,i}$	Radial width of shell $i$ just before collision
$u_i$	Proper speed of shell $i$
$t_{\text{off}}$	Time between ejection of the shells
$L_i$	Source power during the ejection of shell $i$
$t_{\text{on},i}$	Activity time of the source during ejection of shell $i$

**Table 2.** List of derived parameters.

Symbol	Definition	Expression
$R_0$	Collision radius	$\frac{\beta_1 \beta_4 c t_{\text{off}}}{\beta_4 - \beta_1}$
$\chi$	Radial width ratio	$\frac{\Delta_{0,1}}{\Delta_{0,4}}$
$a_u$	Proper speed ratio	$\frac{u_4}{u_1} > 1$
$f$	Proper density ratio	$\frac{n'_4}{n'_1} = \chi \frac{E_{k0,4} \Gamma_1 (\Gamma_1 - 1)}{E_{k0,1} \Gamma_4 (\Gamma_4 - 1)}$

shell 4 and a forward shock (FS) propagating into shell 1. The two shocked regions, region 3 (shocked shell 4) and region 2 (shocked shell 1), are separated by a contact discontinuity (CD). At the collision radius, the use of the shock jump conditions together with pressure equality across the CD and the equation of state in the shocked regions allow for an analytical derivation of all relevant hydrodynamical quantities. Values at the collision radius will be noted by the subscript 0.

In planar geometry, quantities are constant across a shocked shell and with propagation. From the constant shock front velocities one easily derives shock crossing times and radius, determining the emission timing properties. We give in Appendix A the main results from R24a. Those do not hold anymore in spherical geometry, prompting the present numerical study.

### 2.2. Numerical method

This study is performed with the code **GAMMA** (Ayache et al. 2022) to solve the equations of special relativistic hydrodynamics (SRHD) in one dimension, using a finite-volume Godunov scheme, the HLLC (Mignone & Bodo 2005) solver for relativistic hydrodynamics, piecewise linear spatial reconstruction, and following an arbitrary Lagrangian-Eulerian approach. This means **GAMMA** can compute fluxes for any interface velocity. The HLLC solver adds a calculation of the contact discontinuity (CD) wavespeed to the two-wave HLL solver (Harten et al. 1983), the default behavior of **GAMMA** sets the interface velocity to that of the CD. We will use this default setting for all of this work, as a mesh moving with the flow's velocity allows to evolve propagating shells over a wide range of scales using bigger time steps: in such a mesh the limiting velocity becomes the sound speed, while it is the flow speed in fixed-mesh approaches. Such a moving mesh also offers the added benefit of Lagrangian behavior of the cells like natural refinement of zones with high gradients, as the cell size will follow the compression of the fluid.

**GAMMA** offers the choice between several time integration methods, among which we chose the third-order Runge-Kunta. The time step is adaptive, based on a Courant-Friedrich-Lewy (CFL) condition (Courant et al. 1928). To be consistent with the derivation of R24a, we implemented the Taub-Mathews equa-

tion of state (Mathews 1971) following Mignone & McKinney (2007). We used none of the adaptive mesh refinement methods present in *GAMMA* for this work to be able to properly identify cells from one timestep to the next and compare their properties. Finally, we use the shock detection algorithm introduced in Zanotti et al. (2010) already implemented in *GAMMA*. We find setting the shock detecting threshold to 0.15 produces satisfactory detection of the two fronts across the simulation. *GAMMA* also contains a method to inject an electron distribution in shocked cells and let them evolve using a reformulation of the cooling equation into an advection equation, which we will not use in this work given our choice of assumptions for the radiative efficiency (see discussion in Rahaman et al. 2024b, and references therein). We leave the exploration of different cooling regimes to an upcoming work.

### 2.3. Flux calculation from cells

In this work we derive the observed flux from our simulations by applying the method for an infinitely thin shell as described in Genet & Granot (2009) to cells right downstream of each shock front, the infinitely thin shell approximation is valid as  $\Delta r/R \sim 10^{-9}$  for shocked cells in the simulations run for this work. The contributing cells are chosen right downstream of the shocks, counting only one contribution of each cell crossed by the shock, waiting the few time steps necessary for the shock to cross to another cell to add a new contribution. We also assume the accelerated electrons follow a power-law energy distribution of index  $p$  ( $dN_e/dy_e \propto \gamma_e^{-p}$  for  $\gamma_e \geq \gamma_m$ ), and all the energy given to the electrons of a cell by the shock passage is radiated in less than a numerical time step. This requires the emission to be deep in the “fast cooling” regime. After identifying the contributing cell right downstream of the shock, we derive the minimum Lorentz factor of the post-shock electron distribution by normalizing the total available energy over the electron population:

$$\gamma_m = \frac{p-2}{p-1} \frac{m_p}{m_e} \frac{\epsilon_e}{\xi_e} \frac{e'_{\text{int}}}{\rho' c^2}, \quad (2)$$

for  $p > 2$ , where  $e'_{\text{int}}$  is the comoving (or proper) internal energy density.  $\epsilon_e$  is the fraction of internal energy transferred to the fraction  $\xi_e$  of total electrons, and we write the comoving peak frequency

$$\nu'_m = \nu'_{\text{syn}}(\gamma_m) = \frac{q_e B'}{2\pi m_e c} \gamma_m^2. \quad (3)$$

The contribution of a cell at radius  $r$  and time  $t$  traveling with dimensionless velocity  $\beta$  (corresponding to Lorentz factor  $\Gamma$ ) to the flux at an observed frequency  $\nu$  and observed time  $T$  is:

$$F_\nu(\tau \geq 1) = \frac{1+z}{4\pi d_L^2} \tilde{L}_{\nu'_m} \tau^{-2} S\left(\tau \frac{\nu}{\nu'_m}\right), \quad (4)$$

where  $S$  is a normalized function verifying  $S(x) = xS(x) = 1$  for  $x = 1$ , the normalized time  $\tau$  is defined as

$$\tau = \frac{T - T_{\text{ej}}}{T_\theta}, \quad T_{\text{ej}} = (1+z) \left( t - \frac{r}{\beta c} \right), \quad T_\theta = \frac{(1+z)r}{2\Gamma^2 c}, \quad (5)$$

and the peak luminosity:

$$\tilde{L}_{\nu'_m} = \frac{\Gamma \Delta V^{(3)}}{T_\theta} \frac{\epsilon_e e'_{\text{int}}}{W(p) \nu'_m}, \quad (6)$$

with  $\Delta V^{(3)}$  the (three-)volume of the cell in the rest frame of the central source, and  $W(p) = 2(p-1)/(p-2)$ . Eqn. (6) is obtained by comparing the isotropic energy from a single pulse in the formulation of GG09 and the formulation of De Colle et al. (2012), the derivation is detailed in Appendix B.2. The quantity  $\tilde{L}_{\nu'_m}$  is a numerical equivalent luminosity derived from synchrotron power and is not to be confused with the usual luminosity that appears in similar equations for the flux in GG09 or R24b. From their Appendix D, we write the comoving luminosity behind a shock front<sup>1</sup>:

$$L'_{\nu'_m} = \frac{L'_{\text{bol}}}{W(p) \nu'_m} = \frac{4}{3} \pi R^2 \beta_{\text{ud}} c \frac{\epsilon_e e'_{\text{int}}}{W(p) \nu'_m}, \quad (7)$$

using  $e'_{\text{int}} = (\Gamma_{\text{ud}} - 1) \rho_{\text{d}} c^2$  to obtain  $\beta_{\text{ud}}$ . Finally we identify :

$$\tilde{L}_{\nu'_m} = \frac{3\Gamma \Delta r}{\beta_{\text{ud}} c T_\theta} L'_{\nu'_m}. \quad (8)$$

In this work, the spectral shape  $S$  will either be the synchrotron broken power-law with low- and high-frequency spectral slopes  $b_1$  and  $b_2$  respectively (syn-BPL), or the Band function:

$$S(x) = e^{1+b_1} \begin{cases} x^{b_1} e^{-(1+b_1)x} & x \leq x_b \\ x^{b_2} x_b^{b_1-b_2} e^{-(b_1-b_2)x} & x \geq x_b \end{cases} \quad (9)$$

where  $x_b = (b_1 - b_2)/(1 + b_1)$ . Summing all contributions from the run gives the total observed flux as a function of observed time and frequency.

In the following, quantities will be plotted in units of the normalization frequency  $\nu_0$  and flux  $F_0$ , defined as the peak observed frequency and flux radiated at the RS at collision in R24b:

$$\nu_0 = 2\Gamma_0 \nu'_{m,\text{RS}}(R_0), \quad (10)$$

$$F_0 = \frac{(1+z)}{12\pi d_L} 2\Gamma_0 L'_{\nu'_m,\text{RS}}(R_0). \quad (11)$$

$\Gamma_0$  is the Lorentz factor of the shocked material at  $R_0$ , which is at this radius equal downstream of both shock fronts. See their Appendix G for the full derivation.

### 2.4. Numerical setup

To expand on the theoretical framework of R24b, we explore the collision of two ultrarelativistic shells of equal energy and width with a moderate proper velocity ratio  $a_u = 2$ . The kinetic energy available in the shells is taken to be  $10^{52}$  erg, a typical order of magnitude value for the isotropic equivalent value corresponding to a single GRB pulse. The choice of equal activity time / equal shell width is doubly motivated: by GRB spectrum observations and to ensure high radiative efficiency. From R24b, the peaks' relative prominence is tied to the shells' sizes: if  $t_{\text{on},1} \gtrsim 2 t_{\text{on},4}$  the FS peak is too prominent relative to the RS and vice versa (see e.g. their Fig. 4). They also showed that the rarefaction wave traveling back towards the center after shock crossing may catch up with and suppress the second shock before it finishes crossing its shell for values of  $\chi$  not close to 1, limiting the radiative efficiency of the process in such a case. The off time between pulses  $t_{\text{off}}$  is set to the same value as the pulses themselves, as observations suggests a correlation between pulse width and interval

<sup>1</sup> Since the electrons are assumed by construction to be deep in the fast cooling regime, it follows that the bolometric luminosity is directly related to  $\nu_m$  and the spectral luminosity at  $\nu_m$  and is independent of the cooling frequency.

**Table 3.** Run parameters in CGS units.

Parameter	Value
$E_{k,0}$	$10^{52}$ erg
$u_1$	100
$u_4$	200
$t_{\text{on},i}$	0.1 (0.5) s
$t_{\text{off}}$	0.1 s
$N_{\text{sh}}$	3000 (15000)
$\rho'_1$	$4.7 \times 10^{-12}$ g.cm $^{-3}$
$\rho'_4$	$1.2 \times 10^{-12}$ g.cm $^{-3}$
$\Theta_0$	$5 \times 10^{-5}$
$\tilde{\rho}'_{\text{ext}}$	$5 \times 10^{-2}$
$\Delta_{0,i}$	$3 \times 10^9 (1.5 \times 10^{10})$ cm
$t_0$	$2.7 \times 10^3$ s
$R_0$	$8 \times 10^{13}$ cm
$a_u$	2
$\chi$	1
$f$	0.25

between pulses, outside of quiescent periods (see e.g. Nakar & Piran 2002). We set both activity times  $t_{\text{on}}$  and the off time to a typical order of magnitude for the activity timescale of 0.1 s. The shells are ultra-relativistic with Lorentz factors of  $u_1 = 100$  and  $u_4 = 200$ , a minimum value to ensure the assumption of optically thin emission.

To complete this setup we define the external medium density behind shell 4,  $\rho'_{\text{ext},b}$  and in front of shell 1,  $\rho'_{\text{ext},f}$  from a density contrast parameter  $\tilde{\rho}'_{\text{ext}} = \rho'_4/\rho'_{\text{ext},b} = \rho'_1/\rho'_{\text{ext},f}$ . Both regions of external medium are set with the same velocity as the shell they are in contact with. Such an “external” medium is required for the rarefaction wave to set after shock crossing and hardly affects the results. The external pressure is defined by introducing the relativistic temperature  $\Theta_0$  as a parameter, we set pressure to be constant everywhere to  $p_0 = \min(\rho'_1, \rho'_4)\Theta_0 c^2$ . Setting pressure equality over the whole simulation box allows to avoid any unwanted effects from  $p dV$  work between the external medium and the shells. All these parameters are summarized in Table 3. The simulation is run in 1D over 6100 cells of which  $N_{\text{sh}} = 3000$  for each shell and 50 on each side for the external medium. This choice of resolution was made to ensure that the shock fronts have not propagated more than  $2 \times 10^{-3} R_0$  before the downstream values are properly established. This can be estimated by applying the formula for the crossing time (Eqn. A.3) to the width of 5 numerical cells, greater than the typical numerical size of the detected shock front with our choice of threshold parameter. Finally, we set an additional passive tracer with different values in each shell to help separate them easily during post-processing.

To fully explore the effects of spherical geometry on shock hydrodynamics by going well above the doubling radius for the crossing radius of each front, we ran another simulation in spherical geometry with larger activity times (and initial shells width) by a factor of 5 while keeping the off time constant. We increase the number of numerical cells per shell by the same factor. The values corresponding to this run are given in brackets in Table 3.

### 3. Effects of spherical geometry

Having calibrated our simulation against the analytical results in planar geometry in appendix A, we explore the spherical effects through two simulations: one where all parameters are equal for the sake of comparison, and a second one where activity times

$t_{\text{on},i}$  and thus shell width  $\Delta_{0,i}$  have been multiplied by 5 to explore hydrodynamics over a larger range of radii.


#### 3.1. Spherical effects on shells structure and shocks dynamics

A first result of performing the same run in spherical geometry is the variation in crossing times (radii): for the same values of parameters  $\Delta R_{\text{RS}}/R_0$  increases from 1.29 to 1.52 when switching from planar to spherical geometry, while  $\Delta R_{\text{FS}}/R_0$  only grows from 1.62 to 1.67. Fig. 1 shows snapshots of the comoving density, proper velocity and pressure, similar to Fig. A.1, at times  $t_0$ ,  $2 t_0$ , and  $2.6 t_0$ . The analytical expectations from planar geometry, with density and pressure rescaled by  $(R/R_0)^{-2}$  to account for propagation, are plotted to better highlight the differences with R24a. Spherical effects modify the structure of the shocked regions: the density profile shows compression from the shocks to the contact discontinuity, a proper velocity decrease with radius, and a slightly increasing pressure profile from the RS to the FS. As the shells and shocks propagate, the density in regions 1 and 4 (i.e. the unshocked portions of both shells) will decrease with  $r^{-2}$ . This is due to mass conservation of a fluid element in spherical geometry, with our assumption of little to no velocity spread between the two interfaces. At the 0th order where we consider constant shock strength, the downstream density  $\rho_d$  and pressure will also evolve following a  $r^{-2}$  law. From pressure continuity (i.e. the pressure gradient is rather small in the shocked regions as they are in causal contact), the pressure at the CD will follow the same law instead of the  $r^{-2\hat{\gamma}}$  from adiabatic expansion, with  $\hat{\gamma}$  being the adiabatic index. That is,  $p_d \approx p_0(R/R_0)^{-2} \approx p_{\text{CD}} \approx (\rho_{\text{CD}}/\rho_0)^{\hat{\gamma}}$  and  $\rho_d = \rho_0(R/R_0)^{-2}$ , implying  $\rho_{\text{CD}}/\rho_0 = (R/R_0)^{2(1-\hat{\gamma}^{-1})}$ . This results in a compression of the fluid towards the center with the ratio between densities behind the shock and at the CD following a  $-2(1 - \hat{\gamma}^{-1})$  law. This implies a density scaling  $\rho_{\text{CD}} \propto r^{-2/\hat{\gamma}}$  between  $r^{-1.5}$  and  $r^{-1.2}$  ( $\rho_{\text{CD}}/\rho_0 \propto r^{2(1-\hat{\gamma}^{-1})}$  between  $r^{0.5}$  and  $r^{0.8}$ ) for an adiabatic index varying between 4/3 and 5/3.

Both of these effects are seen Fig. 2, top panel, which displays densities rescaled with  $(r/R_0)^2$  to take out spherical effects: the values taken right downstream of the shocks show very little to no variation in radius, while those on both sides of the CD increase with the same  $r^{0.7}$  (or  $\rho' \propto r^{-1.3}$  without rescaling) fitting with our observed regime of intermediate shock strengths. This results in intermediate adiabatic index values according to the Kumar & Granot (2003) formulation used in R24a:

$$\hat{\gamma} = \frac{4\Gamma_{\text{ud}} + 1}{3\Gamma_{\text{ud}}}, \quad (12)$$

which they proved to be equivalent to the TM EoS for a cold upstream medium. To a highest order of precision, the variation of the shock strength  $\Gamma_{\text{ud}} - 1$  with propagation changes this behavior: as seen in the bottommost panel of Fig. 2 the shock strengths decrease with propagation, at a stronger rate for the RS than the FS. This translates to a slight decrease of the post-RS rescaled density, and stronger decrease in post-RS pressure than downstream of the FS as shown in the 3rd panel of Fig. 2, explaining the increasing pressure profile from RS to FS seen in the snapshots. Similarly, we observe larger post-RS flow velocity than downstream of the FS, the first increases with propagation while the second decreases with it, creating the profile observed Fig. 1. While this approach in terms of power-law scalings proves itself useful to explain behavior below the doubling radius (i.e.  $R \lesssim 2R_0$ ), exploring a greater range of radii show different behavior above it.

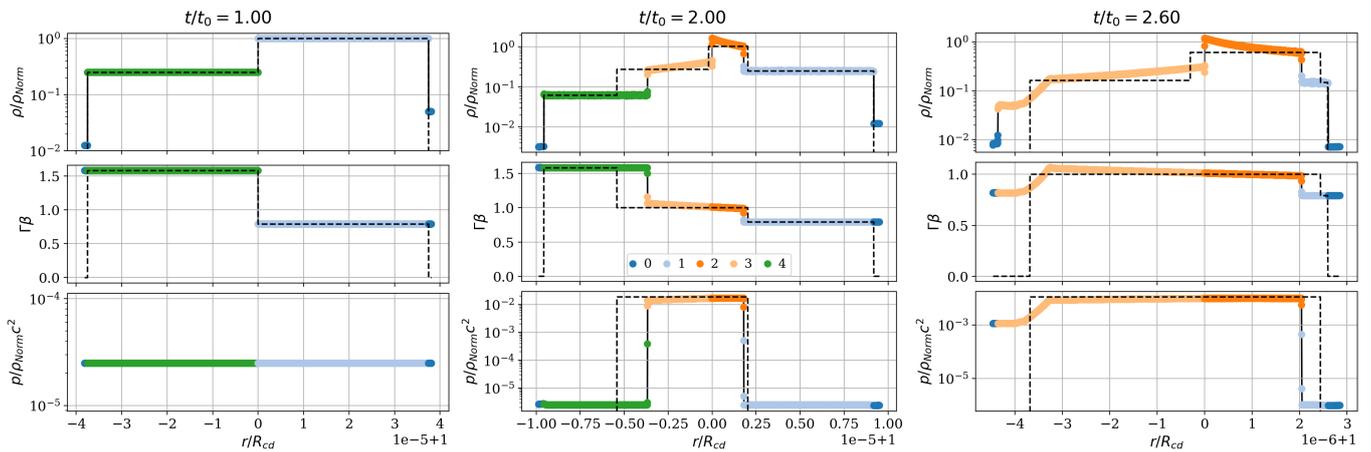

**Fig. 1.** Snapshots of the run in spherical geometry, with all parameters similar to the fiducial run, at  $t = t_0$  (left), before first (reverse) shock crossing (center), and after shock crossing (right). Dashed black lines show the analytical expectations from the results in planar geometry. Legend is common to all panels.

### 3.2. Asymptotical hydrodynamics in the spherical regime

We present here the results of the simulation ran with both activity times multiplied by a factor of 5, while keeping  $t_{\text{off}}$  and all other quantities constant. This means the shells are now wider than their separation by this same factor, which allows to explore the evolution of the various relevant quantities for the flux calculation over a range of radii  $\sim 10 R_0$ , almost an order of magnitude greater than the situation presented in § 3.1. In Fig. 3 we show the fluid and shock fronts Lorentz factors in the top panel, and the shock strengths in the bottom panel. Data has been smoothed by a rolling average window to eliminate the strong noise caused by the propagation of numerical errors in the interface velocity over the large number of code iterations for this simulation. Such oscillations could be reduced by the use of an higher spatial order reconstruction algorithm instead of the 1st order piecewise linear algorithm currently present in GAMMA. The downstream and shock Lorentz factors evolve at the same rate, keeping the ratio  $g$  introduced in R24a close to constant. At the collision radius the values are in accordance to the analytical expectations in planar geometry derived in R24a, before decreasing in a power-law up to the doubling radius and smoothly connecting to a constant value after a few  $R_0$ . Values relative to the RS change by a greater amount in this asymptotical regime compared to the planar case than values relating to the FS: shock and downstream Lorentz factor grow by  $\sim 10\%$  at the RS and go down by  $\sim 3\%$  at the FS, while shock strength diminishes by  $\sim 3\%$  and  $\sim 0.7\%$  respectively. We thus model any hydrodynamical or derived quantity  $X$  with the law:

$$X(R) = \left[ \left( X_{0*} \tilde{R}^n \right)^s + \left( X_{\text{sph}} \tilde{R}^h \right)^s \right]^{1/s} = X_0 f_X(R), \quad (13)$$


with  $\tilde{R} = R/R_0$  and  $f_X$  a function verifying  $f_X(R_0) = 1$ . The index  $h$  corresponds to the expected scaling from propagation effects at constant shock strength, which can be 0;  $X_{\text{sph}} \tilde{R}^h$  is the asymptotical value at large radii, and  $X_{0*}$  is defined by the value at collision radius  $X_0 = X(R_0) = [X_{0*}^s + X_{\text{sph}}^s]^{1/s}$ . Note that  $s$  need to be of the opposite sign of  $n$  (and of  $h$  when nonzero). The values obtained for the shock strength and downstream Lorentz factors by the fitting procedure are given Table 4. While the change in those quantities and thus the related quantities such as luminosity and peak frequency are not very significant in absolute values, it is their rate of change that has the most impact on observable data at very early times.

### 3.3. Lightcurves and spectra from two spherical colliding shells

We present Figs. 4 and 5 the resulting lightcurves and time-integrated spectra from our simulations, comparing the two geometries in the same panel for both the Band and the broken power-law spectral shape. To highlight the difference between the assumptions for propagation chosen in R24b and the fully spherical results, we compare our results to the hybrid approach instead of the fully planar case detailed in Appendix B.3. The total lightcurve is weakly affected by the geometry, with slightly increased peak times corresponding to our estimation in § 3.1 and a smoothed shape compared to the planar case. In comparison, the individual contributions of each shock front vary significantly, with the RS peak luminosity increasing by a factor 5/4 and the FS's decreasing by a factor 0.7. We see from the time-integrated spectra Fig. 5, the peak frequencies of both shock fronts decrease but not by the same amount: the stronger scalings with radius for peak luminosity and frequencies as well as the increase in crossing radius for the RS decrease both peak frequencies, alleviating some of the tension on the range of  $a_{\text{H}}$  explorable through this model while matching observations. We retain from the hybrid approach the intermediate power-law segment of index  $b_3 + 1 \gtrsim 0.1$  with both the Band and syn-BPL spectral shapes. To highlight even further the difference between the results of this present study and those from R24b, we redraw in dotted line the Band + hybrid lightcurve (respectively time-integrated spectrum) in the syn-BPL panel. The main change lies in the total received flux (respectively fluence), especially at lower frequencies, but the essential characteristics of the lightcurve (respectively time-integrated spectrum) are similar.

### 3.4. Peak frequency and flux

The individual variations of peak frequency and flux associated to each shock front are displayed in Fig. 6 against normalized time, where the spherical effects systematically lowers both peak frequency and flux for both shocks. In particular, the peak frequency decreases at a different rate between the rise and the high-latitude emission (HLE) with  $\nu_{\text{pk,RS}} \propto \tilde{T}^{-1.9}$  versus the constant rate of  $\tilde{T}^{-1}$  with approximated spherical effects that do not consider the change in shock strength into account. In the following we present a way to estimate those quantities from the hydrodynamics with less calculations than the full flux calcula-

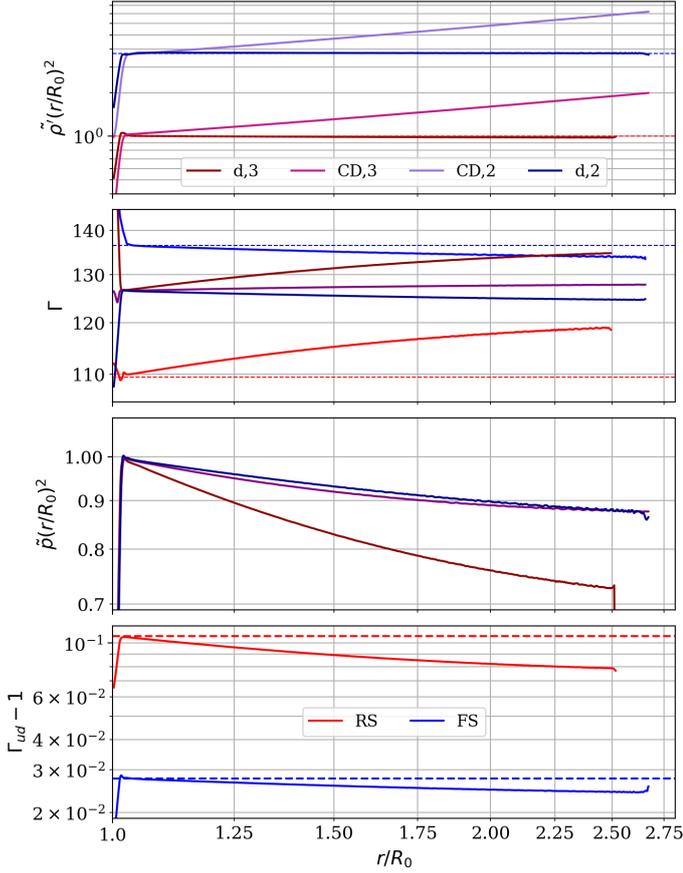

**Fig. 2.** From top to bottom: comoving densities, Lorentz factors of the fluid and shock fronts, pressure, shock strengths. The hydrodynamical quantities are measured downstream of shocks ('d,3' downstream of the RS, 'd,2' for the FS), at the CD by averaging over a few cells crossing the interface, or on each side of it (CD<sub>3</sub>, CD<sub>2</sub>) for the density. Legend is common to all panels. The derived Lorentz factor of the shock fronts is displayed with the measured ones. Densities and pressures are in units of the values behind the RS in the planar case and rescaled to  $(r/R_0)^2$ . Numerical oscillations in data were smoothed by a rolling average. Horizontal dashed lines show the corresponding analytical values from R24a.

tion detailed in § 2.3. We build this approach on the asymptotical regimes identified for the hydrodynamical quantities in § 3.2.


Assuming the hydrodynamical variables can be modeled according to the law given by Eqn. 13, after extracting the relevant variables for flux calculation from the simulation results we fit them with the same type of law :

$$\Gamma_d(R) = \left[ (\Gamma_{0*} \tilde{R}^{-m/2})^s + (\Gamma_{\text{sph}})^s \right]^{1/s} \equiv \Gamma_{f,0} f_\Gamma(R), \quad (14)$$


$$v'_m(R) = \left[ (v'_{0*} \tilde{R}^d)^s + (v'_{\text{sph}} \tilde{R}^{-1})^s \right]^{1/s} \equiv v'_{f,0} f_{v'}(R), \quad (15)$$

$$L'_{v'_m}(R) = \left[ (L'_{0*} \tilde{R}^a)^s + (L'_{\text{sph}} \tilde{R})^s \right]^{1/s} \equiv L'_{f,0} f_{L'}(R). \quad (16)$$

We perform the fit with the `curve_fit` function from SciPy, which is based on a non-linear least square method. We give in Table 4 the obtained values for the fits. The numerical values at  $R_0$  differ slightly ( $\leq 2\%$ ) from the analytical expectations, we note them with the subscript "f,0" to avoid confusion. Then to obtain an estimate for the peak frequency and flux in the rising part of the prompt emission, we assume we can define an effective radius on the EATS at which the peak contribution can be calculated  $R_{\text{eff}}(T) = y_{\text{eff}} R_L(T)$ , with  $R_L(T)$  the maximal radius

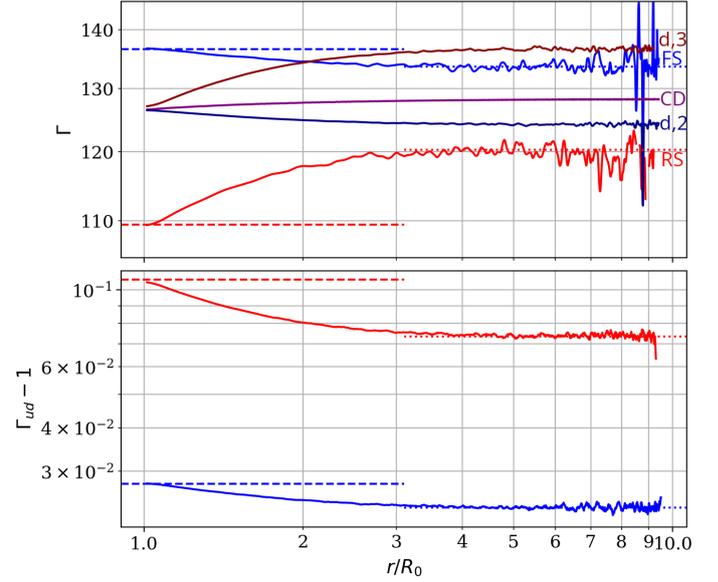


**Fig. 3.** Top: Lorentz factors of the shock fronts, the fluid downstream of the shocks and at the CD with radius. Bottom: Evolution of shock strengths with radius. Data was smoothed by rolling average. The quantities converge smoothly to a constant value after  $r \approx 4R_0$ , shown by the dotted horizontal line for the quantities relative to the RS and the FS. Legend is common to Fig. 2.

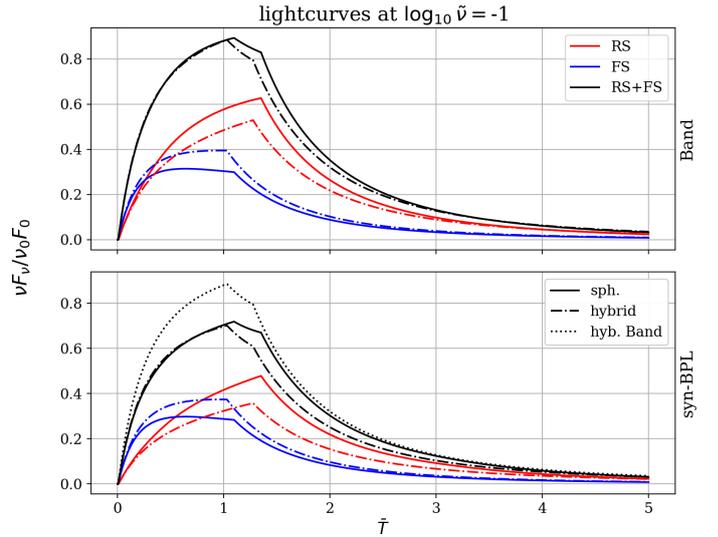

**Fig. 4.** Lightcurves in the spherical (full lines) and hybrid (planar geometry and spherical assumptions for peak frequency and luminosity, dash-dotted lines) cases at fixed frequency  $\tilde{\nu} = 0.1$ . Top panel shows the lightcurves with Band spectral shape and bottom panel the broken power-law spectral shape. The total lightcurve in the hybrid + Band case is redrawn in the bottom panel (dotted line) for the sake of comparison. The individual contributions from each shock change but the resulting lightcurve do not, apart from the slightly increased breaks from the increase in crossing times. The choice of spectral shape decreases total emission at this frequency while keeping the same time evolution.

of the EATS (found along the line of sight). At a given observer time  $T$ , this radius can also be identified by its angle with the line of sight, or more conveniently by the quantity  $\xi_{\text{eff}} = (\Gamma\theta)_{\text{eff}}^2$ . A schematic of this method is given Fig. 7.

Both quantities are joined by  $y = [1 + g^{-2}\xi]^{-1}$  and we take  $R_L = R_0 \tilde{T}$ , where we implicitly choose a constant  $\Gamma_{\text{sh}}$  to approx-

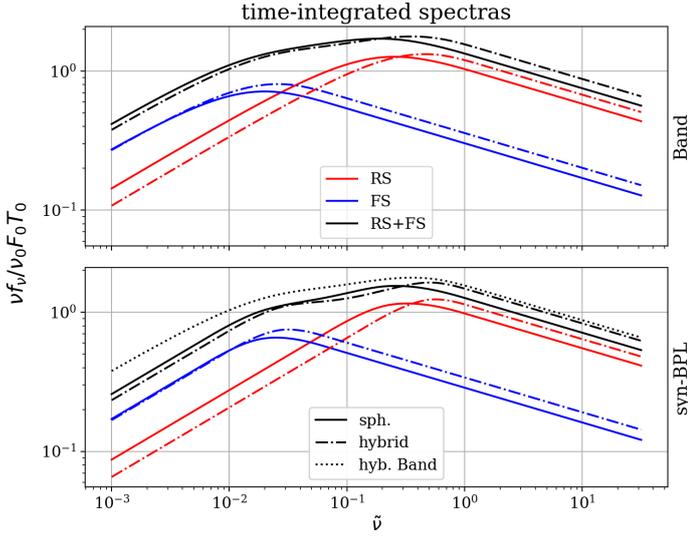

**Fig. 5.** Time-integrated spectras following the same structure as in Fig. 4. The spherical effects decrease the peak frequencies for both shocks, with a stronger effect on the RS. The peaks from both contributions are closer than in the planar case, resulting in a three-part spectrum. This effect is more visible with the broken power-law spectral shape where the two peaks are distinct from each other in the hybrid approach. The choice in spectral shape also diminishes the flux at low frequency.

**Table 4.** Fitting parameters for shock strength and other emission-related quantities behind each shock front, normalized to the analytical values derived in R24b.

	$X_{0*}$	$X_{\text{sph}}$	index	$ s $
$(\Gamma_{\text{ud}} - 1)_{\text{RS}}$	0.103	0.0735	$n = -0.64$	5.0
$(\Gamma_{\text{d}}/\Gamma_0)_{\text{RS}}$	1.01	1.08	$m = -0.29$	24.0
$(v'_m/v'_0)_{\text{RS}}$	0.72	0.40	$d = -3.46$	1.0
$(L'_{\nu_m}/L'_{\nu_0})_{\text{RS}}$	1.03	1.43	$a = 1.84$	3.1
$(\Gamma_{\text{ud}} - 1)_{\text{FS}}$	0.0278	0.0236	$n = -0.21$	18.5
$(\Gamma_{\text{d}})_{\text{FS}}$	0.999	0.982	$m = 0.06$	102.2
$(v'_m/v'_0)_{\text{FS}}$	0.40	0.65	$d = -2.67$	1.0
$(L'_{\nu_m}/L'_{\nu_0})_{\text{FS}}$	1.05	1.16	$a = 1.39$	5.7


imate the EATS at the 0th order. Then the peak frequency and flux are given by:

$$(1+z)v_{\text{pk}}(T) = k_{\nu} v_{f,0} \frac{f_{\Gamma}(R_{\text{eff}}) f_{\nu'}(R_{\text{eff}})}{1 + \xi_{\text{eff}}}, \quad (17)$$


$$F_{\nu_{\text{pk}}}(T) = k_F F_{f,0} 3g^2 \xi_{\text{max}} \left( \frac{f_{\Gamma}(R_{\text{eff}})}{1 + \xi_{\text{eff}}} \right)^3 \frac{f_{L'}(R_{\text{eff}})}{f_{\Gamma}(R_L)^2}. \quad (18)$$

Where  $v_{f,0} = 2\Gamma_{f,0}v'_{f,0}$  and  $F_{f,0} = ((1+z)/(4\pi d_L)) 2\Gamma_{f,0}L'_{f,0}$ .  $k_{\nu}$  and  $k_F$  are two free parameters of order unity introduced to compensate for the difference between analytical and numerical values at  $R_0$  such that  $k_{\nu}v_{f,0} = v_0$  and  $k_F F_{f,0} = F_0$ . The observed peak frequency is obtained by calculating the Doppler factor and comoving peak frequency at  $R_{\text{eff}}$ , and the flux is obtained by assuming the flux integral (Eqn. B.7) can be approximated by the value of the integrand at  $\xi_{\text{eff}}$  times the extension of the EATS in this variable,  $\xi_{\text{max}} = g^2(\tilde{T} - 1)$ . We then look for the function  $\xi_{\text{eff}}(T)$  fitting the data. Noting that contributions from regions of the EATS beyond the relativistic beaming angle  $1/\Gamma$  become increasingly suppressed, we define a saturation angle  $\xi_{\text{sat}}$  of order unity and we chose the fitting function for  $\xi_{\text{eff}}$ :

$$\xi_{\text{eff}}(T) = k_{\xi} (\xi_{\text{max}}^{-s} + \xi_{\text{sat}}^{-s})^{-1/s} = k_{\xi} \left( [g^2(\tilde{T} - 1)]^{-s} + \xi_{\text{sat}}^{-s} \right)^{-1/s},$$

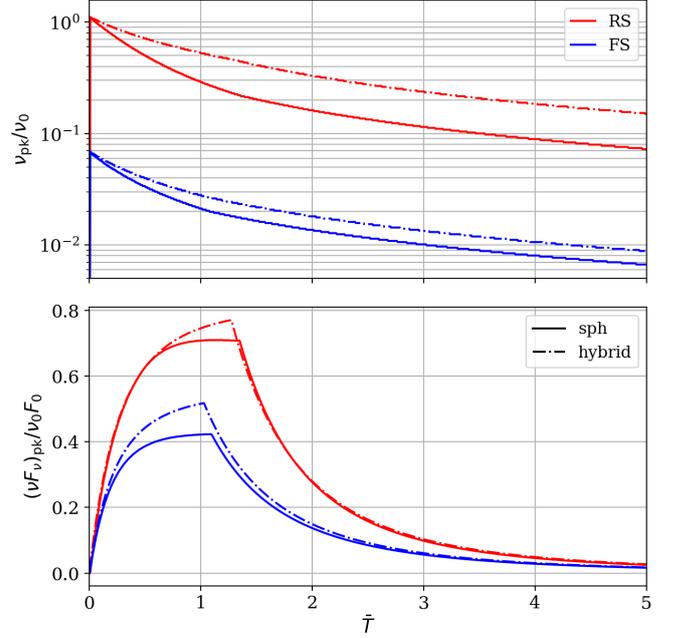

**Fig. 6.** The normalized time evolution of peak frequency and flux for both shock fronts in the spherical (full line) and hybrid (dash-dotted) cases, calculated from the flux obtained with the Band spectral shape. In spherical geometry, the peak frequency decrease at a faster rate during the rising phase and the flux reaches saturation before the break to the high-latitude emission.

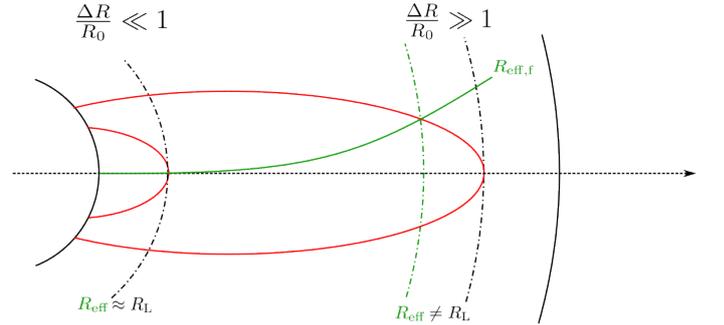

**Fig. 7.** Schematic representation of the effective radius approximation used to derive peak frequency and flux from the hydrodynamical data depending on the asymptotical regime. The EATS is shown in red.

$$(19)$$

where  $k_{\xi}$ ,  $\xi_{\text{sat}}$  and  $s$  are the free parameters. The high-latitude emission part is modeled as the emission from the final effective radius  $R_{\text{eff},f} = y_{\text{eff}}(T_f)R_f$ , with  $T_f$  the observed time corresponding to the shock crossing:

$$v_{\text{pk,HLE}}(T) = v_{\text{pk}}(T_f) \tau_f^{d_{\nu}}, \quad (20)$$


$$F_{\nu_{\text{pk,HLE}}}(T) = F_{\nu_{\text{pk}}}(T_f) \tau_f^{d_F}, \quad (21)$$

and  $\tau_f$  is the normalized time defined at  $R_{\text{eff},f}$  following Eqn. 5. We give Table 5 the values found to fit the peak frequency and flux of Fig. 6 with an accuracy within a few percent.

### 3.5. Maximal frequency and crossing radius

Among the spectral signatures, the behavior of the peak flux versus peak frequency shown Fig. 8 is the one presenting the


front	$k_\xi$	$\xi_{\text{sat}}$	$s$	$k_\nu$	$k_F$	$d_\nu$	$d_F$
RS	0.29	6.98	1.0	0.98	0.54	-1.31	-2.76
FS	0.51	2.89	1.0	0.97	1.28	-1.02	-2.47

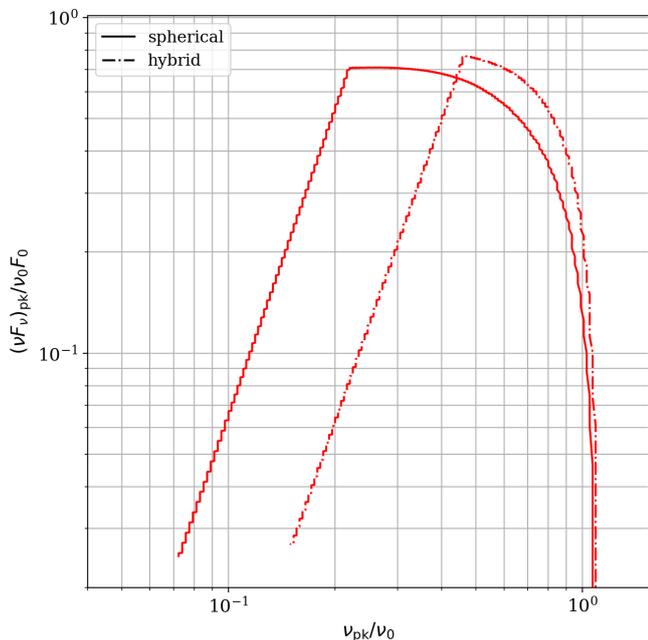**Table 5.** Fitting parameters for the peak frequency and flux.

**Fig. 8.**  $\nu F_\nu$ , at peak frequency vs peak frequency for the reverse shock in the spherical and hybrid case. The fully spherical case show peak flux over a larger range of frequencies.

most striking change between planar and spherical dynamics. In this figure, we compare the purely spherical case to the hybrid approach of R24b, which features planar dynamics along with spherical geometry for calculating the radiation. The spherical case transitions to the anticipated correlation of high-latitude emission  $(\nu F_\nu)_{\text{pk}} \propto \nu_{\text{pk}}^3$  at lower frequency but presents a high flux over a wider range. We will define  $\nu_{\text{bk}}$  as the peak frequency at this break. Comparing to Fig. 11 in R24a, the combined effects from spherical geometry on peak flux and frequency is greater than the pure increase in  $\Delta R/R_0$  compared to the hybrid approach: simply increasing the crossing radius in the R24 formalism is not enough to obtain the curves in the spherical case.

In Fig. 9, we display the evolution with normalized crossed radius  $\Delta R/R_0$  of the ratio between  $\nu_{\text{bk}}$  and the frequency  $\nu_{1/2}$  defined as where the peak flux in the rising part is half of that at  $\nu_{\text{bk}}$ . This allows us to add our modifications to the results presented in Table I1 from R24b: from the ratio in frequencies for peak flux obtained from the data presented in Yan et al. (2024) and assuming the RS is the main contribution to the observed flux, they infer the radius crossed by the RS during the burst  $\Delta R/R_0$  and thus the ratio of activity time to off time  $t_{\text{on},4}/t_{\text{off}}$ . We present in Table 6 our updated values for the crossed radius in light of spherical effects and compare them to the values inferred in R24b. On average, the obtained crossed radius for our fiducial spherical case is half of the value obtained by R24b and about a third for the obtained activity over off time ratio.

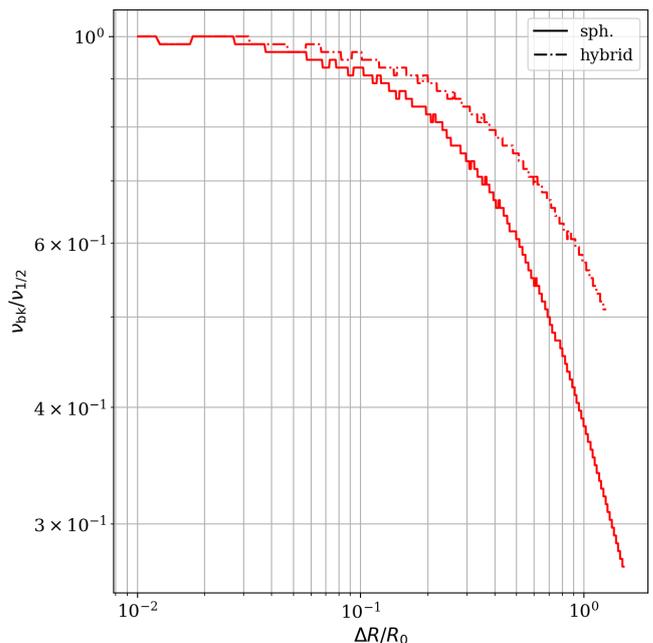GRB	$\nu_{\text{bk}}/\nu_{1/2}$	$(\Delta R/R_0)_{\text{R24}}$	$(\Delta R/R_0)_{\text{sph}}$	$(t_{\text{on}}/t_{\text{off}})_{\text{sph}}$
140606B	0.45	1.66	0.81	0.57
131011A	0.59	1.04	0.51	0.37
170607A	0.36	2.36	1.09	0.74
151027A	0.65	0.84	0.43	0.31
150514A	0.60	0.99	0.50	0.36
120326A	0.70	0.71	0.35	0.26
190829A	0.50	1.40	0.69	0.49

**Table 6.** Estimation of  $\Delta R/R_0$  crossed by the RS in spherical geometry for a choice of GRBs and corresponding  $t_{\text{on}}/t_{\text{off}}$  ratio, assuming our fiducial parameter  $a_{\text{u}} = 2$  for the velocity contrast. Data points are taken from Yan et al. (2024) following R24b.

**Fig. 9.** Ratio between break frequency  $\nu_{\text{bk}}$  and frequency at half flux  $\nu_{1/2}$  for the planar (hybrid) case and the fully spherical case.

## 4. Conclusions

We have presented a fully spherical, self-consistent numerical approach of the internal shocks model for the prompt GRB emission, showing the impact of the spherical hydrodynamics effects on emission, even for crossing radii lower than twice the initial collision radius. Our basic two-shell collision model describes a single spike in the prompt GRB lightcurve, which usually consists of multiple pulses that in this picture correspond to multiple collisions. After calibrating our methods against the analytical results obtained in Rahaman et al. (2024a,b) using a planar approach for hydrodynamics and approximate spherical effects for the emission, we numerically extend their conclusions to the fully spherical case while keeping the assumption of an infinitely thin emitting shell. We present the structural and dynamical differences of shocked shells in spherical geometry and highlight the non-negligible effects of the evolution in Lorentz factors and shock strengths on the emission over the shock crossing time. In particular, the quantities associated with each shock front evolve at a different rate due to the differences in shock strengths. We then expect that following the spectral properties of a burst over time will allow to distinguish this two-zones emission model from a one-zone model. While we assumed equal values of the

microphysical parameters ( $\epsilon_e$ ,  $\epsilon_B$ ,  $\xi_e$ ,  $p$ ) between the two shock fronts, any diversity in those parameters will most likely add diversity to the obtained emission between the two shock fronts.

We produce lightcurves and (time-integrated) spectras with two different spectral shapes, the smooth Band function and the synchrotron broken power-law. While the Band function is a phenomenological model of the emission spectrum, the synchrotron broken power-law is physically motivated. Calculating flux with the latter results in less flux at lower frequencies, but conserves the general time evolution of the light curve. It also preserves the doubly-broken power-law shape of time-integrated spectrum, shape that has been successfully used to fit prompt GRB data (see e.g. Burgess et al. 2014; Oganessian et al. 2017; Ravasio et al. 2019). The validity of the results obtained with this rough spectral shape compared to using the empiric smooth Band function motivates the use of this simpler emission function to explore more complicated flows as well as other cooling regimes with different spectral shapes in further works while retaining physical accuracy.

While the effects of spherical geometry on the shocks hydrodynamics are not striking when comparing lightcurves and time-integrated spectras, they cannot be ignored when studying the evolution of spectral shape within a single spike in the prompt GRB lightcurve. In particular we obtain shapes that are more similar to the observed ones for a choice of GRBs presented in Yan et al. (2024), and our inferred crossing radii and source activity time over off time to obtain such peak flux and frequency evolution are smaller by a factor of 2 and 3, respectively, when compared to the estimations done by Rahaman et al. (2024b).

This work relies on many highly idealized assumptions, especially the choice of homogeneous shells in both density and Lorentz factor. This assumption may be lifted to obtain more realistic emission signatures of internal shocks by simulating more physically-motivated flows. A striking example is the sharp edge in the peak flux vs peak frequency plot that originates from the sharp edge of the shells, emission stopping at once when the shock crosses. Such a sharp edge is not seen in observed GRBs (Yan et al. 2024)). The exploration of internal shocks in higher dimensions is also expected to introduce additional effects. Studies on the external shock of GRB outflows (i.e. the one that form due to the interaction with the external medium) in 2D have shown the growth of Rayleigh-Taylor instabilities (RTI) significantly modifies the dynamics of the external reverse shock and causes its emission to peak at a later time (e.g. Duffell & MacFadyen 2013; Ayache et al. 2022). The shear flow and/or turbulence near RTI fingers at the contact discontinuity may also be source of particle acceleration.

Additionally, the synchrotron broken power-law used in this work is obtained in the limiting case where all the non-thermal electron energy is radiated away in less than a numerical time step. This limits the emission region to a single numerical cell representing an infinitely thin shell, behind each shock front. This case assumes being very deep in the fast cooling regime, exploring the impact of other cooling regimes and extended emission zones in a consistent way using the capacity of GAMMA to evolve a non-thermal electron distribution will be the focus of a future work. Changing the microphysical parameters as mentioned is a way to explore other cooling regimes and try to obtain observed photon indices. In Bošnjak & Daigne (2014), they find the best agreement to observations using varying microphysical parameters with shock conditions. Numerically, this could be achieved by locally computing the value of these parameters following recipes. GAMMA already proposes one such recipe to

compute  $p$ , exploring its effects and implementing local evolution of other parameters may be pursued in a future work.

The implementation for the local electron distribution in GAMMA only features synchrotron and adiabatic cooling, but inverse Compton scatterings with the photons produced at both fronts are expected to modify the distribution in the context of GRB emission (see e.g. Nakar et al. 2009 for a comprehensive reference, Jacovich et al. 2021; McCarthy & Laskar 2024; Pellouin & Daigne 2024 for recent numerical implementations in the context of GRB afterglows). Implementing proper inverse Compton and synchrotron self-Compton is a challenging task that may be tackled in future works.

*Acknowledgements.* We thank Frédéric Daigne for the insightful discussions and the CRAL for its welcome. PB is supported by a grant (no. 2020747) from the United States-Israel Binational Science Foundation (BSF), Jerusalem, Israel, by a grant (no. 1649/23) from the Israel Science Foundation and by a grant (no. 80NSSC 24K0770) from the NASA astrophysics theory program.

## References

- Ayache, E. H., van Eerten, H. J., & Eardley, R. W. 2022, *MNRAS*, 510, 1315  
 Beloborodov, A. M. 2000, *ApJ*, 539, L25  
 Bošnjak, Ž. & Daigne, F. 2014, *A&A*, 568, A45  
 Bošnjak, Ž., Daigne, F., & Dubus, G. 2009, *A&A*, 498, 677  
 Burgess, J. M., Preece, R. D., Connaughton, V., et al. 2014, *ApJ*, 784, 17  
 Bustamante, M., Heinze, J., Murase, K., & Winter, W. 2017, *ApJ*, 837, 33  
 Courant, R., Friedrichs, K., & Lewy, H. 1928, *Mathematische annalen*, 100, 32  
 Daigne, F. & Mochkovitch, R. 1998, *MNRAS*, 296, 275  
 De Colle, F., Granot, J., López-Cámara, D., & Ramirez-Ruiz, E. 2012, *ApJ*, 746, 122  
 Duffell, P. C. & MacFadyen, A. I. 2013, *ApJ*, 775, 87  
 Genet, F. & Granot, J. 2009, *MNRAS*, 399, 1328  
 Granot, J. 2005, *ApJ*, 631, 1022  
 Granot, J., Cohen-Tanugi, J., & Silva, E. d. C. e. 2008, *ApJ*, 677, 92  
 Guetta, D., Spada, M., & Waxman, E. 2001, *ApJ*, 557, 399  
 Harten, A., Lax, P. D., & Leer, B. v. 1983, *SIAM review*, 25, 35  
 Jacovich, T. E., Beniamini, P., & van der Horst, A. J. 2021, *MNRAS*, 504, 528  
 Kaiser, C. R., Sunyaev, R., & Spruit, H. C. 2000, *arXiv preprint astro-ph/0001501*  
 Kino, M., Mizuta, A., & Yamada, S. 2004, *ApJ*, 611, 1021  
 Kobayashi, S., Piran, T., et al. 1997, *ApJ*, 490, 92  
 Kumar, P. & Granot, J. 2003, *ApJ*, 591, 1075  
 Malzac, J. 2014, *MNRAS*, 443, 299  
 Mathews, W. G. 1971, *ApJ*, vol. 165, p. 147, 165, 147  
 McCarthy, G. A. & Laskar, T. 2024, *arXiv preprint arXiv:2405.11309*  
 Mignone, A. & Bodo, G. 2005, *MNRAS*, 364, 126  
 Mignone, A. & McKinney, J. C. 2007, *MNRAS*, 378, 1118  
 Nakar, E., Ando, S., et al. 2009, *ApJ*, 703, 675  
 Nakar, E. & Piran, T. 2002, *MNRAS*, 331, 40  
 Oganessian, G., Nava, L., Ghirlanda, G., & Celotti, A. 2017, *ApJ*, 846, 137  
 Pellouin, C. & Daigne, F. 2024, *arXiv preprint arXiv:2406.08254*  
 Pe'er, A. 2014, *Space Sci. Rev.*, 183, 371  
 Pe'er, A., Long, K., & Casella, P. 2017, *ApJ*, 846, 54  
 Rahaman, S. M., Granot, J., & Beniamini, P. 2024a, *MNRAS*, 528, 160  
 Rahaman, S. M., Granot, J., & Beniamini, P. 2024b, *MNRAS*, 528, L45  
 Ravasio, M., Ghirlanda, G., Nava, L., & Ghisellini, G. 2019, *A&A*, 625, A60  
 Rees, M. 1978, *MNRAS*, 184, 61P  
 Rees, M. J. & Mészáros, P. 1994, *arXiv preprint astro-ph/9404038*  
 Rudolph, A., Bošnjak, Ž., Palladino, A., Sadeh, I., & Winter, W. 2022, *MNRAS*, 511, 5823  
 Rudolph, A., Petropoulou, M., Bošnjak, Ž., & Winter, W. 2023, *ApJ*, 950, 28  
 Sari, R. & Piran, T. 1997, *MNRAS*, 287, 110  
 Spada, M., Ghisellini, G., Lazzati, D., & Celotti, A. 2001, *MNRAS*, 325, 1559  
 Spada, M., Panaitescu, A., & Meszaros, P. 2000, *ApJ*, 537, 824  
 Yan, Z.-Y., Yang, J., Zhao, X.-H., Meng, Y.-Z., & Zhang, B.-B. 2024, *ApJ*, 962, 85  
 Zanotti, O., Rezzolla, L., Del Zanna, L., & Palenzuela, C. 2010, *A&A*, 523, A8

## Appendix A: Hydrodynamics in planar geometry

In planar geometry, the quantities are constant across the two shocked regions. In particular the shocked material's proper speed,  $u_3 = u_2 \equiv u_0$ , can be conveniently determined in the rest frame of shell 1 (see Appendix B of R24a):

$$u_{21} = u_{41} \left( \frac{2f^{3/2}\Gamma_{41} - f(1+f)}{2f(u_{41}^2 + \Gamma_{41}^2) - (1+f^2)} \right)^{1/2}, \quad (\text{A.1})$$

where  $u_{41}$  and  $\Gamma_{41}$  are the proper velocity and Lorentz factor of shell 4 in the rest frame of shell 1. Eq. A.1 is transformed to the source frame by velocity transformation  $u_0 = \Gamma_{21}\Gamma_1(\beta_{21} + \beta_1)$ . The density and pressure in the shocked shells are determined from the relative Lorentz factor between up- and downstream,  $\Gamma_{34}$  for the RS and  $\Gamma_{21}$  for the FS, using shock jump conditions.  $\Gamma_{21}$  is derived from Eqn. A.1, and  $\Gamma_{34}$  is easily obtained by either velocity transformation or using the result  $(\Gamma_{21}^2 - 1) = f(\Gamma_{34}^2 - 1)$  that applies to the collision of cold shells (see R24a). The shock front velocities  $\beta_{RS}$  and  $\beta_{FS}$  can be derived from these relative Lorentz factors (see Appendix C of R24a for the full derivation), and in turn one obtains the crossing times of both shocks:

$$\beta_{RS} = \frac{\beta_4 - 4\Gamma_{34} \left( \frac{u_0}{\Gamma_4} \right)}{1 - 4\Gamma_{34} \left( \frac{\Gamma_0}{\Gamma_4} \right)}, \quad \beta_{FS} = \frac{\frac{1}{4\Gamma_{21}} \left( \frac{u_1}{\Gamma_0} \right) - \beta_2}{\frac{1}{4\Gamma_{21}} \left( \frac{\Gamma_1}{\Gamma_0} \right) - 1}, \quad (\text{A.2})$$

$$t_{RS} = \frac{\beta_4 t_{on,4}}{\beta_4 - \beta_{RS}}, \quad t_{FS} = \frac{\beta_1 t_{on,1}}{\beta_1 - \beta_{FS}}. \quad (\text{A.3})$$

To make sure our numerical methods fit the analytical framework of Rahaman et al. (2024a), we ran the simulation described in § 2.4 up to the point where each of the shocks have crossed their respective shells. Fig. A.1 shows three snapshots of our fiducial simulation: (a) the initial conditions, (b)  $t_0$  after the collision, (c)  $1.5 t_0$  after the collision. The dashed black lines show the expected values using the analytical results from R24a for the same set of parameters. The zones are determined with a combination of the passive tracers, the position of the shocks identified by GAMMA, and an interface detection algorithm based on peak detections in the gradient of the hydrodynamical variables to identify the rarefaction wave front when no shock is present in a given shell. We see a very good agreement for both the hydrodynamical variables and the position of the interfaces of both shocks and the rarefaction wave after the first shock crossing. This interface analysis is completed with a method to recover the shock front velocities by detecting when the front enters a cell for the first time, and assuming the front is at the interface between this cell and its already-shocked neighbor at the half time-step.

The values across the shocked region remain constant in time with very good accuracy compared to the analytical results: the proper speed  $u$  matches its expected value with a precision of the order  $10^{-5}$ , and derived quantities such as the shock strength  $\Gamma_{ud} - 1$  matches to within a few times  $10^{-4}$ . We also recover the analytical values for the shock crossing times  $t_{RS}$  and  $t_{FS}$  with an accuracy of  $10^{-3}$ , consistent with a systematic error of a few time steps due to the finite width of the numerical shock.

## Appendix B: Flux calculation in the power-law approximation

### Appendix B.1: Analytical flux

We present here the formalism for the analytical calculation of the flux received at observer time  $T$  and frequency  $\nu$  from a range

of emitting radii. From Eq. (4) we see a single pulse emitted at a single time and radius in the source frame will be seen over a range of observed times. This means that several source times and radii contribute to a single observer time, defining a surface called equal arrival time surface (EATS) as the locus of all emission points from which photons will arrive at the same time to the observer. In R24b, itself expanding on previous works (e.g. Granot 2005; Granot et al. 2008; Genet & Granot 2009), the authors derive the observed flux coming from a shock front propagating with Lorentz factor  $\Gamma_{sh} = \Gamma_{sh,0}(R/R_0)^{-m/2}$ , emitting between radii  $R_0$  and  $R_f = (1 + \Delta R/R_0)R_0$  at a peak frequency  $\nu'_p = \nu'_0(R/R_0)^d$  and with peak luminosity  $L'_{\nu'_p} = L'_0(R/R_0)^a$ . As quantities introduced in this subsection are relative to a single shock front, we will drop here the subscript *RS* (respectively *FS*) for the sake of readability. Additionally in R24, compared to GG09, it is the shocked material traveling with Lorentz factor  $\Gamma = g\Gamma_{sh}$  that is considered to be the source of emission, meaning that while the shock front itself serves to determine the location of the emitting surface, it is the emitting material that will be considered for the Doppler factor.

The flux is calculated against normalized time  $\tilde{T}$  defined as:

$$\tilde{T} = \frac{T - T_{ej,0}}{T_0}, \quad (\text{B.1})$$

where  $T_{ej,0}$  and  $T_0$  are the effective (observed) ejection time and angular time as defined Eq. (5) for the shock front at  $R_0$  the initial collision radius:

$$T_0 = (1+z) \left( \frac{1 - \beta_{sh,0}}{\beta_{sh,0}} \right) \frac{R_0}{c} \approx (1+z) \frac{R_0}{2c\Gamma_{sh,0}^2}, \quad (\text{B.2})$$

$$T_{ej,0} = (1+z) \left( t_0 - \frac{R_0}{\beta_{sh,0}c} \right). \quad (\text{B.3})$$

We do not provide here the details of the EATS and intermediate variables definitions, and instead refer again to appendix F of R24b for full details of the calculation. We introduce the normalized radius  $y(\tilde{T}) \equiv R/R_L(\tilde{T})$  such that the flux is obtained by integrating from  $y_{min}$  to  $y_{max}$  defined as:

$$y_{min}(\tilde{T}) = \begin{cases} 1 & \text{if } \tilde{T} \leq 1, \\ \tilde{T}^{-1/(m+1)} & \text{if } \tilde{T} \geq 1, \end{cases} \quad (\text{B.4})$$

$$y_{max}(\tilde{T}) = \begin{cases} 1 & \text{if } \tilde{T}_f \leq 1, \\ \tilde{T}_f^{-1/(m+1)} & \text{if } \tilde{T}_f \geq 1, \end{cases} \quad (\text{B.5})$$

where  $\tilde{T}_f = (1 + \Delta R/R_0)^{m+1}$ . The Doppler factor is also expressed as a function of  $y$ :


$$\delta = (1+z) \frac{\nu}{\nu'} = \frac{1+z}{\Gamma(1-\beta\mu)} \approx (1+z) \frac{2(m+1)g\Gamma_{sh,0}y^{\frac{m}{2}}\tilde{T}^{-\frac{m}{2(m+1)}}}{g^2y^{-1} + (m+1-g^2)y^m}. \quad (\text{B.6})$$

The received flux at normalized observer time  $\tilde{T}$  for any given comoving luminosity  $L'_{\nu}(y)$  can be expressed as:

$$F_{\nu}(\tilde{T}) = \frac{1+z}{8\pi d_L^2} \int_{y_{min}}^{y_{max}} \left| \frac{d\mu}{dy} \right| \delta^3 L'_{\nu}(y) dy. \quad (\text{B.7})$$

With the change of variable:

$$\frac{d\mu}{dy} = \frac{y^{-2}(1+my^{m+1})}{2(m+1)\Gamma_{sh,0}^2} \tilde{T}^{m/(m+1)}, \quad (\text{B.8})$$

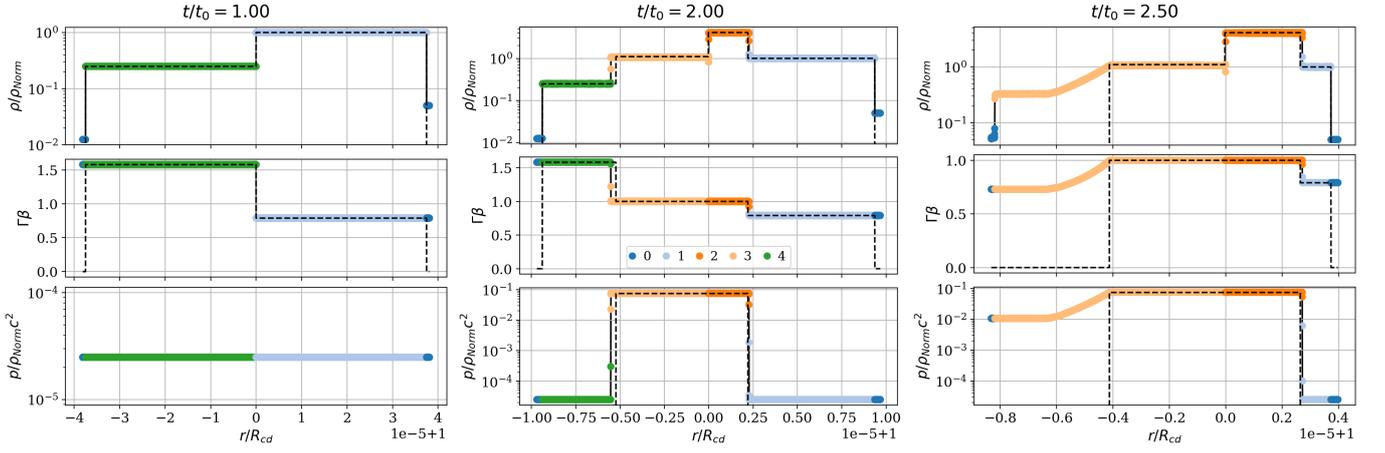

**Fig. A.1.** Snapshots of the fiducial planar run ( $a_u = 2$ ,  $E_{k0,4} = E_{k0,1}$ ,  $t_{on,1} : t_{on,4} : t_{off} = 1 : 1 : 1$ ) at  $t = t_0$  (left), before first shock crossing (center), and after shock crossing (right). Shells are color-coded according to the identified zones, the dashed lines show theoretical values.  $t_0 = 2.7 \times 10^3$  s and  $R_0 = 8 \times 10^{13}$  cm for this set of parameters.

and using Eqn. B.6 in B.7:

$$F_\nu(\tilde{T}) = \frac{(1+z)g^3\Gamma_{sh,0}\tilde{T}^{-\frac{m}{2(m+1)}}}{2\pi d_L^2} \int_{y_{\min}}^{y_{\max}} dy L'_{\nu'}(y)y^{-1-\frac{m}{2}} \times \left[ 1 + g^2 \frac{y^{-(m+1)} - 1}{m+1} \right]^{-2} \left( \frac{1 + my^{m+1}}{g^2 + (m+1 - g^2)y^{m+1}} \right). \quad (\text{B.9})$$

In the general case, we will chose power-law scalings for the luminosity and peak frequency with radius:

$$L'_{\nu'} = L'_0 \left( \frac{R}{R_0} \right)^a S \left( \frac{\nu'}{\nu'_p} \right) = L'_0 \tilde{T}^a y^a S \left( \frac{\nu'}{\nu'_p} \right), \quad (\text{B.10})$$

$$\frac{\nu'}{\nu'_p} = \tilde{T}^{-d} y^{m/2-d} \left[ 1 + g^2 \frac{y^{-(m+1)} - 1}{m+1} \right] \frac{\nu}{\nu_0}. \quad (\text{B.11})$$

### Appendix B.2: Numerical flux normalization

To obtain the appropriate flux from a numerical cell corresponding to the infinitely thin shell approximation used in R24b, we compare the isotropic energy obtained by integrating Eq. (4) to the equivalent integration of the flux formula from De Colle et al. (2012) for the contribution from a single computational cell, which for an isotropic comoving emissivity per unit volume and frequency,  $P'_{\nu',jk}$ , reads:

$$\Delta F_{\nu,ijk} = \frac{(1+z)^2 \Delta V_{ijk}^{(4)} P'_{\nu',jk}}{4\pi d_L^2 \Delta T_{obs,i} \Gamma_{jk}^2 (1 - \beta_{jk} \cos \theta_{jk})^2}, \quad \text{for } \left| T_{obs,z,i} - t_{jk} + \frac{r_{jk} \cos \theta_{jk}}{c} \right| < \frac{\Delta T_{obs,z,i}}{2}. \quad (\text{B.12})$$

Here  $T_{obs,z} = T_{obs}/(1+z)$  and  $\nu_z = (1+z)\nu$  are measured in the source's cosmological frame, as is the (Lorentz invariant) 4-volume  $\Delta V^{(4)}$ . In this section, subscript i refer to observer time bins over which flux is calculated, subscript j to the simulation time step, and subscript k to the numerical cell within data file j. This approach attributes all of the contribution from any given numerical 4D cell jk to a single observer time interval i. This approximation relies on sufficiently fine spatial (and temporal) resolution and on the Doppler factor not significantly varying within the cell, due to the variation of its velocity direction w.r.t

the direction to the observer. However, our simulation is spatially 1D: the Doppler factor significantly varies within each numerical cell of lab-frame volume  $\Delta V_{jk}^{(4)} = 4\pi r^2 \Delta r$  and contributes to different observed time bins. We thus divide 1D cells further into subcells along the  $\theta$  coordinate in which the Doppler factor can be considered constant.

The observed flux depends only on  $\mu = \cos \theta$  through the Doppler factor and the photon arrival time but not on the  $\phi$  coordinate as we calculate flux along the outflow axis. Thus each subdivision of volume  $\Delta V_{ijk}^{(4)} = 2\pi r_{jk}^2 \Delta r_{jk} \Delta \mu_i \Delta t_j$  contributes to the time bin centered on  $T_{obs,i} = (1+z)(t_j - r_{jk}\mu_i/c)$  of width  $\Delta T_{obs,i} = (1+z)(r_{jk}/c)\Delta \mu_i$ . Recalling  $E_{iso} = \int dv_z \int dT_{obs,z} L_{\nu_z,iso} = (4\pi d_L^2/(1+z)) \int dT_{obs} \int dv F_\nu(T_{obs})$ , the isotropic energy for a spherical cell reads:

$$E_{iso,jk}^{(num)} = \frac{4\pi d_L^2}{1+z} \int dv \sum_i \Delta T_{obs,i} \Delta F_{\nu,ijk} = \int dv_z \sum_i \Delta V_{ijk}^{(4)} \frac{P'_{\nu',jk}}{\Gamma_{jk}^2 (1 - \beta_{jk}\mu_i)^2} = 2\pi r_{jk}^2 \Delta r_{jk} \Delta t_j \frac{P'_{\nu',m,jk}}{\Gamma_{jk}^2} \int_0^\infty dv_z \int_{-1}^1 d\mu (1 - \beta\mu)^{-2} S \left( \frac{\nu'}{\nu'_{m,jk}} \right) = \Delta V_{jk}^{(4)} (1 - \beta_{jk}) \Gamma_{jk}^2 \nu_{m,z,jk} P'_{\nu',m,jk} \mathcal{A} \cong \frac{1}{2} \Delta V_{jk}^{(4)} \nu_{m,z,jk} P'_{\nu',m,jk} \mathcal{A}, \quad (\text{B.13})$$

having changed variables to  $x \equiv \nu'/\nu'_m = \nu(1-\beta\mu)/[\nu_m(1-\beta)] = \nu_z(1-\beta\mu)/[\nu_{m,z}(1-\beta)]$  and denoting  $\mathcal{A} = \int S(x)dx$ . In De Colle et al. (2012) the flux at a fixed observed time bin was calculated by summing over j and k. To obtain the isotropic energy we performed the opposite, i.e. fix j and k and sum over i (and integrated over frequency). Performing the equivalent integration on a single shell in the infinitely thin shell approximation (Genet & Granot 2009) reads:

$$E_{iso}^{(th)} = \frac{4\pi d_L^2}{1+z} \int dT_{obs} \int dv F_\nu = \tilde{L}_{\nu_m} T_\theta \int \frac{d\tilde{T}}{\tilde{T}^2} \int dv S \left( \frac{\nu}{\nu_m} \tilde{T} \right) = \frac{1}{2} \nu_{m,z} \tilde{L}_{\nu_{m,z}} T_{\theta,z} \mathcal{A}, \quad (\text{B.14})$$

using change of variable  $x \equiv (\nu/\nu_m)\tilde{T}$ . Finally, we obtain the equivalent numerical luminosity for simulation cell  $k$  of data file  $j$  in the infinitely thin shell approximation:

$$\tilde{L}_{\nu_{m,z},jk} = \frac{\Delta V_{jk}^{(4)} P'_{\nu_{m,z},jk}}{T_{\theta,z,jk}} = \frac{\Delta E'_{\nu_{m,z},jk}}{T_{\theta,z,jk}}. \quad (\text{B.15})$$

Here  $\Delta E'_{\nu_{m,z},jk}$  is the energy emitted per unit frequency in the co-moving frame by the 4-dimensional cell  $jk$ . Going further with the infinitely thin shell approximation, we can assume all the energy given to the accelerated electrons is radiated over a time smaller than the numerical timestep, and we write:

$$\tilde{L}_{\nu_{m,z},jk} = \frac{\Gamma_{jk} \Delta V_{jk}^{(3)} \epsilon_e e'_{jk}}{W(p) \nu'_{m,z,jk} T_{\theta,z,jk}}. \quad (\text{B.16})$$

### Appendix B.3: Flux calibration

While the general analytical formula for any scaling indices  $a, d, m$  was not obtained and the integral in Eqn. B.9 must be calculated numerically, two special cases with a simpler integral form are of interest to us. We use the first case  $a, d, m = 0, 0, 0$  to calibrate the post-processing methods in a consistent way from our fully planar simulation before extending them to the physically-relevant spherical geometry. With these simplifying assumptions, the observed flux is:

$$F_\nu(\tilde{T} \geq 1) = \frac{(1+z)g^3 \Gamma_{\text{sh}} L'_0}{2\pi d_L^2} \int_{y_{\min}}^{y_{\max}} \frac{dy y^{-2} S(x)}{[1+g^2(y^{-1}-1)]^3}. \quad (\text{B.17})$$

With

$$x = \frac{\nu'}{\nu'_0} = [1+g^2(y^{-1}-1)] \tilde{\nu}, \quad (\text{B.18})$$

$$\tilde{\nu} = \nu/\nu_0, \quad (\text{B.19})$$


$$\tilde{T} = \frac{T - T_{\text{ej}}(R_0, \beta_{\text{sh}})}{T_\theta(R_0, \Gamma_{\text{sh}})} \equiv 1 + \tilde{T}, \quad (\text{B.20})$$

and the integration limits  $y_{\min}, y_{\max}$  are defined in Eqn. B.4-B.5. Choosing  $x$  as the new integration variable, we obtain:

$$F_\nu = \frac{(1+z)2\Gamma_0 L'_0}{4\pi d_L^2} \left(\frac{\nu}{\nu_0}\right)^2 \int_{x_l}^{x_u} dx x^{-3} S(x). \quad (\text{B.21})$$

The upper and lower integration limits are respectively  $x_u = x(y_{\min})$  and  $x_l = x(y_{\max})$ , and the integral is performed numerically using the quad method from `scipy.odeint`<sup>2</sup>. We present in Fig. B.1 lightcurves at  $\tilde{\nu} = 10^{-1}$  and instantaneous spectras at  $\tilde{T} = 1$  obtained from our fiducial run in planar geometry, compared to the analytical flux obtained analytically with Eqn. B.21. The figure presents the observed flux using either the smooth Band function (top row) or a broken power-law (bottom row). Depending on the local spectral shape, the relative contributions of both shock to the lightcurve between their respective peak frequencies may vary, also causing a change in the peak flux at this intermediary frequency range, but the overall shape of the lightcurve obtained by the sum of both contributions do not. This difference between peak frequencies is better shown in the instantaneous spectrum where the shape of the curve between the peaks shows more variation with spectral shape. Our numerical fluxes agree to a good degree of precision with their analytical counterparts.

<sup>2</sup> An analytic solution of the integral exist for both spectral shapes, but in the case of the Band function this form features the incomplete Gamma function, which is not implemented in Python for negative values of the first parameter. See Appendix F in R24b.

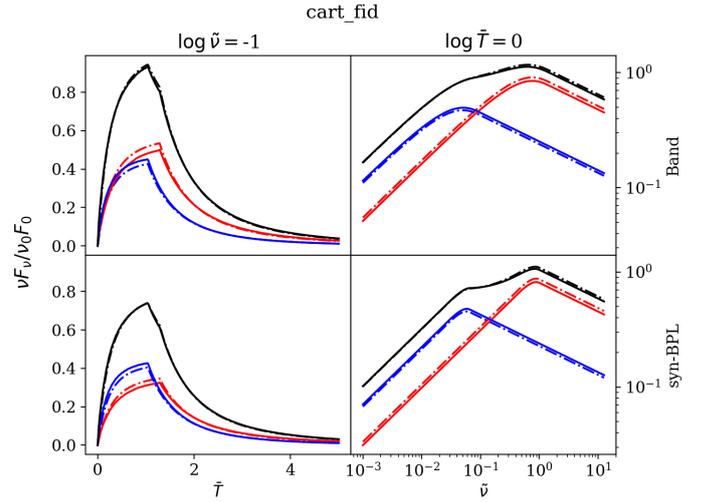

**Fig. B.1.** Lightcurves (left column) and instantaneous spectras (right column) obtained from the fiducial run in planar geometry (full lines) compared to the analytical expectations (dash-dotted lines). Normalisations of  $\tilde{T}$  and  $\tilde{\nu}$  are defined at the RS. The top row display the result for a Band spectral shape, and in the bottom the synchrotron broken power-law. The respective contributions of each shock to the total observed flux (in black) are given in red for the RS and blue for the FS.