Highlights

Designing an LLM-Based Copilot for Manufacturing Equipment Selection

Jonas Werheid, Oleksandr Melnychuk, Hans Zhou, Meike Huber, Christoph Rippe, Dominik Joosten, Zozan Keskin, Max Wittstamm, Sathya Subramani, Benny Drescher, Amon Göppert, Anas Abdelrazeq, Robert H. Schmitt

- Novel approach to reduce ramp-up time in manufacturing
- Promising industrial feedback

Designing an LLM-Based Copilot for Manufacturing Equipment Selection

Jonas Werheid^a, Oleksandr Melnychuk^a, Hans Zhou^a, Meike Huber^{a,c}, Christoph Rippe^b, Dominik Joosten^b, Zozan Keskin^b, Max Wittstamm^{c,e}, Sathya Subramani^c, Benny Drescher^c, Amon Göppert^a, Anas Abdelrazeq^a, Robert H. Schmitt^{a,d}

 ^aLaboratory for Machine Tools and Production Engineering, WZL, RWTH Aachen University, Campus-Boulevard 30, Aachen, 52074, Germany
 ^bINC Innovation Center GmbH, Frankenthaler Str. 20, Munich, Germany
 ^cHong Kong Industrial Artificial Intelligence & Robotics Centre (FLAIR), 78 Tat Chee Avenue, Hong Kong, China
 ^dFraunhofer IPT, Steinbachstr. 17, Aachen, 52074, Germany
 ^eCorresponding Author, max.wittstamm@hkflair.org,

Abstract

Effective decision-making in automation equipment selection is critical for reducing ramp-up time and maintaining production quality, especially in the face of increasing product variation and market demands. However, limited expertise and resource constraints often result in inefficiencies during the ramp-up phase when new products are integrated into production lines. Existing methods often lack structured and tailored solutions to support automation engineers in reducing ramp-up time, leading to compromises in quality. This research investigates whether large-language models (LLMs), combined with Retrieval-Augmented Generation (RAG), can assist in streamlining equipment selection in ramp-up planning. We propose a factual-driven copilot integrating LLMs with structured and semi-structured knowledge retrieval for three component types (robots, feeders and vision systems), providing a guided and traceable state-machine process for decisionmaking in automation equipment selection. The system was demonstrated to an industrial partner, who tested it on three internal use-cases. Their feedback affirmed its capability to provide logical and actionable recommendations for automation equipment. More specifically, among 22 equipment prompts analyzed, 19 involved selecting the correct equipment while considering most requirements, and in 6 cases, all requirements were fully met.

Preprint submitted to Manufacturing Letters

December 19, 2024

Keywords: Manufacturing, Equipment Selection, Generative AI, LLM, Copilot

1. Introduction

Global manufacturing demands agility, driven by increasing product complexity and rapidly changing market conditions, making efficient production ramp-up essential [1]. Automation design, especially equipment selection, is critical in reducing ramp-up time and addressing challenges resulting from global trends like digitalization [2], globalization, and sustainability [3]. The ramp-up phase relies on an effective design stage, where equipment choices must be made quickly to align with market demands and stay competitive. Key challenges mirror those in manufacturing, including complexity management [4]-[5], skills shortages [6], supply chain reliability [7], and quality control [8]. While methods for equipment selection support have been introduced, they often rely on static rules and predefined knowledge [9], which lack generalization and require users to adhere to specific syntax to align with the workflow [10]. While Large Language Models (LLM) show potential to generate customized and dynamic interactions in other domains [11], they lack transparency [12] and resilience [13]-[14] and often suggest generic options [15].

For equipment selection, however, tailored [16], transparent [17], as well as dynamic solutions are required to support automation design and enable efficient ramp-up processes [18]-[19]. Retrieval-augmented generation (RAG) techniques have demonstrated their effectiveness in incorporating tailored information, reducing hallucinations, and improving response quality, especially within specialized domains. [20]. This article explores whether these recent advancements in factual-driven RAG-LLMs, combined with a statemachine architecture, can fulfill the requirements of the equipment selection process and guide automation equipment design effectively.

The literature's existing approaches were investigated using the Scopus and Web of Science search platforms, which retrieved 198 and 85 articles, based on the selected search string provided in the Appendix (Section Appendix A). Among the retrieved literature, Meyer et al. [21] highlight the potential of generative AI for creating assembly instructions, demonstrating how LLMs can document processes to guide new workers on manufacturing lines. Similarly, Lim et al. [22] investigate the use of LLMs for human-robot communication, where the LLM serves as an interface to the operational capabilities of robotic systems in manufacturing. Also, fine-tuned LLMs have been proposed as question-and-answer systems in product management and production line operations [23], with some utilizing RAG for enhanced information retrieval [24]. These models have also been applied to extract information from technical manuals and other documents [25]. Furthermore, LLMs have been explored for generating theoretical process selections, such as flowcharts [26].

However, no studies have been identified that propose LLM-driven methods or tools specifically designed to support automation engineers in equipment selection during the ramp-up phase. To address this gap, we propose a factual-driven copilot based on RAG-LLMs designed to support the selection of automation equipment in manufacturing.

First, the copilot design is introduced in Section 2. Next, Section 3 presents feedback from an industrial partner. Lastly, limitations and potential directions for future research are derived in Section 4.

2. Copilot Design

The LLM-based copilot consists of multiple components. At its core is the primary agent, which orchestrates subcomponents based on the multi-agent design pattern proposed by Wu et al. [27]. These include the equipment selection procedure, the relational knowledge system, the semi-structured knowledge system, and the answer generator. All are either based on or connected to an LLM via an Application Programming Interface (API), with the knowledge behind the retrieval systems derived from scientific literature and lecture materials. Figure 1 represents these components as a state machine, illustrating the copilot's interconnections.

The knowledge underpinning these systems is derived from a combination of scientific literature, lecture materials, and domain-specific datasets.

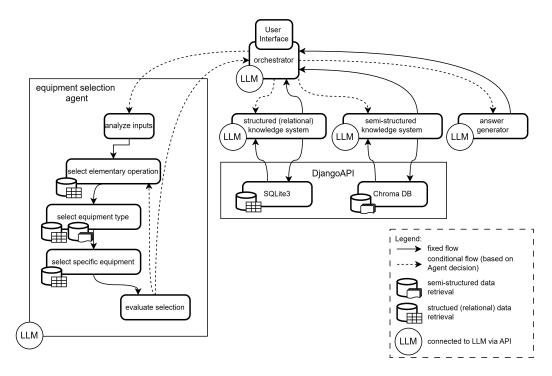


Figure 1: State machine diagram of the copilot

Users can either ask general questions, which are answered by the primary agents LLM (orchestrator) with support from the relational and semistructured knowledge systems, or initiate the equipment selection procedure, which also utilizes both systems in a multistep procedure. Firstly, the process of equipment selection is outlined, following a description of the semistructured and structured knowledge systems.

The equipment selection process is triggered when the user specifies requirements for an assembly process. The LLM interprets the term specific based on a predefined prompt (pre-prompt) but can also be reinforced through a provided template. The workflow 1 is initiated by analyzing the provided requirements. The requirements are structured and grouped into general assembly components, such as robots, and feeding systems based on a pre-prompt that describes them. Using this information, the system determines the appropriate elementary operation e.g. for robotic handling based on the structured knowledge. Following the determined elementary operation, a more specific type of equipment, such as a Cartesian Robot, is selected based on the structured and semi-structured knowledge. Therefore, the selection process relies on information from both relational and semi-structured knowledge. This leads to specific equipment within the chosen elementary operation category. Once a specific type of equipment is selected, the workflow progresses to the evaluation selection step, where the LLM reflects the suitability of the decision to alleviate Hallucination [28]. In case of an unsuitable selection, additional information about the decision is requested from the user to enhance a further iteration of the equipment selection process based on the reflection, restarting the selection of the elementary operation.

Alternatively, when tasked with answering general queries, the agent accesses the relational- and semi-structured knowledge systems to directly process the user request to provide a dedicated expert answer. The semistructured knowledge system is a RAG-based component that processes text chunks containing semi-structured information on our partner's most relevant automation equipment types: Robotic systems, feeder technologies, and machine vision systems. This information is sourced from lecture slides and dissertations provided by the WZL institute and formatted in Markdown. The text chunks are embedded and indexed in RAG, with a chunk size of 750 and an overlap of 150. Overlapping chunks improve retrieval accuracy by ensuring context-aware responses [29]. The system retrieves the three most matching chunks, ordered by their relevance score. It is calculated as the dot product indicating the similarity between the embedding of the request and chunk [30].

The structured knowledge system maps specific equipment such as feeders, robots, and vision systems to their corresponding attributes in a relational format. It is linked to product- and equipment catalogs by the selected supplier of the respective domains. The mapping is done based on scientific books [31]. Once the relevant information is retrieved, the system passes it to the answer generator, which synthesizes a response with a defined preprompt.

The copilot is implemented in LangGraph [32] using a state machine model. OpenAI's GPT-40 model [33] is employed as the LLM model and integrated with LangGraph via its API. Django REST Framework provides the relational and vectorized database API [34]. Chroma [35] is used as a vector database, providing chunk embeddings generated with the opensource model all-MiniLM-L6-v2 by Hugging Face [36]. SQLite3 is selected to provide the structured knowledge. The user interaction is facilitated through Gradio, which visualizes the chat and the states [37]. The system is hosted directly on Microsoft Azure, enabling the industrial partner to access it for the case study [38].

3. Industrial Case-study

The copilot, accessible as a web application, was presented to our industrial partner, an international manufacturer of plastic products with about 850 employees, operating six factories across three continents. Two automation engineers tested the system on three ramp-up planning use-cases: two for products in Europe and one in China. More specifically, the system was used to derive automation components for robots, feeders, and vision applications within the design process. Operational requirements were provided as context, and the components suggested by the copilot were compared against the internal selection. Table 1 provides examples of each component type, including the input prompt und equipment suggestions. However, not all prompts can be shown because they involve confidential company information.

Name	Туре	Context (and prompt)	Component suggested by partner	Component sug- gested by copilot
Pre- feeding of bush- ings	Feeder	The first equipment serves as an input buffer for 25 x 12 x 12 mm bushings weighing 20g, manu- ally loaded by per- sonnel. It acts as a 1- hour buffer, supply- ing at least 8 bush- ings every 40 seconds for subsequent pro- cessing.	SLL 800-1200	Hudson Robotics PlateCrane EX, RNA SLK-05
Movement to clean- ing and inspec- tion	Robot	Equipment is needed to work with a com- posite plastic and steel housing com- ponent, measuring $45 \times 45 \times 30$ mm and weighing 60 g. It must provide a wide range of motion to perform complex tasks, including flex- ible movements and turning the housing to work on all its faces. Precision and repeatability are critical requirements.	Epson Artic- ulated arm robots N2- A450	Brand: RNA Type: Flexible Feeder Model: FlexCube 380, Brand: Epson Type: Articulated Arm Robot Model: C8-A1401 (C8XL), Brand: LMI Tech- nologies Type: Laser Scanner Model: GOCATOR 2150- 3R-REVD
Inspection	Vision	Equipment is needed for a visual inspec- tion of the part af- terward. The cam- era requires at least 5 Mega Pixels and two pictures need to be taken within a small timeframe. The field of inspection varies for each part.	Area-scan cameras with over 5MP/30FPS	OPTRONIS CP- CYCLONE-21-230-C

Table 1: Input prompts and components suggestions by partner and copilot for different operations

Among the 22 equipment prompts analyzed, three involved selecting the correct equipment type, such as a feeder system, but not identifying the appropriate subtype, like a vibratory bowl feeder. In thirteen instances, a sufficient component was chosen by selecting the correct equipment subtype, such as a SCARA-Robot, and also considering most specific requirements, such as arm length. Notably, the selected component was fully suitable in six cases, successfully meeting all relevant requirements, reflecting a positive outcome. Therefore, the system delivered logical component suggestions, aligned with the partner's requirements. Nevertheless, it also had certain limitations. Firstly, it does not support layout design as an important aspect of the work of the automation engineer that influences the equipment selection itself. Additionally, it does not incorporate the ramp-up implementation phase. Nevertheless, it effectively supported the selection of appropriate automation equipment based on the provided context prompts.

4. Conclusion

The increasing complexity of manufacturing workflows, combined with a shortage of expertise, presents significant challenges in accelerating the integration of new products into production lines without compromising quality. This study introduced a factual-driven copilot utilizing RAG and tailored domain knowledge to assist engineers in streamlining ramp-up processes. The copilot demonstrated promising feedback in an industrial manufacturing usecase by providing structured and tailored features in traceable recommendations. These were derived from academic lectures, industrial literature, and a comprehensive supplier database, ensuring dependable local and international equipment suggestions. This underscores the potential of LLM-based systems to enhance the automation equipment selection process. However, limitations remain, as the copilot does not address the ramp-up implementation phase or layout design considerations. Future research should explore further integration, creating a comprehensive solution that spans design through to the ramp-up implementation phase.

5. Usage Notes

The software will be made available on request to the authors Jonas Werheid (jonas.werheid@rwth-aachen.de) and Dominik Joosten (dominik.joosten@rwthaachen.de).

6. Declarations

6.1. Funding

Our research is funded by AIR@InnoHK research cluster of the Innovation and Technology Commission (ITC) of the HKSAR Government. The results presented in this paper within the scope of the research project '1-5 Ramp-Up Time Reduction by Learning from Past Process Cycles' has come to a successful completion because of the support from ITC. We would like to express our sincere gratitude to them.

6.2. Competing interests

The authors have no competing interests to declare that are relevant to the content of this article.

6.3. Author Contributions

Conceptualization, Writing – original draft, Writing – review and editing: Jonas Werheid, Oleksandr Melnychuk, Hans Zhou, Meike Huber, Christoph Rippe, Dominik Joosten, Zozan Keskin.

Conceptualization, Writing – **review and editing:** Max Wittstamm, Sathya Subramani, Benny Drescher, Amon Göppert, Anas Abdelrazeq, Robert H. Schmitt.

Appendix A. Search String

(("manufacturing" OR "production line*" OR "production planning" OR "production optimization" OR "production processes" OR "automation engineering" OR "fabrication" OR "assembly line*" OR "assembly automation" OR "industrial automation") AND ("ramp-up" OR "ramp up" OR "quality" OR "efficiency" OR "resources" OR "optimization" OR "quality assurance" OR "quality control" OR "labor") AND ("large-language models" OR "language models" OR "LLM*" OR "retrieval-augmented generation" OR "RAG" OR "GPT*" OR "copilot" OR "generative AI" OR "AI assistant" OR "intelligent assistant"))

References

- M. C. Magnanini, K. Medini, B. I. Epureanu, Decision Making for Fast Productivity Ramp-Up of Manufacturing Systems, Springer Nature Switzerland, Cham, 2024, pp. 235–266. doi:10.1007/ 978-3-031-54034-9_7. URL https://doi.org/10.1007/978-3-031-54034-9_7
- [2] P. O. Mura, L. E. Donath, Digitalisation and economic growth in the european union, Electronics (Basel) 12 (7) (2023) 1718–.
- [3] K. Alsahali, R. Malagueño, An empirical study of sustainability reporting assurance: Current trends and new insights, Journal of Accounting and Organizational Change 18 (5) (2022) 617–642. doi: 10.1108/JA0C-05-2020-0060.
- [4] P. Schott, M. Lederer, I. Eigner, F. Bodendorf, Case-based reasoning for complexity management in Industry 4.0, Journal of Manufacturing Technology ManagementCRIS-Team Scopus Importer:2020-08-14 (2020). doi:10.1108/JMTM-08-2018-0262.
- [5] G. Herrera-Vidal, J. R. Coronado-Hernández, B. P. Martínez Paredes, B. O. Sánchez Ramos, D. M. Sierra, Systematic configurator for complexity management in manufacturing systems, Entropy 26 (9) (2024). doi:10.3390/e26090747. URL https://www.mdpi.com/1099-4300/26/9/747
- [6] M. C. Magnanini, M. Colledani, O. Melnychuk, D. Caputo, Effect of work-force availability on manufacturing systems operations of job shops, Procedia CIRP 103 (2021) 152–157, 9th CIRP Global Web Conference – Sustainable, resilient, and agile manufacturing and service operations : Lessons from COVID-19. doi:https://doi.org/10.1016/j.procir.2021.10.024. URL https://www.sciencedirect.com/science/article/pii/ S2212827121008659
- [7] O. Melnychuk, J. Rachner, L. Kaven, A. Göppert, R. H. Schmitt, T. Tolio, Evaluation of material shortage effect on assembly systems considering flexibility levels, Procedia CIRP 107 (2022) 966– 971, leading manufacturing systems transformation – Proceedings

of the 55th CIRP Conference on Manufacturing Systems 2022. doi:https://doi.org/10.1016/j.procir.2022.05.093. URL https://www.sciencedirect.com/science/article/pii/ S2212827122003778

- [8] M. C. Magnanini, O. Melnychuk, A. Yemane, H. Strandberg, I. Ricondo, G. Borzi, M. Colledani, A digital twin-based approach for multi-objective optimization of short-term production planning, IFAC-PapersOnLine 54 (1) (2021) 140-145, 17th IFAC Symposium on Information Control Problems in Manufacturing INCOM 2021. doi:https://doi.org/10.1016/j.ifacol.2021.08.077. URL https://www.sciencedirect.com/science/article/pii/S2405896321008119
- H.-S. Park, A knowledge-based system for assembly sequence planning, International Journal of Precision Engineering and Manufacturing 1 (2000) 35–42.
- [10] C. Bikas, A. Argyrou, G. Pintzos, C. Giannoulis, K. Sipsas, N. Papakostas, G. Chryssolouris, An automated assembly process planning system, Procedia CIRP 44 (2016) 222–227. doi:10.1016/j.procir. 2016.02.085.
- [11] J. Ji, Z. Li, S. Xu, W. Hua, Y. Ge, J. Tan, Y. Zhang, Genrec: Large language model for generative recommendation (2023). arXiv:2307. 00457. URL https://arxiv.org/abs/2307.00457
- [12] Q. V. Liao, J. Wortman Vaughan, AI Transparency in the Age of LLMs: A Human-Centered Research Roadmap, Harvard Data Science Review (Special Issue 5), https://hdsr.mitpress.mit.edu/pub/aelql9qy (may 31 2024).
- [13] C. Njeh, H. Nakouri, F. Jaafar, Enhancing rag-retrieval to improve llms robustness and resilience to hallucinations, in: H. Quintián, E. Corchado, A. Troncoso Lora, H. Pérez García, E. Jove Pérez, J. L. Calvo Rolle, F. J. Martínez de Pisón, P. García Bringas, F. Martínez Álvarez, Á. Herrero, P. Fosci (Eds.), Hybrid Artificial Intelligent Systems, Springer Nature Switzerland, Cham, 2025, pp. 201–213.

- P. Hacker, Sustainable ai regulation, ArXiv abs/2306.00292 (2023).
 URL https://api.semanticscholar.org/CorpusID:259000079
- [15] I. H. Sarker, Llm potentiality and awareness: A position paper from the perspective of trustworthy and responsible ai modeling (Feb. 2024). doi:10.36227/techrxiv.170905626.67078570/v1. URL http://dx.doi.org/10.36227/techrxiv.170905626. 67078570/v1
- [16] J. Wan, X. Li, H.-N. Dai, A. Kusiak, M. Martínez-García, D. Li, Artificial-intelligence-driven customized manufacturing factory: Key technologies, applications, and challenges, Proceedings of the IEEE 109 (4) (2021) 377–398. doi:10.1109/JPROC.2020.3034808.
- [17] T. Hollanek, Ai transparency: a matter of reconciling design with critique, AI & Society 38 (5) (2020) 2071-2079. doi:10.1007/s00146-020-01110-y. URL https://link.springer.com/article/10.1007/ s00146-020-01110-y
- [18] N. Leberruyer, J. Bruch, M. Ahlskog, S. Afshar, Toward zero defect manufacturing with the support of artificial intelligence—insights from an industrial application, Computers in Industry 147 (2023) 103877. doi:https://doi.org/10.1016/j.compind.2023.103877. URL https://www.sciencedirect.com/science/article/pii/ S0166361523000271
- [19] M. Colledani, T. Tolio, A. Yemane, Production quality improvement during manufacturing systems ramp-up, CIRP Journal of Manufacturing Science and Technology 23 (2018) 197-206. doi:https://doi.org/10.1016/j.cirpj.2018.07.001. URL https://www.sciencedirect.com/science/article/pii/ S1755581718300348
- [20] X. Wang, Z. Wang, X. Gao, F. Zhang, Y. Wu, Z. Xu, T. Shi, Z. Wang, S. Li, Q. Qian, R. Yin, C. Lv, X. Zheng, X. Huang, Searching for best practices in retrieval-augmented generation, in: Y. Al-Onaizan, M. Bansal, Y.-N. Chen (Eds.), Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing, Association

for Computational Linguistics, Miami, Florida, USA, 2024, pp. 17716– 17736. doi:10.18653/v1/2024.emnlp-main.981. URL https://aclanthology.org/2024.emnlp-main.981

- [21] F. Meyer, L. Freitag, S. Hinrichsen, O. Niggemann, Potentials of large language models for generating assembly instructions, in: 2024 IEEE 29th International Conference on Emerging Technologies and Factory Automation (ETFA), 2024, pp. 1–8. doi:10.1109/ETFA61755.2024. 10710806.
- [22] J. Lim, S. Patel, A. Evans, J. Pimley, Y. Li, I. Kovalenko, Enhancing human-robot collaborative assembly in manufacturing systems using large language models, in: 2024 IEEE 20th International Conference on Automation Science and Engineering (CASE), 2024, pp. 2581–2587. doi:10.1109/CASE59546.2024.10711843.
- [23] R. Rosati, F. Antonini, N. Muralikrishna, F. Tonetto, A. Mancini, Improving industrial question answering chatbots with domain-specific llms fine-tuning, in: 2024 20th IEEE/ASME International Conference on Mechatronic and Embedded Systems and Applications (MESA), 2024, pp. 1–7. doi:10.1109/MESA61532.2024.10704843.
- [24] Y. Bei, Z. Fang, S. Mao, S. Yu, Y. Jiang, Y. Tong, W. Cai, Manufacturing domain qa with integrated term enhanced rag, in: 2024 International Joint Conference on Neural Networks (IJCNN), 2024, pp. 1–8. doi:10.1109/IJCNN60899.2024.10649905.
- [25] F. Incitti, A. Salfinger, L. Snidaro, S. Challapalli, Leveraging llms for knowledge engineering from technical manuals: A case study in the medical prosthesis manufacturing domain, in: 2024 27th International Conference on Information Fusion (FUSION), 2024, pp. 1–8. doi:10. 23919/FUSION59988.2024.10706469.
- [26] M. Mhatre, A. Pandey, H. Rane, S. Sahu, A novel approach for creating flowcharts using generative ai, in: 2024 Asia Pacific Conference on Innovation in Technology (APCIT), 2024, pp. 1–7. doi:10.1109/ APCIT62007.2024.10673464.
- [27] Q. Wu, G. Bansal, J. Zhang, Y. Wu, B. Li, E. Zhu, L. Jiang, X. Zhang, S. Zhang, J. Liu, A. H. Awadallah, R. W. White, D. Burger, C. Wang,

Autogen: Enabling next-gen LLM applications via multi-agent conversations, in: First Conference on Language Modeling, 2024. URL https://openreview.net/forum?id=BAakY1hNKS

- [28] Z. Ji, T. Yu, Y. Xu, N. Lee, E. Ishii, P. Fung, Towards mitigating LLM hallucination via self reflection, in: H. Bouamor, J. Pino, K. Bali (Eds.), Findings of the Association for Computational Linguistics: EMNLP 2023, Association for Computational Linguistics, Singapore, 2023, pp. 1827–1843. doi:10.18653/v1/2023.findings-emnlp.123. URL https://aclanthology.org/2023.findings-emnlp.123
- [29] K. Church, J. Sun, R. Yue, P. Vickers, W. Saba, R. Chandrasekar, Emerging trends: a gentle introduction to rag, Natural Language Engineering 30 (2024) 870–881. doi:10.1017/S1351324924000044.
- [30] J. Svec, L. Smídl, J. Psutka, A. Pražák, Spoken term detection and relevance score estimation using dot-product of pronunciation embeddings (10 2022). doi:10.48550/arXiv.2210.11895.
- [31] G. Boothroyd, Assembly Automation and Product Design, CRC Press, Boca Raton, FL, 2005, eBook ISBN: 9781420027358. doi:10.1201/ 9781420027358.
- [32] LangChain, Langgraph: A library for building stateful, multi-actor applications with llms, https://github.com/langchain-ai/langgraph, accessed: 2024-11-12 (2024).
- [33] OpenAI, Chatgpt-4.0, https://openai.com, accessed: 2024-11-12 (2024).
- [34] D. S. Foundation, Django (2019). URL https://djangoproject.com
- [35] C. D. Team, Chroma: Open-source embedding database for ai applications, accessed: November 23, 2024 (2024).
 URL https://github.com/chroma-core/chroma
- [36] S. Transformers, all-minilm-l6-v2, https://huggingface.co/ sentence-transformers/all-MiniLM-L6-v2, accessed: 2024-11-12 (2021).

- [37] A. Abid, A. Abdalla, A. Abid, D. Khan, A. Alfozan, J. Zou, Gradio: Hassle-free sharing and testing of ml models in the wildReleased: 2019-06-06 (2019). doi:10.48550/arXiv.1906.02569. URL https://arxiv.org/abs/1906.02569
- [38] Microsoft Corporation, Microsoft azure: Cloud computing services, accessed: 2024-11-12 (2024).
 URL https://azure.microsoft.com/de-de