

The destabilising effect of particle concentration in inclined settlers

Cristian Reyes^{a,*}, Cristobal Arratia^b, Christian F. Ihle^a

^aLaboratory for Rheology and Fluid Dynamics, Department of Mining Engineering, University of Chile. Beauchef 850, 8370448 Santiago, Chile

^bNordita, Stockholm University and KTH Royal Institute of Technology, SE-106 91 Stockholm, Sweden

Abstract

Water scarcity has required constant water recycling, leading to a decline in water quality, further exacerbated by high concentrations of fine particles that reduce the efficiency of solid-liquid separation systems. Inclined settlers offer a viable secondary treatment option for high-turbidity water. Effective design requires understanding of operational conditions, geometry, and suspension properties. Using OpenFOAM, CFD simulations were performed for a continuous inclined countercurrent conduit to assess the influence of inlet particle concentration on efficiency, exploring various Surface Overflow Rates (SOR) and inclination angles. The results show that the steady state in which the flow settles is strongly dependent on the particle concentration. For very low particle concentrations, the flow is mostly stationary with little to no resuspension of particles. Increasingly unstable regimes are observed to emerge as the inlet concentration increases, leading to increased particle resuspension. Instabilities arise from overhanging zones at the tip of the suspension, generating recirculation zones that enlarge the resuspension region and induce entrainment within the bulk suspension. Shear instabilities become noticeable at large particle concentrations, further increasing resuspension. Different regimes were identified, influenced by the SOR and the inclination angles. Additionally, a Reynolds number characterizing these systems is proposed alongside a scale analysis. The findings highlight particle concentration as a critical parameter in inclined plate settler design.

1. Introduction

Solid-liquid separation is a crucial process in water recovery, with its efficiency highly dependent on the type and concentration of particles involved. For example, in the mining industry, where the water footprint has become a central issue, the emergence of clays within gangue minerals has become a significant impediment to maintaining the quality of recycled water [12, 23]. Inclined settler technology presents itself as a viable and environmentally friendly option for low footprint gravitational secondary physical treatment of turbid water. These systems serve the purpose of clarification either as standalone processes or in conjunction with others, depending on the nature of the suspensions undergoing treatment. Falling under the classification of high-rate settlers, inclined settler technology is predominantly utilized for water clarification, often in tandem with pretreatment operations such as coagulation and flocculation. This

*Corresponding author

Email address: cristian.reyes@ug.uchile.cl (Cristian Reyes)

combined approach is a cost-effective solution for secondary treatment in wastewater plants [11, 19]. The operating mode of these systems is mainly continuous, as observed in the water treatment industry [19]. In continuous operation, inclined settlers are typically categorized as countercurrent or cocurrent and occasionally as cross-flow, based on the relative positioning of the feed and the underflow. In particular, countercurrent equipment, where the feed is located at or near the bottom, represents the most prevalent configuration in inclined settler equipment [14, 49]. A fundamental aspect of this technology is the use of inclined confining elements. Among the most common types are Lamellar settlers, a class of physical separators that employ an array of inclined plates to facilitate the reorganization between the solid and liquid phases, leveraging the Boycott effect [7]. Lamella settlers, as inclined element settlers in general, are recognized for their high efficiency and relatively low footprint in particle separation, especially at low concentrations [47]. They find widespread application in wastewater contexts [44]. Reyes et al. [39] provides a recent review on the subject of inclined settlers.

Concerning design, the prevalent method used to determine the size of inclined settler components assumes that particles follow either a linear or parabolic path from any position perpendicular to the bottom wall of the inclined cell, depending on the type of flow and the geometry ([31, 50]). This assumption relies on the system being within the dilute limit, maintaining steady-state conditions in each inclined flow conduit, and the flow being uniform and reasonably represented by the mean flow velocity. Despite the arguments of Fadel and Baumann [20] that the constant velocity model underestimates tube length, this approach continues to be widely endorsed in the literature (e.g., studies of Crittenden et al. [14], Letterman [31], Lin [34], Wilson [49] and Droste and Gehr [18]). Perhaps surprisingly, the criteria thus derived for settler size design coincide with a different size determination based on a mass balance approach known as PNK [35, 37], later theoretically justified and extended to continuous operation by [1]. According to these modeling approaches, the suspended particles can reach a position L_m (given below in §2) along the settler.

However, these designs overlook the impact of hydrodynamic instabilities on the efficiency of the final system design. Instability occurs within the cell interior when flow inertia exceeds viscous forces, forming two- or three-dimensional flow structures. These structures can impede settling by lifting particles and potentially carrying them toward the settler's overflow. This mechanism significantly contributes to the degradation of the total removal efficiency (TRE). Instabilities in these inclined systems have been studied mathematically, using linear stability analysis [6, 17, 25, 45], and numerically, using finite difference, finite volume, or lattice Boltzmann methods [9, 30, 36]. These analyses have focused on the development of shear instabilities around the interface between the clear water layer next to the upper wall and the suspension. Laux and Ytrehus [30] noted that with increasing particle concentration, their findings diverged from the predictions outlined in the PNK model (Borhan and Acrivos [6] also observed this effect; see also [39], for a review). Designing these inclined settlers correctly and understanding the physics inside is essential to optimize these processes.

In the present paper, we report on two-dimensional numerical simulations of the flow in an inclined container that mimics a single-cell settler. Although such numerical simulations are not an exact representation of the three-dimensional effects that occur at both the inlet and the discharge of industrial equipment, they give the essential features

of the underlying physical mechanism that degrades the TRE in them. Starting from very dilute suspensions, we studied the effect of particle concentration on resuspension and efficiency within the inclined settler, observing a marked degradation of performance as concentration increases. We provide a detailed description of different regimes that we identify along the destabilization route through which efficiency breaks down. We characterize this destabilization route for different angles and feed rates. Although we consider monodisperse suspensions, we end with an exploration of different particle sizes.

2. System description

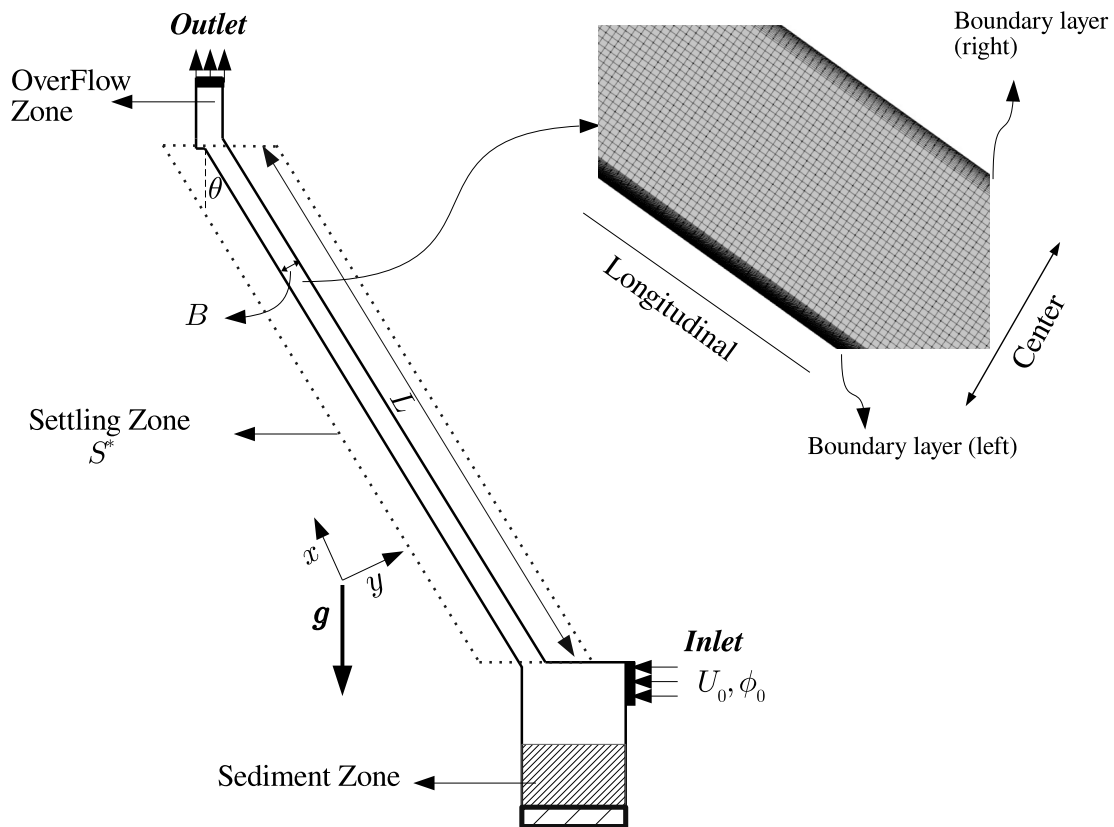


Figure 1: Geometry used in numerical simulations. The main geometrical and flow parameters are shown. In the close-up area the structure of the mesh used can be appreciated.

Figure 1 illustrates the geometry under examination along with the mesh structure within the settling zone. The setup represents a countercurrent inclined settler featuring plates characterized by a length $L = 1$ m, plate separation $B = 2$ cm, and an inclination angle θ from the vertical. This inclined cell is connected to an inlet and a hopper in its lower part and an outlet zone in its upper part. In this system a suspension with particle size d and volume concentration

ϕ_0 is injected with a velocity U_0 to settle the particles between the plates. The inlet size $l_{in} = B/2$ is half the width of the cell and is slightly separated from the beginning of the cell to avoid any effect of the inflow condition in the cell. Similarly, the outlet is separated from the cell to avoid backflow. The excess of accumulated particles is removed from the hopper zone as described in Section 3.1, below. The coordinates x and y correspond to the longitudinal and transverse directions to the walls of the conduit.

As mentioned above, the models used to design these inclined settling tanks ([50],[31] and [26]) turn out to coincide ([39]) with the continuous extension of the PNK theory [1] which is valid under certain suspension and flow criteria [16]. According to these models, the particles in the suspension can raise along the settler until reaching an interface position given by

$$L_m = \left(\frac{B}{\sin \theta} \right) \left(\frac{\bar{U}}{W_s} - \cos \theta \right), \quad (1)$$

where $\bar{U} = l_{in}U_0/B$ is the nominal mean velocity in the cell and W_s is the Stokes settling velocity. In other words, L_m is the theoretical longitudinal length of the suspension layer (measured from the bottom) inside the cell.

2.1. Input parameters

2.1.1. Surface overflow rate (SOR)

A common design parameter that describes the capacity of the settler is the surface overflow rate (SOR), which relates the flow in the settler (operational parameter) to the projected area (geometrical parameter). For an inclined settler this parameter is calculated as [11]

$$\text{SOR} = \frac{\bar{U}}{\frac{L}{B} \sin \theta + \cos \theta}. \quad (2)$$

The SOR corresponds to the minimum settling velocity that this settler can theoretically remove (as can be seen by replacing the settler length L in (2) by the predicted interface position L_m in (1)). Thus, SOR should satisfy $\text{SOR} < W_s$, in order to prevent the conduit from completely filling with particles.

Consequently, when studying different particle sizes, an important parameter to guide comparisons is the ratio of SOR to settling velocity $\frac{\text{SOR}}{W_s}$. This ratio is directly related to the fraction of the length cell L that would be occupied by the suspension (in the ideal case). In fact, when the ratio L/B is large, it is satisfied that:

$$\frac{\text{SOR}}{W_s} \approx \frac{L_m}{L}. \quad (3)$$

2.1.2. Physical parameters of the simulations

We study the effect of particle concentration considering angles used in inclined settlers and particle sizes found in thickener supernatants in mining operations. The different values of particle concentration ϕ_0 , SOR and angle of inclination (θ) for our main study with particle diameter $d = 10 \mu\text{m}$ are given in Table 1. We perform simulations for all possible combinations of these parameters and put an emphasis on the effect of particle concentration.

To get an idea of the expected behavior of the operating settler according to (3), the SOR values can be compared with the Stokes sedimentation velocity W_s . The value of W_s for the main case, as well as the values of W_s for the

Table 1: Range of values used in the 90 numerical simulations with particle diameter $d = 10 \mu\text{m}$ constituting the main part of our study.

Parameter	Values
Inlet particle concentration ϕ_0 (1×10^{-3})	0.02, 0.05, 0.1, 0.125, 0.15, 0.2, 0.4, 0.8, 1.2, 2
SOR (mm/s)	0.018, 0.036, 0.054
Inclination angle θ	35, 45, 55°

exploratory cases with particle diameters $d = 5 \mu\text{m}$ and $d = 20 \mu\text{m}$ reported in §5.3, are given in Table 2. Table 2 also gives the range of nominal Reynolds numbers $Re = \bar{U}B/\nu$ (with ν the kinematic viscosity of water) of the main study, as well as the values of Re for exploratory cases with different d .

Another important nondimensional parameter is Λ defined by [1] as the ratio between the sedimentation Grashof number and the sedimentation Reynolds number $Re_s = W_s \mathcal{L}/\nu$, which gives

$$\Lambda = \frac{gR_p \mathcal{L}^3/\nu^2}{Re_s} = \frac{9}{2} \left(\frac{\mathcal{L}}{a} \right)^2 \phi \quad (4)$$

where $R_p = \phi_0(\rho_s - \rho_f)/\rho_f$ is the density ratio between the suspension and the clear fluid, \mathcal{L} is a length scale of the flow (with L_m used in this study), and $a = d/2$ is the particle radius. Acrivos and Herbolzheimer [1] show that the PNK theory consistent with (1) is recovered in the limit as $\Lambda \rightarrow \infty$. Different asymptotic similarity solutions have been obtained by Shaqfeh and Acrivos [45] depending on the value of $\mathcal{R}^{1/2}$ as the limit $\Lambda \rightarrow \infty$ is approached, where $\mathcal{R} = Re_s \Lambda^{-1/3}$. This family of solutions bridges the gap between a viscous regime for $\mathcal{R} \ll 1$ and an inertial regime for $\mathcal{R} \gg 1$. Which of these similarity solutions, if any, is approached by the actual (experimental or numerical) solution to the full problem is not known *a priori*. The values of Λ for our simulations are shown in Table 2. In practical cases, this parameter has large values ($> 10^6$, [4]).

Inlet velocities for particles with diameters of 5 and 20 μm were calculated by maintaining a constant ratio $\frac{SOR_{10}}{W_{s,10}} = \frac{SOR_5}{W_{s,5}} = \frac{SOR_{20}}{W_{s,20}}$, with subscripts denoting particle diameter in micrometers. This approach was adopted because application of the same SOR would result in excessively high inlet velocities for the 5 μm particles and insufficiently low inlet velocities for the 20 μm particles, potentially leading to non-representative characterizations of the settling dynamics.

Table 2: Range of values used in the numerical simulations. *main* means the values used for the simulations associated with 10 micron particles.

Parameter	$d = 5 \mu\text{m}$	$d = 10 \mu\text{m}$ (<i>main</i>)	$d = 20 \mu\text{m}$
W_s (mm/s)	0.023	0.093	0.371
Re ($\bar{U}B/\nu$)	6.5	10.7-45	198
Λ	1.44×10^9	$3.6 \times 10^6 - 3.6 \times 10^8$	9×10^5

Another relevant feature of the behavior of the studied system is related to the fact that the profile is independent of the length of the inclined cell. We tested the same case for different geometries where only the cell length was modified. According to the results of the simulations, changing the length does not generate relevant changes in the concentration profile for $x < L$, for the same values of inlet velocity U_0 and particle concentration ϕ_0 . Thus, the results obtained

would be valid for any cell smaller than L (equal to 1 m in this article), as long as the same boundary conditions are considered.

2.2. Performance parameters

2.2.1. Local turbidity removal efficiency

The turbidity removal efficiency is a parameter widely used to measure the overall degree of solid-liquid separation achieved by the cell. A local value of the separation efficiency at a specified height x (measured from the base) is defined as:

$$\text{TRE}_{local} = \frac{\phi_0 - \bar{\phi}(x)}{\phi_0} \quad (5)$$

where ϕ_0 is the concentration of particles in the inlet and $\bar{\phi}(x)$ is the average concentration in a perpendicular coordinate segment within the cell (in the normal direction of the wall). Measuring this parameter locally allows us to analyze the length where the desired efficiency is obtained given a flow rate, and to relate the TRE with a measure of effective length to achieve a particular particle concentration at the overflow. Despite the importance of this parameter, the potential objective of completely eliminating particles from the overflow would generally require extremely long settling elements. This trade-off between process objective fulfillment and cost requires tolerating some degree of turbidity at the overflow.

2.2.2. Interface Position

In continuous operation, the interface position is the location along the inclined settler at which the average particle concentration reduces below a prescribed value. For these simulations, two different positions were considered. The first corresponds to the position of the bulk suspension, L_b , and the second corresponds to the maximum position of the resuspension zone, L_r . For the bulk suspension interface, we calculate the position where $\bar{\phi}(x)$ is closest to the inlet particle concentration value (ϕ_0). On the other hand, the resuspension interface L_r was calculated as the position where the mean concentration corresponds to 1% of ϕ_0 .

2.2.3. Mass overflow parameter

This parameter allows us to compare the behavior of the system with the theoretical prediction of the interface position L_m given by (1) commonly used to design these inclined settling tanks. Thus, the overflow of solid mass beyond the theoretical prediction, ‘mass overflow parameter’ (mo) for short, is defined as

$$mo = \int_{L_m}^L \rho_s \phi dS^*, \quad (6)$$

where ρ_s is the solid density. As the problem at hand is effectively two-dimensional, the integration is over a surface S^* above L_m within the settling zone. Therefore, mo has units of mass per unit length.

2.2.4. Mean thickness of the clear water layer

In this type of system, three layers associated with different particle concentrations develop: (i) the clear water layer with $\phi = 0$, (ii) the suspension layer with a concentration roughly equal to the inlet concentration, and (iii) the sediment layer with a high concentration that forms a slowly flowing layer at the bottom of the cell. In countercurrent systems below the bulk interface, the clear water layer is smaller than the suspension layer, while for low-concentration cases, the sediment layer is submillimetric and can be neglected. Therefore, the analysis focuses only on the suspension and the clear water layers. As the thickness of the suspension is approximately $\delta_{susp}(x) \approx B - \delta_{cw}(x)$, only the behavior of the thickness of the clear water layer, $\delta_{cw}(x)$, will be reported. This parameter allows us to characterize how the particle concentration profile develops in the direction perpendicular to the plates. Furthermore, according to the theory proposed by [33], this thickness is sensitive to the concentration of feed particles and has a direct relationship with the balance of forces within the fluid. The mean thickness of the clear water layer was calculated by the following integral:

$$\bar{\delta} = \frac{1}{L_b} \int_0^{L_b} \delta_{cw}(x) dx, \quad (7)$$

where L_b is the bulk suspension position. The local thickness δ_{cw} refers to the perpendicular distance from the upper wall to the sediment layer. It is calculated by identifying the position where the concentration of particles falls below a predefined threshold value, specifically $0.4\phi_0$. This approach is adopted due to the diffuse nature of the layer; employing a threshold value equal to ϕ_0 would inaccurately delineate the position of the interface.

3. Governing equations and numerical implementation

The performance parameters referred to in the previous section are obtained from high resolution two-dimensional numerical simulations of a mixture model, following the Euler-Euler approach (i.e., both the solid and liquid phases are assumed to be continuous), using the OpenFOAM library [40, 41]. The corresponding momentum equations are as follows:

$$\frac{\partial(\phi_1 \rho_1 \mathbf{U}_1)}{\partial t} + \nabla \cdot (\phi_1 \rho_1 \mathbf{U}_1 \mathbf{U}_1) = -\phi_1 \nabla p_{rgh} + \phi_1 \rho_1 \mathbf{g} + \nabla \cdot (\phi_1 \boldsymbol{\tau}_1) - p_s \nabla \phi_1 + \mathbf{F}_1, \quad (8)$$

$$\frac{\partial(\phi_2 \rho_2 \mathbf{U}_2)}{\partial t} + \nabla \cdot (\phi_2 \rho_2 \mathbf{U}_2 \mathbf{U}_2) = -\phi_2 \nabla p_{rgh} + \phi_2 \rho_2 \mathbf{g} + \nabla \cdot (\phi_2 \boldsymbol{\tau}_2) + \mathbf{F}_2, \quad (9)$$

where ϕ_i , ρ_i and \mathbf{U}_i are the volume fraction, density, and velocity of each phase. Here, 1 and 2 represent the solid and water phases, respectively, where it must be satisfied that $\phi_2 = 1 - \phi_1$. $\mathbf{F}_1 = -\mathbf{F}_2$ are inter-phases forces, p_s is a solid pressure that models interparticle contact forces, and p_{rgh} is a common pressure that ensures incompressibility.

$$\nabla \cdot \mathbf{V} = 0, \quad (10)$$

where

$$\mathbf{V} \equiv \phi_1 \mathbf{U}_1 + \phi_2 \mathbf{U}_2, \quad (11)$$

is the (volumetric) mean velocity.

With respect to the forces between phases, only the drag force, calculated from the Gidaspow Wen-Yu/Ergun model [22], was considered:

$$\mathbf{F} = \phi_1 0.75 C_d(\text{Re}_p) \rho_2 \frac{v}{d^2} (\mathbf{U}_1 - \mathbf{U}_2), \quad (12)$$

where $C_d(\text{Re}_p)$ depends on the model selected, when particle concentration is lower than 0.2 it use the Gidaspow - Wen Yu model, otherwise it uses the Gidaspow-Ergun model:

$$C_d(\text{Re}_p) = \begin{cases} 24 \left(1 + 0.15 \mathfrak{X}_{p,c}^{0.687} \right) \phi_2^{-2.65}, & \text{if } \phi \leq 0.2 \\ \frac{4}{3} \left(150 \frac{\phi_1}{\phi_2} + 1.75 \text{Re}_p \right) \phi_2^{-2.65}, & \text{otherwise.} \end{cases}$$

Here $\mathfrak{X}_{p,c} = \phi_2 \text{Re}_p$, with $\text{Re}_p = \frac{|\mathbf{U}_1 - \mathbf{U}_2| d}{\nu_2}$. On the other hand, the shear stress tensors are as follows:

$$\boldsymbol{\tau}_i = \mu_i \left[\left(\nabla \mathbf{U}_i + \nabla \mathbf{U}_i^T \right) - \frac{2}{3} (\nabla \cdot \mathbf{U}_i) \mathbf{I} \right] \quad (13)$$

where $\mu_i = \rho_i \nu_i$, with ν_i the kinematic viscosity. To determine an effective viscosity for the solid, it is established that the viscosities must satisfy the following relationship: $\mu_{mix} = \phi_1 \mu_1 + \phi_2 \mu_2$, where μ_{mix} corresponds to the viscosity of the mixture calculated as [29]:

$$\mu_{mix} = \mu_2 \left(1 - \frac{\phi}{\phi_{max}} \right)^{-\zeta \phi_{max}} \quad (14)$$

where $\phi_{max} = 0.6$ and $\zeta = 2.5$. This equation is relevant for $\phi > 0.1$ where there is a collision between particles. Finally, the equation to determine the particle concentration is given by:

$$\frac{\partial \phi_1}{\partial t} + \nabla \cdot (\phi_1 \mathbf{U}_1) = 0. \quad (15)$$

In OpenFOAM this equation is solved explicitly by the MULES algorithm [15], which limits convective flux to allow the variable to remain within a range given by the user. With respect to numerical aspects of the simulation, a second-order linearUpwind scheme [48] was used for the convection scheme and a Crank-Nicholson scheme [13] was used for time. In simulation, an adaptive time step was used to reach a Courant number around 0.9, thus avoiding potential numerical viscosity effects in the output. A summary of the steps of the algorithm that solves these equations can be found in the Appendix A.

3.1. Boundary conditions

The following boundary conditions have been considered, with reference to the particular methods used in OpenFOAM:

- **Inlet:** A fixed value (Dirichlet boundary condition) was applied for both particle concentration and velocities. The ‘fixedFluxPressure’ condition was used for the pressure, to satisfy both the momentum equation and the boundary conditions of velocities.

- **Outlet:** For the particle concentration at the outlet, we utilized the ‘inletOutlet’ condition, which incorporates Neumann-type boundary condition for the outflow and Dirichlet for the inflow. Additionally, the boundary condition ‘pressureInletOutletVelocity’ was applied to manage velocity, which corresponds to a mixed boundary condition where for outflow, a zero gradient condition was utilized, whereas for inflow, the velocity was derived from the internal cell value normal to the patch. On the other hand, a ‘prghPressure’ boundary condition was adopted for the pressure. This condition calculates the pressure at the boundary, excluding the hydrostatic effect, represented by $p_{rgh} = p - \rho g(h - h_{ref})$.
- **Hopper:** In hopper zone, on a height H_{Hop} , the return of excess particles is avoided by imposing that the concentration ϕ is equal to ϕ_0 (Dirichlet condition) in this zone, thus preventing cell contamination from the hopper. This effectively renders the hopper as a particle sink, thus providing a focus on the dynamics inside the cell rather than on the particular features of the inlet and outlet.
- **Walls:** For the walls, a ‘non-slip condition was chosen for the liquid phase velocity and a free-slip condition for particle phase velocity. ‘fixedFluxPressure’ was utilized for the pressure boundary condition. The particle concentration used a ‘zeroGradient’ condition, which means $\frac{\partial \phi}{\partial n} = 0$, where n corresponds to the normal direction to the wall.

Since the solid phase is treated as a continuum, the selection of the appropriate boundary condition is not straightforward and may depend on the specific problem being addressed. Solid particles interact with the wall and can also collide with one another, rotate, or be displaced by the shear stress of the fluid. Consequently, a non-slip condition is not the most suitable choice because the particles do not adhere to the bottom; instead, they tend to slip and may undergo shear-induced mixing with the upper part of the particle layer [3, 27]. The particles are likely to slip at the bottom, which can be influenced by factors such as roughness of the wall, particle collisions, and friction between the particles and the wall. For this reason, various models have been developed, including the Johnson-Jackson model [27], to describe partial slip conditions. However, these models often require the specification of coefficients that may not be readily available from experimental data. In cases where smooth, non-adhesive walls and hard particles are assumed, the ‘free-slip’ condition has been found to yield good agreement with experimental results, resembling the results obtained with the partial slip model when using small friction coefficients (Benyahia et al. [3]). For this reason, we assume a smooth wall, with hard and non-adhesive particles.

3.2. Mesh Comparison

The mesh used in the simulations was a structured 2D grid with quadrilateral elements, which has been shown to have better convergence and higher resolution than an unstructured grid [10]. The formation of the suspension, clear fluid and sediment layer (the last two of them very thin), requires to shape a fine mesh close to the wall. This refinement is crucial for the appropriate development of boundary layers, which play a significant role in this system as they govern mixing, resuspension, and the gravity flow towards the hopper. To study the dependence of the density of

Table 3: Number of cells of different mesh sections. Sections are shown in Figure 1.

Mesh	Center	Longitudinal	Boundary layer (Left)	Boundary layer (Right)	CPU time (hrs)
Coarsest	18	880	30	10	30.4
Coarse	24	1183	30	12	30.3
Medium	30	1583	30	15	92.8
Fine	40	2000	30	20	133.8
Finest	50	3000	30	30	202.6

the mesh, five meshes were considered: coarsest, coarse, medium, fine, and finest (see Table 3), which have different levels of refinement in the cells of the boundary layer and in the center cells. In all cases, the boundary layer close to the bottom boundary of the cell was highly refined so that the sediment layer (the thickness of which is less than 1 mm) is correctly developed. It is important to note that the aspect ratio considered in the center cells was close to 1 to avoid a possible gradient preference. Generally, aspect ratios greater than 1 are used near the boundary layer, where normal gradients are known to be particularly higher than those tangential to the wall ([24]). On the other hand, in areas of high vorticity, where the velocity vector changes constantly and also the velocity gradient varies, cell aspect ratios close to 1 have been chosen to avoid abrupt variations of Δt , in order to maintain the Courant number or loss of accuracy.

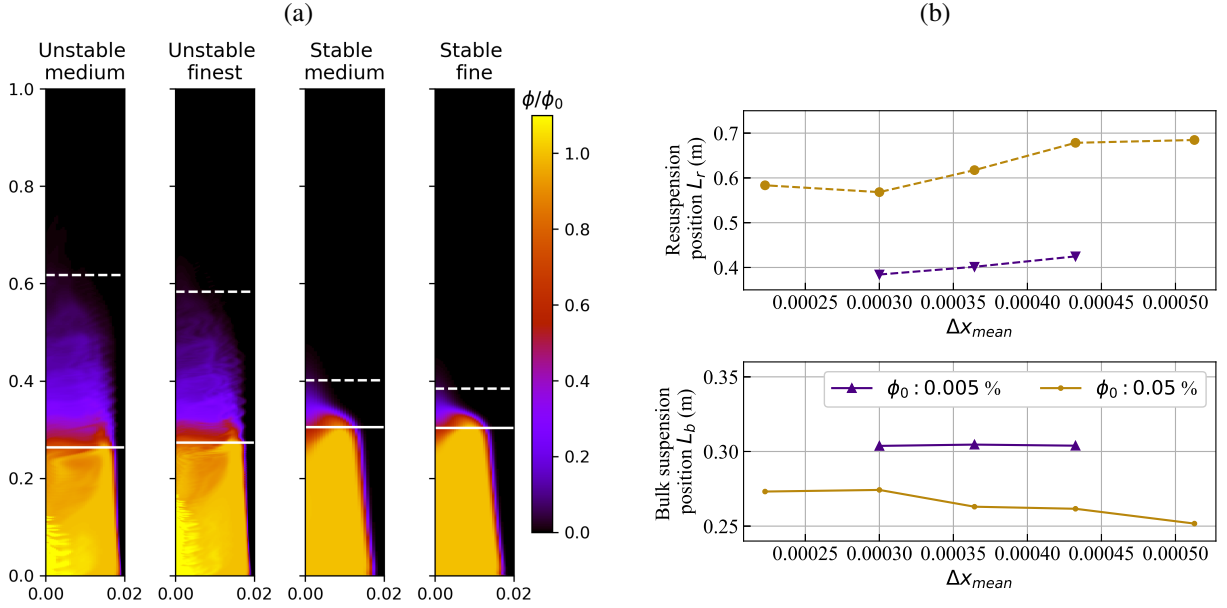


Figure 2: 2D particle concentration profile for stable ($\phi_0 = 0.005\%$) and unstable ($\phi_0 = 0.05\%$) cases, where two levels of refinement are shown (left). Solid white line corresponds to suspension bulk position (L_b) and dashed line to resuspension position (L_r). On the right, mesh dependence of the suspension and resuspension positions, where $\delta x_{mean} = (1/n) \sum \sqrt{A_i}$, with A_i representing the area of cell i .

For this mesh analysis, two cases were studied: with and without the onset of flow instabilities. This was necessary because mesh density requirements are expected to vary because the physics in unstable cases differs from that in stable cases. Both cases are observed in Figure 2, where the left side shows the 2D profile of the particle concentration for

different levels of refinement, and the right side shows the interface positions for bulk suspension (L_b) and resuspension (L_r) as a function of the mean size of the cells Δx_{mean} . As can be observed in the variation of the interface positions L_b and L_r (see Figure 2, right), the dependence on the mesh is greater for unstable cases (with physical instabilities). Note that the position of the resuspension L_r is more sensitive to the mesh, in part because it strongly depends on the development of instabilities, which are sensitive to the mesh resolution. Although the position of the bulk suspension is mainly determined by the inflow rate and the sedimentation velocity of the particles, it is also influenced by the erosion of the suspension due to instabilities. For stable cases, the bulk suspension positions are similar, whereas there is a slight difference for the resuspension interface. Qualitative similarities can be observed in all cases; however, from the medium mesh onward, similar profiles are observed, both in particle concentration (see Figure 2, left) and flow velocities.

Overall, according to the results of the different meshes, decreasing differences can be observed as the mesh becomes finer, especially from the medium mesh onward. However, as expected, decreasing cell size has a direct effect on computational time. The computational time is almost seven times larger when the average cell size is reduced by a factor of two below the coarse mesh (see Table 3, last column). For this reason, the medium mesh density was selected for this study as a compromise between accuracy and the ability to run multiple cases to analyze different aspects of this system.

3.3. Initial conditions and convergence to a statistically steady state

To characterize the flow in what would correspond to continuous operation conditions, simulations need to be carried out until they reach a steady state. This can be either a stationary state or a fluctuating but statistically steady state, which is achieved over several flow cycles once stationary mean values have been reached. Examples of this convergence to a steady state are shown for three particle concentrations in Figure 3, which shows the instantaneous value (solid lines) of the longitudinal velocity of the liquid U_{2x} at a specific point (indicated by white dots in Figure 7 below) and its moving average (dashed lines) on a centered window of 100 time units. It is observed that the convergence of the flow values can show different types of variation involving different time scales which, as apparent from the simulations, depend on the development of flow instabilities. For example, for a system that does not show instability (top plot of Figure 3, $\phi_0 : 0.005\%$), the flow evolves from its initial condition to smoothly converge to its final values. In the presence of instabilities, the flow can oscillate around a value with a clear dominant frequency (middle plot, $\phi_0 : 0.01\%$) or with a strongly fluctuating behavior (bottom plot $\phi_0 : 0.12\%$). In the first two cases (top and middle plots), the convergence of the system to an average value is clearly observed in the moving average. The small oscillations detected at $\phi_0 = 0.01\%$ (solid line, middle plot) suggest that the system is near the onset of an instability. For the third case, with a much higher particle concentration ($\phi_0 = 0.12\%$, bottom plot), the moving average shows slight variations indicating that the system has broad spectrum fluctuations reaching low frequencies. Still, the system does not show a clear long-term trend and thus appears to be sufficiently close to converge to a well-defined average. We define as a steady state the full velocity and concentration fields corresponding to the average of the last 20 snapshots, with a time difference of $\Delta t = 5$ s in

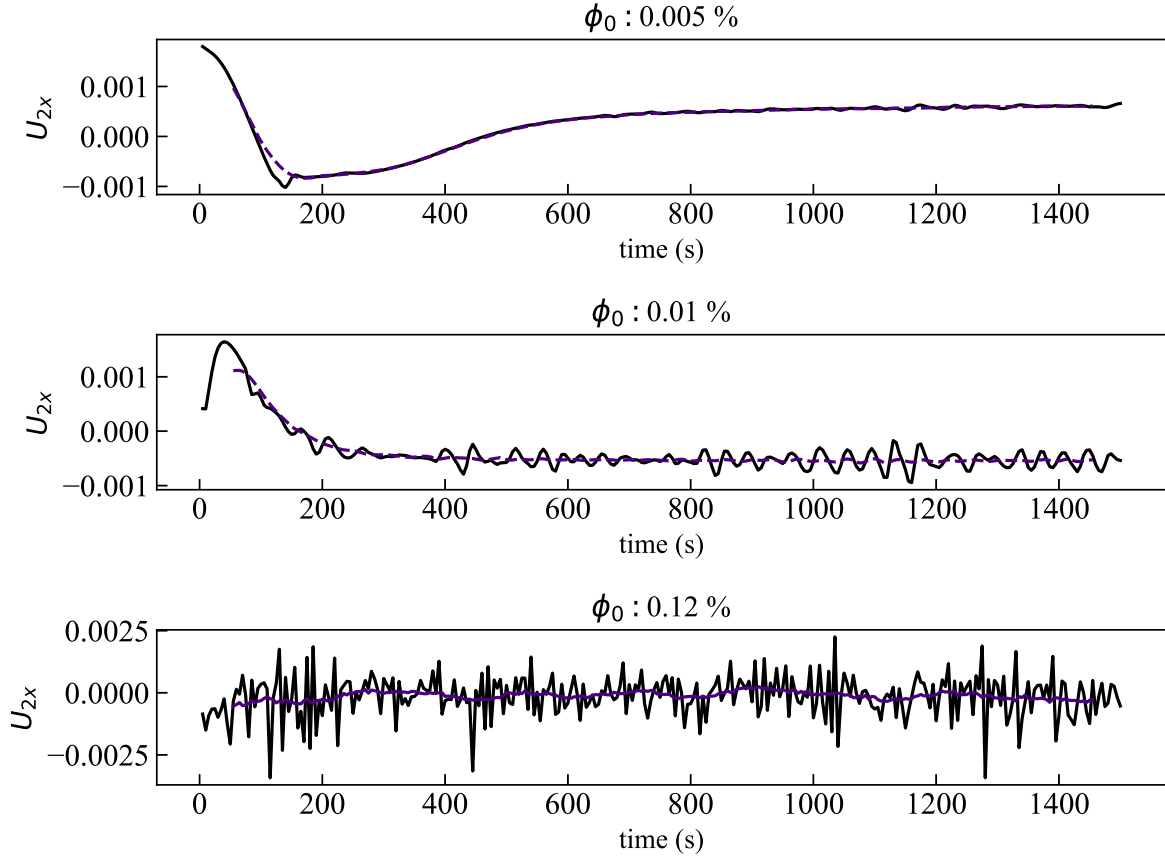


Figure 3: Example of velocity field convergence to steady-state behavior at a fixed point (0.005, 0.27) for three different particle concentrations. U_{2x} is the longitudinal velocity.

between. Residual variations of the point-wise variables (as in the moving average in the bottom plot of Figure 3) will, after initial transients have passed, have a negligible effect on integral measures such as the local TRE and the positions of the interface used to characterize the settler.

The choice of initial condition is crucial to reduce transients and accelerate convergence in the various cases. For the first case, a homogeneous concentration up to a certain height L_0 was defined inside the cell, with zero velocity for both phases. This results in a long adjustment time until the steady state is reached. The evolution of these transients can also be studied by following the position of the interfaces, both of the bulk suspension L_b and of the resuspension L_r , as shown in Figure 4. It is observed, as expected, that the further away the initial condition is from the steady state, the more time is needed to reach that steady state (see $L_0 = 0.77$ and $L_0 = 0.19$ in Figure 4). When the initial condition is close to the steady state, such as for low concentration when $L_0 = L_m$, the guess based on the theoretical solution (with zero velocity and a uniform particle concentration up to a height L_m , Eq. (1)), or the solution of a simulation with a close particle concentration, then the system reaches the steady state in a faster way. In this work, most cases were run from nearly the lowest particle concentration ($\phi_0 = 0.005\%$) to the highest, using the steady-state concentration of the

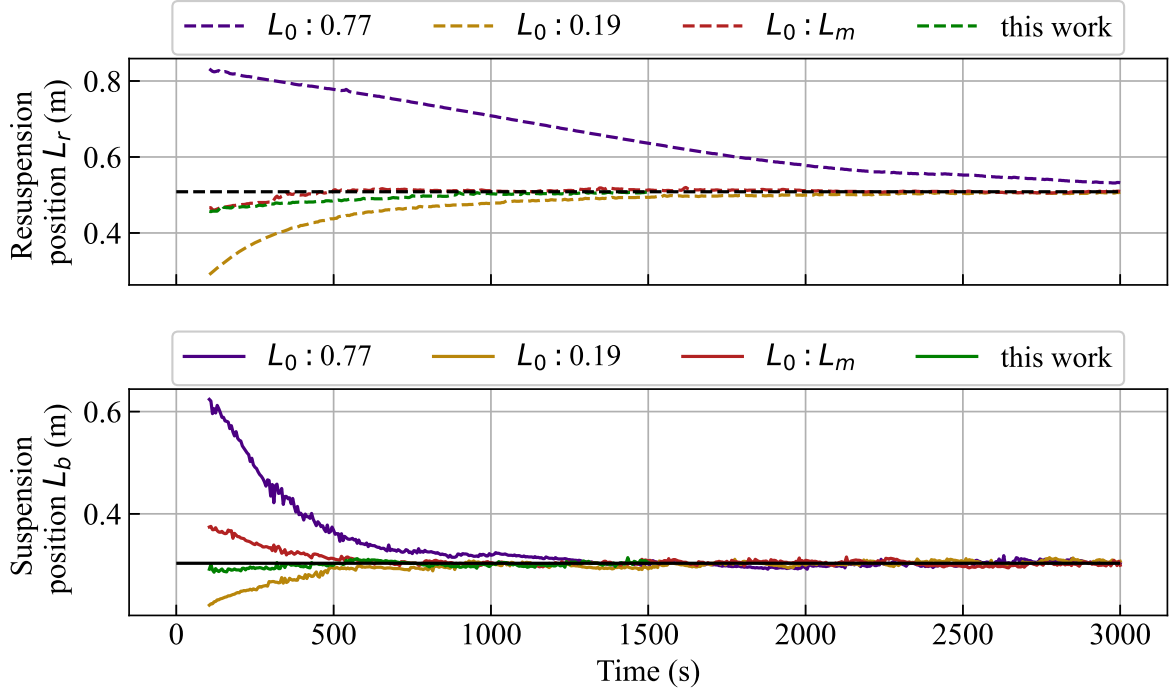


Figure 4: Effect of initial conditions on reaching the steady state, where the suspension position (L_b) is L_0 at $t = 0$ with a uniform particle concentration ϕ_0 . L_m is calculated using eq 1 whose value for this case equals 0.389 m.

previous case as an initial condition for the concentration in next, after normalizing its values to the new concentration. In this way, it is possible to reduce the computational time because the initial condition is closer to the steady state. We stress that the main advantage of this method over using the theoretical solution L_m is that the theoretical solution gets increasingly farther away from the final solution as the particle concentration increases (a topic to be discussed further in the results).

It is important to note that different initial conditions may result in the convergence to distinct steady states, as can be expected in the presence of multiple attractors of the dynamical system. Moreover, since our protocol for the choice of initial conditions involves an increase in particle concentration, one could expect to find hysteresis when concentration is decreased. We performed a few tests to explore these possibilities and found, in all such attempts, that the system ultimately converges to the same steady state, independent of the initial condition.

4. Results

We begin in §4.1 by presenting the simulations for different inlet concentrations with a medium SOR (0.036 mm/s) and an angle of 55° , which provides a moderate degree of resuspension, and a smooth transition of instability regimes. The effects of SOR and angle of inclination are discussed independently in the following subsections.

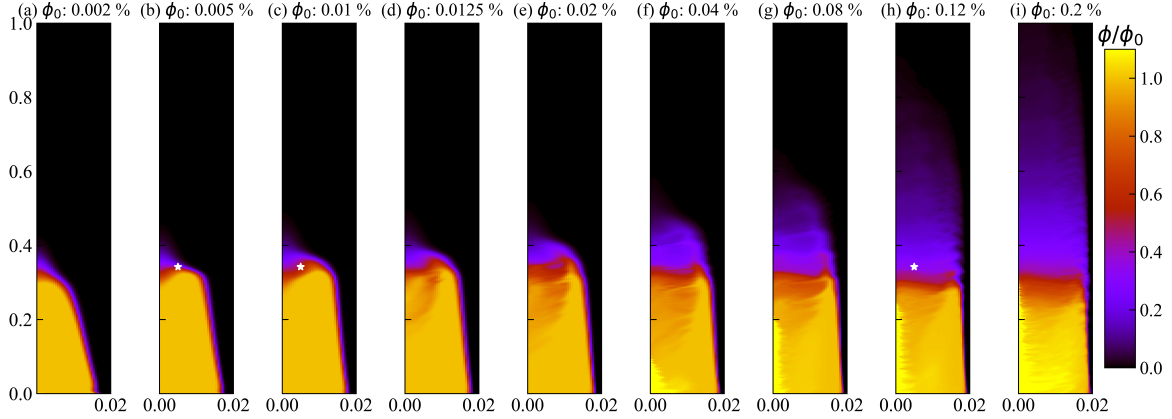


Figure 5: Particle concentration profile for 9 different inlet particle concentrations. Orange zone corresponds to bulk suspension and purple zone corresponds to resuspended particles. SOR: 0.036 m/s, θ : 55° , Re: 30. The white dot corresponds to the point where the convergence test was performed (Figure 3).

4.1. Particle concentration effect

Figure 5 shows the mean particle in the 2D profile for 9 distinct particle concentrations, normalized by input concentration. An observable trend emerges: with the rise in concentration, there is a corresponding increase in particle resuspension (depicted by the purple zone). Consequently, this leads to a decrease in cell efficiency due to the increase in the number of particles reporting to the overflow, diverging from the theoretical value of inclined plate designs such as Yao [50].

4.1.1. Physical description of the flow development

In the simulations, we observe the gradual emergence of instabilities that intensify with increasing particle concentration. For the lowest concentrations, the flow settles into a state without time dependence. We will refer to this as Regime 0. Flow fluctuations become noticeable in the steady-state concentration profiles when the inlet concentration exceeds $\phi_0 = 0.01\%$. At this point the effects of time variation remain confined to a small region below the bulk interface position, as evidenced by the darker regions (brick color) of reduced concentration within the bulk suspension in Figure 5 (d-e). Until this concentration level, which includes Regime 1 to be described below, there is minimal to no resuspension towards the upper region of clarified fluid. As the particle concentration increases to $\phi_0 = 0.04\%$ and beyond, the region of particle resuspension increases until the resuspended particles cover almost the entire upper section of the settler, as illustrated in Figure 5 (i). We distinguish here two further regimes: Regime 2 in which the density of resuspended particles decreases in a staircase structure with nearly discrete changes, as shown in Figure 5 (f, g), and Regime 3 in which the resuspension becomes diffuse (Figure 5 (h, i)).

Initial regimes of destabilization (from regime 0 to 1): Separation of the clear fluid from the suspension

Changes in the configuration of the (statistically) steady state through the different regimes are detailed in Figure 6, which shows contours of the stream function of the (volumetric) mean velocity \mathbf{V} and isolines that indicate regions

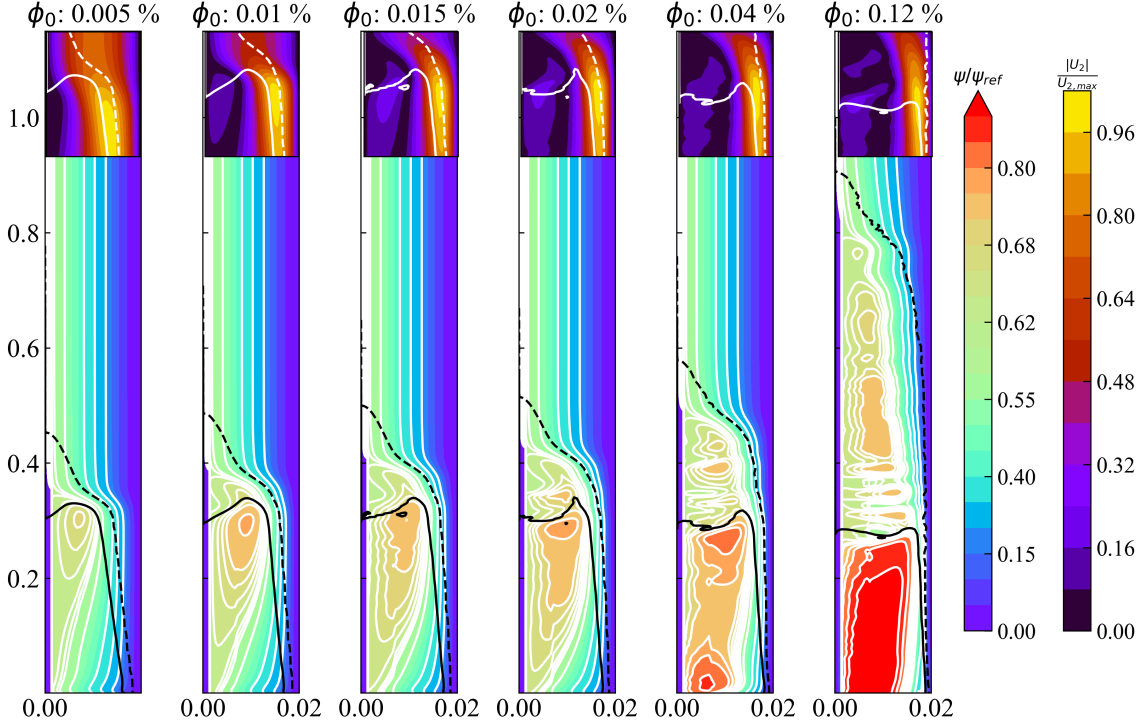


Figure 6: Streamfunction field (ψ) normalized by a reference value ($\psi = 5 \times 10^{-3} \text{ m}^2/\text{s}$) for six different particle concentrations, SOR: 0.036 m/s, $\theta = 55^\circ$, $\text{Re} = 30$ (same cases as Figure 5). The thick solid line on each plot corresponds to bulk suspension ($\phi = 0.8\phi_0$) and the dashed lines correspond to resuspended particles ($\phi = 0.005\phi_0$). The inset at top of each figure corresponds to the normalized magnitude of velocity field of the fluid phase U_2 , the yellow zone representing the zone with the highest velocity within the whole domain. The clear fluid zone is at the right in each figure.

occupied by the bulk of the suspension (solid black line, $\phi = 0.8\phi_0$) and particle resuspension (dashed line, $\phi = 0.005\phi_0$). The first three subfigures (from left to right) show the transition from a stable stationary system to a time-dependent but only mildly unstable one. For $\phi_0 = 0.005\%$, the stationary flow has one recirculation zone located around the tip of the suspension region (bounded by the solid black line), just below a single stagnation point on the lower wall (left side). In the configuration at $\phi_0 = 0.01\%$, the top of the recirculation zone is stretched and tilted to the left, while the steady mean flow detaches from the wall. In the time-developing simulations (see the supplementary material), these features are seen to correspond to the release of small jets of particles from the tip of the suspension, similar to what Laux and Ytrehus [30] have referred to as a ‘fountain of particles’. The topological configuration of the streamlines remains unchanged up to an initial concentration $\phi_0 = 0.015\%$. We identify this time-dependent regime with a single recirculation zone away from the wall as Regime 1. At this point, the clear fluid separates from the suspension and the small recirculation zone that appears remains trapped between the suspension and the wall. Unlike the incipient case with $\phi_0 = 0.01\%$, for $\phi_0 = 0.0125\%$ (and $\phi = 0.015\%$) the jets are strong enough to lead to the formation of overhanging zones which are gravitationally unstable and break down in plumes like those of the Rayleigh-Taylor instability, but with shear. These plumes induce mixing, near the interface, of clear water entrained into the bulk suspension. These unstable overhanging zones are at the origin of the darker regions (brick color) of the reduced

concentration within the bulk suspension in Figure 5(d-e) mentioned above. At the high concentration end of this range of ϕ_0 , *i.e.*, for $\phi_0 = 0.02\%$, new features begin to appear in the streamlines of Figure 6.

Regime 2: Detachment and suspension release

Figure 6 shows that the recirculation zone around the tip of the suspension splits in additional vortices when the inlet concentration increases to $\phi_0 = 0.02\%$, leading to a new recirculation region. Some more recirculation zones are visible for $\phi_0 = 0.04\%$, most of which extend upward along the settler and are tightly contained within the resuspension region (dashed line). The location of these upper recirculation zones coincide with the steps (or nearly discrete changes) in the mentioned staircase structure of the density of resuspended particle concentration in Figure 5(f) (also visible in Fig. 5(g)). These results indicate that the growth of the resuspension region is associated with enlargement of the clear fluid separation region and the detachment of the recirculation zones from around the suspension interface. These recirculation zones break up the suspension, releasing particles into a resuspension region that extends up to around the point where the clear fluid reattaches to the wall. In fact, it is noted that the resuspension region (dashed line) closely follows the streamlines that envelope the recirculation zones, which is a distinguishing feature of Regime 2.

Another characteristic that becomes noticeable in this regime is the appearance of a distinct recirculation zone near the bottom of the suspension region (lower left corner of $\phi_0 = 0.04\%$ in Figure 6); this corresponds to a marked increase in particle concentration within the suspension (bright yellow corner in Figure 5(f)). When the inlet concentration increases further to $\phi_0 = 0.12\%$, this bottom recirculation zone has merged with the one at the tip of the suspension into a single open cell engulfing the bulk of the suspension. This induces a further increase in particle concentration within the suspension (enlarged bright yellow regions in Figure 5), this time with particles transported from the sediment region near the underflow outlet of the settler. Furthermore, since the difference of the values of the stream function at any two points gives the total flux (of incompressible flow) between those points, the increasingly red color in Figure 6 relates to a marked increase in flow velocity. The location where the velocity of the fluid phase \mathbf{U}_2 is maximum can be seen in the insets of Figure 6, which show its normalized absolute value $|\mathbf{U}_2|/\max(|\mathbf{U}_2|)$ around the tip of the suspension. The maximum velocity is in all cases located next to the tip of the suspension, close to the boundary between the suspension and the supernatant region. The increase in flow velocity around the interface between the clear fluid and the suspension is fully aligned with the sequential regimes of onset and enlargement of flow separation described so far. However, as the inlet concentration reaches $\phi_0 = 0.12\%$, other effects become important.

Regime 3: Erosion of the clear-fluid–suspension interface

The plot on the right of Figure 6 shows several recirculation zones within a substantially enlarged resuspension region, compared to previous cases. Moving upward from the top of the suspension interface (black line), the width of the recirculation zones decreases considerably, while the width of the resuspension region remains largely constant. This indicates that the resuspension region contains particles that do not originate in the recirculation zones but are extracted at the interface between the clear fluid and the suspension. We distinguish two ways in which this erosion of the clear-fluid–suspension interface takes place.

First, the observed resuspension can be partly linked to shear instabilities, driven by an increase in the maximum velocity of the clear water layer as ϕ increases (this velocity increase is explored further in §5). This creates growing interfacial waves at the clear-fluid–suspension interface, propelling a portion of the particles towards the outflow. This is the mechanism that has been studied most extensively in the literature to explain the loss of efficiency in inclined settlers [6, 16, 17, 46]. Indications of the development of a shear instability at the clear-fluid–suspension interface can be found for the largest concentration in Figure 5(i), which shows oscillations in the density of particle concentration near the interface (brick color indentations into the suspension area near $(x, y) = (0.2, 0.02)$). For the other case with $\phi_0 = 0.12$ in Figure 5(h), a shear instability is only apparent in the wavy shape of the edge of the resuspension region (and even this may potentially be related to the recirculation zones visible in Figure 6). Being largely developed above the suspension, this mechanism does not fully explain the particle erosion that originates in the resuspension region.

The second mechanism of erosion of the suspension interface relates not only to the magnitude of maximum velocity of the fluid, but also to its position within the system. As seen in the insets of Figure 6, the highest velocities occur around the clear water layer, next to the suspension interface, encouraged by the rapid ascent of water due to the Boycott effect. However, as the velocity increases with increasing ϕ_0 , there is a strong reduction in the thickness of the clear water layer, to the point at which the maximum velocity overlaps the clear-water–suspension interface. Indeed, when the concentration reaches $\phi_0 = 0.12\%$, the maximum velocity is found within the suspension itself, which can significantly increase the resuspension of particles. Figure 6 (inset) captures this phenomenon, showing the shift to the right of the particle interface that results in the highest velocities and shear rates occurring within the suspension. This observation aligns with the increased resuspension observed within the system and highlights the critical role of the velocity and thickness of the clear fluid layer under varying particle concentrations. A scaling analysis and the relationship between thickness, maximum velocity, and particle concentration will be discussed further in Section 5.

4.1.2. Performance quantifications

The increase in resuspension, due to the increase in concentration and its effect on the bulk suspension, is shown in Figure 7 (left), for the present values of $SOR = 0.036$ mm/s and tilt angle $\theta = 55^\circ$. The figure compares the interface position as predicted by theory and observed in simulation. In all cases, the theoretical line is observed to lie between the positions of the resuspension and the bulk suspension. In addition, the resuspension position (L_r) increases significantly, reaching nearly four times its initial value. This change is also reflected in the decrease in efficiency within the settler. The loss in efficiency is evident throughout the cell, as Figure 7 (right) demonstrates how the local efficiency decreases at three different positions $x = 0.4, 0.6, 0.8$ m within the settling plates, showing a sharp drop at all three positions for concentrations higher than 0.08%. This is a concentration within Regime 2, confirming that the dynamics of the system is strongly affected by the onset and development of instabilities, which in turn depend on the concentration of particles entering the system.

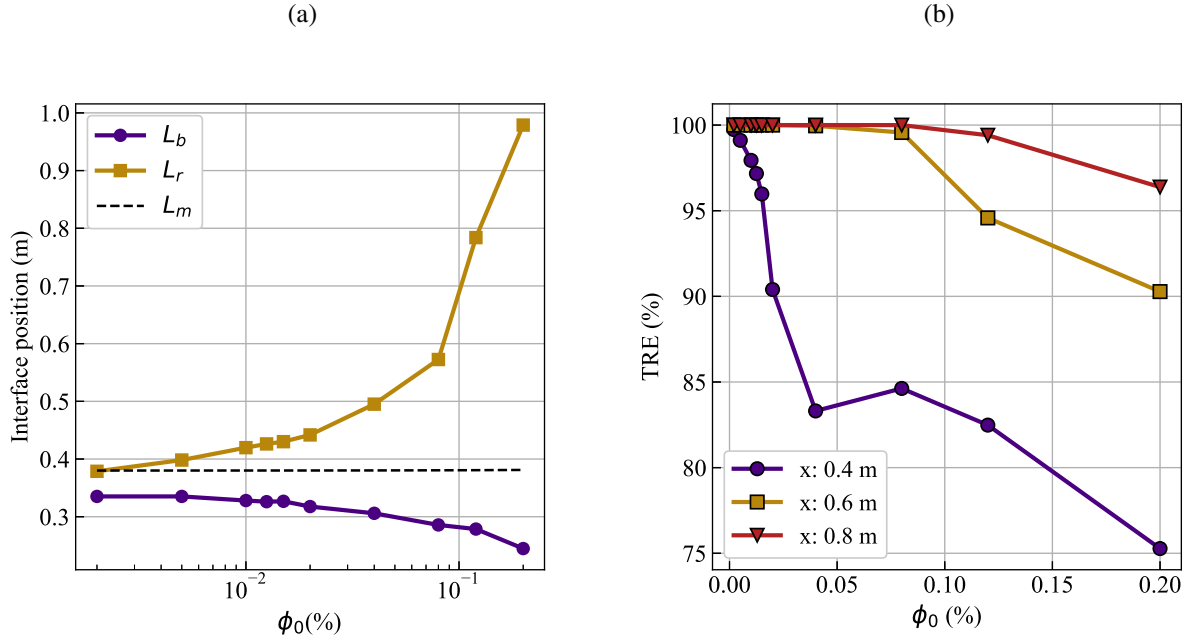


Figure 7: On the left, the suspension position (L_b) and resuspension position (L_r) as a function of inlet particle concentration are shown, where the black dashed line represents the theoretical line L_m obtained from equation 1. On the right, the effect of ϕ_0 on local efficiency (TRE) is shown for three different positions along the cell. In both figures, $Re = 30$, $SOR = 0.036$ m/s, and $\theta = 55^\circ$.

4.2. Surface overflow rate (SOR) effect

The spatial particle concentration profiles for three different surface overflow rates, $SOR = 0.018, 0.036, 0.054$ mm/s, at two particle concentrations are illustrated in Figure 8 ($\phi_0 = 0.015\%$ and $\phi_0 = 0.12\%$). This figure also demonstrates that the transitions between the four regimes discussed in Section 4.1 are influenced by the SOR value. For a concentration of 0.12% the Regime 3 is observed for a SOR of 0.036 and 0.054 mm/s, with different degrees of erosion, leading to a greater expansion of the resuspension zone for the higher SOR (purple zone in figure). Clearly, in both cases the theoretical interface position (solid line) fails to accurately represent the true interface position. In contrast, for the $\phi_0 = 0.015\%$ case, the theoretical position aligns closely with the obtained position, even in the presence of instabilities, which are associated with the transition between Regime 1 and Regime 2.

Furthermore, for $\phi = 0.12\%$ an increase in the area resuspended from the sediment (light yellow zone in Figure 8) is observed, probably due to the growth of instabilities in the sediment zone as the SOR increases. This suggests that instabilities originating at the suspension interface can affect the stability of the sediment layer and vice versa, since recirculation of the suspension can also influence sediment entrainment into the suspension layer.

This nonlinear relationship between SOR and settler efficiency is consistent with the findings in Ahmet [2] for a multiplate system, where it is shown that efficiency can decrease by more than 20% when loading is doubled, for a study of Bentonite clay at $70\text{--}80$ NTU.

The behavior for different concentrations and SOR is shown in Figure 9 (left). For lower SOR values, the resuspension phase exhibits a gradual increase without reaching the end of the cell within the range studied. At the

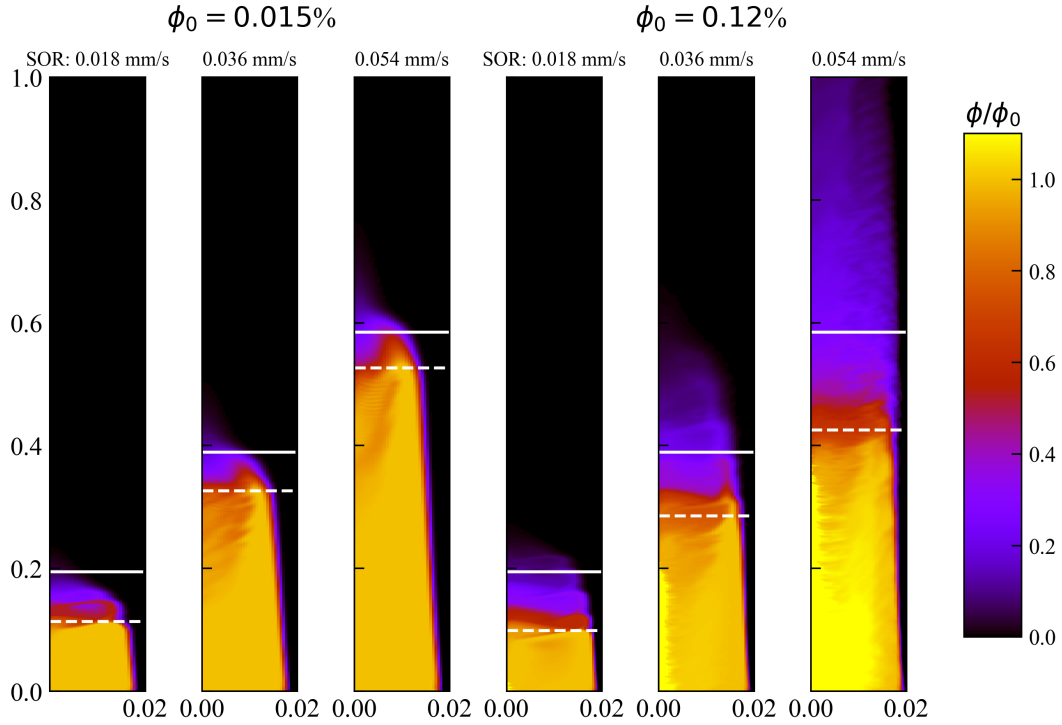


Figure 8: Effect of SOR on the particle concentration profile, where the orange zone corresponds to suspension and the purple zone corresponds to resuspension. Here $Re = 15-45$, $\theta = 55^\circ$, and $\phi_0 = 0.12\%$. The solid line represents the theoretical line (L_m) calculated by Eq. (1), and the dashed line represents the bulk position (L_b).

same particle concentration, the distinctive instabilities observed in higher SOR systems are notably absent in the low SOR case. For low SOR values, Regime 3 is absent within the studied range; instead, the flow is characterized by the dominance of the staircase structure. The lack of instability development in the resuspended region prevents substantial entrainment of particles into the overflow. In fact, for this case, Regime 2 is the dominant regime, appearing at lower concentrations compared to other SOR values and persisting throughout the studied range. In contrast, regimes 0 and 1 have a very limited range and, for certain angles, some of these regimes are not observed.

In contrast, the higher SOR scenario, where the SOR is equal to 0.054 mm/s, shows a different behavior: particles reach the overflow zone at a lower concentration compared to the medium and low SOR cases, where the SOR is 0.036 mm/s and 0.018 mm/s, respectively. This indicates that the transition between different regimes occurs earlier, with Regime 3 being reached at lower ϕ_0 values (where erosion dominates and shear instabilities are relevant). This is further illustrated by the increasing distance between L_b (dashed lines) and the theoretical line L_m (solid lines), as shown in Figure 9, which increases with higher SOR values. This growth highlights the pronounced effect of erosion on the suspension, leading to a greater number of particles accumulating above the theoretical line.

According to local efficiency, as depicted in Figure 9 - right, an increase in the Surface Overflow Rate (SOR) leads to a more elongated profile and a larger region with efficiency below 100%. This profile elongation indicates that a longer plate would be necessary to achieve 100% efficiency. This observation is particularly evident for $SOR = 0.054$ mm/s,

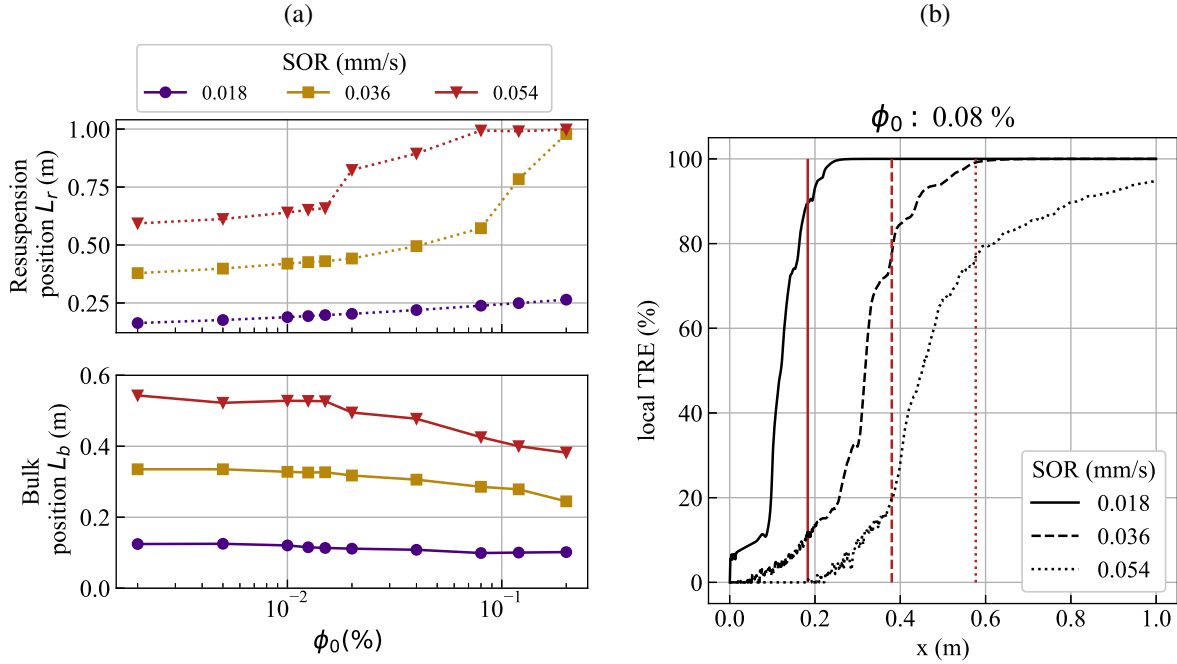


Figure 9: On the left, the effect of SOR on interface positions for three different particle concentrations is shown, where the suspension position (L_b) and resuspension position (L_r) correspond to the solid and dashed lines, respectively. On the right, the local TRE values along the cell for three different SOR values are shown with $\phi = 0.08\%$. The red vertical lines represent the theoretical value (L_m) for each SOR value.

where no position within the cell reaches an efficiency of 100%. This requirement cannot be obtained from the theoretical model.

4.3. Inclination angle effect

Figure 10 (left) shows that the interface positions behave similarly across three different angles as the particle concentration increases. For the three angles studied, although not all cases exhibit the same regimes (R0-R3), a fixed SOR value tends to result in the same regimes for each angle analyzed. For example, at an SOR of 0.036 mm/s, all three angles exhibit an initial stable regime, followed by the onset of recirculation, the development of a staircase structure, and finally the growth of the resuspension zone associated with erosion. The main difference lies in the fact that the transition between regimes occurs at lower concentrations as the cell becomes more vertical (see Figure 11 for more details). In the most vertical case (35°), the resuspension zone begins to grow for a $\phi_0 = 0.02\%$ (regime 3). On the other hand, for a more horizontal case (55°) this value is around 0.08%. This enhancement in stability with increasing angle was also observed experimentally by [6] and later confirmed through numerical simulations by [9]. The latter points out that when the angle is less than 45° the sedimentation efficiency is reduced due to flow instability. In our simulations, this behavior is also reflected in the thickness of the clear water layer, which for the 35° case is always less than for the 55° case generating a more confined layer and a more elongated velocity profile.

Within the range studied, the effect of varying this parameter on efficiency is less significant compared to the influence of the SOR variable. When comparing the local efficiency profile for the case $\phi_0 = 0.08\%$ the profiles are

quite similar when varying the inclination (see Figure 10, right), which is not the case when varying the SOR. A change in the angle of inclination could affect the efficiency between 1 and 5 % compared to the SOR parameters, where TRE could vary between 10 and 20 %.

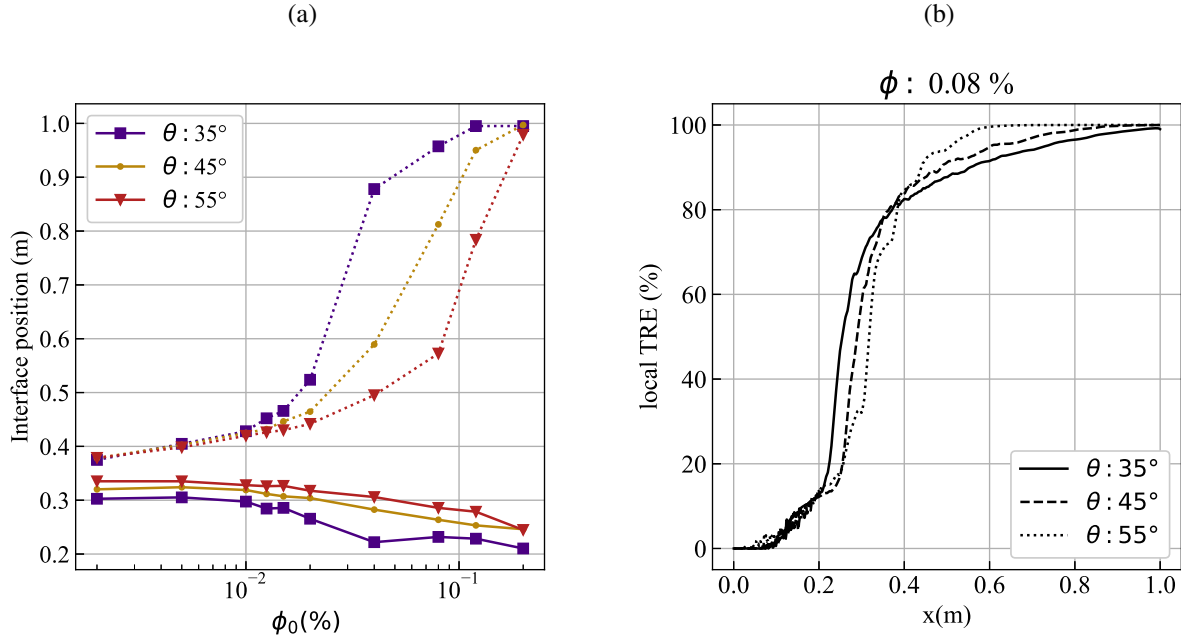


Figure 10: Effect of inclination angle (θ) on interface position for three particle concentration, where suspension and resuspension position (L_b and L_r) corresponds to the solid and dashed line respectively (left) and local TRE for SOR: 0.036 mm/s (right).

4.4. Summary of results

We have studied the effect of particle concentration systematically for the three SOR and inclination angles described. Figure 11 presents a summary of local efficiency given its particle concentration for different angles and SOR where the colors refer to the degree of efficiency, with yellow being close to 100% efficiency and purple being poor efficiency. This figure also shows the different regimes (R0 to R3) associated with the instabilities for each of the different cases.

Within the range studied, this system exhibits two extreme states and two intermediate ones. The first extreme is the dissolved limit (R0), associated with the PNK theory, where sedimentation (Boycott effect) prevails and the dissolved limit model of Yao [50] can be applied. At the other extreme lies a high-vorticity regime (R3), controlled by high concentration, where resuspension dynamics dominate over sedimentation, and particles report to the settler overflow. Between these two extremes, there are two intermediate regimes in which the timescales of the sedimentation and resuspension processes are similar. In these regimes, resuspension acts as a particle source from the suspension zone, coexisting with a sedimentation process occurring under a gravitational field of magnitude $g \cos \theta$.

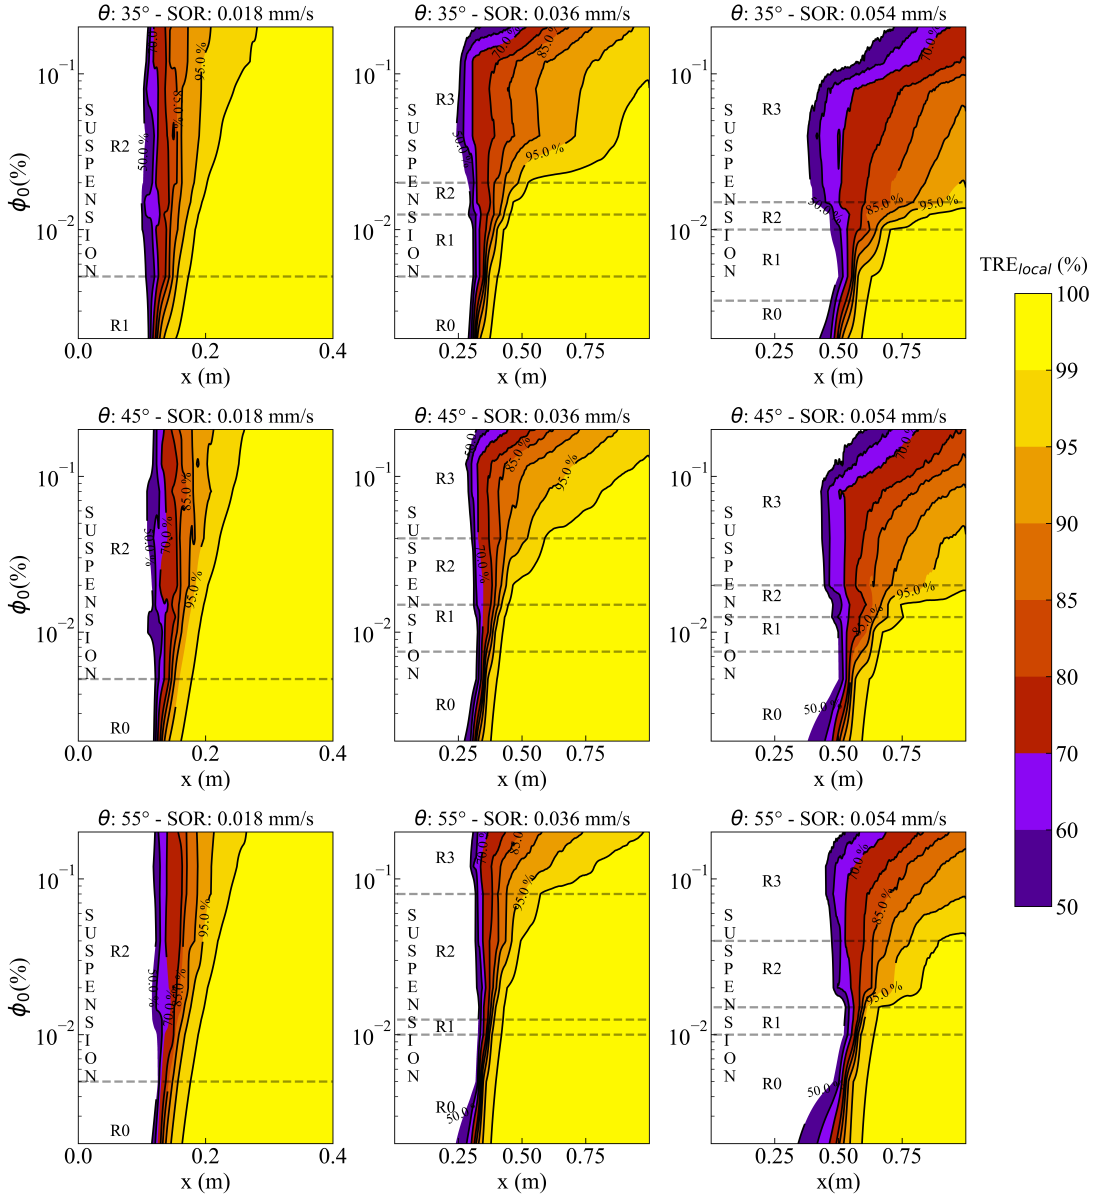


Figure 11: Summary panel of the effect of particle concentration on local efficiency (TRE) for different SORs and angles.

5. Discussion

The results and analysis presented above demonstrate a crucial role on instabilities and resuspension of particle concentration, even while remaining confined to low volume fractions of less than half a percent. Previously, Borhan and Acrivos [6] studied the effect of particle concentration on the asymptotic solutions first derived in [45] for different levels of inertia (represented by \mathcal{R} mentioned after Eq. (4)) and their stability. They found that increasing particle concentration has a stabilizing effect on the clear-fluid–suspension interface, but that increasing inertia destabilizes.

In his subsequent study, Borhan [5] conducted experiments with concentrations of the order of 10% and fluids with viscosities higher than those of water, showing that as the concentration increases, the interface tends to stabilize. This is in general agreement with the previous results of Borhan and Acrivos [6] and seemingly in contradiction with our results. However, a different trend is observed in the concentration range between 0 and 0.05 (Figures 8 and 31 in [6]), which is the focus of this study. For those low concentrations, destabilization (or no noticeable effect, depending on the viscosity of the fluid) is found for increasing concentration. The subsequent stabilization of the system suggests the existence of a critical concentration (higher than those evaluated here) at which the unstable trend leading to resuspension ceases, giving way to stabilization likely driven by the emergence of effective viscosity associated with the increased particle concentration.

Previous studies on the instabilities of these systems [5, 6, 8, 17, 25, 32, 38] have primarily focused on the development of shear instabilities at the interface between the clear water layer near the upper wall and the suspension. As demonstrated in our results, this type of instability plays a significant role in advancing the resuspension zone toward the overflow. However, it does not account for the destabilizing mechanism observed at the tip of the suspension. At this position, unstable overhanging zones form and give rise to recirculation zones. This mechanism is particularly important, as it directly affects the degree of mixing between the bulk suspension and the clear water. Although it is not the main mechanism associated with the projection of the resuspension zone into the overflow, it is responsible for the degree of mixing in the bulk suspension zone and the concentration profile within it.

Identifying the onset of these instabilities, as well as the associated behavioral changes, makes it possible to optimize the selection of the operating concentration or to foresee the impact of an increase in the inlet concentration in settlers of this type. As a specific example, the level of fluctuations at the tip of the suspension could be monitored to actively control the feed rate.

5.1. Lessons learned for the design and operation of lamella settlers

The results and analysis presented above could contribute to the design of lamellar systems. These findings illustrate how unstable conditions develop as the system processes varying inlet concentrations, significantly impacting its efficiency. According to our findings, the severity of these instabilities correlates with particle concentration. These flow instabilities, in turn, influence the flow profiles within the settler and could have important implications for the design of inclined systems.

Part of the effect on design can be observed by calculating the mass over the theoretical line, as mentioned in section 2.2.3. Figure 12, which illustrates the mass fraction above the theoretical line (L_m) for two angles, shows that a significant fraction of particles lies above this line, and this fraction increases notably with higher SOR values and a greater fraction of inlet particles. This would indicate that the concentration of small particles ($\approx 10 \mu\text{m}$) should be taken into account. An increase in the number of these particles at the inlet can bring with it a considerable loss of efficiency under the same operating conditions.

For design purposes, low concentrations allow the use of theoretical height assumptions, with models such as

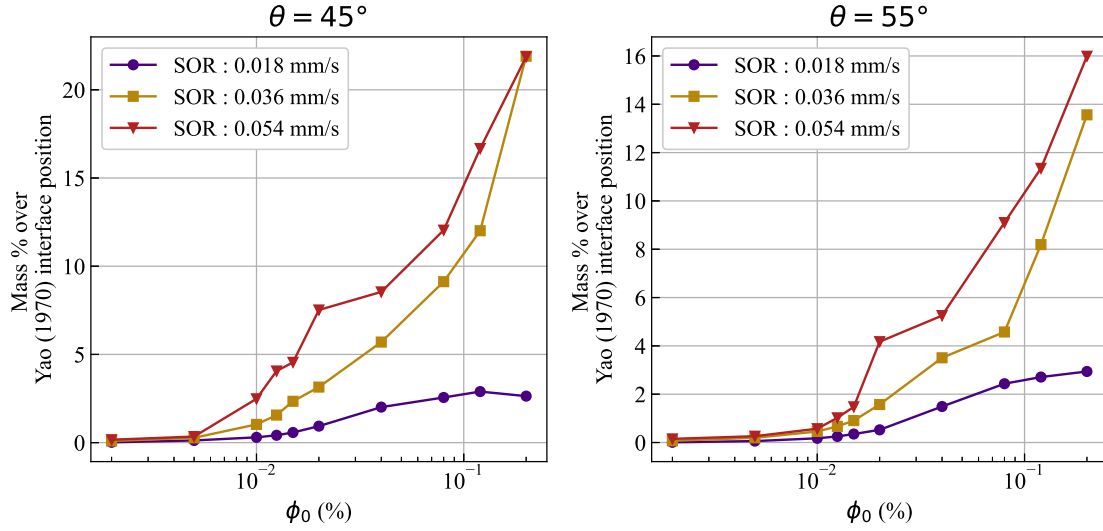


Figure 12: Mass percentage over the theoretical line (L_m), as mentioned in the section 2.2.3, as a function of concentration, where the effect of SOR is evident.

the Yao model [50] and PNK theory [28, 35, 37] performing well within this range. However, high concentrations require adjustments by incorporating a resuspension zone into the design calculations. This adjustment depends on the characteristics of the suspension being treated and parameters such as the SOR and the inclination angle, which also influence efficiency. Optimizing the SOR involves balancing throughput and efficiency, while avoiding excessive turbulence that could disrupt the particle separation process. Regarding inclination, steeper angles reduce projected area, requiring longer particle travel paths, increasing the risk of overflow, but enhancing self-cleaning by preventing particle stagnation. Optimizing settler performance involves evaluating concentration, flow parameters, and geometry to enhance efficiency and identify limitations based on suspension properties.

5.2. Instability route

As mentioned previously, the existing literature has focused predominantly on shear instability within inclined systems. However, according to the results presented in this study, we observe that the instability begins at the tip of the suspension region. As described in §4.1, the destabilization process is associated to different regimes of flow separation, which is a common fluid mechanical phenomenon. Indeed, flow separation occurs at a sudden widening of a channel depending on a suitably defined Reynolds number; the clear-fluid layer has a sudden expansion at the tip of the suspension region. Furthermore, a parallel between the different regimes can be drawn to a prototypical case of flow separation, that of the flow around a cylinder [21]. For very low Reynolds numbers, the flow remains attached from the front to the back of the cylinder. At a slightly larger Reynolds number (≈ 10), the flow separates and a recirculation region appears and remains attached to the cylinder, similar to the recirculation region that appears in the wall and remains attached to the suspension in Regime 1. Further increasing the Reynolds number beyond ≈ 47 , the Bénard–von-Kármán vortex shedding instability takes place and gives place to a regular pattern of alternating vortices.

In the present case, baroclinic effects and buoyancy prevent the corresponding vorticity release, but a parallel can be drawn with the pattern of release of recirculation regions from the suspension of Regime 2. An increased Reynolds number leads to further destabilization, turbulence, and mixing, analogous to Regime 3.

These observations suggest that the destabilization process could be characterized by a Reynolds number based on the velocity and widening of the clear-fluid region, that is,

$$Re_{\bar{\delta}_{susp}} = \frac{\bar{\delta}_{susp} \mathbf{U}_{max}}{\nu} = \frac{(B - \bar{\delta}) \cos \theta \mathbf{U}_{max}}{\nu} \quad (16)$$

where $\bar{\delta}_{susp}$ is the horizontal projection of the width of the suspension layer, ν is the kinematic viscosity of water and \mathbf{U}_{max} the local maximum flow velocity. As presented in the results, the instability of the system is associated with thinner clear water thicknesses or a wider suspension layer. On the other hand, as we will see in the scaling, the maximum velocity is a characteristic velocity that scales well with the parameters of the inclined system.

Figure 13 illustrates how the value of this number increases with higher inlet concentrations, indicating a more unstable system. Furthermore, the relationship between the SOR and the angle of inclination with $Re_{\bar{\delta}_{susp}}$ is evident. Systems characterized by higher SOR values and an angle of inclination of $\theta = 35^\circ$, which exhibit greater instabilities and a higher degree of resuspension, also show higher values of this number.

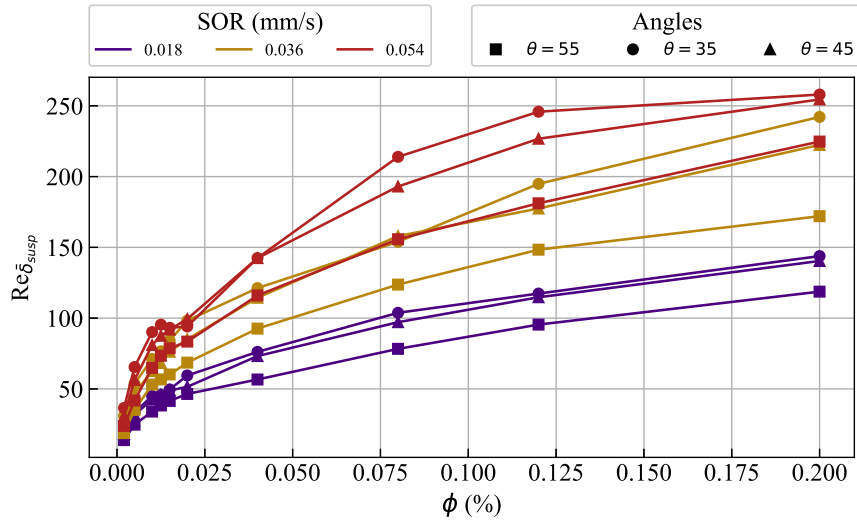


Figure 13: $Re_{\bar{\delta}_{susp}}$ for different SOR and inclination angle as a function of particle concentration.

Such an approach allows for a more detailed analysis of the flow and the transition to complex regimes, bringing new perspectives to the understanding of these systems.

5.3. Particle diameter effect

Since in reality suspensions are not monodisperse and present a size distribution, it is relevant to study the behavior at different particle sizes. It is necessary to understand whether instabilities occur in the same way at all sizes or whether the system behaves completely differently. Due to the complexity of analyzing polydisperse cases, it was studied how

the present system would be when the diameter is half and double its base size, 5 and 20 microns, respectively. With respect to the effect of particle size on the behavior of instabilities caused by particle concentration, it can be observed that increasing particle size delays the appearance of the instability that causes plumes near the suspension interface. In the opposite case, at a smaller particle size, instability is present from the first case studied with slow recirculation similar to Regime 1. Both cases can be observed in Figure 14, where the 2D concentration profile can be seen for both diameters. This is consistent with the fact that a larger particle size is associated with a greater thickness of the clear water layer, allowing the clear water to flow in a less confined way, thus reducing the erosion of the suspension surface. On the other hand, a smaller diameter leads to a smaller thickness and the development of instability for a lower concentration. Furthermore, a higher sedimentation rate is not related to an earlier onset of instability. However, the development of instabilities is qualitatively distinct and strongly dependent on this rate. At lower sedimentation rates, the flow is dominated by small-scale recirculation and the formation of a staircase structure, while at higher sedimentation rates, erosion becomes the dominant mechanism. As in the case of the 10 microns, in these cases it is observed that there is a relationship between the thickness of clear water, resuspension and the presence of instabilities in the system. In addition, it is observed that very small particles would generate an increase in resuspension and a greater loss of efficiency in these inclined systems. Regardless of these differences, it is confirmed that in all cases the destabilization begins at the tip of the suspension as the concentration increases.

5.4. *Scaling of the thickness and velocity of the clear-fluid layer*

The clear relationship between particle concentration and efficiency loss has several factors influencing this behavior, which include the clear water thickness and the maximum velocity. Simulations show that the thickness of clear water decreases as the particle concentration increases, directly reducing the space available for the water to exit the suspension zone. This reduction is accompanied by an increase in the maximum velocity with higher concentrations.

Log-log plots of the maximum velocity and thickness of the clear water layer versus particle concentration for three different surface overflow rates are shown in Figure 15, accompanied by a fitted model of the form $(C\phi^b)$ to determine the exponents relating these parameters. The results indicate that the exponent for the thickness fit ranges from -0.37 to -0.4 , while for the velocity, it varies from 0.34 to 0.37 . Additionally, the figure reveals that maximum velocity can increase up to sixfold and thickness up to tenfold depending on the particle concentration.

According to the theoretical scaling pointed out by [4, §5.2.1] (see also [39]), the scales of the longitudinal velocity and the clear water thickness correspond to:

$$\delta^* \sim \mathcal{L}\Lambda^{-1/3}, \quad (17)$$

$$U^* \sim W_s\Lambda^{1/3}, \quad (18)$$

with Λ calculated by equation (4). In the continuous case, the length scale (\mathcal{L}) is defined by the steady-state suspension position, which, in our study, corresponds to L_m as calculated by equation (1). Therefore, the thickness and velocity

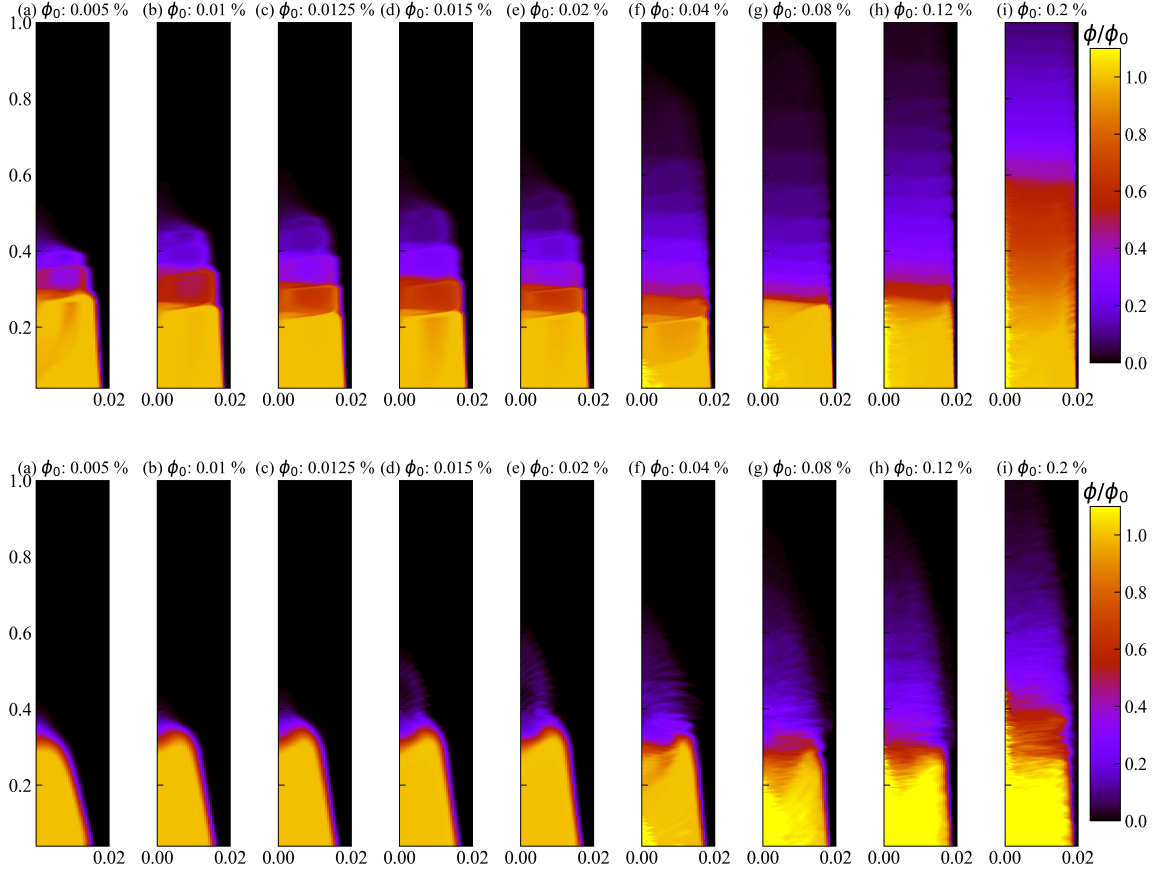


Figure 14: Particle concentration profile for different inlet concentrations, $\theta = 45^\circ$. Top row corresponds to $d = 5 \mu\text{m}$, $\text{SOR} = 0.009 \text{ mm/s}$ and bottom row to $d = 20 \mu\text{m}$, $\text{SOR} = 0.144 \text{ mm/s}$.

scales can be expressed as:

$$\delta^* \sim (L_m a^2)^{1/3} \phi^{-1/3}, \quad (19)$$

$$U^* \sim \left(\frac{W_s^3 L_m^2}{a^2} \right)^{1/3} \phi^{1/3}. \quad (20)$$

On these scales the maximum velocity and the average thickness yields the values presented in Figure 16. The results show that the scaled velocities and thicknesses for different angles, SOR, and particle diameter converge within a relatively narrow range of values, showing that the scaling effectively captures the trends of these parameters.

However, for the thickness of the clear water, a correction in the scaling appears necessary, since the fit begins to diverge from the model $D\phi^{1/3}$ (see gray line in Figure 15) at higher concentrations, indicating that this scaling may not be accurate at elevated concentrations (see also Figure 15). An option to adjust the velocity scale could be the use of a hindered settling velocity relationship, such as the Richardson-Zaki model [42]. Within the studied range, well below 0.5 %, this effect is negligible, but should be considered at higher concentrations. A more likely explanation is that the scalings in Eqs. (17-18) are valid for self-similar solutions with fixed $\mathcal{R}^{1/2}$, indicating a fixed level of inertia as $\Lambda \rightarrow \infty$

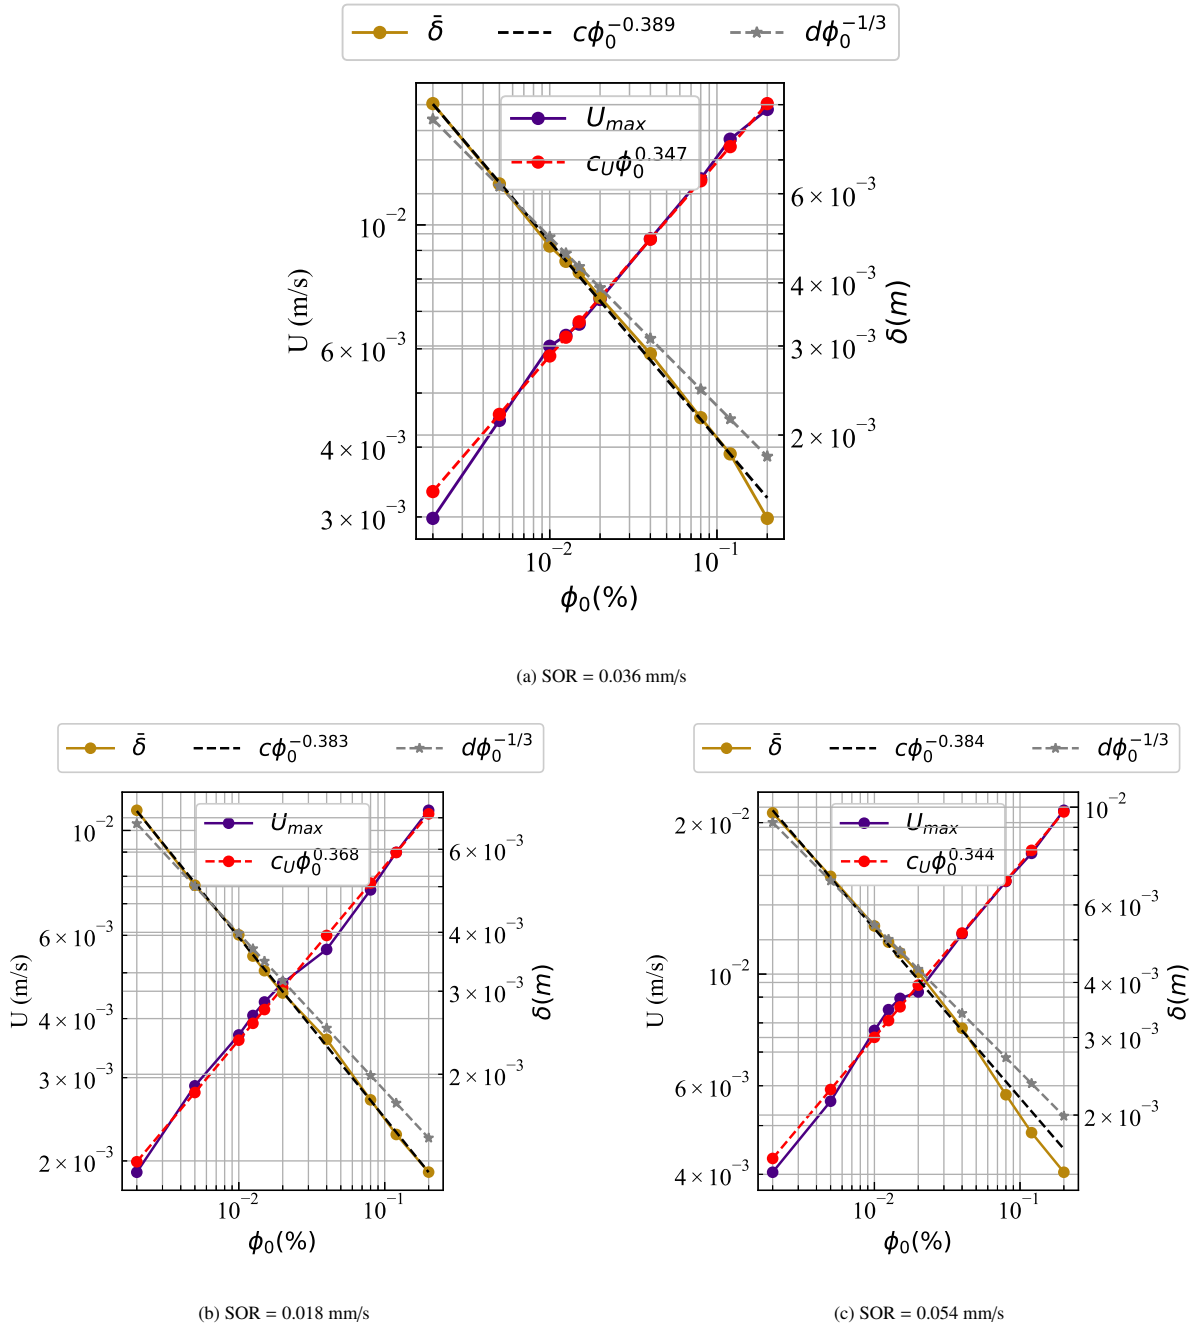


Figure 15: Velocity and layer thickness of clear water for three different SOR, $\theta = 55^\circ$, as a function of particle concentration. The grey dashed curve represents the fitted curve, while the black dashed curve corresponds to the curve with an exponent of $-1/3$.

[45]. However, as concentration increases, the flow appears to approach more viscous solutions, *i.e.*, with lower \mathcal{R} corresponding to decreasing levels of inertia. This is consistent with the displacement of the position of the maximum velocity with respect to the clear-fluid–suspension interface (insets in Figure 6), which can be compared with results in

[6, 45] showing the change of the velocity profile depending on inertia. However, the scales (19) and (20) allow us to capture the dominant behavior of velocity and thickness in this system for this concentration range.

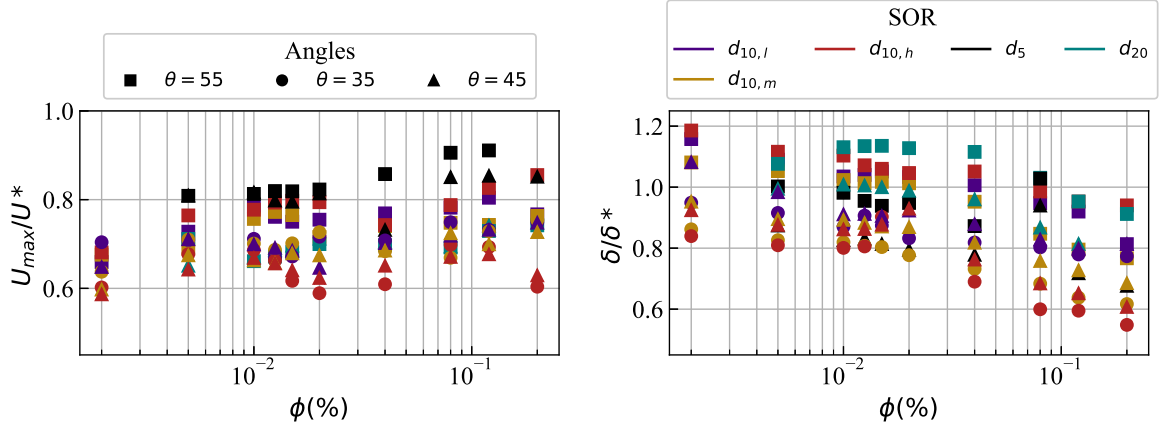


Figure 16: Scaled values of thickness and maximum velocity, $\theta = 35, 45, 55^\circ$. For three different SOR. The subscript l, m and h means low, medium and high SOR respectively (see Table 1). SOR for $d = 5 \mu\text{m}$ and $d = 20 \mu\text{m}$ was 0.009 and 0.144 mm/s respectively.

6. Conclusions

The present study underscores the critical role of particle concentration, particularly for fine particles, in the design and operation of lamellar settling systems. Within the range studied, different regimes (R0-R3) were identified, each associated with different behavior patterns of the system. Starting with a stable system (R0), as concentration increases, the system transitions to developing instabilities in the suspension region, characterized by unstable overhanging zones that lead to recirculation (R1). With further increases in concentration, multiple recirculation zones emerge, forming a staircase structure (R2). At higher concentrations, the resuspension zone tends to expand, resulting in a significant degree of resuspension driven by the increasing relevance of shear-induced instabilities (R3). The concentration at which each of these mechanisms occurs depends on other parameters, such as the SOR and the angle of inclination. Elevated SOR values induce turbulence, accelerating instability effects, while steeper inclinations (more vertical cells) reduce the projected sedimentation area, promoting the onset of instabilities at lower concentrations. Understanding the effect of each parameter on resuspension is crucial, as it directly influences the solid-liquid separation efficiency in these inclined systems.

Although the effect of particle size was not explored in depth, it was shown that particle size influences the behavior of instabilities within the same concentration range. For smaller particle sizes, recirculation zones dominate, whereas for larger particle sizes, erosion becomes the prevailing mechanism beyond the concentration at which the system becomes unstable.

This study also introduced a Reynolds number based on the thickness and maximum velocity, along with velocity and thickness scales derived from the theoretical length, incorporating the effects of SOR, inclination angle, and particle

size. It is also a dimensionless number that depends on internal characteristics of the flow, and would require either numerical simulation or experimental work to be identified. In parallel, the velocity and thickness scales presented in the discussion provide a practical framework for approximating the behavior of the system. However, adjustments are required to consider the effect of particle concentration. These findings could serve as a reference for future analyses of similar systems.

Although this study provides valuable information on the influence of particle concentration on solid-liquid separation in inclined settlers, several knowledge gaps remain. In particular, further research on the effect of the mean particle diameter would improve our understanding of the behavior of the present system. Furthermore, the present study employs a simplified 2D model, which may not fully capture the complex 3D flow structures and particle interactions that occur in actual settlers, and particularly regarding the effect of particle size and concentration on lateral particle distributions. Future research could explore 3D simulations to provide a more comprehensive understanding of the dynamics of the system. Finally, experimental validation of numerical results, particularly in relation to the onset and development of instabilities, would strengthen the conclusions drawn from this study and provide validation of the current results for the development of future engineering concentration-dependent models.

Acknowledgments

The authors gratefully acknowledge support from the Department of Mining Engineering of the University of Chile, the Chilean National Agency for Research and Development (ANID) through projects Fondecyt 1211044, Anillo ACT210027, Fondef ID23I10333, and National Doctoral Scholarship 21200441. CA acknowledges support of Nordita and the Swedish Research Council Grant No. 2018-04290.

References

- [1] Acrivos, A., Herbolzheimer, E., 1979. Enhanced sedimentation in settling tanks with inclined walls. *Journal of fluid mechanics* 92, 435–457.
- [2] Ahmet, D., 1995. Determination of settling efficiency and optimum plate angle for plated settling tanks. *Water Research* 29, 611–616.
- [3] Benyahia, S., Syamlal, M., O'Brien, T.J., 2005. Evaluation of boundary conditions used to model dilute, turbulent gas/solids flows in a pipe. *Powder Technology* 156, 62–72.
- [4] Blanchette, F., 2003. Sedimentation in a stratified ambient. Ph.D. thesis. MIT.
- [5] Borhan, A., 1989. An experimental study of the effect of suspension concentration on the stability and efficiency of inclined settlers. *Physics of Fluids A: Fluid Dynamics* 1, 108–123. URL: <https://doi.org/10.1063/1.857539>, doi:10.1063/1.857539, arXiv:https://pubs.aip.org/aip/pof/article-pdf/1/1/108/12228430/108_1_online.pdf.
- [6] Borhan, A., Acrivos, A., 1988. The sedimentation of nondilute suspensions in inclined settlers. *The Physics of fluids* 31, 3488–3501.
- [7] Boycott, A., 1920. Sedimentation of blood corpuscles. *Nature* 104, 532–532.
- [8] Brown, D.J., 1986. Design of lamella separators. Part 2. Ph.D. thesis. Loughborough University of Technology.
- [9] Chang, Y.C., Chiu, T.Y., Hung, C.Y., Chou, Y.J., 2019. Three-dimensional eulerian-lagrangian simulation of particle settling in inclined water columns. *Powder Technology* 348, 80–92.
- [10] Chawner, J., 2013. Quality and control-two reasons why structured grids aren't going away. Pointwise, URL: <http://www.pointwise.com/theconnector/March-2013/Structured-Grids-in-Pointwise.shtml> [cited 8 March 2015].
- [11] Clark, S.E., Roenning, C.D., Elligson, J.C., Mikula, J., 2009. Inclined plate settlers to treat storm-water solids. *Journal of Environmental Engineering* 135, 621–626.
- [12] Connelly, D., 2011. High clay ores a mineral processing nightmare. *Australian Journal of Mining* 24, 28–29.
- [13] Crank, J., Nicolson, P., 1947. A practical method for numerical evaluation of solutions of partial differential equations of the heat-conduction type, in: *Mathematical proceedings of the Cambridge philosophical society*, Cambridge University Press. pp. 50–67.
- [14] Crittenden, J.C., Trussell, R.R., Hand, D.W., Howe, K.J., Tchobanoglous, G., 2012. *MWH's water treatment: principles and design*. John Wiley & Sons.
- [15] Damián, S.M., Nigro, N.M., 2014. An extended mixture model for the simultaneous treatment of small-scale and large-scale interfaces. *International Journal for Numerical Methods in Fluids* 75, 547–574.

- [16] Davis, R.H., Acrivos, A., 1985. Sedimentation of noncolloidal particles at low reynolds numbers. *Annual Review of Fluid Mechanics* 17, 91–118.
- [17] Davis, R.H., Herbolzheimer, E., Acrivos, A., 1983. Wave formation and growth during sedimentation in narrow tilted channels. *The Physics of fluids* 26, 2055–2064.
- [18] Droste, R.L., Gehr, R.L., 2018. *Theory and practice of water and wastewater treatment*. John Wiley & Sons.
- [19] Edzwald, J., 2011. *Water quality & treatment: a handbook on drinking water*. McGraw-Hill Education.
- [20] Fadel, A.A., Baumann, E.R., 1990. Tube settler modeling. *Journal of Environmental Engineering* 116, 107–124.
- [21] Frisch, U., 1995. *Turbulence: The Legacy of A. N. Kolmogorov*. Cambridge University Press.
- [22] Gidaspow, D., 1994. *Multiphase flow and fluidization: continuum and kinetic theory descriptions*. Academic press.
- [23] Gräfe, M., Klauber, C., McFarlane, A.J., Robinson, D.J., 2017. *Clays in the minerals processing value chain*. Cambridge University Press.
- [24] Greenshields, C.J., Weller, H.G., 2022. *Notes on computational fluid dynamics: General principles*. (No Title) .
- [25] Herbolzheimer, E., 1983. Stability of the flow during sedimentation in inclined channels. *The Physics of fluids* 26, 2043–2054.
- [26] Ihle, C.F., Reyes, C., 2022. A new criterion to estimate the capacity of steeply inclined settlers of arbitrary cross-sectional shape. *Powder Technology* 397, 117004.
- [27] Johnson, P.C., Jackson, R., 1987. Frictional–collisional constitutive relations for granular materials, with application to plane shearing. *Journal of fluid Mechanics* 176, 67–93.
- [28] Kinoshita, K., 1949. Sedimentation in tilted vessels (1). *Journal of Colloid Science* 4, 525–536.
- [29] Krieger, I.M., Dougherty, T.J., 1959. A mechanism for non-newtonian flow in suspensions of rigid spheres. *Transactions of the Society of Rheology* 3, 137–152.
- [30] Laux, H., Ytrehus, T., 1997. Computer simulation and experiments on two-phase flow in an inclined sedimentation vessel. *Powder technology* 94, 35–49.
- [31] Letterman, R.D., 1999. *Water quality and treatment: a handbook of community water supplies* .
- [32] Leung, W.F., 1983. Lamella and tube settlers. 2. Flow stability. *Industrial & Engineering Chemistry Process Design and Development* 22, 68–73.
- [33] Leung, W.F., Probst, R.F., 1983. Lamella and tube settlers. 1. model and operation. *Industrial & Engineering Chemistry Process Design and Development* 22, 58–67.
- [34] Lin, S.D., 2014. *Water and wastewater calculations manual*. McGraw-Hill Education.
- [35] Nakamura, H., Kuroda, K., 1937. La cause de l'accélération de la vitesse de sédimentation des suspensions dans les récipients inclinés. *Keijo Journal of Medicine* 8, 256–296.
- [36] Patankar, N., Joseph, D., 2001. Modeling and numerical simulation of particulate flows by the eulerian–lagrangian approach. *International journal of multiphase flow* 27, 1659–1684.
- [37] Ponder, E., 1925. On sedimentation and rouleaux formation-i. *Quarterly Journal of Experimental Physiology: Translation and Integration* 15, 235–252.
- [38] Probst, R.F., Yung, D., Hicks, R.E., 1977. A model for lamella settlers, in: *Theory, Practice, and Process Principles for Physical Separations*, Engng Foundation Conf., Asilomar, California.
- [39] Reyes, C., Apaz, F., Niño, Y., Barraza, B., Arratia, C., Ihle, C.F., 2022. A review on steeply inclined settlers for water clarification. *Minerals Engineering* 184, 107639.
- [40] Reyes, C., Ihle, C., Arratia, C., 2016. Stability and nonlinear dynamics of a settling fresh water particle laden fluid below a salt water layer, in: *International Symposium on Stratified Flows*.
- [41] Reyes, C., Ihle, C.F., Apaz, F., Cisternas, L.A., 2019. Heat-assisted batch settling of mineral suspensions in inclined containers. *Minerals* 9, 228.
- [42] Richardson, J., Zaki, W., 1997. Sedimentation and fluidisation: Part i. *Chemical Engineering Research and Design* 75, S82–S100.
- [43] Rusche, H., 2002. *Computational fluid dynamics of dispersed two-phase flow at high phase fractions*. Ph. D. thesis, University of London .
- [44] Salem, A., Okoth, G., Thöming, J., 2011. An approach to improve the separation of solid–liquid suspensions in inclined plate settlers: Cfd simulation and experimental validation. *Water research* 45, 3541–3549.
- [45] Shaqfeh, E.S.G., Acrivos, A., 1986. The effects of inertia on the buoyancy-driven convection flow in settling vessels having inclined walls. *The Physics of fluids* 29, 3935–3948.
- [46] Shaqfeh, E.S.G., Acrivos, A., 1987. The effects of inertia on the stability of the convective flow in inclined particle settlers. *The Physics of Fluids* 30, 960–973. URL: <https://doi.org/10.1063/1.866283>, doi:10.1063/1.866283.
- [47] Tarpagkou, R., Pantokratoras, A., 2014. The influence of lamellar settler in sedimentation tanks for potable water treatment—a computational fluid dynamic study. *Powder Technology* 268, 139–149.
- [48] Warming, R., Beam, R.M., 1976. Upwind second-order difference schemes and applications in aerodynamic flows. *AIAA Journal* 14, 1241–1249.
- [49] Wilson, T.E., 2005. Introduction and overview water environment federation clarifier design, manual of practice no. fd-8, in: *WEFTEC 2005*, Water Environment Federation. pp. 4412–4416.
- [50] Yao, K.M., 1970. Theoretical study of high-rate sedimentation. *Journal of the Water Pollution Control Federation* , 218–228.

Appendix A. Solver algorithm

The algorithm employed in this study bears similarity to the scheme proposed by [43]. It comprises both external and internal iterations, a method referred to as "PIMPLE" in OpenFOAM, which effectively combines iterations from the SIMPLE (Semi-Implicit Method for Pressure Linked Equations) method with the PISO (Pressure Implicit with

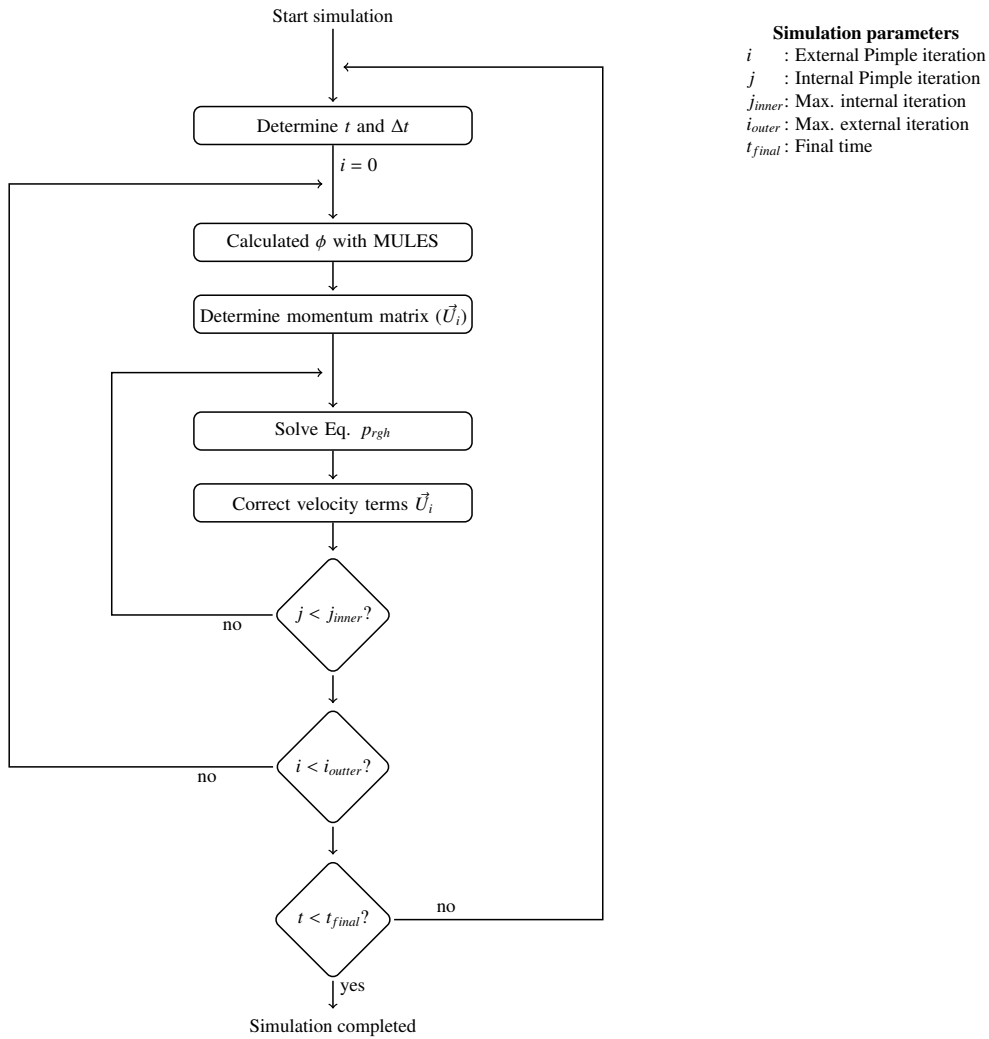


Figure A.17: Algorithm employed in OpenFOAM

Splitting of Operators) method. The internal iterations focus solely on achieving convergence for velocity correction. In contrast, the external iterations aim to resolve equations for extraneous variables, such as concentration (ϕ). These external variables ultimately modify the coefficients of the momentum matrix. This algorithmic structure allows for a comprehensive approach to solving complex fluid dynamics problems, balancing efficiency with accuracy in the numerical solution process. The residuals of the equations must reach a certain threshold value at all time steps. The final value of the residuals depends on the number of outer and inner iterations and the method used to calculate the velocity correction given by the pressure.