

Use Cases for Terahertz Communications: An Industrial Perspective

Tommaso Zugno¹, Cristina Ciochina², Sharad Sambhwani³, Patrick Svedman⁴, Luis M. Pessoa⁵, Ben Chen⁶,
Per Hjalmar Lehne⁷, Mate Boban¹, Thomas Kürner⁸

¹Huawei Technologies, Munich Research Center, Germany, ²Mitsubishi Electric R&D Centre Europe (MERCE), France, ³Apple, Inc.,
⁴InterDigital Communications, Inc., ⁵INESC TEC and Faculty of Engineering, University of Porto, Portugal, ⁶Beijing Jiaotong University, Beijing,
⁷Telenor Research & Innovation, Fornebu, Norway, ⁸Technische Universität Braunschweig, Germany

Abstract—Thanks to the vast amount of available resources and unique propagation properties, terahertz (THz) frequency bands are viewed as a key enabler for achieving ultrahigh communication performance and precise sensing capabilities in future wireless systems. Recently, the European Telecommunications Standards Institute (ETSI) initiated an Industry Specification Group (ISG) on THz which aims at establishing the technical foundation for subsequent standardization of this technology, which is pivotal for its successful integration into future networks. Starting from the work recently finalized within this group, this paper provides an industrial perspective on potential use cases and frequency bands of interest for THz communication systems. We first identify promising frequency bands in the 100 GHz - 1 THz range, offering over 500 GHz of available spectrum that can be exploited to unlock the full potential of THz communications. Then, we present key use cases and application areas for THz communications, emphasizing the role of this technology and its advantages over other frequency bands. We discuss their target requirements and show that some applications demand for multi-Tbps data rates, latency below 0.5 ms, and sensing accuracy down to 0.5 cm. Additionally, we identify the main deployment scenarios and outline other enabling technologies crucial for overcoming the challenges faced by THz system. Finally, we summarize the past and ongoing standardization efforts focusing on THz communications, while also providing an outlook towards the inclusion of this technology as an integral part of the future sixth generation (6G) and beyond communication networks.

Index Terms—terahertz, communications, sensing, 6G

I. INTRODUCTION

The next generation of wireless communications technologies, i.e., the sixth generation (6G), is expected to bring the digital and physical worlds even closer to each other across all dimensions, providing users with a holographic, haptic, and multi-sense experience. Turning this vision into reality requires not only enhancing the communication performance, but also delivering functionalities that are not currently supported.

One promising direction to meet this demand comes from the exploitation of new spectrum. So far, the frequency range between 0.1 and 10 terahertz (THz), also referred to as THz spectrum, has remained underutilized, in part due to the lack of devices able to operate at such frequencies. Difficulties encountered in the design and fabrication of THz devices have hindered the exploitation of this range and resulted in the so-called THz gap, a “dead zone” between microwave, millimeter wave, and infrared spectra. As a result of recent advancements

in the design and fabrication of Radio Frequency (RF) components, this gap is finally closing and mass-produced devices able to operate at THz frequencies are expected to hit the market in the near future.

Thanks to the large amount of available bandwidth, THz systems can achieve higher capacity and lower latency than traditional wireless technologies, making them suitable for applications requiring high-speed and low-latency wireless access. The enhanced directionality of THz systems contributes to reducing interference and maximizing spatial reuse, which is beneficial for applications with a high density of users. Additionally, the small size of THz antennas allows for the development of extremely compact transceivers for small-scale applications. Along with ultra-high communication performance, THz bands offer enhanced sensing capabilities and thus are particularly suitable for applications targeting quality-of-life goals such as advanced e-health, well-being, immersive entertainment, access to quality education for everyone everywhere, public safety, and safe work environments. Thanks to this great potential, THz communications are considered by many as one of the main technological enablers for the next generations of wireless systems [1]. However, several challenges must be faced to fully exploit their capabilities, mostly due to the harsh and variable propagation conditions experienced at such high frequencies [2].

Several initiatives aiming at the development, standardization, and commercialization of this technology have been launched in recent years. In this regard, European Telecommunications Standards Institute (ETSI) recently established an Industry Specification Group (ISG) focusing on THz communications (ETSI ISG THz), with the goal of providing appropriate models for THz communications, thus laying the technical foundation for the development and standardization of the technology. The group currently brings together 63 industrial and academic institutions, including vendors, operators, universities, and research centers with expertise in relevant areas.

In this paper, we provide a thorough analysis of use cases for THz communication systems. We first summarize the outcomes that have been achieved so far by the ETSI ISG THz, with a focus on potential use cases and frequency bands of interest. In particular, we provide a general overview of wireless communications at THz frequencies, describe the current regulatory situation of the THz spectrum, and introduce

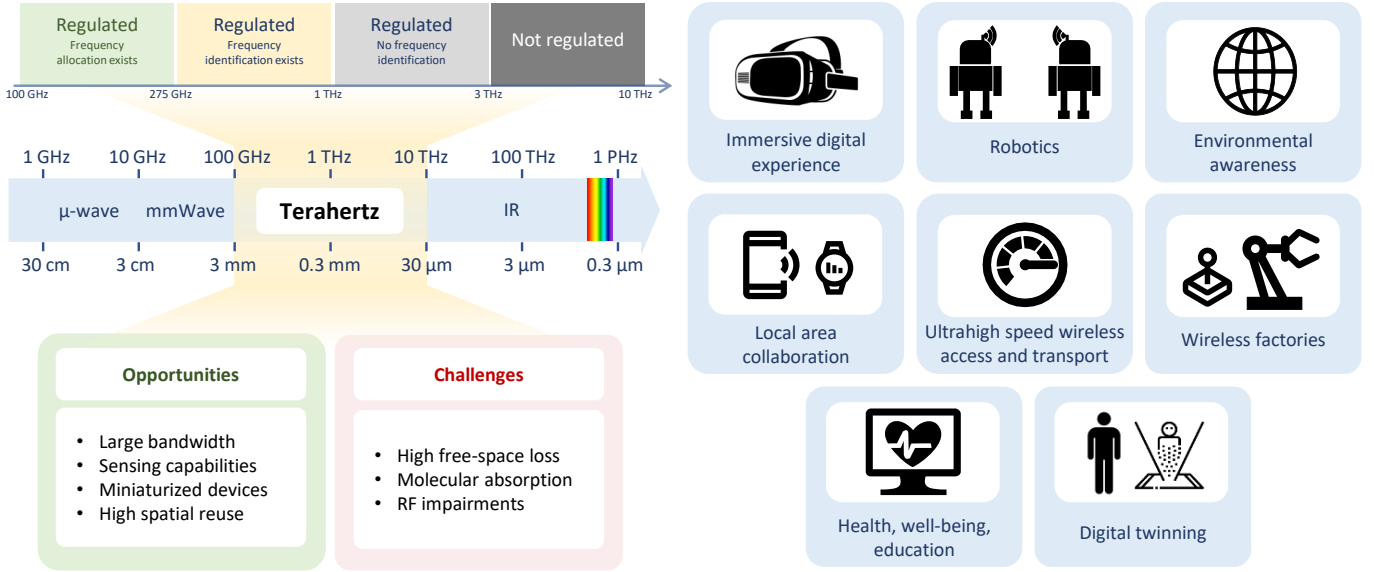


Fig. 1. Overview of THz communications and identified application areas.

standardization and pre-standardization efforts focusing on this technology. Then, we present 19 use cases for THz communications that have been identified by the ETSI ISG THz and describe related application areas. Moreover, we provide further considerations on related aspects that are important for the development and standardization of THz systems, including propagation environments and deployment scenarios, other enabling technologies, and potential requirements and Key Performance Indicators (KPIs).

The rest of the paper is structured as follows. Section II provides an overview of THz communications, Section III presents the use cases that have been identified and describes the related application areas, Section IV discusses relevant aspects related to the identified use cases, and Section V concludes the paper.

II. THz COMMUNICATIONS AND SENSING LANDSCAPE

This section overviews the regulatory situation of THz frequency bands, describes the distinctive features of THz signal propagation, and summarizes related standardization and pre-standardization efforts.

A. THz frequency bands

The frequency range between 100 GHz and 10 THz is referred to as the “THz range”. The corresponding wavelengths are from 0.03 mm to 3 mm. Below this range, the millimeter wave (mmWave) and microwave frequency ranges are found, already heavily utilized for communications and non-communications applications. Above 10 THz, the near- and mid-infrared spectrum starts. Based on the regulatory status and application scenarios, the frequency band 100 GHz – 10 THz can be divided in three ranges, as shown in Fig. 1.

Frequency bands between 100 and 275 GHz are already allocated for terrestrial services on an international level through

the International Telecommunication Union (ITU) Radio Regulations [3], and up to 252 GHz, several bands allocated for passive services are explicitly protected against interference, typically for Earth Exploration Satellite Services (EESS) and Radio Astronomy Services (RAS). Already at World Radiocommunication Conference (WRC) 2019, 137 GHz of spectrum from 275 to 450 GHz were identified for the use by mobile and fixed services, i.e., THz communications. This identification followed extensive sharing studies between THz communications and passive services like EESS and RAS, which have already used this frequency band and need to be protected from harmful interference [4]. As technology evolves, the exploitation of THz bands is becoming more feasible, and recent studies suggest that technological means can make sharing possible also in the protected bands [5], thus enabling the coexistence of passive, such as climate and weather monitoring, and active applications, such as mobile communications and radars. Further resolutions were approved at the WRC 2023, ensuring contiguous allocations for fixed and mobile services between 232 and 239 GHz [6].

The ETSI ISG THz identified a number of frequency bands as interesting for THz communications [7], which are reported in Tab. I. Between 100 and 275 GHz, 8 bands with sufficient contiguous bandwidth are allocated to fixed or mobile services on a co-primary basis, constituting 91.2 GHz of total available bandwidth. Above 275 GHz, 12 interesting bands have been identified for THz communications purposes based on a combination of regulatory status and favorable propagation conditions, resulting in 488 GHz of bandwidth. 91 GHz of this range is identified for fixed and mobile services.

Further regulatory efforts are essential for the successful exploitation of the THz spectrum. One of the main issues is the development of regulatory frameworks on regional and national levels to support the intended applications. Another open problem concerns Electromagnetic Field (EMF) exposure

TABLE I
FREQUENCY BANDS OF INTEREST AND REGULATORY STATUS RELATED TO
FIXED OR MOBILE SERVICES.

Band [GHz]	Bandwidth [GHz]	Regulatory status
102 - 109.5	7.5	Allocated
141 - 148.5	7.5	Allocated
151.5 - 164	12.5	Allocated
167 - 174.8	7.8	Allocated
191.8 - 200	8.2	Allocated
209 - 226	17	Allocated
231.5 - 239.2	7.7	Allocated
252 - 275	23	Allocated
275 - 296	21	Identified
296 - 306	10	Not identified
306 - 313	7	Identified
313 - 318	5	Not identified
318 - 321	3	Identified
327 - 333	6	Identified
333 - 356	23	Not identified
356 - 368	12	Identified
391 - 433	42	Identified
452 - 520	68	Not identified
598 - 722	124	Not identified
786 - 953	167	Not identified

regulations, as there are currently no globally standardized guidelines specifically tailored for the THz frequency range. Finally, the design of effective sharing and protective methods is a key challenge to be addressed.

B. Distinct features of THz communications

The large amount of radio resources available at THz frequencies offer a promising solution to alleviate spectrum scarcity issues faced at lower frequency bands. The large bandwidth can be exploited to achieve higher capacity than traditional wireless systems, even with lower spectral efficiency, making THz systems suitable for applications requiring high-speed wireless access. The large bandwidth also allows for a shorter slot duration and enables more frequent scheduling of users over time, thus reducing communication latency. Due to the short wavelength, THz devices can embed a large number of antennas within a small form factor, achieving high gain and increased directionality. This contributes to reduced interference and improved spatial reuse, which is beneficial for dense network deployments and applications with a high density of users. The small antenna size allows for the development of extremely compact transceivers, small enough to build wireless networks on chips and be implanted within the human body for advanced biomedical applications.

Additionally, THz bands offer several advantages over lower frequencies for sensing applications, making THz systems appealing for realizing the so-called Integrated Sensing and Communication (ISAC) paradigm [1]. The larger available bandwidth can enhance the spatial resolution of sensing algorithms, allowing for more precise localization, detection, and imaging of objects [8]. THz antennas can achieve a higher directionality and lower sidelobes, improving the angular resolution and minimizing the occurrence of ghost targets. Given the short wavelength, THz frequencies exhibit more pronounced scattering from surface roughness, which can be exploited to improve the detectability of objects. Moreover, unlike X and gamma rays, THz radiation is non-ionizing

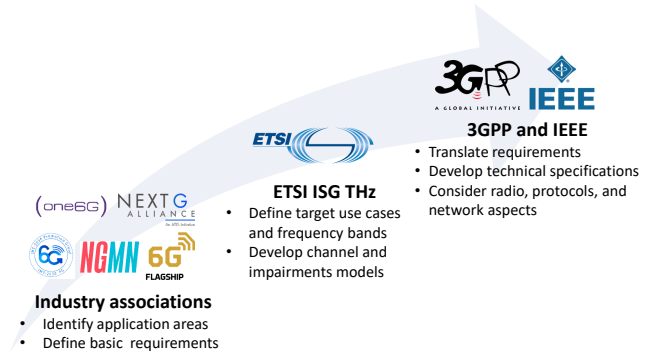


Fig. 2. Standardization of THz communication systems.

and thus safe for human exposure. THz waves can penetrate non-conductive materials such as plastic, paper, and textiles, making them suitable for detecting hidden objects or defects in security screening, quality control, and process monitoring applications. Due to the peculiar behavior when interacting with various substances, THz frequencies are commonly used for spectroscopy applications and for characterizing material properties [9].

The potential of THz communications has been proven by various experiments conducted in the past few years. For example, Northeastern University has demonstrated a multi-kilometer and multi-Gbps link operating at 210–240 GHz, while the EU-Japan ThoR project has demonstrated a 300 GHz bidirectional communication link achieving 20 Gbps over 160 m.

C. Standardization and pre-standardization efforts

Although THz communications is a relatively new field, the first standardization activities started already more than 15 years ago. In 2008, the Institute of Electrical and Electronics Engineers (IEEE) 802 committee established a THz Interest Group, which is now continuing its work as the IEEE 802.15 Standing Committee THz. As a spin-off of these early activities, in 2017 the IEEE 802 completed the IEEE Std 802.15.3d-2017 as an amendment to IEEE Std 802.15.3-2016, which defines a new THz physical layer for the frequency range 252–321 GHz featuring 8 different bandwidths between 2.16 GHz to 69.2 GHz. A revision published in 2023 IEEE Std 802.15.3-2023 extends the frequency range up to 450 GHz [10]. Despite representing the first standard for THz communications, it is applicable to a limited set of use cases with fixed point-to-point links, and thus not suitable for mobile communication systems.

Major industrial associations for next-generation wireless systems foresee the inclusion of THz communications in 6G standards and some of them are actively working on the development of this technology. For example, the European initiatives one6G and 6G FLAGSHIP, the North-American initiative Next G Alliance (NGA), the forum of world-leading mobile network operators Next Generation Mobile Networks (NGMN) Alliance, and the Chinese initiative IMT-2030 6G Promotion Group consider THz communications as one of the

key technologies for 6G and beyond. Bringing together multiple players in different domains and across different verticals, these associations aim to define the basic requirements and identify the application groups of interest for this technology.

Recently, ETSI has started a related pre-standardization activity by establishing the ISG THz at the end of 2022. The work program of this group is divided into four work items covering different aspects of the THz technology, including the identification of use cases and frequency bands of interest, channel measurements and modeling, and RF hardware modeling. In particular, work item DGR/THz-001 studied the use cases that are relevant for THz communication systems, identified possible deployment scenarios, and analyzed potential requirements and KPIs. Similarly, work item DGR/THz-002 investigated the frequency bands of interest, analyzed the current regulatory situation, and identified the incumbent services to be considered for coexistence studies. The main findings of these work items have been documented in publicly available reports, namely GR001 [11] and GR002 [7]. As future steps, work item DGR/THz-003 will analyze specific radio propagation aspects for THz communications, perform channel measurement campaigns for the identified use cases and frequency bands, and develop channel models for THz bands. At the same time, DGR/THz-004 will develop models and investigate possible approaches for the realization of THz devices, circuits, and systems, characterize RF impairments to obtain suitable models in the THz frequency range, and assess the overall device complexity, cost, and energy impact.

The final goal of the ETSI ISG THz is to lay the foundation for the development and standardization of this technology. The outcomes of this activity are openly published group reports covering all the above-mentioned aspects, including channel and impairments models. This material will be available for subsequent standardization activities such as 3rd Generation Partnership Project (3GPP) and IEEE. An overview of different entities involved in the standardization process and their main roles is provided in Fig. 2.

III. USE CASES FOR THz COMMUNICATION SYSTEMS

The ETSI ISG THz identified 19 potential use cases for THz communication systems, which are listed in Table II-III and documented in the group report GR001 [11]. From an application perspective, the identified use cases have been grouped into different areas. In the following, we describe the application areas and discuss the key aspects of the associated use cases. As shown in Table II-III, the same use case may be relevant for multiple areas. Interested readers are referred to the group report for a more detailed description of each individual use case [11].

A. Robotics

THz links can provide the required data rates to enable efficient robot-to-network and robot-to-robot communications for a variety of robots, such as automated guided vehicles, industrial robots, drones, etc. For example, the offloading of video or sensor data to a neighboring edge server for real-time processing requires high data rates (ranging between 600 Mbps

and 3 Gbps depending on the video quality [11]), which can be provided through high-capacity THz links. THz bands are also suitable for establishing fast short-range connections among robots for data-sharing purposes. Furthermore, THz sensing can provide accurate robot positioning, as well as assist robots in achieving high-resolution environmental mapping, including information on material composition and surface textures of surrounding objects.

B. Environmental Awareness

As described in Sec. II-B, THz bands provide unique sensing capabilities which can enable wireless systems to achieve a holistic view of the surroundings. For example, unlike current deployments, outdoor THz networks can monitor the emission of harmful gases and pollutants into the atmosphere by leveraging the unique molecular absorption profiles of THz signals, thus contributing to environmental awareness and climate action goals. Additionally, THz systems can be used to detect the presence of toxic substances and hazardous materials in workplaces and indoor environments, thereby improving situational awareness and human safety.

C. Immersive Digital Experience

Immersive digital experiences characterized by real-time interaction with other remote humans, avatars, and objects in virtual worlds can be provided using wearables (such as eXtended Reality (XR) headsets, haptic gloves, holographic displays). To enable a seamless user experience, ultimate XR applications require extremely high data rates and low latency, which are beyond the capabilities of today's mmWave 5G systems, thus giving the reason for exploiting THz bands. In this context, THz links can be used to connect wearable devices to the network or to create side connections among devices worn by the same user or by nearby users. Moreover, real-time gesture and body pose detection, as well as precise localization services, can be assisted by the sensing capabilities provided by THz signals. THz-enabled XR can also be used in use cases with mission-critical constraints, such as supporting public safety personnel during their operations and assisting doctors in performing surgeries on remote patients.

D. Local Area Collaboration

Thanks to the available spectrum and limited propagation range, utilizing THz links for the purpose of transferring data between devices in close proximity can be beneficial. Compared to lower frequencies, THz bands can enable a more efficient sharing of the spectrum and minimize the risk of collisions in the wireless channel. In this way, THz can support many use cases for local collaboration among wireless terminals (e.g., smartphones, wirelessly connected watches and glasses, notebooks, tablets, or storage devices), such as fast media sharing and high-speed data backup. Also, since small wearables may have limited computational capabilities, THz links can assist the offloading of compute tasks to higher-end devices within reach, such as smartphones, tablets, and notebooks.

TABLE II
IDENTIFIED USE CASES.

Use case	Application areas	Propagation environments	Other enabling technologies
Remote surgery	<ul style="list-style-type: none"> Immersive digital experience Robotics Health, Wellbeing, Education 	<ul style="list-style-type: none"> On-body Medical facility Living room 	<ul style="list-style-type: none"> AI/ML Advanced MIMO Sensing, imaging, positioning Energy efficient design for portable devices Edge computing
In airplane / train cabin entertainment	<ul style="list-style-type: none"> Local area collaboration Ultrahigh-speed wireless access and transport Health, wellbeing, education 	<ul style="list-style-type: none"> Airplane cabin Train cabin 	<ul style="list-style-type: none"> Advanced MIMO Advanced relays Sensing, imaging, positioning Energy efficient design for portable devices D2D, mesh networks Edge computing
Cooperative mobile robots	<ul style="list-style-type: none"> Robotics Local area collaboration Wireless factories Digital twinning 	<ul style="list-style-type: none"> Factory 	<ul style="list-style-type: none"> RIS Sensing, imaging, positioning Energy efficient design for portable devices D2D, mesh networks Edge computing
Hazardous material work	<ul style="list-style-type: none"> Robotics Wireless factories Environmental awareness Health, wellbeing, education 	<ul style="list-style-type: none"> Factory 	<ul style="list-style-type: none"> Sensing, imaging, positioning Energy efficient design for portable devices
Remote education	<ul style="list-style-type: none"> Immersive digital experience Robotics Ultrahigh-speed wireless access and transport Health, wellbeing, education Digital twinning 	<ul style="list-style-type: none"> Classroom 	<ul style="list-style-type: none"> AI/ML Sensing, imaging, positioning Energy efficient design for portable devices Edge computing
Wireless X-haul transport for fixed and mobile links	<ul style="list-style-type: none"> Ultrahigh-speed wireless access and transport 	<ul style="list-style-type: none"> Open space Highway Urban street Urban canyon Stadium Square 	<ul style="list-style-type: none"> Advanced MIMO
Wireless data centres	<ul style="list-style-type: none"> Ultrahigh-speed wireless access and transport 	<ul style="list-style-type: none"> Data centre 	<ul style="list-style-type: none"> Advanced MIMO RIS
Interactive immersive XR	<ul style="list-style-type: none"> Immersive digital experience Environmental awareness Health, wellbeing, education Digital twinning 	<ul style="list-style-type: none"> Living room Office 	<ul style="list-style-type: none"> Advanced MIMO RIS Advanced relays Sensing, imaging, positioning Energy efficient design for portable devices D2D, mesh networks Edge computing
Mission critical Immersive digital experience	<ul style="list-style-type: none"> Immersive digital experience Robotics Environmental awareness Health, Wellbeing, Education 	<ul style="list-style-type: none"> Medical facility Living room Factory Classroom Data centre Office Open space Urban street Urban canyon Stadium Square 	<ul style="list-style-type: none"> Sensing, imaging, positioning Energy efficient design for portable devices D2D, mesh networks Edge computing
Real-time industrial control	<ul style="list-style-type: none"> Robotics Environmental awareness Wireless factories 	<ul style="list-style-type: none"> Factory Intra-machine/device Inter-machine 	<ul style="list-style-type: none"> RIS Sensing, imaging, positioning Edge computing
Simultaneous imaging, mapping, localization	<ul style="list-style-type: none"> Robotics Environmental awareness 	<ul style="list-style-type: none"> Living room Classroom Hallway Meeting room Office Stadium Square 	<ul style="list-style-type: none"> AI/ML Sensing, imaging, positioning Energy efficient design for portable devices
Commissioning of industrial plants	<ul style="list-style-type: none"> Robotics Wireless factories Digital twinning 	<ul style="list-style-type: none"> Factory 	<ul style="list-style-type: none"> AI/ML Sensing, imaging, positioning Edge computing
Grand events with ultra-high throughput	<ul style="list-style-type: none"> Immersive digital experience Ultrahigh-speed wireless access and transport 	<ul style="list-style-type: none"> Stadium Square 	<ul style="list-style-type: none"> Advanced MIMO Energy efficient design for portable devices

TABLE III
IDENTIFIED USE CASES (CONTINUED).

Use case	Application areas	Propagation environments	Other enabling technologies
Ultra-high throughput for indoor users	<ul style="list-style-type: none"> Immersive digital experience Local area collaboration Ultrahigh-speed wireless access and transport Wireless factories 	<ul style="list-style-type: none"> Living room Classroom Hallway Meeting room Office 	<ul style="list-style-type: none"> Advanced MIMO Advanced relays Energy efficient design for portable devices
Intra-device communications	<ul style="list-style-type: none"> Ultrahigh-speed wireless access and transport 	<ul style="list-style-type: none"> Intra-machine/device 	<ul style="list-style-type: none"> Energy efficient design for portable devices
Local area collaboration for fixed or low mobility applications	<ul style="list-style-type: none"> Local area collaboration Ultrahigh-speed wireless access and transport Health, wellbeing, education 	<ul style="list-style-type: none"> On-body Medical facility Living room Factory Classroom Hallway Meeting room Office Open space Stadium Square 	<ul style="list-style-type: none"> Energy efficient design for portable devices D2D, mesh networks
Local area collaboration for vehicular applications	<ul style="list-style-type: none"> Local area collaboration 	<ul style="list-style-type: none"> Open space Highway Urban street Urban canyon 	<ul style="list-style-type: none"> Energy efficient design for portable devices D2D, mesh networks
Predictive maintenance and diagnostics	<ul style="list-style-type: none"> Robotics Environmental awareness Wireless factories Digital twinning 	<ul style="list-style-type: none"> Factory 	<ul style="list-style-type: none"> AI/ML Edge computing

E. Ultra-high-speed wireless access and transport

Given the large bandwidth and the high spatial reuse, THz networks can support a much higher connection density than lower frequency bands. The dense deployment of THz microcells can provide ultra-high-speed internet access in stadiums and festivals, enabling audiences to access and share high-resolution media content in real-time. In small indoor scenarios, such as train or plane cabins, THz access points located above the seats can provide passengers with fast access to a local media server for streaming high-definition videos and movies, thus improving their travel experience. In addition, THz links can support wireless transport applications, such as wireless back/front/mid-hauling, able to provide higher capacity and reduced interference compared to solutions at lower frequency bands.

F. Wireless Factories

Current industrial facilities are still largely based on wired communications technologies which present major issues, the main ones being increased costs, size, and weight due to cabling, and the need for special measures to connect devices in motion, such as reinforced cables, contact strips, etc. Wireless technologies based on THz communications have the potential to meet the demanding requirements envisioned for future industrial applications. For example, they can support real-time information exchange between industrial machines and virtual controllers deployed at an edge server, thus enabling a more flexible management of the factory.

G. Health, well-being, education

The THz technology offers unique capabilities for supporting novel medical, healthcare, and educational applications. For example, it can be used to build extremely small devices with communication and sensing capabilities that can be implanted in the body to monitor critical health parameters, such as blood glucose levels, heart rate, and oxygen saturation. These sensors can wirelessly transmit the collected data to user devices for continuous health monitoring. THz access points installed in classrooms can provide fast wireless access to students equipped with wireless XR devices and holographic displays for improving their learning experience. Moreover, THz sensors integrated into student's smartphones can enable the characterization of their surroundings, such as analyzing biological samples, and deepen their understanding of natural sciences.

H. Digital twinning

THz technologies offer enhanced support for digital twin applications. THz imaging techniques can be used to produce precise digital replicas of mechanical components and other physical objects, enabling the creation of accurate digital twins. The shorter wavelength compared to mmWave frequencies provides higher resolution, while the higher penetration through many non-conducting materials compared to infrared waves enables the non-destructive inspection of hidden parts, making THz an excellent candidate for this purpose. Moreover, high-throughput and low-latency THz links can support real-time synchronization between real systems and their digital twin, enabling use cases requiring hardware-in-the-loop validation (e.g., virtual commissioning of industrial plants).

IV. FURTHER CONSIDERATIONS

This section provides further considerations on aspects related to the identified use cases, including propagation environments and deployment scenarios, other enabling technologies, and potential requirements and KPIs.

A. Propagation environments and deployment scenarios

The identified use cases have been further analyzed and mapped to relevant propagation scenarios, as reported in [11]. These scenarios describe the physical propagation conditions that THz communication systems will be subject to, consequently leading to the development of realistic channel models for the evaluation of technical solutions during the standardization phase. For each of the 19 use cases, the report provides information on the target physical environments where those use cases are likely to be deployed (also reported in Tables II and III). Two groups have been defined: 13 indoor and 6 outdoor environments. The majority of use cases will be deployed in indoor environments, the most likely being living rooms, offices, and classrooms. Moreover, it shows that THz communications will cover scenarios that are not currently supported by conventional wireless communications systems, such as intra-device, on-body, airplane and train cabins, and data centers. Some use cases will be deployed in outdoor environments such as stadiums, open squares, urban canyons, and highways. In addition, [11] provides a literature review on already available channel measurements and models revealing the physical environments that have not been already characterized. Few of them have been under-explored (on-body, medical facilities, living rooms, factories, classrooms, inter-machine, stadium and square environments), thus requiring further studies. This will be the subject of future work for the ETSI ISG THz.

Another important aspect to consider is the mobility of wireless terminals. In this regard, three different groups can be identified. The first group includes use cases with fixed nodes aiming to replace wired connections, such as wireless data centers, fixed wireless X-hauling, and intra-device communications. The second group includes use cases characterized by limited mobility, such as in-airplane or in-train cabin entertainment and local area collaboration between nearby devices. The third group includes use cases with mobile nodes, such as those related to robotic applications, wireless access for mobile users, and XR. Given the high directionality that typically characterizes THz links, the use cases belonging to the third group may require more advanced procedures for establishing and maintaining wireless connections compared to those with no or limited mobility. These considerations should be taken into account during the definition of technical requirements for THz systems.

B. Challenges and enablers

Despite the tremendous potential, THz communications present inherent challenges mainly related to the unique properties of signals propagating at these frequencies, including high sensitivity to blockage effects, limited propagation

range, difficulties in channel measurements and modeling, pronounced near-field effects, high power consumption of RF components. To solve these issues and exploit their full potential, the development of THz wireless systems is expected to advance alongside other technologies, including:

1) *Artificial Intelligence (AI) and Machine Learning (ML)*: Unlike microwave bands, THz signals can be easily blocked by physical objects such as walls, furniture, and even human bodies. Prediction algorithms such as recurrent neural networks can be leveraged to anticipate future blockage events and avoid link disruptions. Also, ML techniques have the potential to streamline beam management operations, since traditional solutions lead to a huge signaling overhead due to the narrow size of THz beams. Since performing channel measurements at such high frequencies is challenging, generative AI approaches can be used to learn the statistical properties of THz channels from a limited amount of measurement data and augment it with synthetic samples [12]. Moreover, generalization techniques such as meta-learning can be adopted to adapt learned models to unseen environments/conditions.

2) *Advanced Multiple Input Multiple Output (MIMO) techniques*: The short wavelength at THz allows for the employment of ultra-massive MIMO arrays, which can address challenges imposed by the wideband spectrum and severe propagation conditions. For example, novel THz devices such as graphene-based plasmonic nano-antenna arrays can accommodate hundreds of antenna elements in a few millimeters. Advanced MIMO techniques such as Line Of Sight (LOS) or holographic MIMO can exploit the near-field effects that are more pronounced at THz frequencies to shift from traditional beamforming, where the radiated energy is confined in an angular sector, to beam focusing, where the energy is directed to a specific point in space [13]. Unlike traditional massive MIMO schemes, these techniques enable spatial multiplexing even in LOS conditions and increase spectral efficiency.

3) *Reconfigurable Intelligent Surface (RIS) and advanced relays*: In indoor scenarios, THz signals are easily blocked by walls, doors, and other building structures, therefore providing ubiquitous coverage can be an issue. In this regard, RISs can mitigate the effect of blockage by creating additional propagation paths, enabling THz communication and sensing in Non Line Of Sight (NLOS) conditions. Transmissive RIS (T-RIS) can passively re-radiate the signal from an outdoor base station to indoor devices and mitigate losses due to Outdoor-to-Indoor (O2I) penetration, which are particularly pronounced at high frequencies. Similarly, signal-transparent relays can avoid O2I losses by translating THz signals into optical signals and distributing them to indoor access points using the concept of radio-over-fiber. Moreover, relaying THz signal through multiple hops using active or passive relays can extend their limited propagation range.

4) *Energy-efficient device technologies*: Energy efficiency is a pre-requisite for THz communications to achieve the desired link budget and limit power consumption. This is even more stringent for portable devices where battery life is a concern. In this regard, new materials such as graphene-based semiconductors are showing promising results for drastically

TABLE IV
SUMMARY OF REQUIREMENTS RELATED TO THE IDENTIFIED USE CASES.

End-to-end latency	< 0.5 - 300 ms
Data rate	10 Mbps - 1 Tbps
Reliability	99,9 - 99,9999999 %
Connection density	< 2 million devices/km ²
Localization accuracy	> 0.5 cm

improving energy efficiency compared to conventional electronic and photonic technologies.

Other technologies recognized as particularly beneficial for supporting the identified use cases are indicated in Table II-III, as reported in [11].

C. Potential requirements and KPIs

The use cases that have been analyzed present diverse communication requirements which are summarized in Tab. IV. For example, some use cases may require latency below 0.5 ms, such as fixed wireless X-haul transport, cooperative mobile robots, real-time industrial control, and commissioning of industrial plants. Required data rates can exceed 1 Tbps, such as remote education, grand events with ultra-high throughput, and ultra-high throughput for indoor users. Use cases dealing with motion control and industrial applications, such as cooperative mobile robots, real-time industrial control, and commissioning of industrial plants may require extremely reliable operations. Some use cases may require a high connection density (up to 2 million devices/km²) such as grand events with ultra-high throughput, ultra-high throughput for indoor users, and local area collaboration with mobility. Use cases such as interactive immersive XR and simultaneous imaging, mapping, and localization have requirements related to sensing KPIs, for example localization accuracy down to 0.5 cm. Power consumption and energy efficiency are considered key aspects for all identified use cases, especially for those involving portable devices with reduced form factors such as local area collaboration, cooperative mobile robots, XR, grand events with ultra-high throughput, and ultra-high throughput for indoor users. In this regard, standardized metrics for comparing power consumption and energy efficiency across various system design are needed [14]. The ETSI ISG THz will conduct further studies on this matter, and more detailed requirements will be presented in subsequent group reports.

V. CONCLUSION

6G communication systems will need to support the ever-increasing demands for high data rates as well as native integration of sensing functionalities. The distinctive features of the THz frequency bands – including high available bandwidth and sensing capabilities – make THz communications a suitable technology to support these demands. With the approval of the IMT-2030 framework [15], the ITU agreed on the timeline for the development and standardization of 6G, where the period between 2024 and 2027 is dedicated to the definition of requirements and evaluation criteria. Within this time frame, the ETSI ISG THz is setting the stage for future development and standardization of THz wireless systems.

Standardization activities related to technology specification are expected to start in 2027 and can make use of the outcomes of the ETSI ISG THz as a starting point towards the inclusion of THz communications into wireless standards.

This paper summarized the initial findings of the ETSI ISG THz, including the identified use cases and frequency bands of interest for THz communication systems, and provided an overview of standardization efforts focusing on this technology. The work described herein sets the basis for subsequent activities of the group, which will focus on channel and RF hardware modeling for THz bands.

ACKNOWLEDGEMENT

The authors would like to acknowledge the active members of the ETSI ISG THz who contributed to the preparation of GR001 and GR002.

REFERENCES

- [1] P. Z. Wen Tong, *6G: The Next Horizon: From Connected People and Things to Connected Intelligence*. Cambridge University Press, 2021.
- [2] T. Kürner, D. Mittleman, and T. Nagatsuma, *THz Communications paving the way toward 1 Tbps*. Springer, 2020.
- [3] ITU-R, *ITU-R Radio Regulations*, vol. 1. ITU, 2020.
- [4] ITU-R, “Sharing and compatibility studies between land-mobile, fixed and passive services in the frequency range 275-450 GHz,” ITU-R Report SM.2450-0, Jun. 2019.
- [5] M. Polese, X. Cantos-Roman, A. Singh, M. J. Marcus, T. J. Maccarone, T. Melodia, and J. M. Jornet, “Coexistence and Spectrum Sharing Above 100 GHz,” *Proceedings of the IEEE*, vol. 111, no. 8, pp. 928–954, 2023.
- [6] ITU-R, “World Radiocommunication Conference 2023 (WRC-23) - Provisional Final Acts,” tech. rep., Dec. 2023.
- [7] ETSI, “TeraHertz technology (THz); Identification of frequency bands of interest for THz communication systems,” ETSI GR THz 002, ETSI ISG THz, 2024.
- [8] H. Chen, H. Sarrieddeen, T. Ballal, H. Wymeersch, M.-S. Alouini, and T. Y. Al-Naffouri, “A tutorial on Terahertz-band Localization for 6G Communication Systems,” *IEEE Communications Surveys & Tutorials*, 2022.
- [9] M. Naftaly, N. Vieweg, and A. Deninger, “Industrial applications of terahertz sensing: State of play,” *Sensors*, 2019.
- [10] “IEEE Standard for Wireless Multimedia Networks,” *IEEE Std 802.15.3-2023 (Revision of IEEE Std 802.15.3-2016)*, pp. 1–684, 2023.
- [11] ETSI, “TeraHertz technology (THz); Identification of use cases for THz communication systems,” ETSI GR THz 001, ETSI ISG THz, 2024.
- [12] A. Ghosh and M. Kim, “THz channel sounding and modeling techniques: An overview,” *IEEE Access*, vol. 11, pp. 17823–17856, 2023.
- [13] A. Singh, V. Petrov, and J. M. Jornet, “Utilization of Bessel beams in wideband sub terahertz communication systems to mitigate beamsplit effects in the near-field,” in *ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 1–5, IEEE, 2023.
- [14] M. Ying, D. Shakya, H. Poddar, and T. S. Rappaport, “Waste factor: A new metric for evaluating power efficiency in any cascade,” in *GLOBECOM 2023-2023 IEEE Global Communications Conference*, IEEE, 2023.
- [15] ITU-R, “Framework and overall objectives of the future development of IMT for 2030 and beyond,” ITU-R Recommendation M.2160-0, Nov. 2023.