

DATA-DRIVEN OPTIMIZATION FOR THE EVOLVE-FILTER-RELAX REGULARIZATION OF CONVECTION-DOMINATED FLOWS

ANNA IVAGNES^{a,1}, MARIA STRAZZULLO^{a,2}, MICHELE GIRFOGLIO³, TRAIAN ILIESCU⁴, GIANLUIGI ROZZA^{a,1}

ABSTRACT. Numerical stabilization techniques are often employed in under-resolved simulations of convection-dominated flows to improve accuracy and mitigate spurious oscillations. Specifically, the evolve-filter-relax (EFR) algorithm is a framework which consists in evolving the solution, applying a filtering step to remove high-frequency noise, and relaxing through a convex combination of filtered and original solutions. The stability and accuracy of the EFR solution strongly depend on two parameters, the filter radius δ and the relaxation parameter χ . Standard choices for these parameters are usually fixed in time, and related to the full order model setting, i.e., the grid size for δ and the time step for χ . This paper makes two significant improvements to the standard EFR framework by proposing: (i) time-dependent parameters, (ii) data-driven adaptive optimization of the parameters in time, considering a fully-resolved simulation as a reference. In particular, we propose three different classes of Optimized-EFR strategies, aiming to optimize one or both parameters. Moreover, we investigate the accuracy and efficiency of the proposed optimization algorithms considering different objective functions, both local (point-valued) and global (such as the kinetic energy). The new Optimized-EFR strategies are tested in the under-resolved simulation of a turbulent flow past a cylinder at $Re = 1000$. The Optimized-EFR results are more accurate than the standard EFR solution while maintaining a similar computational time. In particular, we show that using a global objective function and including the H^1 velocity seminorm is crucial to accurately match the reference flow dynamics.

1. INTRODUCTION

It is well known that, in the convection-dominated (e.g., turbulent), under-resolved regime (i.e., when the number of degrees of freedom is not high enough to accurately represent the complex underlying dynamics), classical numerical discretizations of the Navier-Stokes equations (NSE) generally yield spurious numerical oscillations [1, 20]. To alleviate this inaccurate behavior, these discretizations are generally equipped with numerical stabilization, large eddy simulation, or Reynolds-averaged Navier-Stokes (RANS) models [1, 20, 29]. Regularized models (see [20] for a review) are a class of numerical stabilization strategies that leverage spatial filtering to increase the numerical stability of the underlying model and eliminate the spurious numerical oscillations. One of the most popular regularized model is the *evolve-filter-relax* (EFR) algorithm, which consists of the following three steps: (i) *Evolve*: Use the NSE discretization to advance the velocity approximation at the current time step to an intermediate approximation at the next time step. (ii) *Filter*: Use a spatial filter to smooth the intermediate approximation in step (i). The goal of this step is to eliminate the spurious oscillations from the intermediate velocity approximation in step (i). (iii) *Relax*: Set the velocity approximation at the next time step to be a convex combination of the filtered velocity in step (ii) and the intermediate velocity approximation in step (i). The goal of this step is to prevent an overdiffusive velocity approximation, which could occur in step (ii) if, e.g., the filter radius is too large. The EFR

¹ INTERNATIONAL SCHOOL FOR ADVANCED STUDIES, SISSA, MATHEMATICS AREA, VIA BONOMEA, 265, 34136, TRIESTE, ITALY

² POLITECNICO DI TORINO, DEPARTMENT OF MATHEMATICAL SCIENCES “GIUSEPPE LUIGI LAGRANGE”, CORSO DUCA DEGLI ABRUZZI, 24, 10129, TORINO, ITALY

³ DEPARTMENT OF ENGINEERING, UNIVERSITY OF PALERMO, VIA DELLE SCIENZE, ED. 7, PALERMO, 90128, ITALY

⁴ DEPARTMENT OF MATHEMATICS, VIRGINIA TECH, BLACKSBURG, VA 24061, USA

^a INDAM RESEARCH GROUP GNCS MEMBER

Date: January 8, 2025.

strategy has been successfully used in conjunction with classical numerical discretization techniques, ranging from finite element (FE), to spectral element, to finite volume methods, to reduced order modeling (see, e.g., [4, 5, 7, 10, 11, 12, 13, 14, 15, 40, 24, 19, 25, 26, 30, 34, 36, 31, 33]) in challenging applications, ranging from nuclear engineering design, to the quasi-geostrophic equations describing the large scale ocean circulation, to cardiovascular modeling (see, e.g., [14, 16, 3, 41, 28, 42, 35, 20]). The EFR’s popularity is due to its accuracy and low computational cost. We emphasize, however, that probably the main reasons for the EFR’s popularity in practical applications are its *ease of implementation*, *modularity*, and *minimally intrusive* character. Indeed, the EFR algorithm is embarrassingly easy to implement: Given access to the stiffness matrix of the underlying numerical discretization, the spatial filter (and, thus, the EFR algorithm) can be implemented in a matter of minutes. Furthermore, the EFR algorithm is modular and minimally intrusive: Given a *legacy* NSE code, one can very easily add a modular spatial filter subroutine and a modular relaxation step without having to modify the legacy code.

The EFR algorithm has been proven to be a popular and effective strategy in important applications. Its further development, however, currently faces a major roadblock: The EFR algorithm involves two parameters (i.e., the filter radius and the relaxation parameter) that need to be carefully calibrated in order to obtain accurate approximations. This parameter calibration is critical for the EFR’s success: If the filter radius is too large, the EFR model is overdiffusive and the results are inaccurate (smeared) [32]. On the other hand, if the filter radius is too small, there is not enough dissipation and the EFR model can actually blow up. Similarly, a relaxation parameter that is too small or too large can yield grossly inaccurate EFR results. Thus, finding the optimal filter radius and relaxation parameter is critical for the EFR’s success. We note that the sensitivity of the EFR results to the model parameters have been well documented (see, e.g., the numerical investigations in [2, 14, 33, 32, 36]). We also note that the importance of the EFR’s parameter calibration is not a surprise since parameter sensitivity is a central issue for most numerical stabilizations [1, 20, 9, 8].

Recognizing the importance of finding the optimal filter radius and relaxation parameter in the EFR model, several approaches have been proposed early on. For example, in [14, 33], the EFR filter radius was chosen to be the mesh size of the underlying FE discretization. Another choice was proposed in [2], where the EFR filter radius was chosen to be the Kolmogorov lengthscale. Similarly, several choices for the EFR relaxation parameter have been proposed. For example, choosing the relaxation parameter proportional to the time step is a popular choice in the EFR literature [2, 33]. We note, however, that heuristic arguments have been used to motivate higher values for the relaxation parameter [2, 31, 33].

We emphasize that the vast majority of the current choices for the EFR filter radius and relaxation parameter yield *constant* values for these two parameters (an important exception is the nonlinear filtering proposed in [14].) Using constant values for the parameters imposes significant limitations on the EFR’s performance. For example, if the flow transitions from a laminar regime to a turbulent regime, the EFR’s filter radius and/or time relaxation parameter should increase to adapt to this transition. We emphasize that this is simply not possible with the current parameter choices.

In this paper, we put forth a novel *data-driven optimization* strategy for determining the optimal EFR parameters. Specifically, after a predetermined number of time steps, we leverage the available data and solve optimization problems to find the EFR parameters that yield the most accurate results. We investigate three classes of optimization strategies, in which we optimize the filter radius, the relaxation parameter, or both. Furthermore, we investigate the accuracy and efficiency of the proposed optimization algorithms by considering different types of objectives functions, based on either local or global quantities of interest (e.g., L^2 norm of the velocity, velocity gradient, and pressure). The proposed strategies are tested in the marginally-resolved simulation of a flow past a cylinder at a Reynolds number $Re = 1000$.

We emphasize that our new strategy is fundamentally different from the current approaches:

- This is the first time that data-driven modeling is leveraged to determine the EFR parameters.

- Furthermore, the new data-driven parameters vary in time, which is in stark contrast to the vast majority of current methods used to determine the EFR parameters.

The rest of the paper is organized as follows: In Section 2, we present the EFR strategy and discuss the critical role played by the EFR parameters, the filter radius and relaxation parameter. In Section 3, we introduce the novel data-driven optimization algorithms for the EFR strategy. Specifically, we introduce three new data-driven optimization strategies: (i) In the χ -Opt-EFR approach, we fix the filter radius and optimize the relaxation parameter. (ii) In the δ -Opt-EFR approach, we fix the relaxation parameter, and optimize the filter radius. (iii) Finally, in the $\delta\chi$ -Opt-EFR approach, we optimize both the relaxation parameter and the filter radius. In Section 4, we perform a numerical investigation of the three new data-driven EFR strategies in the numerical simulation of incompressible flow past a circular cylinder at Reynolds number $Re = 1000$ on a relatively coarse mesh. For comparison purposes, we also consider the standard EFR approach. As benchmark for our numerical investigation, we use a DNS on a fine mesh. Finally, in Section 5 we draw conclusions and outline future research directions.

2. THE EFR ALGORITHM

This Section is dedicated to a review of the state of the art related to the methodology we investigate. In particular, we briefly recall the discretized Navier–Stokes formulation and the Evolve-Filter-Relax (EFR) approach in Section 2.1. For more details, we refer the reader to [38, 33, 15, 2]. Moreover, in Section 2.2, we highlight the bottleneck of the EFR formulation, and the motivations to enhance it by optimization.

2.1. The Navier–Stokes Equations and the EFR algorithm. As a mathematical model, we consider the **incompressible Navier–Stokes equations (NSE)**. Given a fixed domain $\Omega \subset \mathbb{R}^D$, with $D = 2, 3$, we consider the motion of an incompressible fluid having velocity $\mathbf{u} \doteq \mathbf{u}(\mathbf{x}, t) \in \mathbb{U}$ and pressure $p \doteq p(\mathbf{x}, t) \in \mathbb{Q}$ whose dynamics is represented by the incompressible NSE:

$$(1) \quad \begin{cases} \frac{\partial \mathbf{u}}{\partial t} + (\mathbf{u} \cdot \nabla) \mathbf{u} - \nu \Delta \mathbf{u} + \nabla p = 0 & \text{in } \Omega \times (t_0, T), \\ \nabla \cdot \mathbf{u} = 0 & \text{in } \Omega \times (t_0, T), \\ \mathbf{u} = \mathbf{u}_D & \text{on } \partial\Omega_D \times (t_0, T), \\ -p \mathbf{n} + \nu \frac{\partial \mathbf{u}}{\partial \mathbf{n}} = 0 & \text{on } \partial\Omega_N \times (t_0, T), \end{cases}$$

endowed with the initial condition $\mathbf{u} = \mathbf{u}_0$ in $\Omega \times \{t_0\}$, where $\partial\Omega_D \cup \partial\Omega_N = \partial\Omega$, $\partial\Omega_D \cap \partial\Omega_N = \emptyset$, ν is the kinematic viscosity, and \mathbb{U} and \mathbb{Q} are suitable Hilbert function spaces. The functions \mathbf{u}_D and \mathbf{u}_0 are given. The flow regime is defined by the adimensional **Reynolds number**

$$(2) \quad Re \doteq \frac{UL}{\nu},$$

where U and L represent the characteristic velocity and length scales of the system, respectively. When the Reynolds number is large, the inertial forces dominate the viscous forces: this setting is generally referred to as the convection-dominated regime.

In the numerical tests, we employ the **Finite Element Method (FEM)** and a backward differentiation formula of order 1 (BDF1) for space and time discretization, respectively. In under-resolved or marginally-resolved numerical simulations, namely when employing a coarse grid to run the FEM simulations, standard spatial discretization techniques yield spurious numerical oscillation in convection-dominated regimes.

To alleviate this behavior, we equip the simulation with the **Evolve-Filter-Relax (EFR)** algorithm. We denote the semi-discrete FEM velocity and pressure with $\mathbf{u} \in \mathbb{U}^{N_h^u}$ and $p \in \mathbb{Q}^{N_h^p}$, respectively, where N_h^u and N_h^p are their degrees of freedom, respectively. The time step is Δt . Let $t^n = t_0 + n\Delta t$ for $n = 0, \dots, N_T$, and $T = t_0 + N_T\Delta t$. We denote with y^n the FEM numerical discretization of a general quantity y at the time t^n . The EFR algorithm at time t^{n+1} reads:

$$\begin{aligned}
\text{(I) Evolve:} & \begin{cases} \frac{\mathbf{w}^{n+1} - \mathbf{u}^n}{\Delta t} + (\mathbf{w}^{n+1} \cdot \nabla) \mathbf{w}^{n+1} + \\ -\nu \Delta \mathbf{w}^{n+1} + \nabla p^{n+1} = 0 & \text{in } \Omega \times \{t_{n+1}\}, \\ \nabla \cdot \mathbf{w}^{n+1} = 0 & \text{in } \Omega \times \{t_{n+1}\}, \\ \mathbf{w}^{n+1} = \mathbf{u}_D^{n+1} & \text{on } \partial\Omega_D \times \{t_{n+1}\}, \\ -p^{n+1} \cdot \mathbf{n} + \frac{\partial \mathbf{w}^{n+1}}{\partial \mathbf{n}} = 0 & \text{on } \partial\Omega_N \times \{t_{n+1}\}. \end{cases} \\
\text{(II) Filter:} & \begin{cases} -2\delta^2 \Delta \bar{\mathbf{w}}^{n+1} + \bar{\mathbf{w}}^{n+1} = \mathbf{w}^{n+1} & \text{in } \Omega \times \{t_{n+1}\}, \\ \bar{\mathbf{w}}^{n+1} = \mathbf{u}_D^{n+1} & \text{on } \partial\Omega_D \times \{t_{n+1}\}, \\ \frac{\partial \bar{\mathbf{w}}^{n+1}}{\partial \mathbf{n}} = 0 & \text{on } \partial\Omega_N \times \{t_{n+1}\}. \end{cases} \\
\text{(III) Relax:} & \quad \mathbf{u}^{n+1} = (1 - \chi) \mathbf{w}^{n+1} + \chi \bar{\mathbf{w}}^{n+1},
\end{aligned}$$

for $\chi \in [0, 1]$ relaxation parameter. We denote by \mathbf{w} and $\bar{\mathbf{w}}$ the evolved and the filtered velocity, respectively. Solving the first step (I) with $\mathbf{w}^{n+1} = \mathbf{u}^{n+1}$ equals solving the standard NSE. In step (II), we employ a differential filter (DF) filter radius δ (i.e., the spatial lengthscale over the spatial filter takes action). The success of DFs is due to their mathematical robustness [1]. Indeed, the DF leverages an elliptic operator and eliminates the small scales (i.e., high frequencies) from the input velocity, smoothing it and acting as a spatial filter. Step (III) is a relaxation step: a convex combination of the evolved and filtered velocity is performed at a new time step. In particular, the extreme cases are:

- (i) $\chi = 1$: we only retain the filtered solution $\mathbf{u}^{n+1} = \bar{\mathbf{w}}^{n+1}$;
- (ii) $\chi = 0$: the final solution is exactly the solution of the incompressible NSE (I), i.e., no filtering contribution is included and $\mathbf{u}^{n+1} = \mathbf{w}^{n+1}$.

In other words, the relaxation parameter χ is used to regulate the amount of the filter contribution [7, 11, 24], to increase the accuracy of possible over-diffusive results of Step (II), as shown for example in [2]. We remark that we call *noEFR simulation* the numerical solution of the discretized Navier–Stokes equations with no regularization applied, following the notation of [33].

2.2. On the role of the EFR parameters. A natural question arises in this setting: what are the optimal choices for δ and χ ? In the literature some scales arguments have been proposed (we refer the reader to [33, 2] and the references therein for more details on the topic):

- Common choices for the filter radius δ are the minimum mesh-scale diameter h_{min} or the Kolmogorov length scale $\eta = L \cdot Re^{\frac{3}{4}}$. Another choice is the energy-based lengthscale [23].
- For the relaxation, the scaling $\chi \sim \Delta t$ is commonly used [7]. However, its choice highly depends on the specific test case taken into account and higher values have been employed following heuristic arguments in [2, 14, 33].

While the choice of the filter radius is related to physical quantities, the choice of the relaxation parameter is based on experience and it might completely change with respect to the test case considered. In this context, many adjustments and improvements can be made. For example, time-dependent flow features can be better captured with a time-dependent parameter $\chi(t)$, or the differential filter may have local action [14]. Clearly, *The main bottleneck of the EFR procedure relies upon tuning the filter radius and the relaxation parameters.*

Indeed, in the standard EFR algorithm, the parameters' values need to be carefully tuned in a pre-processing stage to improve the accuracy of the solution:

- (i) If the values of δ and/or χ are **too large**, it may happen that the solution is **over-diffusive** and it does not manifest any turbulent behavior.

- (ii) If the values of δ and/or χ are **too small**, the filter action may be not adequate enough, leading to **spurious oscillations**, as happens in the noEFR scenario.

Moreover, as mentioned above, the flow dynamics may not be properly captured considering parameters constant in time, especially when dealing with turbulent flows or with test cases including a laminar-to-turbulent transition. For instance, we may want larger filter parameters (hence, higher δ and/or χ) in the laminar-to-turbulent transition, as well as in fully turbulent regimes. For this purpose, having time-dependent parameters would help in better capturing the flow dynamics, avoiding, for instance, overdiffusion phenomena. A first attempt was made in [14], where a nonlinear filter with $\delta = \alpha a(\mathbf{u})$, with $a(\mathbf{u})$ an indicator function, was considered.

In this manuscript, **for the first time, we introduce a data-driven strategy** to compute the time-dependent parameters $\delta(t)$ and $\chi(t)$, which allow us to better capture the flow dynamics in unsteady turbulent regimes. In this framework, we aim at investigating different **data-driven optimization algorithms**, with the ultimate goal of developing an adaptive strategy to optimize $\delta(t)$ and $\chi(t)$.

3. THE DATA-DRIVEN OPTIMIZED EFR ALGORITHMS

In this section, we aim at obtaining optimal values for the EFR parameters, enhancing standard approaches by adaptive optimization algorithms. In this way, we increase the accuracy of the re-simulation with respect to a Direct Numerical Simulation (DNS) simulation taken as a reference. Our investigation goes beyond constant parametric values and focuses on three specific cases:

1. **χ -Opt-EFR**, aimed to find the optimal $\chi(t)$ for fixed $\delta = \eta$, presented in Section 3.1;
2. **δ -Opt-EF**, aimed to find the optimal $\delta(t)$, with no relaxation, namely $\chi = 1$, presented in Section 3.2;
3. **$\delta\chi$ -Opt-EFR**, aimed to find the optimal $\delta(t)$ and $\chi(t)$, presented in Section 3.3.

The presented optimization procedures are based on a data-driven algorithm trained taking as reference some pre-computed data. In our specific setting, the training data are represented by the reference velocity and pressure fields of a simulation in a resolved regime.

We refer to those fields as $\mathbf{u}_{ref} \in \mathbb{U}^{M_h^u}$ and $p_{ref} \in \mathbb{Q}^{M_h^p}$, where $M_h^u \gg N_h^u$ and $M_h^p \gg N_h^p$. Such data are provided by a simulation over a refined mesh yielding $M_h^u + M_h^p$ degrees of freedom (dofs). The regularization, instead, is applied to a coarser mesh with respect to the DNS one, with $N_h^u + N_h^p$ dofs. Moreover, it is important to remark the **generality** and the **modularity** of the proposed algorithms, which can be applied to any experimental setting. The motivations behind the choices of the test cases of this contribution are postponed to the numerical sections.

3.1. The χ -Opt-EFR algorithms: find an optimal relaxation parameter. This section presents a strategy that combines standard optimization algorithms with the EFR strategy to find the optimal χ , starting from a fixed value of the parameter δ .

All the algorithms presented in this section predict a discretized time-dependent χ , $\{\chi(t^n)\}_{n=1}^{N_T}$, minimizing an objective function. Specifically, we investigate several objective functions to deduce how the different optimization approaches would affect the accuracy of the final EFR solution. The features of the adopted strategies are summarized in Table 1.

The algorithms in Table 1 perform at each time instance Step (I), Step (II) for a given constant δ and, then, look for an optimal time-dependent $\chi(t)$ to be employed in Step (III). The process is summarized in Algorithm 1, where $y|_{\mathbb{Y}}$ denotes the projection of the field y onto the space \mathbb{Y} .

The time window between two consecutive optimizations is $\Delta t_{opt} > \Delta t$, and, in detail, $\Delta t_{opt} = k\Delta t$, with $k \in \{10, 20, \dots, 90, 100\}$. Every Δt_{opt} , the algorithm takes into account the updated solution of the system and therefore needs to be trained on the fly. The parameter is fixed to its latest optimal value in the time window between two subsequent optimization steps. In the numerical results in Section 4.1, we will also evaluate how the optimization step influences the accuracy and efficiency of the solution.

In other words, our goal is to find the optimal $\chi^n = \chi(t^n)$ minimizing a specific objective function denoted as loss functional. This loss functional can feature either local or global contributions,

TABLE 1. Acronyms and main features of the algorithms χ -Opt-EFR. Gray cells indicate that the algorithm does not present that feature.

Acronym	Objective function type		Contributions in objective function		
	local	global	\mathbf{u} discrepancy	$\nabla \mathbf{u}$ discrepancy	p discrepancy
χ -Opt-EFR $_{\text{local}}^{\mathbf{u}}$	✓		✓		
χ -Opt-EFR $_{\text{local}}^{\mathbf{u}, \nabla \mathbf{u}}$	✓		✓	✓	
χ -Opt-EFR $_{\text{global}}^{\mathbf{u}}$		✓	✓		
χ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}}$		✓	✓	✓	
χ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$		✓	✓	✓	✓

as introduced in Table 1. Specifically, the local approach refers to a pointwise evaluation and minimization of the discrepancy between the reference and the predicted velocity. On the other hand, the global approach consists of the minimization of the discrepancy of the global energy.

We refer to local quantities if we minimize the Mean Squared Error (MSE) between the DNS reference solution (projected on the coarse mesh) and the updated relaxed solution. In this case, we consider the relaxed solution at time instance t^n , $\mathbf{u}^n = \chi^n \bar{\mathbf{w}}^n + (1 - \chi^n) \mathbf{w}^n$, and the DNS reference projected on the coarse mesh at time instance t^n , \mathbf{u}_{ref}^n . The objective function can be written as follows:

$$(3) \quad \mathcal{L}_{\text{local}}(\chi^n) = w_{\mathbf{u}} \mathcal{L}_{\text{local}}^{\mathbf{u}}(\chi^n) + w_{\nabla \mathbf{u}} \mathcal{L}_{\text{local}}^{\nabla \mathbf{u}}(\chi^n),$$

where the individual contributions are

$$(4) \quad \begin{aligned} \mathcal{L}_{\text{local}}^{\mathbf{u}}(\chi^n) &= \text{MSE}(\mathbf{u}^n(\chi^n), \mathbf{u}_{ref}^n), \\ \mathcal{L}_{\text{local}}^{\nabla \mathbf{u}}(\chi^n) &= \text{MSE}(\nabla \mathbf{u}^n(\chi^n), \nabla \mathbf{u}_{ref}^n), \end{aligned}$$

with $w_{\mathbf{u}}$ and $w_{\nabla \mathbf{u}}$ scalar weights associated with the two contributions. In particular, in χ -Opt-EFR $_{\text{local}}^{\mathbf{u}}$ we only consider the \mathbf{u} discrepancy, namely $w_{\mathbf{u}} \neq 0$, and $w_{\nabla \mathbf{u}} = 0$, while both contributions are considered in χ -Opt-EFR $_{\text{local}}^{\mathbf{u}, \nabla \mathbf{u}}$, namely $w_{\mathbf{u}} \neq 0$ and $w_{\nabla \mathbf{u}} \neq 0$, as underlined in Table 1. As pointed out in the results in Section 4.1, the local contributions may not be significant metrics to optimize this test case. In particular, the optimized reg-flow and the DNS may differ a lot in terms of qualitative and quantitative behaviors, even if the local MSE is relatively small. For this reason, the local contributions are replaced with global contributions in algorithms χ -Opt-EFR $_{\text{global}}^{\mathbf{u}}$, χ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}}$, and χ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$. The global objective function has the following expression:

$$(5) \quad \mathcal{L}_{\text{global}}(\chi^n) = w_{\mathbf{u}} \mathcal{L}_{\text{global}}^{\mathbf{u}}(\chi^n) + w_{\nabla \mathbf{u}} \mathcal{L}_{\text{global}}^{\nabla \mathbf{u}}(\chi^n) + w_p \mathcal{L}_{\text{global}}^p(\chi^n),$$

where the global contributions are

$$(6) \quad \begin{aligned} \mathcal{L}_{\text{global}}^{\mathbf{u}}(\chi^n) &= \left| \frac{\|\mathbf{u}^n(\chi^n)\|_{L^2(\Omega)}^2 - \|\mathbf{u}_{ref}^n\|_{L^2(\Omega)}^2}{\|\mathbf{u}_{ref}^n\|_{L^2(\Omega)}^2} \right|, \\ \mathcal{L}_{\text{global}}^{\nabla \mathbf{u}}(\chi^n) &= \left| \frac{\|\nabla \mathbf{u}^n(\chi^n)\|_{L^2(\Omega)}^2 - \|\nabla \mathbf{u}_{ref}^n\|_{L^2(\Omega)}^2}{\|\nabla \mathbf{u}_{ref}^n\|_{L^2(\Omega)}^2} \right|, \\ \mathcal{L}_{\text{global}}^p(\chi^n) &= \left| \frac{\|p^{n+1}(\chi^n)\|_{L^2(\Omega)}^2 - \|p_{ref}^{n+1}\|_{L^2(\Omega)}^2}{\|p_{ref}^{n+1}\|_{L^2(\Omega)}^2} \right|, \end{aligned}$$

for w_p scalar quantity. In particular, we set $w_{\mathbf{u}} \neq 0$ and $w_{\nabla \mathbf{u}} = w_p = 0$ in χ -Opt-EFR $_{\text{global}}^{\mathbf{u}}$ the algorithm, $w_{\mathbf{u}} \neq 0, w_{\nabla \mathbf{u}} \neq 0$ and $w_p = 0$ in the χ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}}$ algorithm, while all the contributions are activated in the χ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$ algorithm.

It is worth highlighting that the expression of $\mathcal{L}_{\text{global}}^p$ in (6) penalizes the pressure obtained as a solution of the evolve step at time instance t^{n+1} . Therefore, the optimization algorithm penalizing the pressure contribution, namely χ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$, is computationally more expensive than the others, since a further evolve step should be performed for each evaluation. Indeed, Steps (II) and (III) at time t^n apply only to the velocity field. Thus, the pressure contribution in Equations (6) needs to be computed considering the pressure at time t^{n+1} , which is the first pressure field affected by the optimization of χ at step t^n . We investigate the effect of the pressure contribution only in the global approach because the numerical results for the local method are not accurate (as showed in Section 4.1), and, hence, it was not worth investigating.

Algorithm 1 Pseudocode for algorithms χ -Opt-EFR optimizing the relaxation parameter $\chi(t)$. Row 10 (underlined) is considered only for χ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$. The optimization part is highlighted in gray.

```

1:  $\mathbf{u}_{ref}^n$ ,  $n = 0, \dots, N_T - 1$ ;  $N_h^u$ ;  $\mathbf{u}^0$ ,  $\Delta t_{opt}$ ,  $\chi^0 = 5\Delta t$   $\triangleright$  Inputs needed
2: for  $n \in [0, \dots, N_T - 1]$  do
3:   (I)+(II)  $\rightarrow \mathbf{w}^{n+1}, \bar{\mathbf{w}}^{n+1}$   $\triangleright$  Perform Evolve and Filter steps
4:    $\mathbf{u}_{ref}^{n+1} \leftarrow \mathbf{u}_{ref}^{n+1} | \mathbb{U}^{N_h^u}$   $\triangleright$  Project the reference field into the coarse mesh
5:    $\chi^{n+1} \leftarrow \chi^n$   $\triangleright$  Initialize  $\chi$ 
6:   if  $\text{mod}(n, \Delta t_{opt}) = 0$  then  $\triangleright$  Perform optimization every  $\Delta t_{opt}$ 
7:      $iter = 0$ 
8:     repeat  $\triangleright$  SLSQP algorithm
9:       (III)  $\rightarrow \mathbf{u}^{n+1}$   $\triangleright$  Relax step
10:      (I)  $\rightarrow p^{n+2}$   $\triangleright$  (Second) Evolve step
11:      Optimize  $\mathcal{L}(\chi^{n+1})$ , subject to  $0 \leq \chi^{n+1} \leq 1$ 
12:       $iter \leftarrow iter + 1$ 
13:      Output current solution:  $\chi^{n+1}$ 
14:    until Convergence or maximum iterations reached
15:  end if
16:  Solve (III) with the optimized  $\chi^{n+1} \rightarrow$  Update  $\mathbf{u}^{n+1}$   $\triangleright$  Perform Relax step (III)
17: end for

```

Algorithm 1 presents the general pseudocode that can be applied for all the algorithms presented in Table 1, by replacing the objective function $\mathcal{L}(\chi^{n+1})$ with the specific functional of the proposed algorithm, namely (3) or (5). Moreover, Algorithm 1 employs a Sequential Least Squares Programming (SLSQP) algorithm [27, 39], which is an iterative method for constrained nonlinear optimization. The only considered constraint is $0 \leq \chi^{n+1} \leq 1$. The underlined row (row 10 in the pseudocode) is considered only in the χ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$ algorithm, since it performs an additional evolve step in order to evaluate the pressure at the following time instance p^{n+2} . As an additional consideration, we consider as the initial value of the relaxation parameter the common choice in the literature [33], namely $\chi_0 = K\Delta t$, with $K = 5$. The results related to this type of optimization are presented in Section 4.1.

3.2. The δ -Opt-EF algorithms: find an optimal filter parameter. In the present section, we optimize an Evolve-Filter algorithm, namely the final velocity at time step t^n coincides with the filtered velocity: $\mathbf{u}^n \equiv \bar{\mathbf{w}}^n = \mathbf{u}^n(\delta^n)$. This is also equivalent to the EFR case with $\chi = 1$, and in this case, the predicted velocity would only depend on the filter parameter.

The motivation for proceeding with this analysis is that the optimization of the relaxation parameter is influenced by the choice of the filter parameter, which is kept fixed in χ -Opt-EFR. To overcome this limitation, in δ -Opt-EF we optimize the time-varying parameter $\delta(t)$ in the EF approach, directly. Moreover, we want to compare how the optimization behaves in absence of the relaxation step, namely when only the filtered velocity is retained at each time step, so we fix $\chi = 1$.

The δ -Opt-EF strategy can be specialized in different versions, according to the objective function we decide to optimize, just as described in Section 3.1 for χ -Opt-EFR. The cases taken into account are reported in Table 2. As will be seen in Section 4.1, the flow fields obtained considering the local objective function are inaccurate and contain spurious oscillations. For this reason, for the δ -Opt-EF objective function, we only consider the global optimization.

TABLE 2. Acronyms and main features of the algorithms δ -Opt-EF. Gray cells indicate that the algorithm does not present that feature.

Acronym	Objective function type		Contributions in objective function		
	local	global	\mathbf{u} discrepancy	$\nabla \mathbf{u}$ discrepancy	p discrepancy
δ -Opt-EF $_{\text{global}}^{\mathbf{u}}$		✓	✓		
δ -Opt-EF $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}}$		✓	✓	✓	
δ -Opt-EF $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$		✓	✓	✓	✓

The loss type considered is the one expressed in (5), with the contributions (6). The difference is that $\mathbf{u}^{n+1} = \overline{\mathbf{w}}^{n+1}$ is obtained just from system (3), and, hence, the contributions will be a function of δ instead of χ , say:

$$(7) \quad \mathcal{L}_{\text{global}}(\delta^n) = w_{\mathbf{u}} \mathcal{L}_{\text{global}}^{\mathbf{u}}(\delta^n) + w_{\nabla \mathbf{u}} \mathcal{L}_{\text{global}}^{\nabla \mathbf{u}}(\delta^n) + w_p \mathcal{L}_{\text{global}}^p(\delta^n),$$

with $w_{\mathbf{u}}$, $w_{\nabla \mathbf{u}}$, and w_p scalar quantities, and where the loss contributions are:

$$(8) \quad \begin{aligned} \mathcal{L}_{\text{global}}^{\mathbf{u}}(\delta^n) &= \left| \frac{\|\mathbf{u}^n(\delta^n)\|_{L^2(\Omega)}^2 - \|\mathbf{u}_{ref}^n\|_{L^2(\Omega)}^2}{\|\mathbf{u}_{ref}^n\|_{L^2(\Omega)}^2} \right|, \\ \mathcal{L}_{\text{global}}^{\nabla \mathbf{u}}(\delta^n) &= \left| \frac{\|\nabla \mathbf{u}^n(\delta^n)\|_{L^2(\Omega)}^2 - \|\nabla \mathbf{u}_{ref}^n\|_{L^2(\Omega)}^2}{\|\nabla \mathbf{u}_{ref}^n\|_{L^2(\Omega)}^2} \right|, \\ \mathcal{L}_{\text{global}}^p(\delta^n) &= \left| \frac{\|p^{n+1}(\delta^n)\|_{L^2(\Omega)}^2 - \|p_{ref}^{n+1}\|_{L^2(\Omega)}^2}{\|p_{ref}^{n+1}\|_{L^2(\Omega)}^2} \right|. \end{aligned}$$

The process is outlined in Algorithm 2.

In this optimization, we consider the Kolmogorov length scale η as the initial guess at time t^0 , namely, the literature common choice [2]. The optimization is performed every Δt_{opt} , as in Opt-EFR, and at each time step, the initial guess is the optimal solution at the previous time instance. Moreover, we consider a constrained optimization, where the filter parameter is in the range $[1 \times 10^{-5}, 1 \times 10^{-3}]$. By adding this constraint, the optimization problem seeks the optimal parameter within the range spanning an order of magnitude lower to one higher than the Kolmogorov length scale. This window has been established after a preliminary sensitivity analysis on the parameter δ , as it provides more physical results. The unconstrained optimization may indeed converge to values that are too large and far from the standard literature choices. We remark that line 10 of Algorithm 2, is performed only if $w_p \neq 0$. The results related to this type of optimization are presented in Section 4.2.

3.3. The $\delta\chi$ -Opt-EFR algorithms: find the optimal filter and relaxation parameters.

This final methodological section is dedicated to the double optimization algorithm. We call this algorithm $\delta\chi$ -Opt-EFR.

Also in this case we include Table 3 describing the cases investigated. Since the results obtained with the local optimizations χ -Opt-EFR $_{\text{local}}$ and δ -Opt-EF $_{\text{local}}$ are not accurate, we decide to exclude these analyses here and to consider only the global optimizations in Table 3.

The double optimization is described in Algorithm 3, where the losses have the same form as in (5) and (6), but with double dependency $\mathcal{L}(\delta, \chi)$. In particular, the expression of the loss can be written as:

Algorithm 2 Pseudocode for algorithms δ -Opt-EF optimizing the filter parameter $\delta(t)$. Row 10 (underlined) is considered only for δ -Opt-EF $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$. The optimization part is highlighted in gray.

```

1:  $\mathbf{u}_{ref}^n, n = 0, \dots, N_T - 1; N_h^u; \mathbf{u}^0, \Delta t_{opt}, \delta^0 = \eta$   $\triangleright$  Inputs needed
2: for  $n \in [0, \dots, N_T - 1]$  do
3:   (I)  $\rightarrow \mathbf{w}^{n+1}$   $\triangleright$  Perform Evolve step
4:    $\mathbf{u}_{ref}^{n+1} \leftarrow \mathbf{u}_{ref}^{n+1} | \mathbb{U}^{N_h^u}$   $\triangleright$  Project the reference field into the coarse mesh
5:    $\delta^{n+1} \leftarrow \delta^n$   $\triangleright$  Initialize  $\delta$ 
6:   if  $\text{mod}(n, \Delta t_{opt}) = 0$  then  $\triangleright$  Perform optimization every  $\Delta t_{opt}$ 
7:      $iter = 0$ 
8:     repeat  $\triangleright$  SLSQP algorithm
9:       (II)  $\rightarrow \mathbf{u}^{n+1}$   $\triangleright$  Filter step
10:      (I)  $\rightarrow p^{n+2}$   $\triangleright$  (Second) Evolve step
11:      Optimize  $\mathcal{L}(\delta^{n+1})$ , subject to  $1 \times 10^{-5} \leq \delta^{n+1} \leq 1 \times 10^{-3}$ 
12:       $iter \leftarrow iter + 1$ 
13:      Output current solution:  $\delta^{n+1}$ 
14:    until Convergence or maximum iterations reached
15:  end if
16:  Solve (II) with the optimized  $\delta^{n+1} \rightarrow$  Update  $\mathbf{u}^{n+1}$   $\triangleright$  Perform Filter step (II)
17: end for

```

TABLE 3. Acronyms and main features of the algorithms $\delta\chi$ -Opt-EFR. Gray cells indicate that the algorithm does not present that feature.

Acronym	Objective function type		Contributions in objective function		
	local	global	\mathbf{u} discrepancy	$\nabla \mathbf{u}$ discrepancy	p discrepancy
$\delta\chi$ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}}$		✓	✓	✓	
$\delta\chi$ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$		✓	✓	✓	✓

$$(9) \quad \mathcal{L}_{\text{global}}(\delta^n, \chi^n) = w_{\mathbf{u}} \mathcal{L}_{\text{global}}^{\mathbf{u}}(\delta^n, \chi^n) + w_{\nabla \mathbf{u}} \mathcal{L}_{\text{global}}^{\nabla \mathbf{u}}(\delta^n, \chi^n) + w_p \mathcal{L}_{\text{global}}^p(\delta^n, \chi^n),$$

where the global contributions are

$$(10) \quad \begin{aligned} \mathcal{L}_{\text{global}}^{\mathbf{u}}(\delta^n, \chi^n) &= \left| \frac{\|\mathbf{u}^n(\delta^n, \chi^n)\|_{L^2(\Omega)}^2 - \|\mathbf{u}_{ref}^n\|_{L^2(\Omega)}^2}{\|\mathbf{u}_{ref}^n\|_{L^2(\Omega)}^2} \right|, \\ \mathcal{L}_{\text{global}}^{\nabla \mathbf{u}}(\delta^n, \chi^n) &= \left| \frac{\|\nabla \mathbf{u}^n(\delta^n, \chi^n)\|_{L^2(\Omega)}^2 - \|\nabla \mathbf{u}_{ref}^n\|_{L^2(\Omega)}^2}{\|\nabla \mathbf{u}_{ref}^n\|_{L^2(\Omega)}^2} \right|, \\ \mathcal{L}_{\text{global}}^p(\delta^n, \chi^n) &= \left| \frac{\|p^{n+1}(\delta^n, \chi^n)\|_{L^2(\Omega)}^2 - \|p_{ref}^{n+1}\|_{L^2(\Omega)}^2}{\|p_{ref}^{n+1}\|_{L^2(\Omega)}^2} \right|. \end{aligned}$$

In this section we will only analyze cases $w_{\nabla \mathbf{u}} = w_{\mathbf{u}} = 1$, $w_p = 0$, and $w_{\nabla \mathbf{u}} = w_{\mathbf{u}} = w_p = 1$, as those were proved to be the algorithms with the best performances in the χ -Opt-EFR and the δ -Opt-EF setting, as shown in Sections 4.1 and 4.2.

In the $\delta\chi$ -Opt-EFR optimization, we consider as ranges for the parameters' search the same intervals taken into account in strategies χ -Opt-EFR and δ -Opt-EF, namely $\delta(t) \in [1 \times 10^{-5}, 1 \times 10^{-3}]$, $\chi(t) \in [0, 1]$. The results related to this type of optimization are presented in Section 4.3. We remark that line 9 of Algorithm 3, is performed only if $w_p \neq 0$.

Remark 3.1. It is worth highlighting that the scalar weights $w_{\mathbf{u}}$, $w_{\nabla \mathbf{u}}$, and w_p are taken exactly equal to 1 when $\neq 0$, namely when the corresponding terms are activated in the objective functions

Algorithm 3 Pseudo-code for algorithms $\delta\chi$ -Opt-EFR optimizing both parameters. Row 9 (underlined) is considered only for $\delta\chi$ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$. The optimization part is highlighted in gray.

```

1:  $\mathbf{u}_{ref}^n$ ,  $n = 0, \dots, N_T - 1$ ;  $N_h^u$ ;  $\mathbf{u}^0$ ,  $\Delta t_{opt}$ ,  $(\delta^0, \chi^0) = (\eta, 5\Delta t)$   $\triangleright$  Inputs needed
2: for  $n \in [0, \dots, N_T - 1]$  do
3:   (I)  $\rightarrow \mathbf{w}^{n+1}$   $\triangleright$  Perform Evolve step
4:    $\mathbf{u}_{ref}^{n+1} \leftarrow \mathbf{u}_{ref}^{n+1} | \mathbb{U}^{N_h^u}$   $\triangleright$  Project the reference field into the coarse mesh
    $(\chi^{n+1}, \delta^{n+1}) \leftarrow (\chi^n, \delta^n)$   $\triangleright$  Initialize both parameters
5:   if  $\text{mod}(n, \Delta t_{opt}) = 0$  then  $\triangleright$  Perform optimization every  $\Delta t_{opt}$ 
6:      $iter = 0$ 
7:     repeat
8:       (II)+(III)  $\rightarrow \mathbf{u}^{n+1}$   $\triangleright$  Filter and Relax step
9:       (I)  $\rightarrow p^{n+2}$   $\triangleright$  (Second) Evolve step
10:      Optimize  $\mathcal{L}(\delta^{n+1}, \chi^{n+1})$ , subject to  $1 \times 10^{-5} \leq \delta^{n+1} \leq 1 \times 10^{-3}$ ,  $0 \leq \chi^{n+1} \leq 1$ 
11:       $iter \leftarrow iter + 1$ 
12:      Output current solution:  $(\delta^{n+1}, \chi^{n+1})$ 
13:    until Convergence or maximum iterations reached
14:    end if
15:    Solve (II)+(III) with the optimized  $\delta^{n+1}$  and  $\chi^{n+1} \rightarrow$  Update  $\mathbf{u}^{n+1}$   $\triangleright$ 
    Perform Filter and Relax
16:  end for

```

(3), (5), (7), and (10). Other choices can be made, but finding the optimal choices for the loss weights was beyond the goal of the manuscript.


4. NUMERICAL RESULTS

This section shows the numerical results obtained by applying the methods proposed in Sections 2 and 3. We consider the test case of the incompressible flow past a circular cylinder at Reynolds number $Re = 1000$ constant in time.

We consider as reference in the optimization algorithms a DNS on a fine mesh, and our goal is to minimize the discrepancy between the optimized-EFR fields and the reference DNS fields.

Remark 4.1. In this project, we call DNS the reference simulation considered to train the proposed data-driven algorithm. However, our reference cannot be considered a fully-resolved simulation in its classical sense. Indeed, in Figure 3 plots (A) and (B) show that the velocity fields still exhibit spurious numerical oscillations.

The two meshes taken into account are displayed in Figure 1. The coarse mesh is characterized



(A) Coarse mesh

(B) Fine mesh

FIGURE 1. Meshes taken into account to run the simulations.

by $N_h^u = 12430$ dofs for the velocity field and $N_h^p = 1623$ for the pressure. On the other hand, the fine mesh is characterized by $M_h^u = 100676$ and $M_h^p = 12760$. We perform the simulations in the

time interval $[0, 4]$, and the adaptive optimization algorithms described in Section 3 are tested in the reconstructive regime.

The results obtained by the EFR simulations are compared with the DNS results using the following error metrics:

- the L^2 relative errors

$$(11) \quad E_{L^2}^u(t_n) = \frac{\|\mathbf{u}^n - \mathbf{u}_{ref}^n\|_{L^2(\Omega)}}{\|\mathbf{u}_{ref}^n\|_{L^2(\Omega)}}, \quad E_{L^2}^p(t_n) = \frac{\|p^n - p_{ref}^n\|_{L^2(\Omega)}}{\|p_{ref}^n\|_{L^2(\Omega)}},$$

- the velocity relative error in the H^1 norm:

$$(12) \quad E_{H^1}^u(t_n) = \frac{\|\mathbf{u}^n - \mathbf{u}_{ref}^n\|_{H^1(\Omega)}}{\|\mathbf{u}_{ref}^n\|_{H^1(\Omega)}}.$$

The domain is $\Omega \doteq \{(x, y) \in [0, 2.2] \times [0, 0.41] \text{ such that } (x - 0.2)^2 + (y - 0.2)^2 \geq 0.05^2\}$, and it is represented in Figure 2. We consider no-slip boundary conditions on $\partial\Omega_{wall} = \partial\Omega_B \cup \partial\Omega_T \cup \partial\Omega_C$ (blue solid line in Figure 2), and an inlet velocity \mathbf{u}_{in} on $\partial\Omega_{in}$ (gold dashed line in Figure 2), given by:

$$(13) \quad \mathbf{u}_{in} \doteq \left(\frac{6}{0.41^2} y(0.41 - y), 0 \right).$$

On the outlet of the domain $\partial\Omega_N$ (brown dotted line in Figure 2), we employ standard free-flow conditions. The initial condition is $\mathbf{u}_0 = (0, 0)$. The viscosity is set to $\nu = 1 \times 10^{-4}$ and, consequently, the Reynolds number is $Re = 1000$.




FIGURE 2. The domain considered in the test cases.

For the test case described above, not applying regularization yields inaccurate field representation. We recall that, for the sake of the presentation, when no regularization is applied, we say that noEFR is performed, following the acronyms introduced in [33].

Some preliminary results motivating our analysis are available in Figure 3, which yields the following conclusions:

- The noEFR simulations present spurious oscillations, as can be seen in plots (C) and (D). This motivates the use of the EFR algorithm, see, also, [31, 32].
- The challenges related to this specific test case are clear even from the DNS simulations that, despite the use of a finer mesh, still present some numerical oscillations near the outlet domain, see plots (A) and (B).
- Moreover, the EFR method with standard choices $\delta = \eta = 5.62 \times 10^{-4}$ and $\chi = 5\Delta t$ yields poor results, as well. Indeed:
 - The standard EF approach is overdifusive and does not capture the vortex shedding in the region near the cylinder, as can be seen from plots (G) and (H).
 - The standard EFR method yields spurious oscillations, meaning that the relaxation parameter χ is too small and should be carefully tuned, as shown in plots (E) and (F).

The above statements motivate the following analysis of parameter optimization, whose main goal is to improve the results of the noEFR and standard EFR approaches with adaptive optimization. In particular:

- Section 4.1 shows the results for χ -Opt-EFR;
- Section 4.2 shows the results for δ -Opt-EF;
- Section 4.3 shows the results for $\delta\chi$ -Opt-EFR.

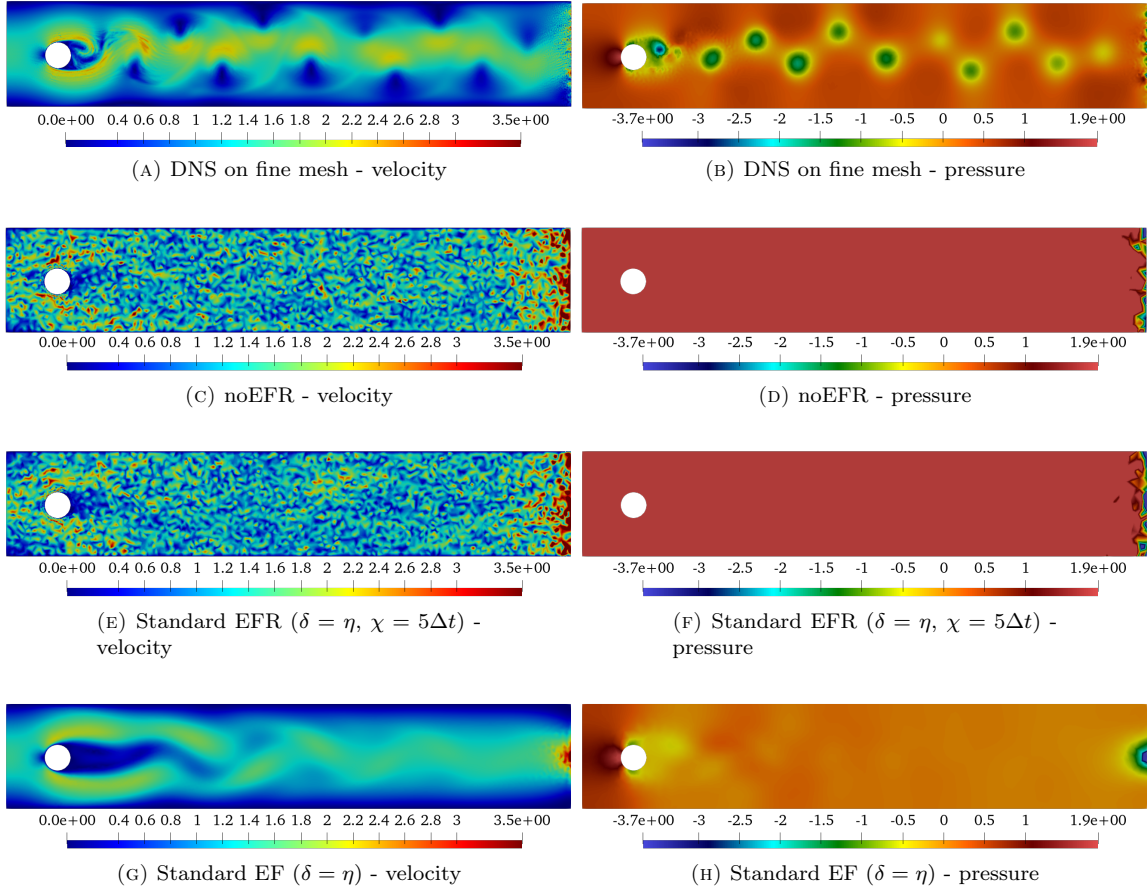


FIGURE 3. From top to bottom: velocity (left plots) and pressure (right plots) fields at final $t = 4$ for DNS on the fine mesh (the reference solution), and noEFR method on the coarse mesh (i.e., the solution to improve with regularization). The results of standard EFR and EF approaches on the coarse mesh are also displayed.

4.1. **Numerical results for χ -Opt-EFR.** First, in Figure 4 (A) we include the $\chi(t)$ trends obtained with the different local or global objective functions taken into account.

When minimizing the **local** MSE discrepancy, the optimal $\chi(t)$ is close to 1 for each optimization time step. It means that the algorithm activates for almost 100% of the filtered velocity, and hence we expect an over-diffuse behavior, as happens in the standard EF approach.

On the other hand, when we only consider the **global** velocity norm discrepancy, the simulation blows up for $t = 1.6$, as can be seen in Figure 5, and in Figures 6 and 7 (D). The simulation is more stable when the velocity gradients and the pressure contributions are also included into the objective function (approaches χ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}}$ and χ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$). However, the last two plots on the right in Figure 4 (A) show an oscillating and chaotic behavior of $\chi(t)$. To better understand the distribution of the parameters' values, we present in Figure 4 (B) the relative number of optimal χ^n values attained by the Opt-EFR algorithms, with $n = 1, \dots, N_T$. In particular, for a given value, n_{points} is the number of times χ^n attains the given value, while n_{total} is the total number of samples, namely 1000. Figure 4 shows us that the number of $\chi(t)$ elements close to 1 is around 25% in both algorithms χ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}}$ and χ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$. This means the optimization algorithm converges statistically more often to values close to 1, deactivating the relaxation step.

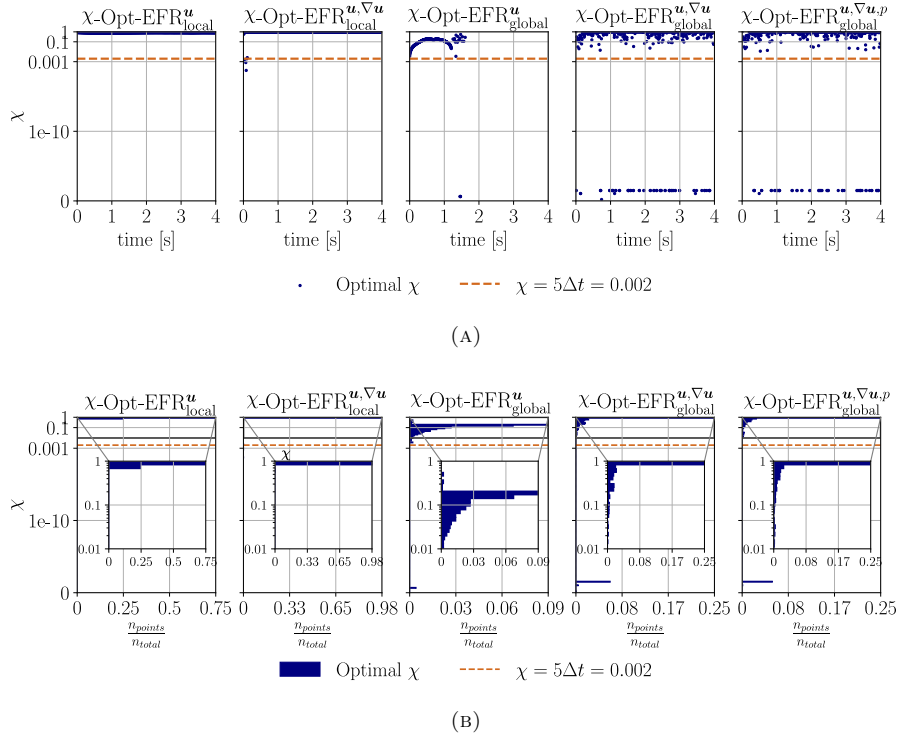


FIGURE 4. Optimal value of $\chi(t)$ in the χ -Opt-EFR algorithms (A), and count of observations of the parameter values (B).

We proceed with our analysis by investigating the accuracy with respect to the L^2 relative errors, i.e., $E_{L^2}^u(t)$ and $E_{L^2}^p(t)$, displayed in Figure 5. All the results look similar in the L^2 errors, except for the χ -Opt-EFR_{global}^u, whose solution blows up at second 1.6. Except for procedure χ -Opt-EFR_{global}^u, all the optimized techniques yield more accurate results with respect to standard EFR (gray line in Figure 5).

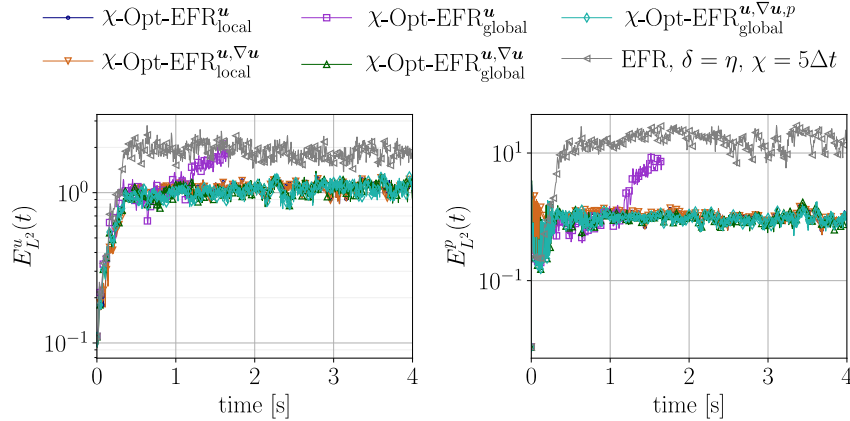


FIGURE 5. Relative velocity and pressure errors of χ -Opt-EFR simulations with respect to the reference solutions projected on the coarse mesh. The results for the standard EFR approach are also reported.

However, as we can see in the graphical results of Figures 6 and 7, the L^2 relative error is not a significant metric to compare the different approaches in our test case. Indeed, even if the results for that metric are all similar, the flow dynamics are well captured in simulations of χ -Opt-EFR $_{\text{global}}^{u, \nabla u}$ and χ -Opt-EFR $_{\text{global}}^{u, \nabla u, p}$, but not in the other approaches. In particular:

- In χ -Opt-EFR $_{\text{global}}^u$, the field is characterized by spurious oscillations in the whole domain;
- The local methods χ -Opt-EFR $_{\text{local}}^u$ and χ -Opt-EFR $_{\text{local}}^{u, \nabla u}$ are over-diffusive.

Hence, we will not consider the L^2 errors as metrics in the remaining part of the manuscript, but we will consider the L^2 velocity and pressure norms, and the H^1 velocity seminorm to evaluate the results. We also note that the reason for analyzing global features, instead of local errors, is that, considering the optimization of local quantities, there is a phase shift in capturing the dynamics of the vortex shedding. Moreover, the local optimization is not able to fully recover all the vortices appearing in the reference DNS simulation.

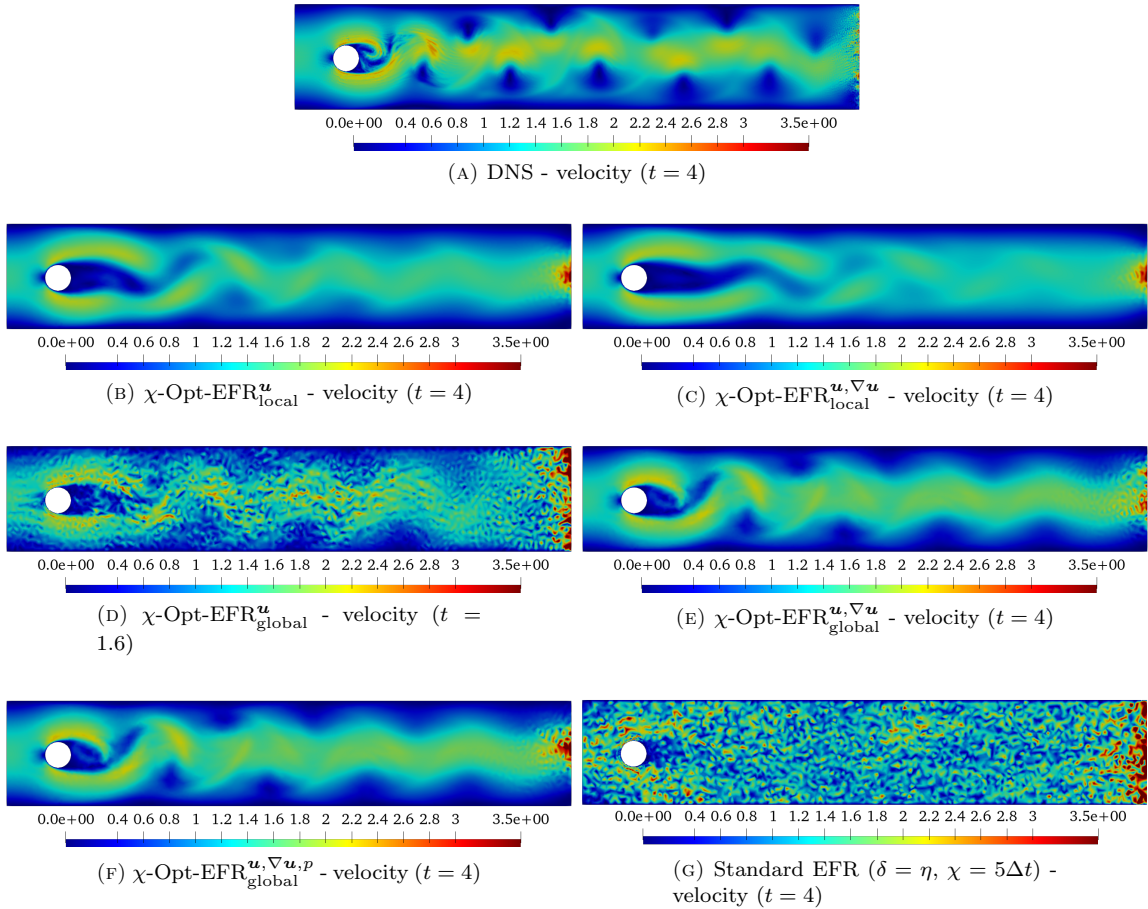


FIGURE 6. Velocity fields at final time instance $t = 4$ for standard EFR, χ -Opt-EFR results, and reference DNS simulation.

The L^2 velocity and pressure norms are displayed in Figure 8, whereas Figure 9 displays the velocity H^1 seminorms. We recall that the objective functions in algorithms χ -Opt-EFR $_{\text{global}}^u$, χ -Opt-EFR $_{\text{global}}^{u, \nabla u}$, and χ -Opt-EFR $_{\text{global}}^{u, \nabla u, p}$ include the information on this specific metric. Hence, we expect better results in these cases with respect to local optimization approaches. As expected, Figures 8 and 9 show that:

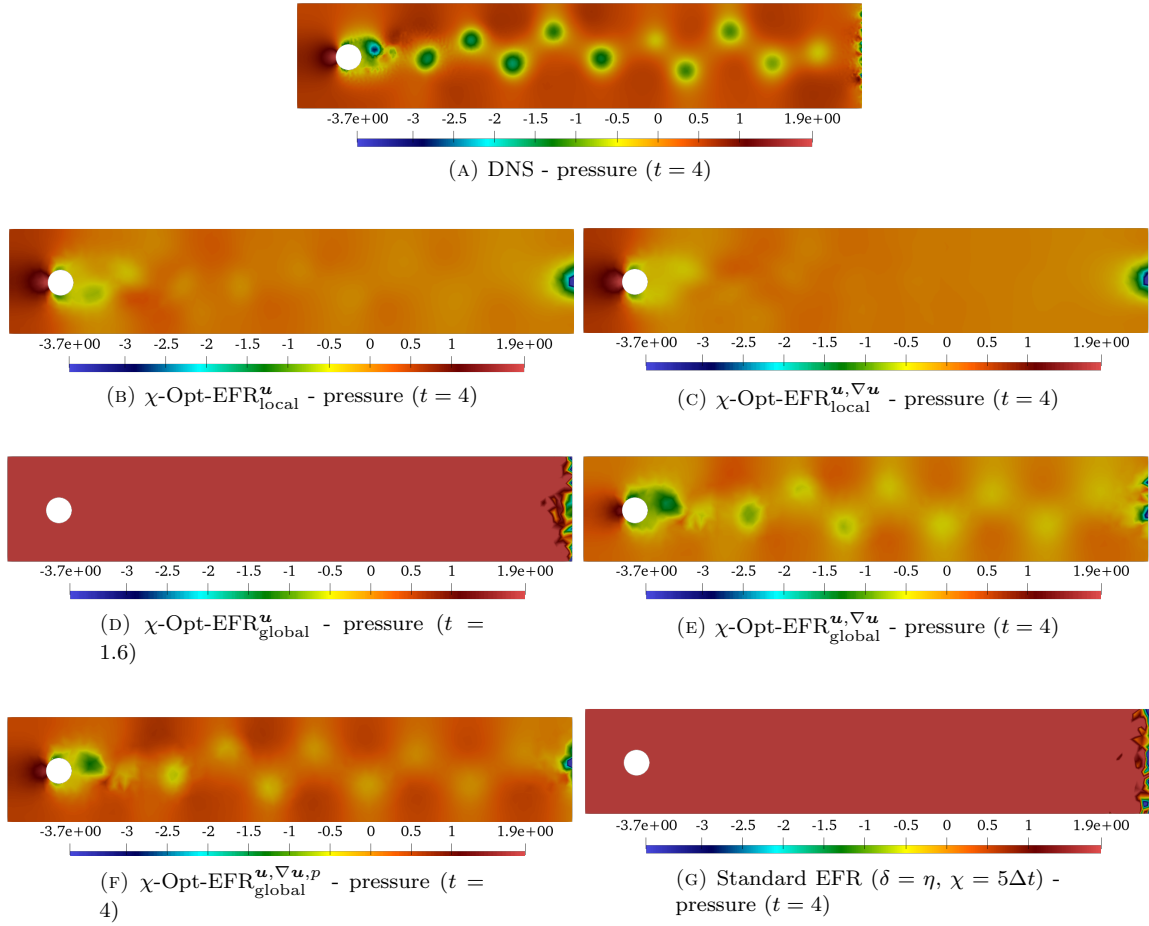


FIGURE 7. Pressure fields at final time instance $t = 4$ for Standard EFR, χ -Opt-EFR results, and for the reference DNS simulation.

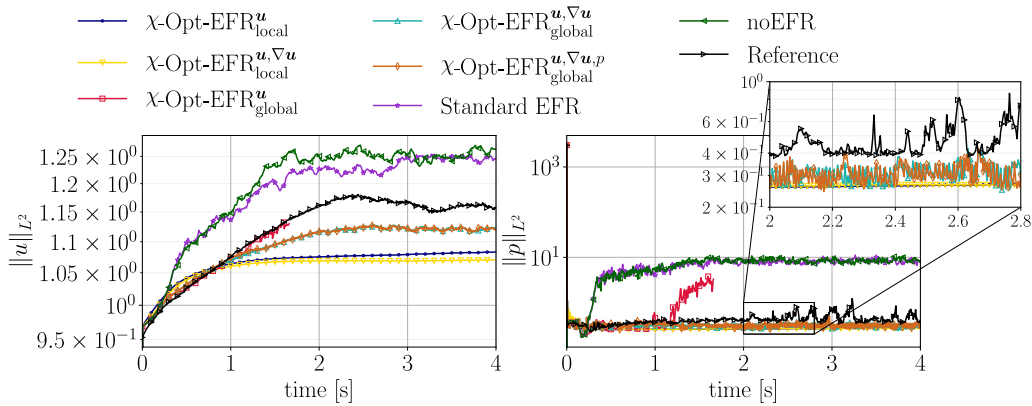


FIGURE 8. Velocity and pressure norms of χ -Opt-EFR simulations, of the reference solutions projected on the coarse mesh, and of standard EFR.

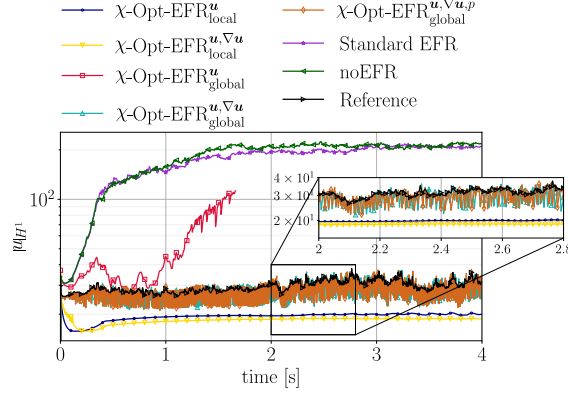


FIGURE 9. Velocity H^1 norms of χ -Opt-EFR simulations, of the reference solutions, projected on the coarse mesh, and of standard EFR.

- χ -Opt-EFR $_{\text{local}}^u$ and χ -Opt-EFR $_{\text{local}}^{u, \nabla u}$ simulations produce less accurate approximations than in the cases of global optimizations;
- χ -Opt-EFR $_{\text{global}}^u$ shows a good agreement in the L^2 velocity norm (until $t = 1.6$) with respect to the reference counterpart because it is exactly the metric optimized in the optimization algorithm, while the pressure norm and the velocity gradients are not accurately predicted. Indeed, this approach yields a poor approximation of the velocity and pressure fields, as can be seen in Figures 6 and 7 (D);
- Approaches χ -Opt-EFR $_{\text{global}}^{u, \nabla u}$ and χ -Opt-EFR $_{\text{global}}^{u, \nabla u, p}$ provide the best results, and show a good agreement in the H^1 velocity seminorm and in the pressure norm;
- We expect that the addition of the pressure contribution in χ -Opt-EFR $_{\text{global}}^{u, \nabla u, p}$ would be beneficial and improve the pressure accuracy with respect to χ -Opt-EFR $_{\text{global}}^{u, \nabla u}$. However, in both cases, the pressure norm has a chaotic trend in time. The graphical comparison between Figure 7 (E) and (F) shows that the addition of the pressure discrepancy in the objective function only slightly increases the pressure accuracy.

Remark 4.2. To highlight the reason why the procedure χ -Opt-EFR $_{\text{global}}^u$ blows up at $t = 1.6$, in Figure 8 we display the pressure norm, which starts increasing after $t = 1$, until it completely explodes, as can be seen in Figure 7 in subplot (D). This happens because the optimization algorithm for parameter χ does not converge to a global optimum.

4.1.1. *On the role of the optimization step.* The previous analysis was undertaken on a fixed optimization step, $\Delta t_{opt} = 10$. However, the optimization step plays an important role in ensuring a good compromise between the accuracy and the efficiency of the described approach. Hence, this section is dedicated to the comparison of the different types of optimization, in terms of **efficiency** and **accuracy**. For each algorithm, we also extend the analysis to different optimization steps, namely $\Delta t_{opt} = k\Delta t$, where, we recall that the positive integer k satisfies $k \in \{10, 20, \dots, 90, 100\}$.

We measure the **accuracy** using metrics $\overline{\mathcal{L}_{global}^u(\chi^n)^n}$, $\overline{\mathcal{L}_{global}^{\nabla u}(\chi^n)^n}$, and $\overline{\mathcal{L}_{global}^p(\chi^n)^n}$, where the operator $\overline{(\cdot)^n}$ is a time average, and the terms $\mathcal{L}_{global}^{(\cdot)}(\chi^n)$ are the global contributions in the optimization introduced in Equations (6). A similar logic will be applied in Sections 4.2 and 4.3 considering the global contributions in Equations (8) and (10), respectively.

We measure the **efficiency** in terms of the wall clock time, expressed in relative percentage with respect to the DNS time (bottom x -axis) and in absolute time (top x -axis).

The results of the χ -Opt-EFR simulations with different k are presented in the Pareto plots in Figure 10, where the k value is visualized in the boxes next to the corresponding markers.

Since in the plots the x -axis represents the computational time and the y axis represents the errors, we expect the best-performing simulations to be located in the lower left part of the plots, which corresponds to low errors and low computational time. Moreover, our goal is to discard simulations taking place in the upper left part, corresponding to high errors and low computational cost, and in the lower right part, corresponding to low errors but high computational cost.

Figures 10 and 11 yield the following conclusions:

- The standard EFR and the noEFR simulations lead to higher errors than the optimized-EFR approaches, as we expect. In particular, for the pressure and the velocity gradients, χ -Opt-EFR methods are able to improve the accuracy by **two** orders of magnitudes. Moreover, the standard EFR and the noEFR simulations also need more computational time than some of the χ -Opt-EFR simulations. This may be due to the fact that the noEFR and standard-EFR simulations are unstable and noisy, and, hence, the FEM Newton solver needs more iterations to converge to a solution.
- With respect to the relative wall clock time, all the optimized-EFR simulations have high gain in time with respect to the DNS simulation. However, the absolute time suggests that the range of all the χ -Opt-EFR simulations is [4, 9] hours. This means that varying the optimization time window, the computational time of the χ -Opt-EFR simulations may change even of hours.
- As expected, the simulations with a smaller optimization step, i.e., $10\Delta t$ or $20\Delta t$, need more time than the simulations with higher optimization steps, but are more accurate. We also note that the accuracy among different optimization steps is still comparable in terms of the L^2 norms, but not in terms of the H^1 velocity seminorm. This may be due to the fact that the velocity gradients get too far from the global optimum before a novel optimization is performed. Hence, the following optimization step is not able anymore to converge and to “fix” the spatial gradients.
- The χ -Opt-EFR $_{global}^{u, \nabla u, p}$ strategy slightly improves the pressure accuracy. However, it is more time consuming than the χ -Opt-EFR $_{global}^{u, \nabla u}$ without yielding a significant gain in the accuracy.

Remark 4.3. The Pareto plots in Figures 10 and 11 show how the optimization step influences the simulation wall clock time. One would expect that simulations with larger time windows are faster than simulations with smaller time windows. However, it is important to underline that this general statement is not always satisfied. For example, simulations with $\Delta t_{opt} \in \{70, 80, 90, 100\}$ take more time than simulations with $\Delta t_{opt} \in \{40, 50, 60\}$. This is because larger optimization steps lead to more unstable systems (i.e., spurious oscillations and presence of noise), and in this scenario the Newton method needs more iterations to converge to the solution.

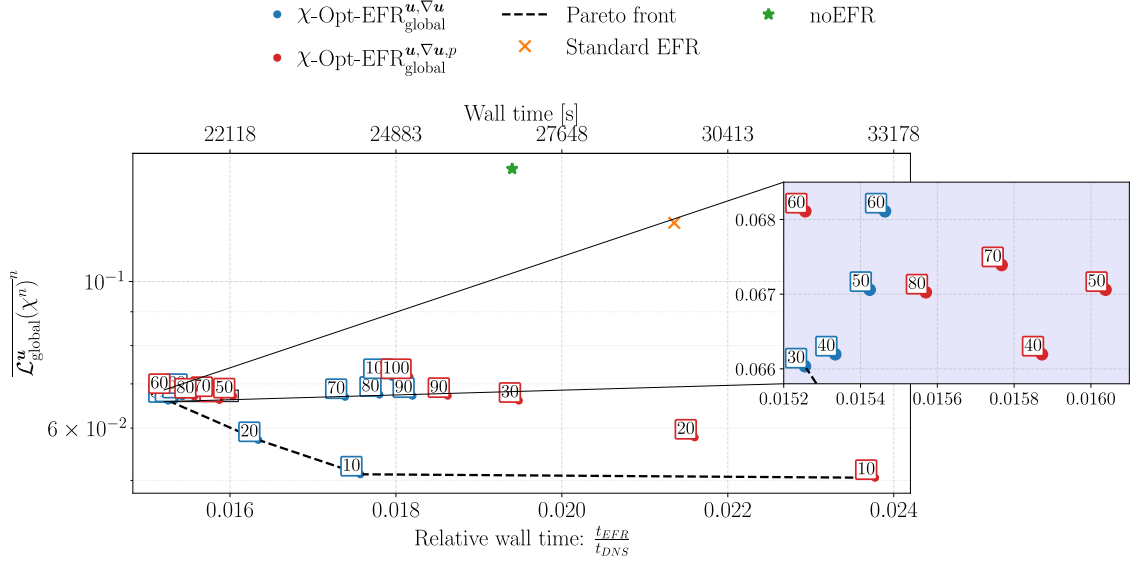
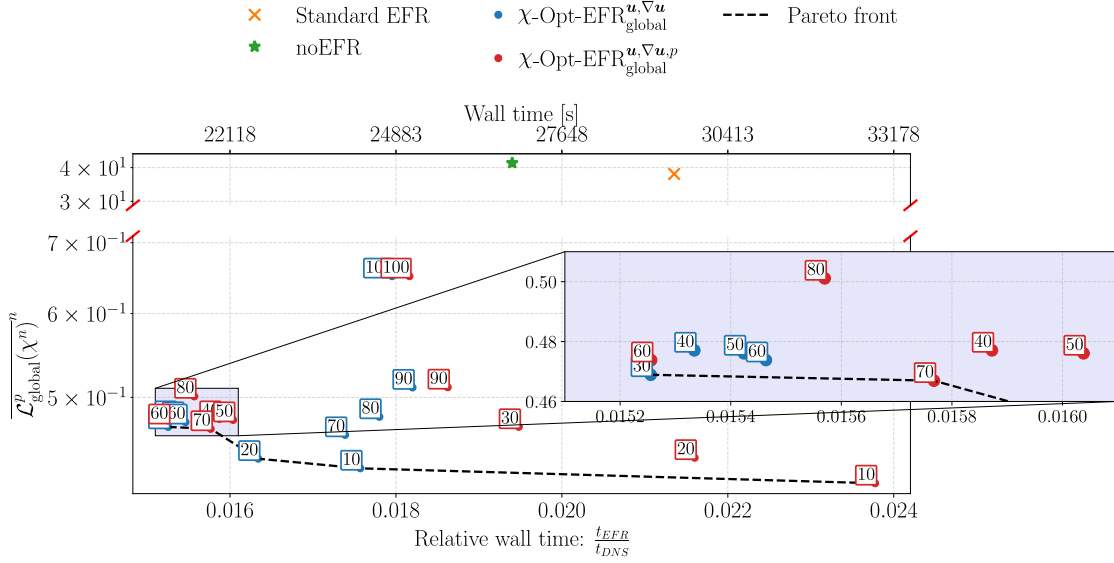
(A) Discrepancy in the velocity L^2 norm(B) Discrepancy in the pressure L^2 norm

FIGURE 10. Representation of how the optimization step affects the efficiency and the accuracy of the final velocity or pressure approximation in χ -Opt-EFR $_{\text{global}}^{u,\nabla u}$ and χ -Opt-EFR $_{\text{global}}^{u,\nabla u,p}$ simulations. The efficiency, on the x -axis, is measured through the relative wall clock time with respect to the DNS time. The accuracy, on the y -axis, is measured with respect to the L^2 velocity and pressure norms..

4.2. Numerical results for δ -Opt-EF. In this section, we present results of the δ -Opt-EF algorithms, namely the ones optimizing parameter $\delta(t)$, for a fixed relaxation parameter, $\chi = 1$. Figure 12 (A) shows the trend of the optimized filter parameter in time.

The results here are similar to the results obtained in Subsection 4.1 with the global optimization of parameter $\chi(t)$, namely $\delta(t)$ is oscillating, but in this case in the prescribed range $[1 \times 10^{-5}, 1 \times$

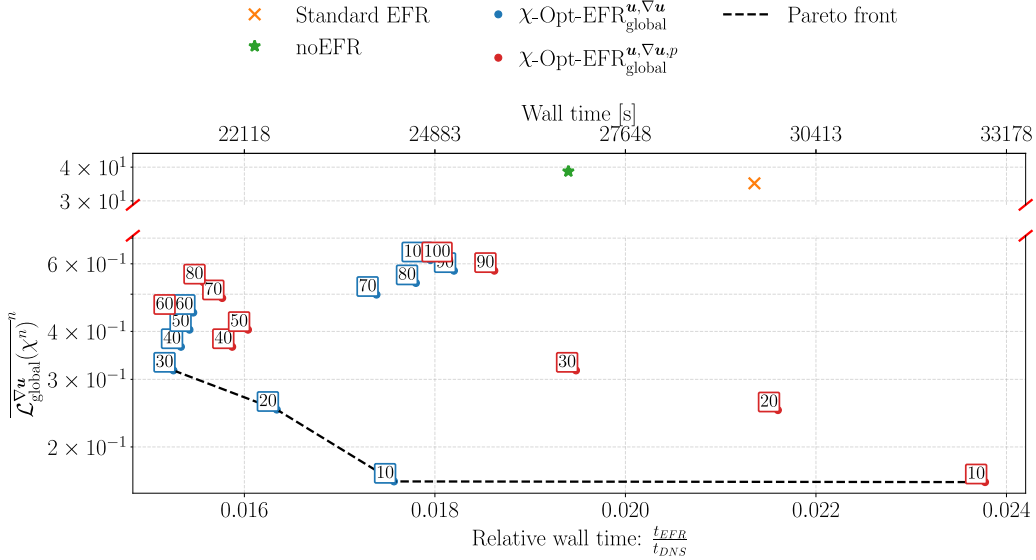
(A) Discrepancy on the velocity H^1 semi-norm

FIGURE 11. Representation of how the optimization step affects the efficiency and the accuracy of the final velocity or pressure approximation in χ -Opt-EFR $_{\text{global}}^{u, \nabla u}$ and χ -Opt-EFR $_{\text{global}}^{u, \nabla u, p}$ simulations. The efficiency, on the x -axis, is measured through the relative wall clock time with respect to the DNS time. The accuracy, on the y -axis, is measured with respect to the H^1 velocity seminorm.

10^{-3}]. In particular, in the δ -Opt-EF $_{\text{global}}^{u, \nabla u, p}$ algorithm, the optimal parameter converges to 1×10^{-3} in the first time steps, and then it oscillates but most of the time converges to 1×10^{-5} . Figure 12 (B) presents the distribution of the parameter values, and it shows that the most frequently occurring value is 1×10^{-5} in all cases. We note that the oscillating behavior between this minimum value and higher values is necessary to alleviate the spurious oscillations appearing in the solution.

The trend of the norms in Figures 13 and 14, and the graphical results in Figures 15 and 16 lead to the following conclusions:

- The optimized algorithms give a better representation of the reference fields, outperforming the over-diffusive approximation of standard EF with fixed δ ;
- Comparing the L^2 norms (Figures 13), we can see that the most accurate result is obtained using the δ -Opt-EF $_{\text{global}}^u$ algorithm, which directly includes the measured metric inside the objective function. However, this algorithm provides inaccurate results, as seen both from the L^2 pressure norm plots and the H^1 velocity norm plots. This is confirmed by the graphical results (Figures 15 and 16 (B)), which show noisy and poor approximations;
- The δ -Opt-EF $_{\text{global}}^{u, \nabla u}$ and the δ -Opt-EF $_{\text{global}}^{u, \nabla u, p}$ approaches are more accurate than the δ -Opt-EF $_{\text{global}}^u$ one, as can be seen from the velocity H^1 and the pressure L^2 norm plots. Also the graphical results (Figures 15 and 16 (C) and (D)) confirm a good agreement with the reference DNS data (displayed in Figures 15 and 16 (A));
- As noticed for the χ -Opt-EFR algorithms, the inclusion of the pressure contribution δ -Opt-EF $_{\text{global}}^{u, \nabla u, p}$ does not improve the pressure accuracy and negatively impacts the computational cost of the method.

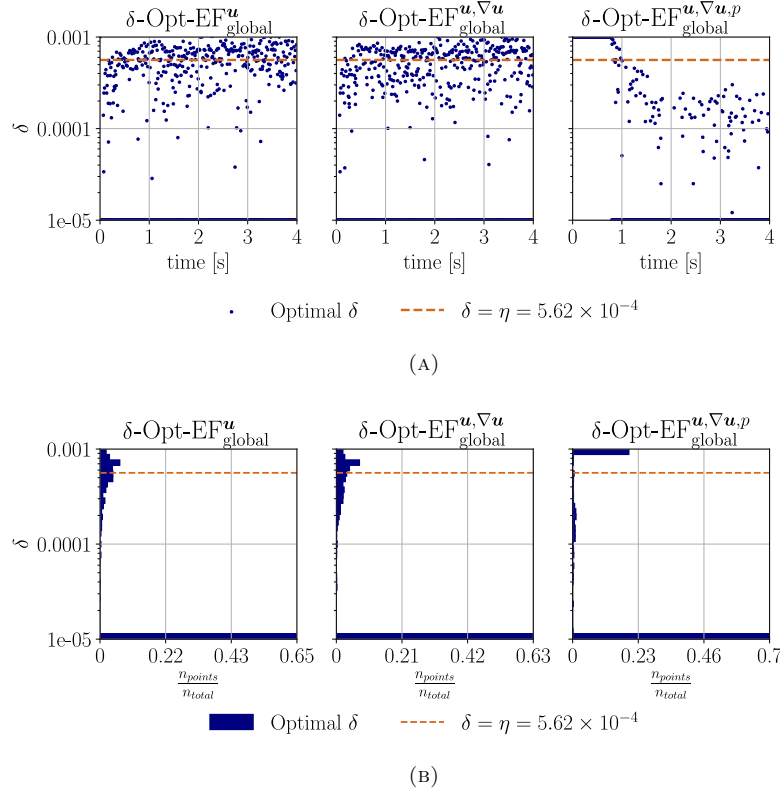


FIGURE 12. Optimal value of $\delta(t)$ in the δ -Opt-EF algorithms (A), and count of observations of the parameter values (B).

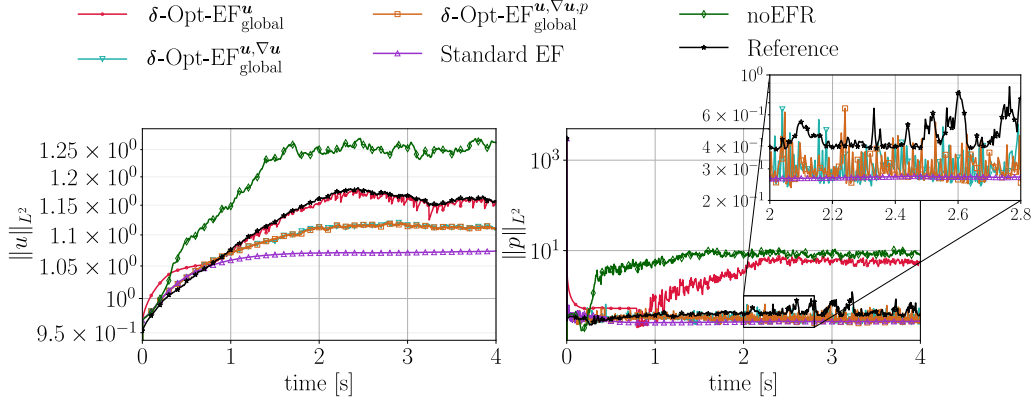


FIGURE 13. Velocity and pressure norms of δ -Opt-EF simulations, of the EF simulation with fixed δ , and of the reference solutions, projected on the coarse mesh.

4.2.1. *On the incompressibility constraint.* In EF simulations of incompressible flows, the incompressibility constraint is in general not satisfied when applying the differential filter in Step (II). In particular, the filter preserves the above-mentioned constraint under periodic boundary conditions, but not under no-slip boundary conditions [2, 22, 37]. A technique that can be exploited to tackle this problem is the so-called **grad-div stabilization**. This approach consists in penalizing the

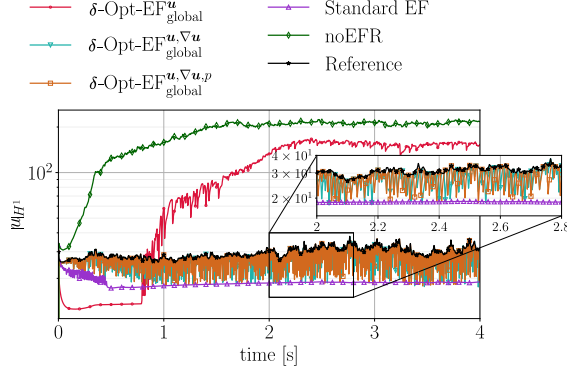


FIGURE 14. Velocity H^1 norms of δ -Opt-EF simulations, of the EF simulation with fixed δ , and of the reference solutions, projected on the coarse mesh.

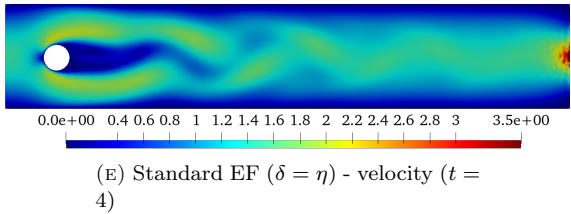
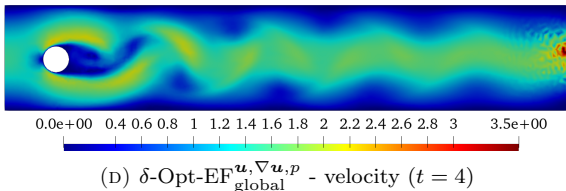
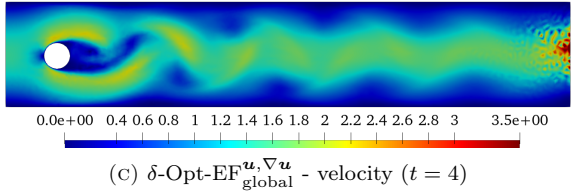
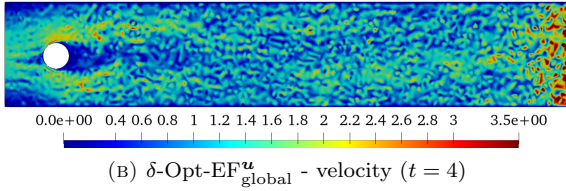
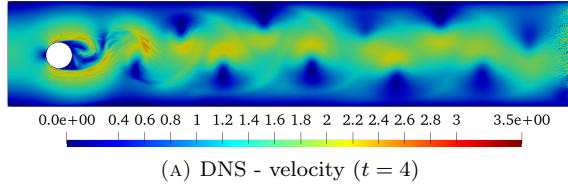


FIGURE 15. Velocity fields at final time $t = 4$ for standard EF, δ -Opt-EF, and reference DNS.

violation of the incompressibility constraint by adding in the differential filter equations a term of the form:

$$(14) \quad \gamma \nabla(\nabla \cdot \overline{\mathbf{w}^{n+1}}),$$

with $\gamma = 100$, as in [17]. The reader can find more details on the grad-div stabilization in [6, 18, 21].

As stated in [33], EFR simulations with $\chi \neq 1$ are typically characterized by low values of the velocity divergence, and the grad-div stabilization is not needed. However, such stabilization becomes necessary in EF simulations, namely when $\chi = 1$.

Although the investigation in Section 4.2 does not employ the grad-div stabilization, next we highlight how the results would change in case it is considered.

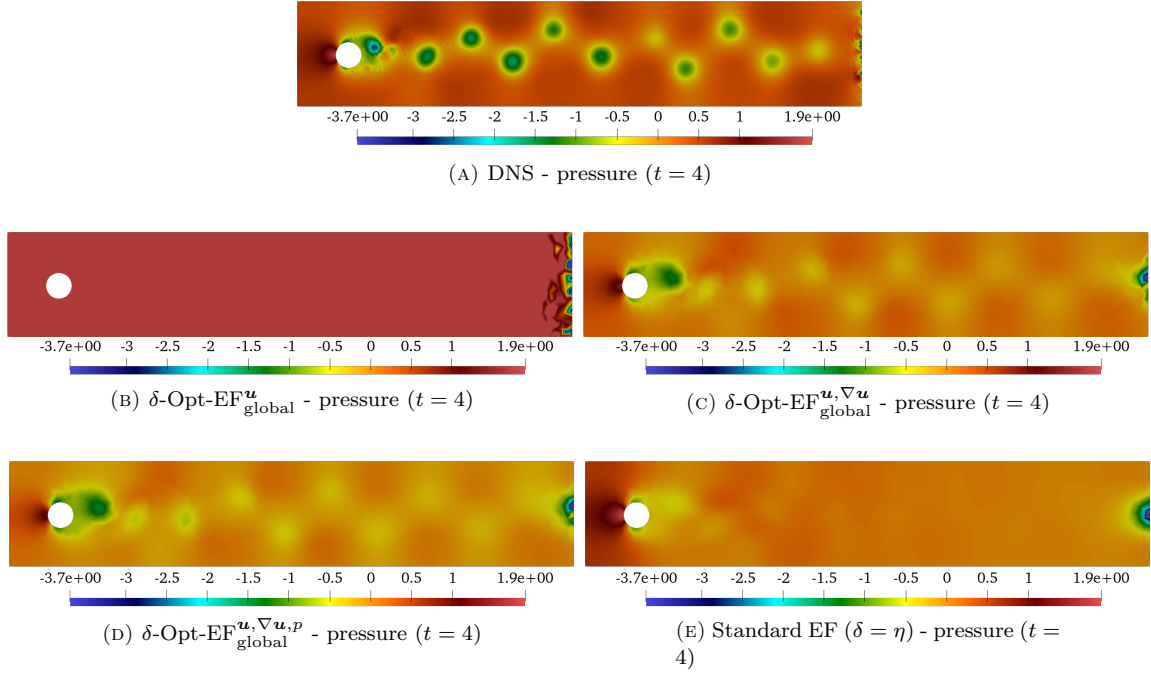


FIGURE 16. Pressure fields at final time $t = 4$ for standard EF, δ -Opt-EF, and reference DNS.

Figure 17 displays the variation in time of the space-average of the velocity divergence for the δ -Opt-EF $_{\text{global}}^{u, \nabla u}$ and δ -Opt-EF $_{\text{global}}^{u, \nabla u, p}$, with and without grad-div stabilization. It clearly shows that in the simulations without the grad-div stabilization the incompressibility constraint is not satisfied, while the grad-div stabilization fixes the issue.

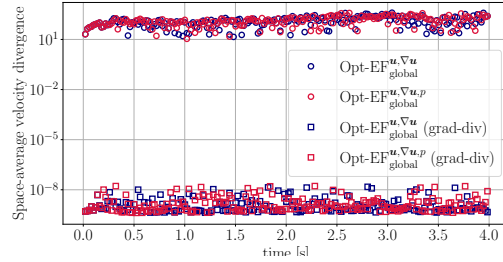


FIGURE 17. Variation in time of the space-averaged divergence of the velocity field, for δ -Opt-EF $_{\text{global}}^{u, \nabla u}$ and δ -Opt-EF $_{\text{global}}^{u, \nabla u, p}$ with and without grad-div stabilization.

Figures 18 and 19, similarly to Figures 13 and 14, display the time evolution of the velocity and pressure L^2 norms, and of the velocity H^1 seminorm, respectively. The plots suggest that the results with the grad-div stabilization are similar to the results obtained without stabilizing the differential filter. In particular, Figure 18 shows that the velocity norm is slightly closer to the reference norm in the last time instances of the simulation, while the pressure maintains the same chaotic behavior observed for the non-stabilized simulations.

We also provide a comparison of the global performance of simulations with and without grad-div stabilization in Table 4. The table reports the time average of the global contributions defined in

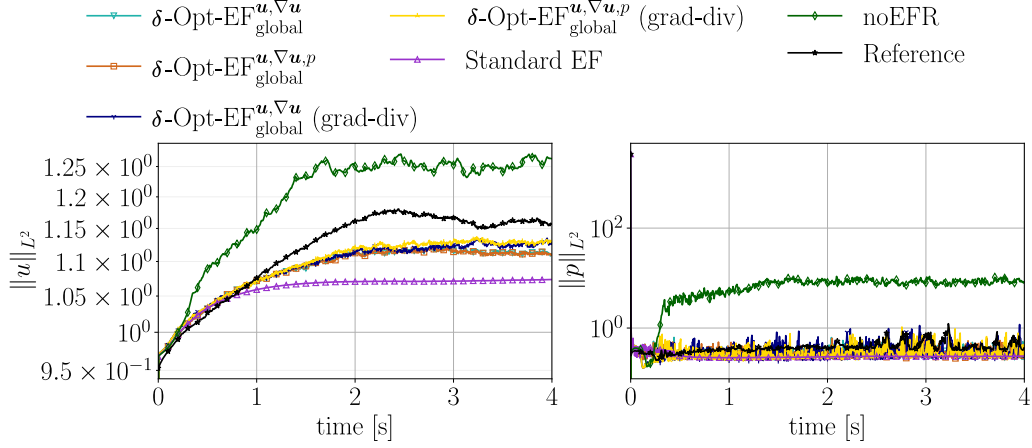


FIGURE 18. L^2 norms of the velocity and pressure fields in δ -Opt-EF simulations, with and without grad-div stabilization.

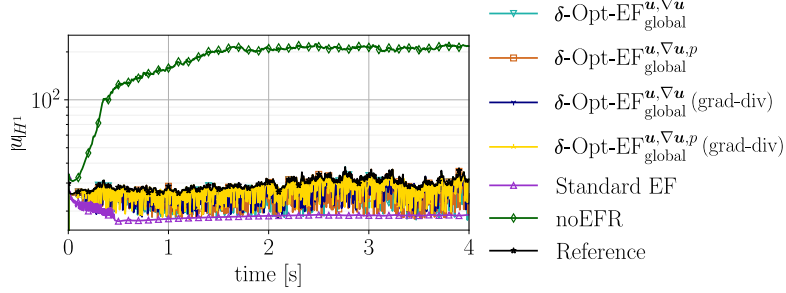


FIGURE 19. H^1 seminorm of the velocity field in δ -Opt-EF simulations, with and without grad-div stabilization.

Equations (8). We can notice that the grad-div simulations provide a slightly improved velocity, as already illustrated in the left plot in Figure 18. However, the pressure accuracy is considerably lower. Moreover, if we look at the graphical representations in Figures 20 and 21, we can notice that, at the final time instance, the grad-div simulation and the DNS lift have opposite signs, while the no-grad-div simulations better capture the flow behavior.

TABLE 4. Comparison between simulations with and without grad-div stabilization in terms of accuracy.

		$\overline{\mathcal{L}}_{\text{global}}^u(\delta^n)^n$	$\overline{\mathcal{L}}_{\text{global}}^{\nabla u}(\delta^n)^n$	$\overline{\mathcal{L}}_{\text{global}}^p(\delta^n)^n$
Without grad-div	δ -Opt-EF $_{\text{global}}^{u, \nabla u}$	0.0578	0.188	0.420
	δ -Opt-EF $_{\text{global}}^{u, \nabla u, p}$	0.0585	0.189	0.425
With grad-div	δ -Opt-EF $_{\text{global}}^{u, \nabla u}$ (grad-div)	0.0520	0.174	0.575
	δ -Opt-EF $_{\text{global}}^{u, \nabla u, p}$ (grad-div)	0.0469	0.167	0.560

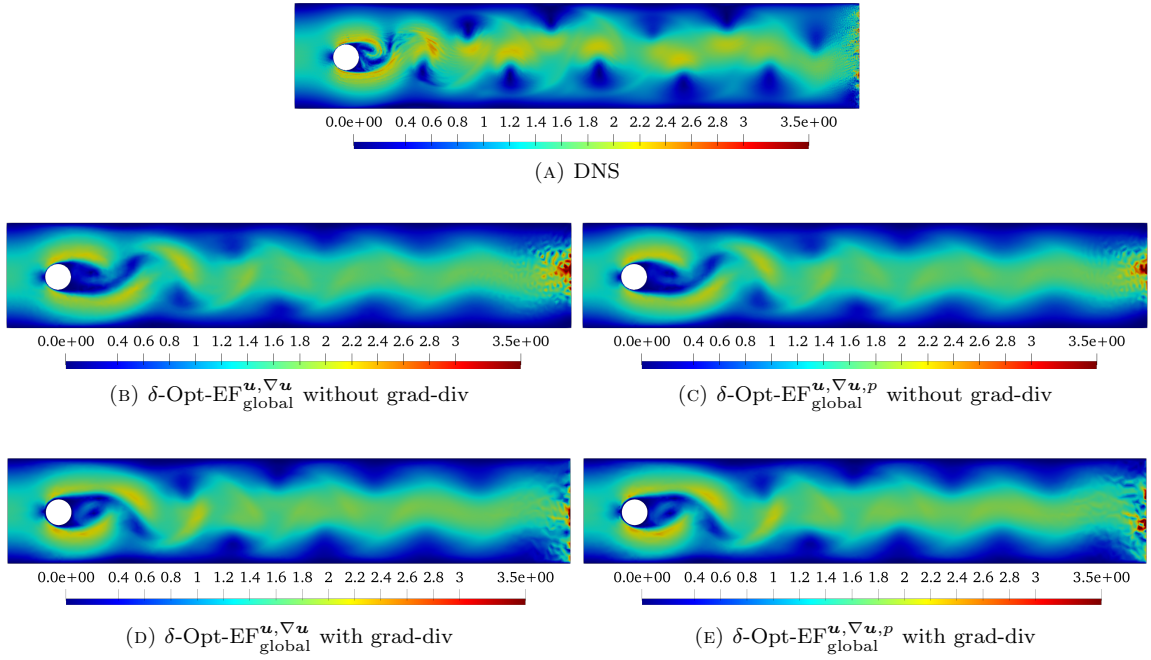


FIGURE 20. Velocity fields for δ -Opt-EF (with and without grad-div stabilization) and reference DNS at the final time instance ($t = 4$).

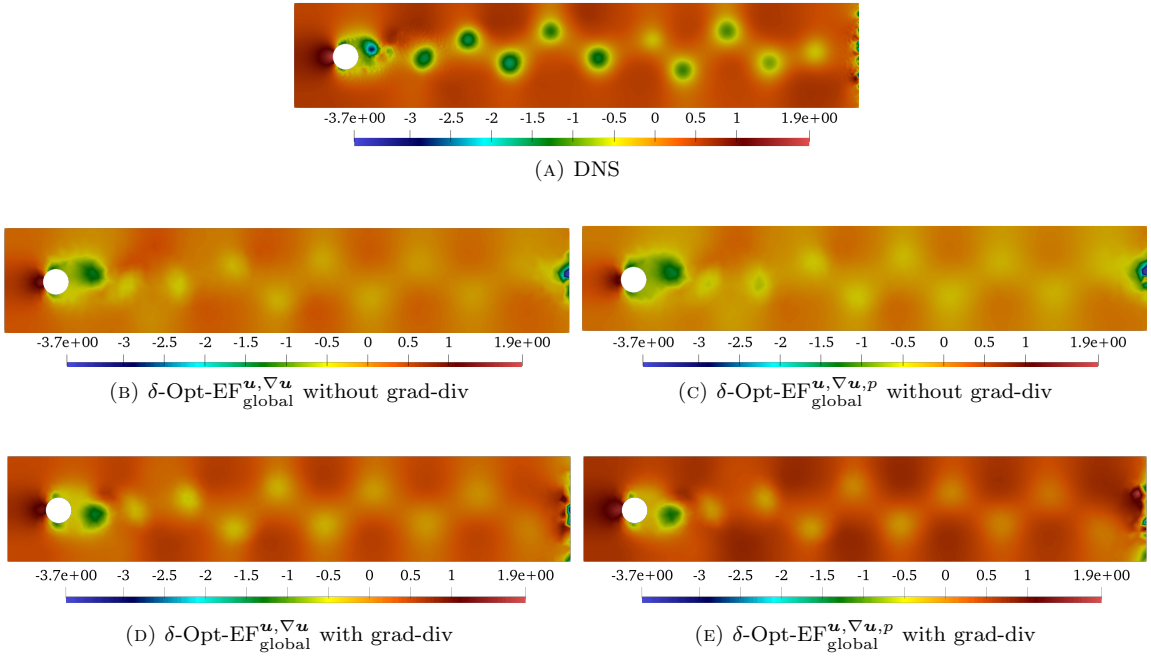


FIGURE 21. Pressure fields for δ -Opt-EF (with and without grad-div stabilization) and reference DNS at the final time instance ($t = 4$).

4.2.2. *On the role of the optimization step.* As in Section 4.1, we include here an analysis of the accuracy depending on the optimization step.

The conclusions are the same as those outlined for the χ -Opt-EFR algorithm. Indeed, as can be seen from Figures 22 and 23, also in this case the algorithm including the pressure contribution (δ -Opt-EF $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$) is slightly more accurate, but the δ -Opt-EF $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}}$ simulations are more efficient. We can, however, notice some differences between the χ -Opt-EFR and δ -Opt-EF strategies:

- (i) **The accuracy of the optimized EF/EFR.** Looking at the y -scale in Figures 22 and 10, we can notice that the χ -Opt-EFR algorithms provide in general more accurate results when keeping constant the filter parameter. Hence, optimizing only $\chi(t)$ and keeping the filter parameter fixed to the Kolmogorov scale produces lower errors than optimizing only $\delta(t)$ without the relaxation step.
- (ii) **The accuracy of the standard EF/EFR.** Standard EFR provides noisy results, while standard EF is over-diffusive but is closer to the DNS results. It is indeed more accurate than the standard EFR with $\chi \neq 1$. As an additional consideration, since it is more stable and does not exhibit spurious oscillations, the Newton method converges faster to the FE solution, and its wall clock time is considerably lower than that of the standard EFR.
- (iii) **The comparison in time between standard EF and δ -Opt-EF** The δ -Opt-EF $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}}$ approach proves to be more accurate than the standard EF when considering $\Delta t_{\text{opt}} = 10\Delta t$ and $\Delta t_{\text{opt}} = 20\Delta t$. However, differently from what happens for χ -Opt-EFR algorithms (Section 4.1), these methods are characterized by longer computational times than the standard EF. This is expected because EF is overdiffusive and, thus, facilitates the convergence of the Newton solver.

4.3. **Numerical results for $\delta\chi$ -Opt-EFR.** In this final part, we discuss the results of the double optimization algorithms $\delta\chi$ -Opt-EFR. Since the algorithms χ -Opt-EFR $_{\text{global}}^{\mathbf{u}}$ and δ -Opt-EF $_{\text{global}}^{\mathbf{u}}$ proved to be inaccurate in the previous subsections 4.1 and 4.2, we here only consider algorithms $\delta\chi$ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}}$ and $\delta\chi$ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$.

Figure 24 (A) shows the optimal parameters' trend in time for the two proposed algorithms. The results for parameter $\delta(t)$ are similar in the two cases. However, the relaxation parameter $\chi(t)$ has statistically higher values in algorithm $\delta\chi$ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$, as can be seen from the histogram in Figure 24 (B). Moreover, in the double optimizations the optimal $\chi(t)$ is almost always in the range $[1 \times 10^{-1}, 1]$, while in optimizations χ -Opt-EFR $_{\text{global}}$ (Figure 4) it has a more oscillating behavior and it also converges to smaller values.

The results for the L^2 and H^1 norms (Figures 25 and 26) are similar in the two cases considered.

If we also look at the graphical representations of the velocity and pressure fields at $t = 4$ in Figures 27 and 28 (C) and (D), the behavior is quite similar. However, the final pressure field is slightly more accurate when the functional takes also into account the pressure contribution, namely in $\delta\chi$ -Opt-EFR $_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$.

4.3.1. *On the role of the optimization step.* As in Sections 4.1 and 4.2, we include here an analysis of the role of the optimization step on the accuracy of the solution.

The results obtained optimizing only parameter $\chi(t)$ (χ -Opt-EFR approach) are more accurate than both the δ -Opt-EF results and the $\delta\chi$ -Opt-EFR results, as extensively discussed in Section 4.4. As a general observation concerning all the Pareto plots in Figures 10, 11, 22, 22, 29, and 30, the results obtained including the pressure contribution ($(\cdot)_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$) are only slightly more accurate than the results coming from the $(\cdot)_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}}$ algorithms. Moreover, computing the pressure field implies performing an additional evolve step at each optimization iteration, leading to larger wall clock time. This is particularly evident when comparing, for instance, the accuracy and wall clock time of simulations with $\Delta t_{\text{opt}} = 10\Delta t$ or $\Delta t_{\text{opt}} = 20\Delta t$.

4.4. **Final Discussion.** We here consider a comparison among the algorithms having the best performance in the previous sections, namely $(\cdot)_{\text{global}}^{\mathbf{u}, \nabla \mathbf{u}, p}$.

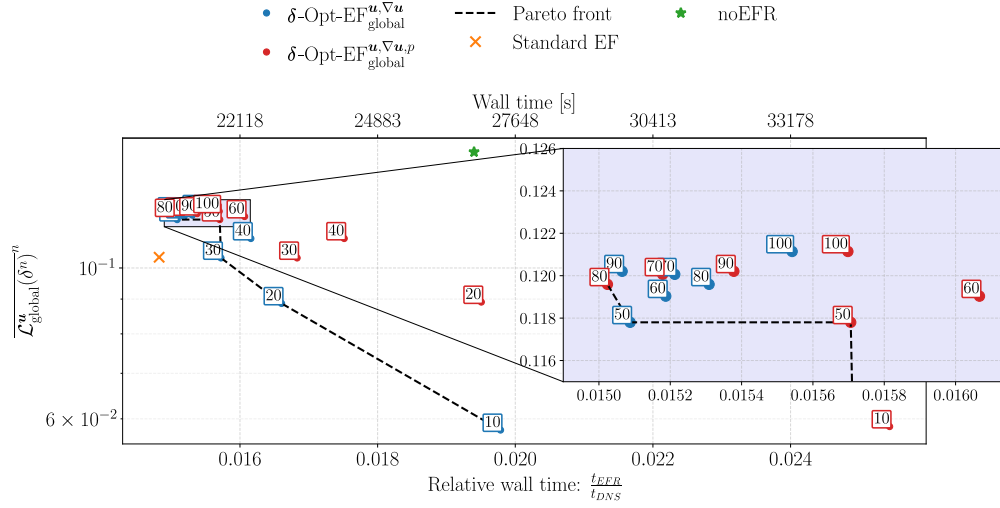
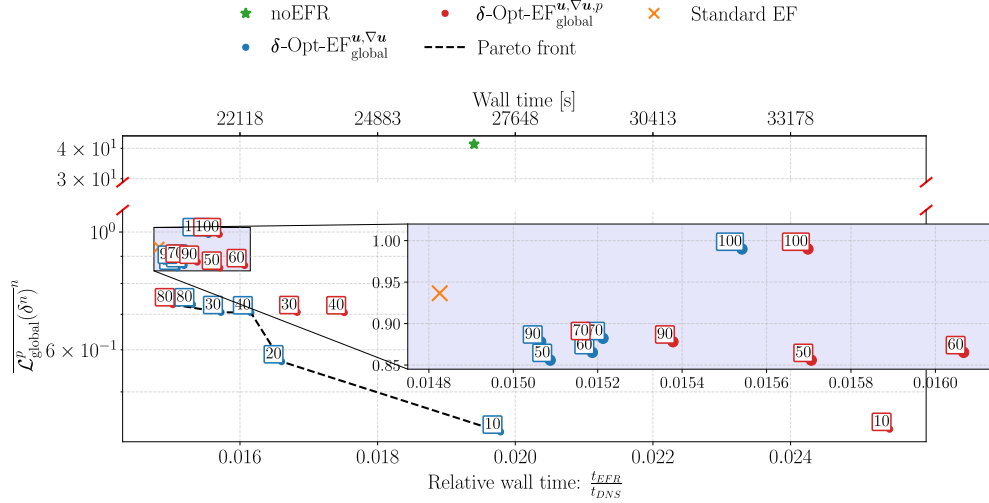
(A) Discrepancy on the velocity L^2 norm(B) Discrepancy on the pressure L^2 norm

FIGURE 22. Representation of how the optimization step affects the efficiency and the accuracy of the final velocity or pressure approximation in δ -Opt-EFR $_{\text{global}}^{u, \nabla u}$ and δ -Opt-EFR $_{\text{global}}^{u, \nabla u, p}$ simulations. The efficiency, on the x -axis, is measured through the relative wall clock time with respect to the DNS time. The accuracy, on the y -axis, is measured with respect to the L^2 velocity and pressure norms.

The comparison in the norms in Figures 31 and 32 show that all the results are similar. However, in the H^1 velocity norm, algorithm $\delta\chi$ -Opt-EFR $_{\text{global}}^{u, \nabla u, p}$ is less oscillating than the others, and is also slightly more accurate in the L^2 velocity norm.

In general, there is a consistent enhancement in the accuracy between the standard and the optimized EFR strategies. This improvement is accompanied by slightly longer times in the case of Algorithm $\delta\chi$ -Opt-EFR $_{\text{global}}^{u, \nabla u}$, but considerably longer times for strategy $\delta\chi$ -Opt-EFR $_{\text{global}}^{u, \nabla u, p}$, since

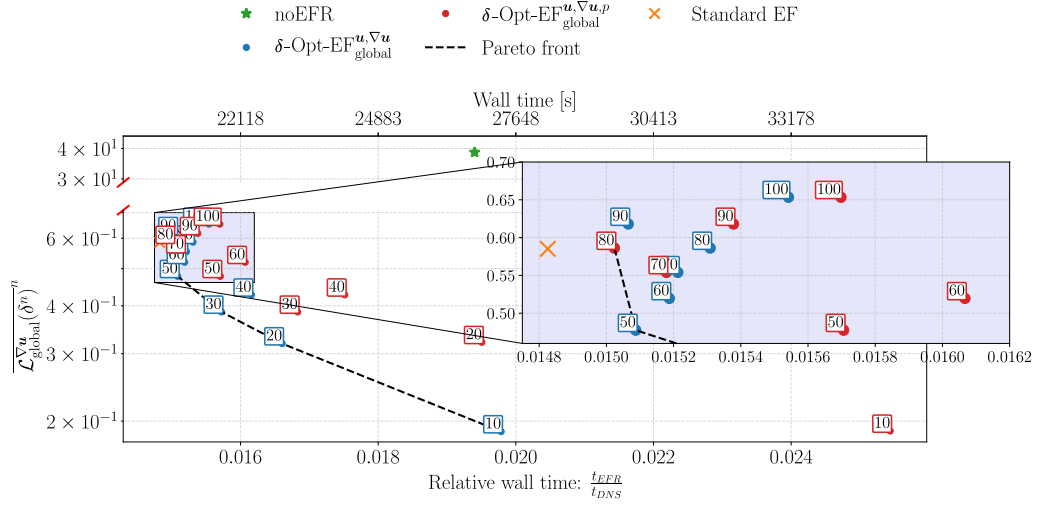
(A) Discrepancy on the velocity H^1 semi-norm

FIGURE 23. Representation of how the optimization step affects the efficiency and the accuracy of the final velocity or pressure approximation in δ -Opt-EFR $^{u, \nabla u}_{\text{global}}$ and δ -Opt-EFR $^{u, \nabla u, p}_{\text{global}}$ simulations. The efficiency, on the x -axis, is measured through the relative wall clock time with respect to the DNS time. The accuracy, on the y -axis, is measured with respect to the H^1 velocity seminorm.

it includes an evolve step within each optimization pass. $\delta\chi$ -Opt-EFR $^{u, \nabla u, p}_{\text{global}}$ slightly improves the accuracy obtained with $\delta\chi$ -Opt-EFR $^{u, \nabla u}_{\text{global}}$ in terms of velocity gradients and pressure discrepancy.

In addition, in what follows we report a series of considerations concerning the comparison among all the algorithms proposed in Sections 4.1, 4.2, and 4.3.

- The χ -Opt-EFR strategies optimizing local quantities, namely algorithms χ -Opt-EFR $^u_{\text{local}}$ and χ -Opt-EFR $^{u, \nabla u}_{\text{local}}$, provide over-diffusive results and are not able to fully capture the dynamics of the test case. For this reason, in Sections 4.2 and 4.3, we only consider the strategies with global loss contributions.
- The strategies of type $(\cdot)_{\text{global}}^u$, optimizing the discrepancy on the global quantity $\|\mathbf{u}\|_{L^2(\Omega)}$, lead to poor results. In particular, the optimized velocity field is characterized by spurious oscillations. That motivates the addition of the gradient contribution to the loss functional.
- The strategies of type $(\cdot)_{\text{global}}^{u, \nabla u}$, which include the discrepancy in both $\|\mathbf{u}\|_{L^2(\Omega)}$ and $\|\nabla \mathbf{u}\|_{L^2(\Omega)}$, provide the best results in terms of velocity accuracy. Therefore, the inclusion of the gradient contribution within the optimization process is indispensable for achieving favorable outcomes in velocity accuracy.
- The strategies considering the pressure contribution in the loss functional, namely $(\cdot)_{\text{global}}^{u, \nabla u, p}$, yield similar results to the algorithms $(\cdot)_{\text{global}}^{u, \nabla u}$ in terms of velocity accuracy. However, the inclusion of the pressure discrepancy in the loss functional leads to better results in terms of pressure accuracy.
- As discussed previously, the computational times of optimized EFR algorithms are comparable to the standard EFR in strategy $(\cdot)_{\text{global}}^{u, \nabla u}$, but with considerably better results. However, the addition of the pressure contribution in the loss functional leads to longer computational times, without a consistent improvement in the accuracy. Moreover, in all the optimized-EFR algorithms, there is a consistent gain in time with respect to the DNS simulation.

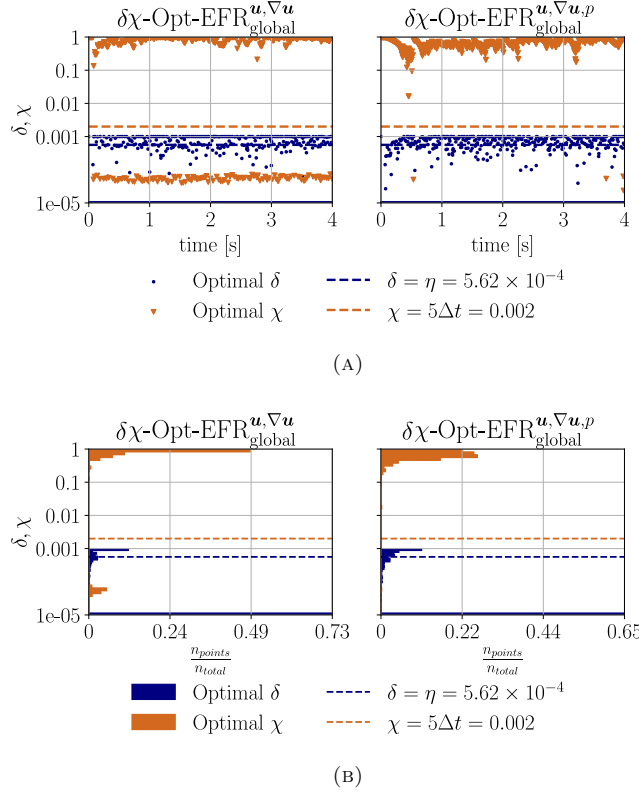


FIGURE 24. Optimal value of $\delta(t)$ and $\chi(t)$ in the $\delta\chi$ -Opt-EFR algorithms (A), and relative parameter distribution (B).

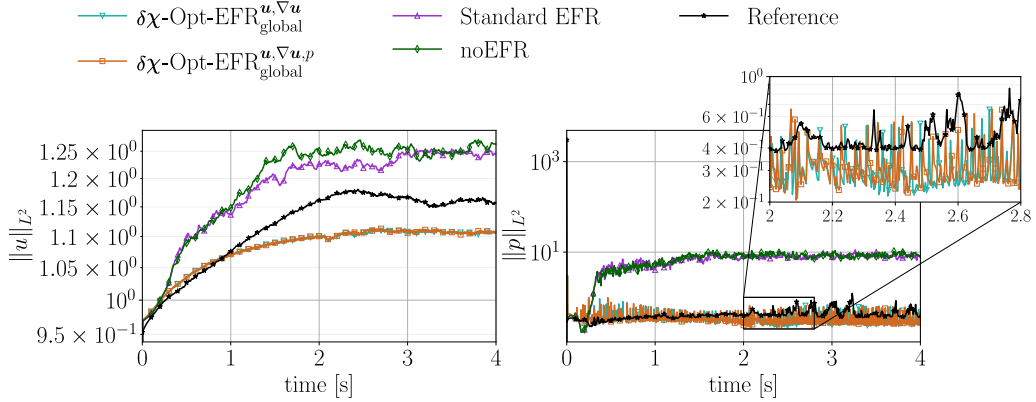


FIGURE 25. Velocity and pressure norms of $\delta\chi$ -Opt-EFR simulations and reference solutions projected on the coarse mesh.

- We can notice that all the algorithms of type $(\cdot)_{\text{global}}^{u, \nabla u}$ and $(\cdot)_{\text{global}}^{u, \nabla u, p}$ outperforms the results of standard EFR ($\delta = \eta$, $\chi = 5\Delta t$). Moreover, δ -Opt-EF $_{\text{global}}^{u, \nabla u}$ and δ -Opt-EF $_{\text{global}}^{u, \nabla u, p}$ with $\Delta t_{\text{opt}} = 10\Delta t$ or $\Delta t_{\text{opt}} = 20\Delta t$ outperform the results of standard EF ($\delta = \eta$). Indeed, standard and fixed values for the filter and the relaxation parameter lead either to spurious oscillations or to over-diffusive fields. Moreover, the computational time of standard EFR

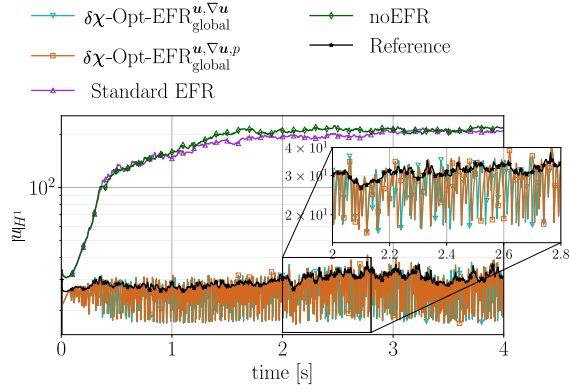


FIGURE 26. Velocity H^1 norms of $\delta\chi$ -Opt-EFR simulations and reference solutions projected on the coarse mesh.

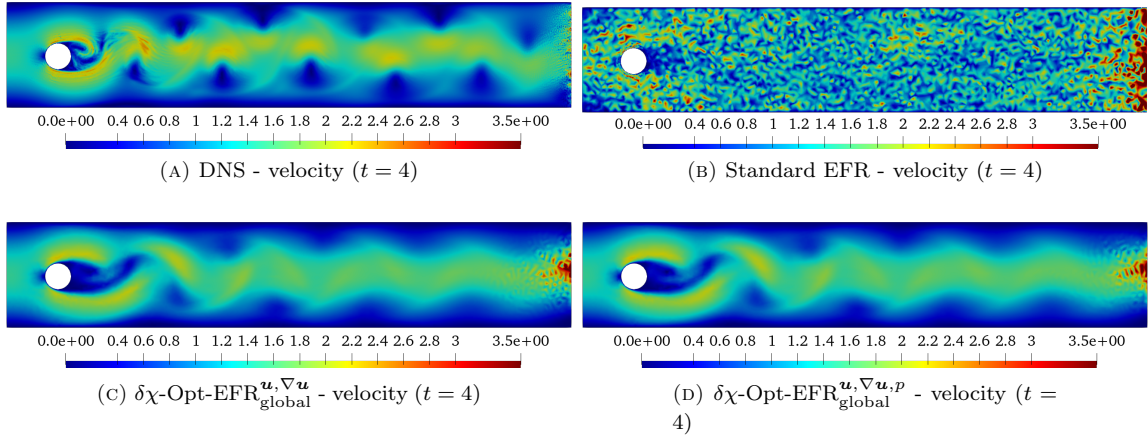


FIGURE 27. Velocity fields at final $t = 4$ for $\delta\chi$ -Opt-EFR simulations, DNS reference, and standard EFR.

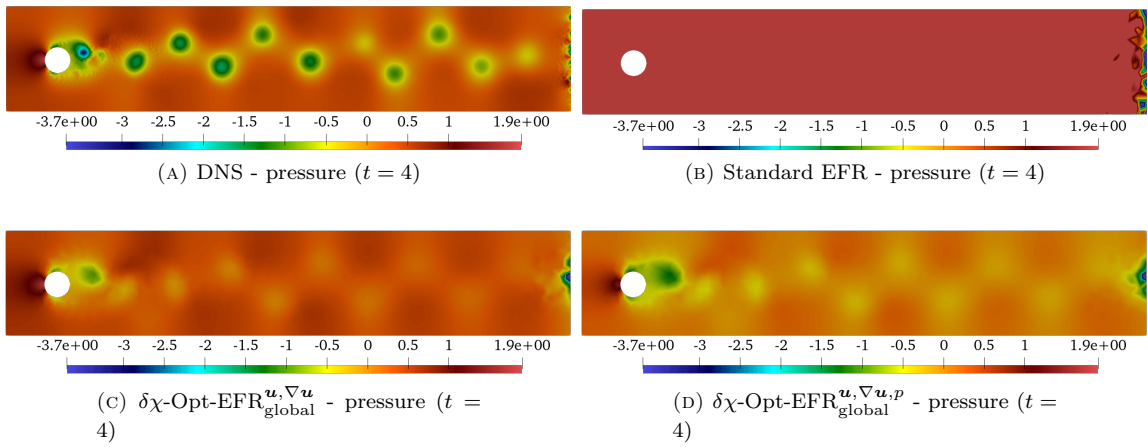


FIGURE 28. Pressure fields at final time $t = 4$ for $\delta\chi$ -Opt-EFR, DNS reference, and standard EFR.

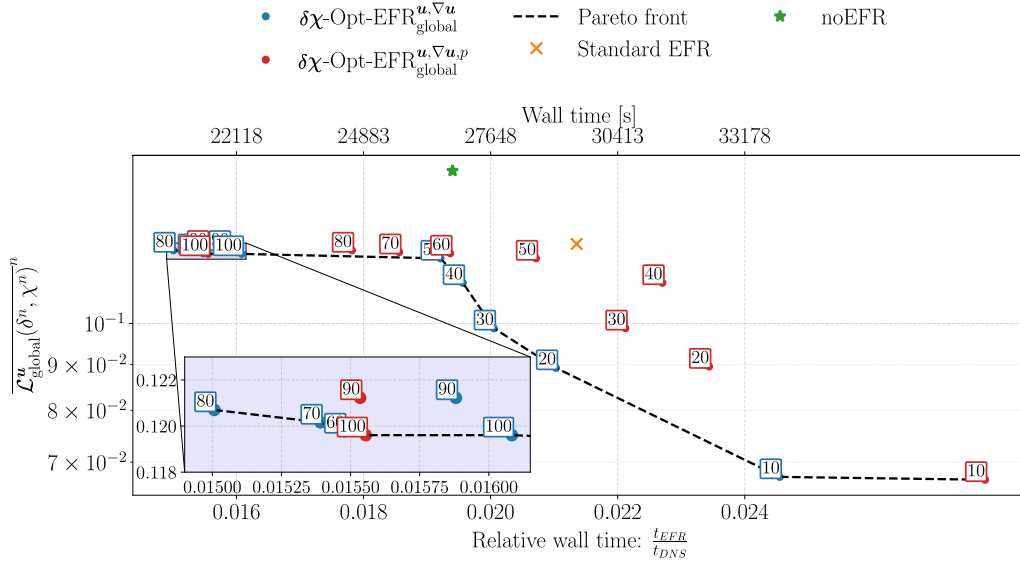
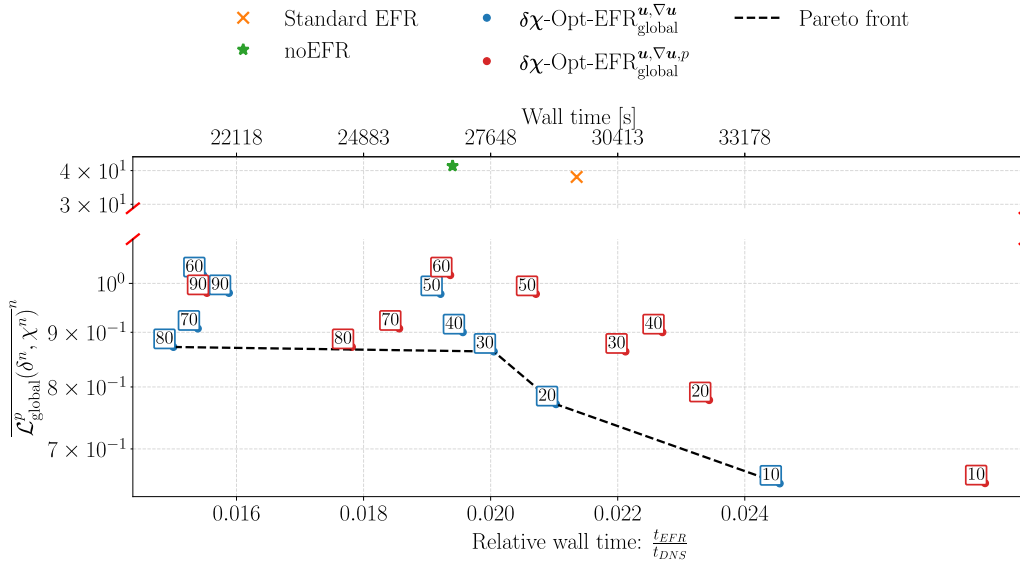
(A) Discrepancy on the velocity L^2 norm(B) Discrepancy on the pressure L^2 norm

FIGURE 29. Representation of how the optimization step affects the efficiency and the accuracy of the final velocity or pressure approximation in $\delta\chi$ -Opt-EFR $_{\text{global}}^{u,\nabla u}$ and $\delta\chi$ -Opt-EFR $_{\text{global}}^{u,\nabla u,p}$ simulations. The efficiency, on the x -axis, is measured through the relative wall clock time with respect to the DNS time. The accuracy, on the y -axis, is measured with the L^2 velocity and pressure norms.

is higher than that of the optimized methods because the simulation is not stable and the Newton method needs more iterations to converge to a solution. This suggests that the optimized strategies work also as numerical stabilizations.

- As a general observation, the velocity H^1 seminorm has an oscillatory behavior in all the examined cases. This is linked to a similar chaotic behavior of the optimal parameter values.

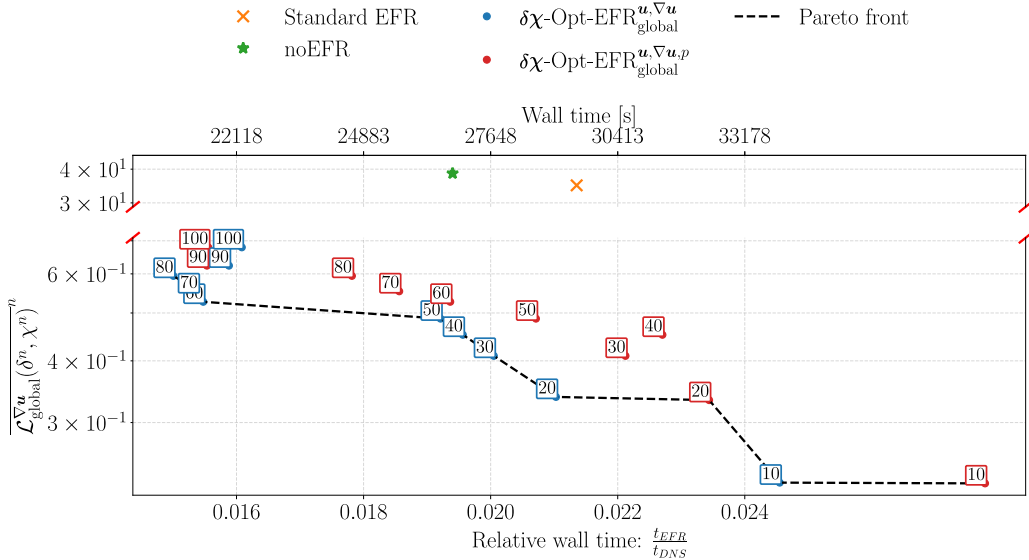
(A) Discrepancy on the velocity H^1 semi-norm

FIGURE 30. Representation of how the optimization step affects the efficiency and the accuracy of the final velocity or pressure approximation in χ -Opt-EFR $_{\text{global}}^{u, \nabla u}$ and χ -Opt-EFR $_{\text{global}}^{u, \nabla u, p}$ simulations. The efficiency, on the x -axis, is measured through the relative wall clock time with respect to the DNS time. The accuracy, on the y -axis, is measured with the H^1 velocity seminorm.

Indeed, the optimization algorithm minimizes the discrepancy in the velocity gradients' norm, so:

- If the norm is far from the reference one, i.e., the velocity starts to exhibit a noisy and nonphysical behavior, which means that the parameters are too small and the algorithm converges to large optimal values;
- Consequently, after Δt_{opt} , the norm is closer to the reference DNS, and the simulation is more stable. Hence, the simulation does not need anymore large filter radii and/or relaxation parameters, and the algorithm converges to smaller optimal values.

This mechanism repeats as the simulation evolves, leading to oscillatory behaviors in both parameters and norms.

5. CONCLUSIONS AND OUTLOOK

In this work, we make a significant contribution to the EFR regularization approach by proposing a novel data-driven automated tuning of the filter and relaxation parameters, δ and χ , respectively. We note that the literature gives guidelines for the value of the above-mentioned parameters. We emphasize, however, that these guidelines strongly depend on the considered test case. Moreover, a wrong choice of parameters highly influences the outcome of the simulations. Indeed, too large parameters may lead to over-diffusive flows, while small values may cause spurious oscillations and chaotic or noisy behavior, as explained in Section 2.2. In order to overcome these issues, we introduce the concept of time-dependent optimized parameters, and propose and investigate three novel optimization algorithms:

- χ -Opt-EFR, optimizing χ for fixed δ , presented in Section 3.1;
- δ -Opt-EF, optimizing δ for fixed $\chi = 1$, presented in Section 3.2;
- $\delta\chi$ -Opt-EFR, optimizing both δ and χ , presented in Section 3.3.

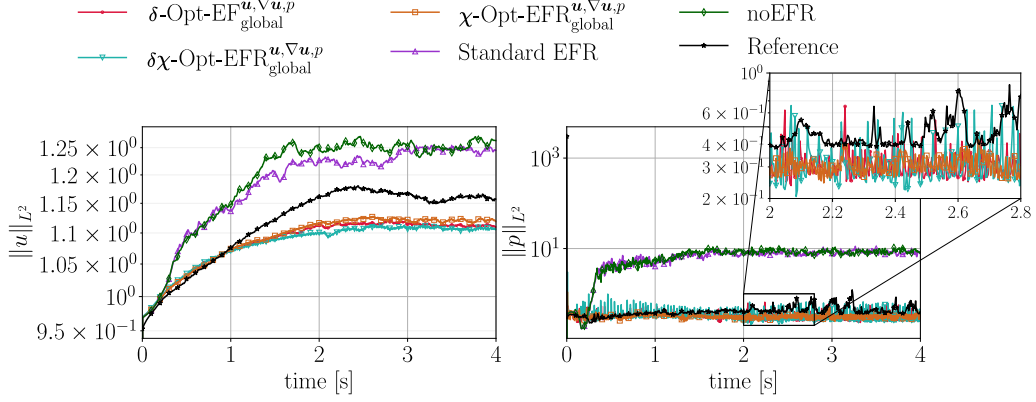


FIGURE 31. Velocity and pressure norms for algorithms $(\cdot)_{\text{global}}^{u, \nabla u, p}$ and reference solutions projected on the coarse mesh.

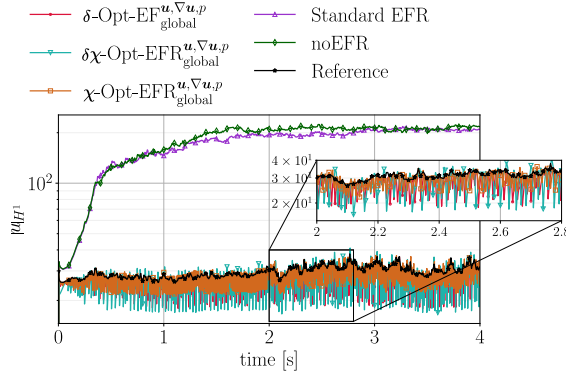


FIGURE 32. Velocity H^1 norms for algorithms $(\cdot)_{\text{global}}^{u, \nabla u, p}$ and reference solutions projected on the coarse mesh.

In each case, we investigate different objective functions, minimizing the discrepancy between the outcome of the EFR simulations (in an under-resolved regime) and a reference DNS (i.e., noEFR performed on a resolved grid). Furthermore, we investigate two types of objective functions: local objective functions, which consist of local quantities of interest, and global objective functions, which consist of global quantities of interest. We also consider three types of quantities of interest: velocity, velocity gradient, and pressure.

We perform the numerical simulations on the test case of incompressible unsteady flow past a cylinder at a fixed Reynolds number $Re = 1000$. The three new optimization algorithms, χ -Opt-EFR, δ -Opt-EFR, and $\delta\chi$ -Opt-EFR, are tested in Sections 4.1, 4.2, and 4.3, respectively. Moreover, a sensitivity study on the role of the optimization step is performed for the best-performing algorithms.

The numerical results yield the following conclusions: First, the optimized-EFR simulations always provide better results than no-EFR and EFR with fixed parameters. Second, the best results are achieved by including in the objective function the weighted discrepancies of the velocity gradients with respect to the reference simulation. Third, the global objective functions always yield more accurate results than the corresponding local objective functions. Fourth, the choice of the weights in the functional can affect the solution, but finding the optimal weights was beyond the goal of the manuscript and, hence, we kept the weights fixed to 1. Finally, our numerical investigation showed

that the three new optimization algorithms can recover the main features of the flow dynamics, while the χ -Opt-EFR class proves to be slightly more accurate than the other tested approaches.

As a possible future research direction, the authors would like to consider the application of machine learning approaches, such as reinforcement learning, in order to perform the training phase of the new optimization algorithms separately from the simulation. In this way, the training is performed only once and employs the data from a specific time window, allowing the prediction of the solution in a time extrapolation setting. Another possible outlook for the project is to extend the new optimization strategies to the framework of reduced order models by comparing the optimal full order model parameters with the optimal reduced order model parameters.

ACKNOWLEDGMENTS

This work was partially funded by INdAM-GNCS: Istituto Nazionale di Alta Matematica — Gruppo Nazionale di Calcolo Scientifico, and by European Union’s Horizon 2020 research and innovation programme under the Marie Skłodowska-Curie Actions, grant agreement 872442 (ARIA). MS and GR thank the “20227K44ME - Full and Reduced order modelling of coupled systems: focus on non-matching methods and automatic learning (FaReX)” project – funded by European Union – Next Generation EU within the PRIN 2022 program (D.D. 104 - 02/02/2022 Ministero dell’Università e della Ricerca). GR acknowledges the consortium iNEST (Interconnected North-East Innovation Ecosystem), Piano Nazionale di Ripresa e Resilienza (PNRR) – Missione 4 Componente 2, Investimento 1.5 – D.D. 1058 23/06/2022, ECS00000043, supported by the European Union’s NextGenerationEU program. MS thanks the ECCOMAS EYIC Grant “CRAFT: Control and Reg-reduction in Applications for Flow Turbulence”. MG thanks the PON “Research and Innovation on Green related issues” FSE REACT-EU 2021 project. TI was funded by the National Science Foundation through grant DMS-2012253. This manuscript reflects only the authors’ views and opinions and the Ministry cannot be considered responsible for them.

Author contributions. Conceptualization: Anna Ivagnes, Maria Strazzullo, Traian Iliescu; Methodology: Anna Ivagnes, Maria Strazzullo, Traian Iliescu; Formal analysis and investigation: Anna Ivagnes; Writing - original draft preparation: Anna Ivagnes, Maria Strazzullo, Traian Iliescu; Writing - review and editing: Maria Strazzullo, Michele Girfoglio, Traian Iliescu; Funding acquisition: Gianluigi Rozza; Supervision: Traian Iliescu, Gianluigi Rozza.

Financial disclosure. None reported.

Conflict of interest. No potential competing interest was reported by the authors.

REFERENCES

- [1] Berselli, Luigi C and Iliescu, Traian and Layton, William J and others. *Mathematics of large eddy simulation of turbulent flows*, volume 2. Springer, 2006.
- [2] Bertagna, L and Quaini, A and Veneziani, A. Deconvolution-based nonlinear filtering for incompressible flows at moderately large Reynolds numbers. *International Journal for Numerical Methods in Fluids*, 81(8):463–488, 2016.
- [3] Besabe, Lander and Girfoglio, Michele and Quaini, Annalisa and Rozza, Gianluigi. Linear and nonlinear filtering for a two-layer quasi-geostrophic ocean model. *Applied Mathematics and Computation*, 488:129121, 2025.
- [4] Boyd, John P. *Chebyshev and Fourier spectral methods*. Courier Corporation, 2001.
- [5] Canuto, Claudio and Hussaini, M Yousuff and Quarteroni, Alfio and Zang, Thomas A. Some Algorithms for Unsteady Navier—Stokes Equations. *Spectral Methods in Fluid Dynamics*, pages 201–239, 1988.
- [6] DeCaria, V and Layton, W and Pakzad, A and Rong, Y and Sahin, NİYAZI and Zhao, H. On the determination of the grad-div criterion. *Journal of Mathematical Analysis and Applications*, 467(2):1032–1037, 2018.
- [7] Ervin, Vincent J and Layton, William J and Neda, Monika. Numerical analysis of filter-based stabilization for evolution equations. *SIAM Journal on Numerical Analysis*, 50(5):2307–2335, 2012.
- [8] Fabio Zoccolan and Maria Strazzullo and Gianluigi Rozza. A Streamline Upwind Petrov-Galerkin Reduced Order Method for Advection-Dominated Partial Differential Equations Under Optimal Control. *Computational Methods in Applied Mathematics*, 2024.
- [9] Fabio Zoccolan and Maria Strazzullo and Gianluigi Rozza. Stabilized weighted reduced order methods for parametrized advection-dominated optimal control problems governed by partial differential equations with random inputs. *Journal of Numerical Mathematics*, 2024.

- [10] Fischer, P. and Kruse, J. and Mullen, J. and Tufo, H. and Lottes, J. and Kerkemeier, S. Nek5000—open source spectral element CFD solver. Argonne National Laboratory, Mathematics and Computer Science Division, Argonne, IL, 2008.
- [11] Fischer, Paul and Mullen, Julia. Filter-based stabilization of spectral element methods. *Comptes Rendus de l'Académie des Sciences-Series I-Mathematics*, 332(3):265–270, 2001.
- [12] Germano, Massimo. Differential filters for the large eddy numerical simulation of turbulent flows. *The Physics of fluids*, 29(6):1755–1757, 1986.
- [13] Germano, Massimo. Differential filters of elliptic type. *The Physics of fluids*, 29(6):1757–1758, 1986.
- [14] Girfoglio, Michele and Quaini, Annalisa and Rozza, Gianluigi. A Finite Volume approximation of the Navier-Stokes equations with nonlinear filtering stabilization. *Computers & Fluids*, 187:27–45, 2019.
- [15] Girfoglio, Michele and Quaini, Annalisa and Rozza, Gianluigi. Fluid-structure interaction simulations with a LES filtering approach in. *Communications in Applied and Industrial Mathematics*, 12(1):13–28, 2021.
- [16] Girfoglio, Michele and Quaini, Annalisa and Rozza, Gianluigi. A novel Large Eddy Simulation model for the Quasi-Geostrophic equations in a Finite Volume setting. *Journal of Computational and Applied Mathematics*, 418:114656, 2023.
- [17] N. Heavner. Locally chosen grad-div stabilization parameters for finite element discretizations of incompressible flow problems. *SIAM Undergraduate Research Online (SIURO)*, 7:SO1278, 2017.
- [18] John, Volker and Linke, Alexander and Merdon, Christian and Neilan, Michael and Rebholz, Leo G. On the divergence constraint in mixed finite element methods for incompressible flows. *SIAM review*, 59(3):492–544, 2017.
- [19] Kaneko, K. and Tsai, P.-H. NekROM. <https://github.com/Nek5000/NekROM>.
- [20] Layton, W. J. and Rebholz, L. G. *Approximate Deconvolution Models of Turbulence: Analysis, Phenomenology and Numerical Analysis*, volume 2042. Springer Berlin Heidelberg, 2012.
- [21] Layton, William and Manica, Carolina C and Neda, Monika and Olshanskii, Maxim and Rebholz, Leo G. On the accuracy of the rotation form in simulations of the Navier–Stokes equations. *Journal of Computational Physics*, 228(9):3433–3447, 2009.
- [22] Layton, William and Manica, Carolina C and Neda, Monika and Rebholz, Leo G. Numerical analysis and computational testing of a high accuracy Leray-deconvolution model of turbulence. *Numerical Methods for Partial Differential Equations: An International Journal*, 24(2):555–582, 2008.
- [23] Mou, C. and Merzari, E. and San, O. and Iliescu, T. An Energy-Based Lengthscale for Reduced Order Models of Turbulent Flows. *Nuclear Engineering and Design*, 412:112454, 2023.
- [24] Mullen, Julie S and Fischer, Paul F. Filtering techniques for complex geometry fluid flows. *Communications in numerical methods in engineering*, 15(1):9–18, 1999.
- [25] Olshanskii, M. A. and Xiong, X. A connection between filter stabilization and eddy viscosity models. *Numerical Methods for Partial Differential Equations*, 29(6):2061–2080, 2013.
- [26] Pasquetti, R and Xu, C.J. Comments on “Filter-based stabilization of spectral element methods”. *Journal of Computational Physics*, 182(2):646–650, 2002.
- [27] Philip, E and Elizabeth, WONG. Sequential quadratic programming methods. UCSD Department of Mathematics Technical Report NA-10-03 August, 2010.
- [28] Quaini, Annalisa and San, Omer and Veneziani, Alessandro and Iliescu, Traian. Bridging Large Eddy Simulation and Reduced Order Modeling of Convection-Dominated Flows through Spatial Filtering: Review and Perspectives. *arXiv preprint arXiv:2407.00231*, 2024.
- [29] T. C. Rebollo and R. Lewandowski. *Mathematical and Numerical Foundations of Turbulence Models and Applications*. Springer, 2014.
- [30] Rezaian, E. and Duraisamy, K. Predictive Modeling of Complex Flows using Regularized Conditionally Parameterized Graph Neural Networks. In *American Institute of Aeronautics and Astronautics (AIAA) SCITECH 2023 Forum*, page 1284. Aerospace Research Central, 2023.
- [31] Strazzullo, Maria and Ballarin, Francesco and Iliescu, Traian and Canuto, Claudio. New Feedback Control and Adaptive Evolve-Filter-Relax Regularization for the Navier-Stokes Equations in the Convection-Dominated Regime. *arXiv preprint arXiv:2307.00675*, 2023.
- [32] Strazzullo, Maria and Ballarin, Francesco and Iliescu, Traian and Rebollo, Tomás Chacón. Variational Multiscale Evolve and Filter Strategies for Convection-Dominated Flows. *arXiv preprint arXiv:2411.13957*, 2024.
- [33] Strazzullo, Maria and Girfoglio, Michele and Ballarin, Francesco and Iliescu, Traian and Rozza, Gianluigi. Consistency of the full and reduced order models for evolve-filter-relax regularization of convection-dominated, marginally-resolved flows. *International Journal for Numerical Methods in Engineering*, 123(14):3148–3178, 2022.
- [34] Takhirov, A. and Lozovskiy, A. Computationally efficient modular nonlinear filter stabilization for high Reynolds number flows. *Advances in Computational Mathematics*, 44:295–325, 2018.
- [35] Tsai, P. H. *Parametric model order reduction development for Navier-Stokes equations from 2D chaotic to 3D turbulent flow problems*. PhD thesis, University of Illinois at Urbana-Champaign, Champaign, IL, Stati Uniti, 2023.

- [36] Tsai, P. H. and Fischer, P. and Iliescu, T. A time-relaxation reduced order model for the turbulent channel flow. Journal of Computational Physics, 521:113563, 2025.
- [37] Van Reeuwijk, M and Jonker, HJJ and Hanjalić, K. Incompressibility of the Leray- α model for wall-bounded flows. Physics of Fluids, 18(1), 2006.
- [38] Wells, David and Wang, Zhu and Xie, Xuping and Iliescu, Traian. An evolve-then-filter regularized reduced order model for convection-dominated flows. International Journal for Numerical Methods in Fluids, 84(10):598–615, 2017.
- [39] Wilson, RB. A simplicial method for convex programming. Harvard University: Cambridge, MA, USA, 1963.
- [40] Xie, X. and Bao, F. and Webster, C. G. Evolve filter stabilization reduced-order model for stochastic Burgers equation. Fluids, 3(4):84, 2018.
- [41] H. Xu. Efficient modeling of the incompressible flow with moderate large Reynolds numbers using a deconvolution-based Leray model: analysis, uncertainty quantification and application in aortic dissections. Online, 2020.
- [42] Xu, Huijuan and Baroli, Davide and Di Massimo, Francesca and Quaini, Annalisa and Veneziani, Alessandro. Backflow stabilization by deconvolution-based large eddy simulation modeling. Journal of Computational Physics, 404:109103, 2020.