

Holographic Metasurfaces Enabling Wave Computing for 6G: Status Overview, Challenges, and Future Research Trends

Zahra Rahimian Omam, Hamidreza Taghvaei, Ali Araghi, María García-Fernandez, Guillermo Álvarez-Narciandi, George C. Alexandropoulos, Okan Yurduseven, and Mohsen Khalily

Abstract—Recent advancements in wave computing using metasurfaces are poised to transform wireless communications by enabling high-speed, energy-efficient, and highly parallelized signal processing. These capabilities are essential to meet the ultra-high data rates of up to 1 terabit per second and minimal latency as low as 1 millisecond required by next-generation wireless networks. Diverging from traditional digital processing, wave computing adopts continuous analog signals to foster innovative functions such as over-the-air computation, integrated sensing and communications, computational electromagnetic imaging, and physical-layer security. This article explores the potential of reconfigurable multi-functional metasurfaces in wave computing, emphasizing their pivotal role in facilitating seamless communications and addressing the escalating computational demands for sixth generation (6G) networks. As artificial intelligence has become one of the most prominent and rapidly advancing fields of research over the last decade, we also introduce a wave-domain-based machine learning approach aimed at achieving power-efficient, fast training and computation. Future research directions are discussed, underscoring how metasurface-based systems can merge computation with communication to innovate components of 6G networks, thus creating smarter, faster, and more adaptable wireless infrastructures.

I. INTRODUCTION

THE rapidly evolving technology of reconfigurable metasurfaces is expected to revolutionize next-generation extremely large transceiver radio-frequency front-ends [1] as well as enable dynamic, over-the-air manipulation of information-bearing signals [2]. These metasurfaces, typically composed of metallic patches or dielectric engravings, offer tunable responses to impinging electromagnetic (EM) waves. They can be configured in planar or multilayered structures with subwavelength thickness and inter-element spacings close to subwavelength scale. Reconfigurable Intelligent Surfaces (RISs), featuring diverse hardware architectures and functionalities—sometimes implemented simultaneously across time, frequency, and space—are increasingly recognized as scalable, cost-effective, and power-efficient components in next-generation wireless communication systems. These systems pursue a broad spectrum of performance objectives, ranging from extending signal coverage and enhancing energy efficiency to integrating sensing and communications (ISAC) [2] and achieving holographic-type spatiotemporal focusing [3].

The vision for sixth generation (6G) wireless networks is converging towards the need for a unified communications, sensing, and computing platform [1]–[3], with the ambition to offer 1 terabit per second data rate and 1 millisecond

latency applications with a wide range of devices, in terms of power consumption and computational capabilities. However, as of today, computing tasks are predominantly accomplished by electronic digital processors, which sometimes are specifically intended for computationally demanding applications (e.g., inference and super-resolution sensing). This in turn constitutes a prohibitive component in terms of size, cost, and power consumption for various lightweight devices, like those comprised in the internet-of-things. The limitations inherent to the design of general-purpose digital processing units have prompted in the last decade the exploration of alternative computing paradigms, such as application-specific integrated circuits and graphics processing units (GPUs), as well as quantum and wave-domain computing [4]–[6]. The last computation paradigm, which is the topic of this article, capitalizes on the inherent properties of the over-the-air propagation of EM signals which offer degrees of freedom for implementing diverse computing tasks (e.g., image processing, edge detection, equation solving, and machine learning) at the speed of light and with increased energy efficiency. Wave computing employs continuous analog signals, allowing for highly parallel processing capabilities and significant reductions in power consumption. This advantageous feature of over-the-air computations contrasts sharply with traditional complex digital computing approaches that rely on discrete binary states.

Wave computing is mainly realized via metamaterials [4]–[6], whose responses can be dynamically engineered to enable precise manipulation of the properties of EM waves. Interestingly, the combination of the different states of a collection of metamaterials can enable wireless environments capable of directly performing various computing tasks. Among the first works dealing with metasurface-based wave computing belongs [4], which presented a holographic metasurface combined with graded-index waveguides and multilayered slabs designed to achieve a desired spatial Green’s function. On another direction, wave-domain-based over-the-air computing eliminates the need for traditional signal processing components in wireless communication systems, such as analog beamforming/combining circuitry and respective digital processing units as well as analog-to-digital converters, thereby streamlining the computing process [6].

In this article, motivated by the potential of the multitude of the lately available forms of reconfigurable multi-functional metasurfaces (e.g., active/passive RISs, dynamic metasurface antennas (DMAs), simultaneous transmitting and

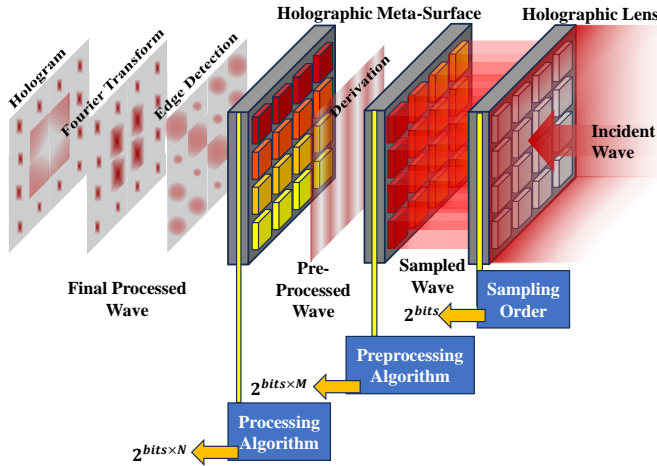


Fig. 1. The core principle of over-the-air wave computing with holographic metasurfaces.

reflecting RISs (STAR-RISs) and stacked intelligent metasurfaces (SIM)) [1], [2] for over-the-air manipulation of EM waves in wireless communication systems and the growing computational requirements for the 6G network components, we investigate the perspective of metasurface technologies for light-speed, highly parallelized, and hardware-compact wave-domain-based signal processing. In Section II, the core principle of over-the-air wave computing with holographic metasurfaces is overviewed and a dual-functional STAR-RIS capable of simultaneous communications and computing is presented. Section III discusses the applications of smart wireless computing environments leveraging computational multi-functional holographic metasurfaces, whereas the open challenges and future directions with this wave computing networking paradigm are discussed in Section IV. The article’s conclusions regarding the wave computing perspective for 6G are included in Section V. .

II. METASURFACES-ENABLED WAVE COMPUTING

With a given location of a transmitter (TX) and a receiver (RX) in a communication link, the holography technique can be employed to realize a desirable aperture response of a periodic structure such as an RIS, transmitting lens, or a DMA [7] with subwavelength-spaced elements. With this technique, a hypothetical reference wave needs to be defined according to the TX’s relative angle and distance to the aperture. In addition, an object wave is defined based on the intended direction of the constructed beam towards the RX. These two wavefronts are then be mapped on the aperture where their corresponding phase profiles are interfered with each other in a process called “Recording” to make an interferogram, commonly known as the hologram [3]. Based on the derived hologram, subwavelength patch scatterers can be geometrically modulated and placed on the aperture to purposefully sample the induced bounded waves on the aperture in case the TX illuminates it in a real-world scenario. This process is called “Reconstruction” with the obtained structure being the holographic metasurface [1]. This is how a beam is

typically formed from an incoming wave via a metasurface. However, interestingly, metasurface-based wave manipulation is not limited to this functionality.

The fundamental principle of over-the-air wave computing with holographic metasurfaces lies in their capacity to directly perform analog computations on incident wavefronts during propagation or reflection, as depicted in Fig. 1. This is achieved by carefully designing metamaterial blocks that manipulate EM waves in the Fourier domain. Metasurfaces are capable of executing operations, such as integration, differentiation, convolution, and edge detection, by encoding specific transfer functions tailored to process the spatial-frequency components of the incident wave. One of the key features of the metasurface approach is its ability to exploit spatial Fourier transformations for real-time signal processing. For example, metasurfaces with phase gradients can act as spatial differentiators or integrators, enabling efficient feature extraction like edge detection directly from EM signals. These functionalities are achieved without the need for bulky optical components or complex digital signal processing, providing a compact and energy-efficient alternative. By tailoring the geometric and material properties of the metasurface, these structures can perform precise wave manipulations, making them ideal for applications such as imaging, optical sensing, and data processing. This metasurface-based approach represents a significant step forward in wave computation, offering unparalleled speed and scalability for modern EM systems.

Several cases where different functionalities of a metasurface, in terms of holographic beamforming and/or computation, can be combined to give rise to offer communication system solutions can be envisioned. For instance, a reconfigurable intelligent computational surface that integrates computing and beamforming functionalities was proposed in [6], with its computational layer realized by exploiting the recent trends in computational metamaterials, such as neuromorphic or analog computing metamaterials [4]. Similarly, stacking multiple RIS panels in parallel can create a three-dimensional SIM capable of signal processing and computation tasks [2], such as image classification directly in the EM wave domain [6].

A dual-functional STAR-RIS that seamlessly integrates holographic-based communication and computational tasks within a single aperture is illustrated in Fig. 2. This design is intended to address the growing demands of task-oriented applications in emerging 6G networks. At the core of its computational functionality lies the Fourier transform (FT), a fundamental operator that bridges the time (or spatial) domain and the frequency (or wave vector) domain, simplifying spectral analysis. The FT has actually broad applications in signal processing, telecommunications, and image analysis. In this context, a lens serves as a well-known two-dimensional counterpart of the spatial FT, focusing an incident plane wave into a point on its focal plane, effectively performing the FT on the input signal. The presented STAR-RIS design in Fig. 2 splits an incoming wave into holographic-based reflected and transmitted components, each serving distinct purposes. The reflected component facilitates tailored beamforming for communication applications, while the transmitted component performs computational tasks, e.g., FT. This is

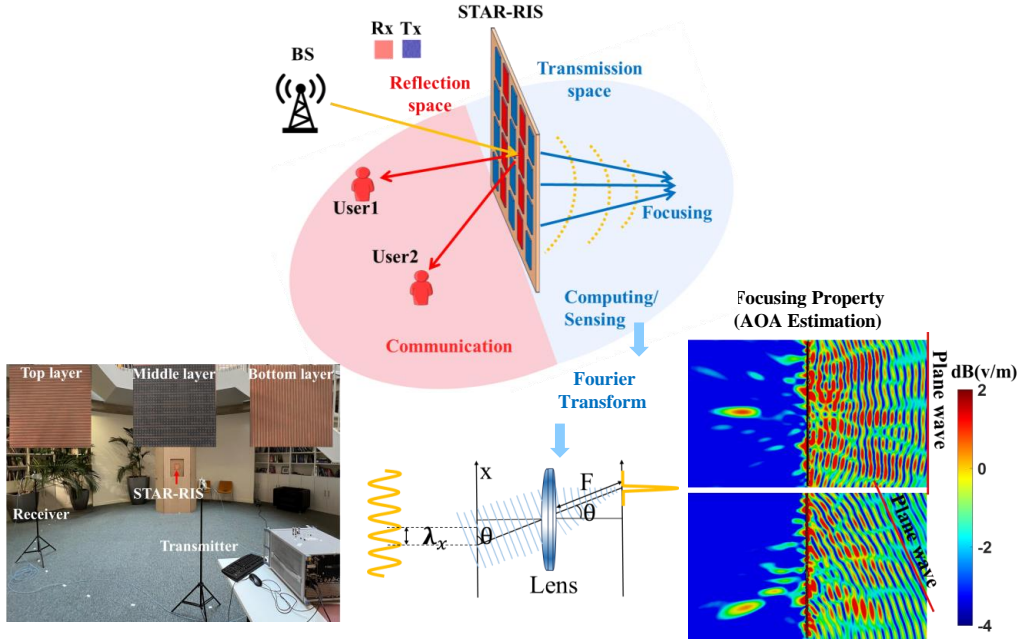


Fig. 2. A holographic STAR-RIS optimized for simultaneous reflective beamforming and to perform AoA estimation at its transmissive part.

achieved using a lens phase profile, enabling precise angle-of-arrival (AoA) estimation. A coding metasurface approach underpins this dual functionality, implementing a linear phase gradient in the reflecting elements and a lens phase profile in the transmitting elements of the STAR-RIS. To validate the concept, a structure featuring side-by-side reflection and transmission arrays has designed, fabricated, and experimentally tested. This structure offers a simpler and more practical design compared to conventional computational RIS solutions, which often depend on complex, multilayered structures or computational metamaterials.

III. WAVE COMPUTING FOR 6G APPLICATIONS

This section explores the transformative potential of wave computing in reshaping future communication systems for 6G, and beyond, applications, as illustrated in Fig. 3. It introduces the essential components of a smart wireless computing environment, focusing on the pivotal role of computational multifunctional holographic metasurfaces in enabling advanced communication and efficient processing capabilities.

A. ISAC Enabled by Wave Computing

Traditional signal processing methods for ISAC schemes and systems often involve digital techniques that, while precise, are computationally demanding and slow. These methods struggle to meet the ultra-low latency requirements of emerging 6G networks, where speed and efficiency are paramount. In contrast, wave-domain-based processing offers a compelling solution by performing complex mathematical transformations directly on the incoming wavefronts. This approach exploits the inherent parallelism of analog signals, allowing simultaneous processing across the entire wavefront. This capability promises a dramatic reduction in computational latency and a

boost in processing speed, perfectly aligning with the latency demands of 6G applications [6].

ISAC has been proposed to enhance wireless network performance by addressing the challenges associated with the unpredictable superposition of wireless signals. This technology aims to mitigate deleterious effects on RXs by integrating sensing capabilities, which allows for a dynamic understanding of the signal propagation environment. Wave-domain-based processing inherently supports the superposition principle, which is a fundamental characteristic of wave phenomena. Wave computing can significantly enhance ISAC applications by enabling these systems to effectively decode superimposed signals from multiple sources or directions. By leveraging wave computing, ISAC systems can distinguish and process overlapping signals more efficiently, enhancing both the accuracy and reliability of combined sensing and communication operations. The ability to handle such superpositions in real-time further underscores the potential of wave-based processing to revolutionize ISAC systems, making it an indispensable component of future wireless networks. The analog nature of wave-based processing addresses a major challenge in integrating sensing and communication functionalities by enabling precise manipulation of EM waves. This capability allows for accurate control over the wave's phase and amplitude, which is crucial for tasks such as object detection and environmental mapping in complex scenarios. As a practical example, by adjusting these properties directly at the RIS level [2], ISAC systems can achieve more refined control over the signal environment, enhancing both communication and sensing capabilities.

B. Wave-Domain-based Artificial Intelligence

As communication systems become increasingly complex, artificial intelligence (AI) is critical for managing dynamic

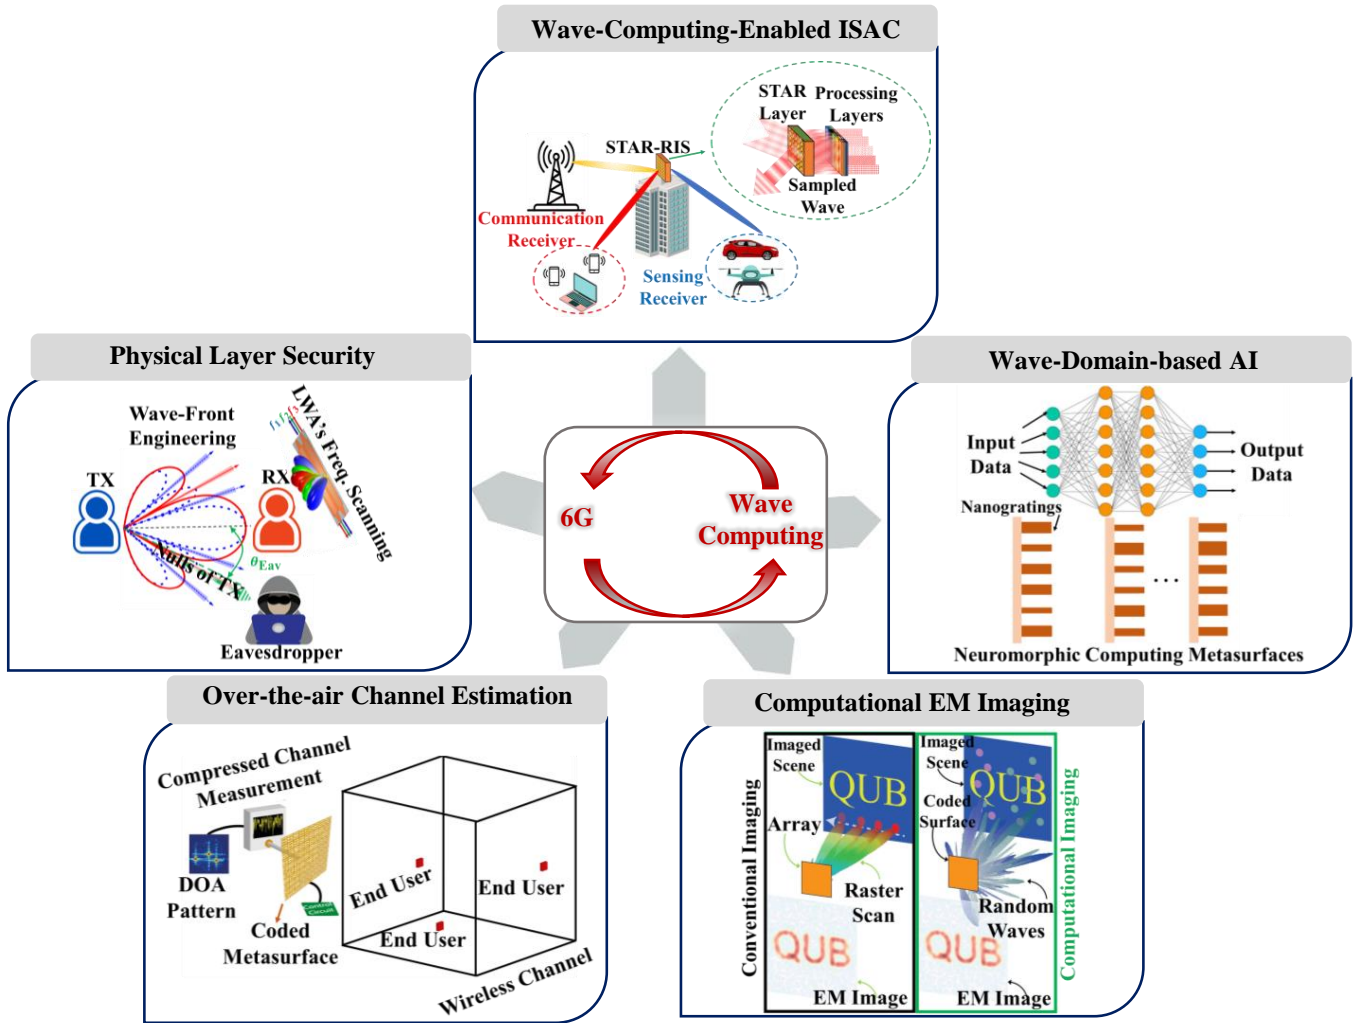


Fig. 3. Wave computing for 6G, and beyond, light-speed and highly parallelized wireless applications.

networks, optimizing resources, and ensuring seamless performance. Neural networks, fundamental to AI, have advanced through progress in computer science and data availability, solving problems across communication networks, smart cities, and environmental monitoring. By 2025, it is anticipated that the number of parameters needed for these models to function will surpass the trillion threshold. This demand for massive models necessitates immense computing power for both training and inference, pushing Moore's law to its limits and causing a significant environmental impact as the number of parameters grows exponentially, along with the required GPUs. This results in high energy consumption and increased demand for materials in production.

Wave computing will enable us to integrate physical systems into AI to perform computations in innovative ways, offering a potential solution to the aforesaid challenge. The integration of AI into metasurface-based wave computing, particularly through neuromorphic metasurfaces, marks a transformative advancement in addressing the limitations of conventional digital computing in communication networks. Neuromorphic metasurfaces, which mimic the brain's neural

structure and computation, enable efficient, real-time, and parallel data processing directly at the wave level. This ability to process information through wave interactions provides unprecedented speed, efficiency, and scalability, which are critical attributes for the demands of future communication systems. In this context, physical training will minimize the digital computation during training and indeed enhance the power efficiency. The physical local training algorithms, which are more compatible with broken-isomorphism physical neural networks, will support performing machine learning tasks with arbitrary analog devices.

C. Wave-Domain-based Computational EM Imaging

EM imaging and characterization of structures in wireless propagation channels has the potential to play a significant role in future wireless networks. From achieving real-time data acquisition to developing energy-efficient imaging solutions that offer simple physical hardware architectures, the technological requirements for next-generation imaging systems are significantly demanding. One of the driving forces in this area lies in the context of wave-domain-based techniques

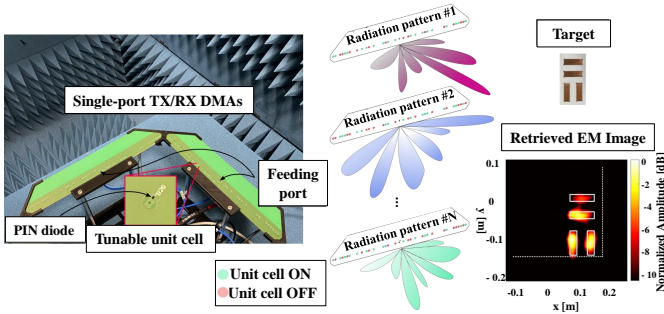


Fig. 4. Computational EM imaging realized by single-pixel DMAs radiating spatiotemporally varying waves.

realized by holographic metasurfaces. In particular, the recent developments in coded-aperture-based frameworks have introduced a radical shift in EM imaging away from the conventional raster-scan-based approaches [8]. As a first step towards benefiting from wave-domain EM phenomena, a key enabler for the coded-aperture concept is the technology of holographic metasurfaces. These surfaces can operate in transmission and/or reflection modes to generate spatiotemporal incoherent waves. In particular, metasurfaces offer the ability to realize wave manipulation without the need for hardware-intensive architectures requiring complex and power-hungry phase shifters. Instead, wave manipulation can be achieved in the hardware layer using simple, low-power semiconductor elements, such as diodes. Moreover, leveraging these surfaces for computational EM imaging can drastically reduce the number of data acquisition channels due to the single-pixel imaging approach offered by the coded-aperture concept in comparison to the conventional raster scan-based imaging modalities. An example DMA-based computational EM imaging system is shown in Fig. 4, which forms a bistatic single-pixel aperture reconfigured using simple PIN diodes [9].

Despite the significant hardware-layer advantages that the coded-aperture-based computational EM imaging architectures offer, there are important challenges to be solved for these systems to serve as the technological backbone of 6G, and beyond, wireless networks. Computational imaging techniques relying on DMAs add an additional complexity to the signal processing layer due to the requirement to process large sensing matrices to solve the imaging problem [10]. In this context, wave-domain-based computing to execute fundamental vector-matrix operations at the speed of light offers a significant potential to address the computational bottlenecks of conventional approaches and respective systems. In particular, metamaterial-based devices can be engineered to perform matrix inversions that can drastically reduce the processing latency to enable real-time imaging [11]. Analog wave computing can also play an important role in mapping wireless channels. Particularly, in the context of 6G, imaging tasks, such as identifying propagation paths with a minimal number of obstacles, will play a crucial role in offering reliable connectivity in cluttered environments. In this context, EM wave computing architectures can be used to enable post-processing on measured channel data and generate real-time

EM maps. As an example, the first order derivation of the EM channel maps to achieve edge-detection can offer a promising solution to identify and classify potential obstacles present in the wireless propagation environment [12].

D. Over-the-Air Channel Parameter Estimation

Characterization of wireless channels is an important requirement for beamforming, which can be realizing using metasurface-based apertures. With the ever growing demands for next-generation wireless systems to offer reduced latencies and increased channel capacities, there is a significant need for technological breakthroughs, both in the hardware layer and the signal processing layer. In this context, from a channel perspective, increased carrier frequencies, such as the Frequency Range 2 (FR2) frequencies and the terahertz (THz) spectrum, can offer significant opportunities due to the availability of wider frequency bandwidths. Conventional channel characterization solutions rely on the use of array-based sounders to measure the channel response. A significant challenge with this approach is that such architectures can require an unpractical large number of elements, especially at high frequencies, due to the reduced wavelengths, as well as suffering from increased power consumption, circuit losses, and large costs of hardware component. RIS-based metasurfaces integrated with wave computing capabilities can offer advantages to tackle these challenges.

Localization and direction of arrival (DoA) estimation play an important role in channel characterization tasks. Sensing the wireless channel and EM visualization (or mapping) of the channel will be one of the key ISAC enablers for future 6G networks [3]. In this context, DoA estimation and channel sensing can be considered variants of an inverse problem, involving the retrieval of the location and DoA information of users. Solving these problems may require significant hardware resources due to the increased computational complexity of the processing algorithms, especially at high frequencies. Wave computing realized by metasurfaces can offer FT-based calculations executed at the speed of light to achieve spatial-frequency (or k-space) processing of the channel data [13]. Such wave-domain-based computing architectures inspired by metamaterial-based devices can pave the way for real-time channel sensing capabilities, offering key technological enablers for the future wireless networks with ultra-low latencies. It is worth noting that EM computing can be executed directly in the hardware layer using a metasurface, which can be realized with multiple distributed RIS panels to enable multiple functionalities simultaneously.

E. Physical-Layer Security Via Wave Computing

Ensuring secure data transmissions in communication systems is paramount, particularly in mitigating eavesdropping and other security threats. Security must be implemented across all levels, including software, hardware, and the physical layer. While data encryption secures systems at the software level, and trusted platform modules enhance hardware-level protection, physical-layer security can be obtained via

wave-front engineering, specifically at high frequencies, like 6G's FR2 and the THz spectrum for future wireless systems.

Wireless communication primarily relies on line-of-sight (LoS) propagation in high frequencies, necessitating highly directive beams to minimize angular divergence. This directive beam configuration inherently improves security, as the eavesdropper's antenna must be positioned within the narrow broadcast sector of the transmitting antenna. However, a potential vulnerability arises if an eavesdropper places a reflective surface within the communication link to scatter a portion of the propagating waves toward their antenna [2]. This can also be a possible scheme of eavesdropping for relatively lower frequency bands, when the initial beam is comparably wider but communication is fulfilled via an RIS where LoS is required between the aperture and the TX. The concept of physical-layer security is a promising technique to counteract such attempts. It traditionally relies on accurate knowledge of the channel state information where characterizing the backscatter of the channel is highly important. Such a method mainly requires a tool to measure incoming signals and differentiate between general environmental backscatter and deliberate eavesdropping attempts. Any unexpected changes in the backscatter signals, whether increases or decreases, can be flagged as a potential security breach. To prevent eavesdropping attempts in a more EM-based approach, the TX antenna's radiation pattern can be intentionally directed to create nulls toward the eavesdropper. Additionally, the wide bandwidth available at FR2 and THz frequencies can be leveraged to enhance security. Frequency sweeping over a broad range shifts the nulls in the radiation pattern, creating blind spots at specific frequencies. By selecting the appropriate frequency, the communication link can reach a secure state ensuring that no eavesdropper can intercept signals.

Systems operating at high frequencies will require advanced capabilities for environmental sensing and adaptive broadcasting to maintain robust security [14]. A promising solution involves leveraging the innate frequency-scanning characteristics of leaky-wave antennas (LWAs). Unlike their traditional use at lower frequencies, LWAs at THz frequencies can be utilized to provide radar-like sensing mechanisms. By equipping both the TX and RX with LWAs, the system can rapidly determine the angular location of a mobile RX and its relative angular rotation to the TX. This capability enhances physical-layer security, while simultaneously enabling precise and adaptive communication in high-frequency environments.

IV. CHALLENGES AND TRENDS

While wave computing presents intriguing features and promising applications for 6G and beyond, several unresolved research challenges remain. This section lists the most significant of these challenges and discusses the future trends of this rapidly advancing field.

A. Open Challenges

1) *Efficient Hardware Design:* Wave computing for future generations of wireless communications relies heavily on precisely fabricating reconfigurable metamaterials. Those

materials need to exhibit exact characteristics to manipulate EM waves effectively. For optical communications, achieving precision on a nanoscale presents significant challenges. Slight deviations in size, shape, or material properties can lead to substantial performance degradation, making consistent and scalable production difficult. Advancements in nanofabrication technologies are required to address these precision issues and ensure reliable manufacturing processes for commercial deployment.

2) *Integration with Digital Systems:* Integrating wave-domain analog computations into digital infrastructures requires efficient bi-directional conversion mechanisms to translate continuous analog signals into discrete digital forms and vice versa. Minimizing data loss and conversion delays is essential to maintain data integrity and efficiency. Ensuring compatibility and consistent performance across various conditions is crucial for deploying wave computing in applications like 6G networks, where it can enhance performance and efficiency.

3) *Regulatory and Standardization:* Wave computing methods, particularly those involving novel EM properties or new frequency bands (like THz or optical frequencies), may require access to parts of the EM spectrum not currently in widespread use for communication purposes. Creating protocols that efficiently encode and decode information is more complex than with digital signals. Such protocols must ensure precise synchronization of wave phases and frequencies, which is critical for accurate data transmission and reception. This synchronization is challenging in dynamic environments where propagation conditions may change rapidly. For example, in a multi-user scenario, managing interference among multiple analog signals that overlap in the time and frequency domains can be particularly difficult.

4) *Error Correction:* Analog signals are inherently more vulnerable to noise and distortion due to their continuous nature. This susceptibility means that even minor variations induced by noise can significantly alter the information carried by analog signals. To ensure the integrity and reliability of data in analog form, error correction mechanisms must operate in real-time, adapting to continuous signal variations instantly. Implementing error correction at the hardware level in analog systems involves designing complex circuits capable of conducting necessary calculations and adjustments swiftly and continuously. This not only helps in maintaining the fidelity of signal transmission, but also enhances the overall system efficiency by reducing the need for frequent conversions between analog and digital formats. Such an approach is essential for applications, e.g., in 6G, where the speed and energy efficiency of analog processing provide substantial benefits over digital alternatives.

B. Future Directions

1) *Goal-Oriented and Semantic Communications:* Future communication systems demand advancements in speed, bandwidth, and intelligent data processing to achieve efficiency. Goal-oriented communication ensures explicit results in applications like autonomous driving, where ultra-low latency

and high reliability are essential. Similarly, semantic communication prioritizes the meaning and intent of messages, optimizing context-aware exchanges. Wave computing, powered by the continuous and simultaneous processing capabilities of analog systems enhanced by metamaterials, enables real-time data analysis and decision-making, adapting dynamically to high-efficiency demands. Operating at the speed of light, it facilitates rapid semantic analysis with minimal latency, meeting complex data processing needs. By integrating wave computing into goal-oriented and semantic frameworks, networks can become more intelligent and adaptive, supporting dynamic environments and diverse requirements efficiently.

2) *Backscatter Communications and Sensing*: Wave-domain computation revolutionizes backscatter communications by leveraging scattered electromagnetic waves for real-time user localization and dynamic environmental mapping. Utilizing the continuous processing capabilities of analog systems, this approach enables rapid interpretation of complex signal environments, especially in dense urban areas. By processing scattered signals on the fly, these systems achieve accurate user localization and dynamic mapping, enhancing the responsiveness and efficiency of communication networks. Integrating wave computing into backscatter communications overcomes traditional limitations, meeting the demands of emerging technologies like autonomous vehicles and advanced mobile services.

3) *Topological Insulators (TIs)*: TIs offer an innovative pathway to enhance metasurface-based wave computing for future communication systems. These materials exhibit a unique combination of insulating bulk and conductive surface states, offering the potential for dissipationless conductivity due to their spin-momentum locking and Dirac cone-like dispersions [15]. These intrinsic properties make TIs an ideal candidate for designing ultra-low-power, highly-efficient holographic metasurfaces capable of advanced wave computing, signal processing, and data transmission in communication networks. Furthermore, TIs provide inherent topological protection, which mitigates a critical limitation of conventional analog signal processors: sensitivity to geometrical perturbations and structural imperfections. By maintaining functionality even in the presence of disorder or environmental inconsistencies, TIs enable more robust and scalable solutions for communication systems engineering. Integrating a computational layer into TI-based metasurfaces will facilitate real-time data processing at the physical layer, eliminating many inefficiencies associated with conventional digital processors.

4) *Optical Wireless Communications*: The integration of wave computing into optical wireless communication (OWC) will revolutionize future wireless networks by enabling multi-user connectivity and ultra-high data rates. A major challenge in OWC systems is managing chromatic dispersion, which distorts signals as light wavelengths travel at different speeds in optical fibers. Wave computing, leveraging wave dynamics and metamaterial-based optical fibers, addresses this issue through real-time dispersion compensation, maintaining signal integrity and supporting advanced modulation formats like quadrature amplitude modulation. This approach enhances signal stability and throughput, paving the way for ultra-high-

speed, low-latency networks and unlocking the potential of next-generation OWC technologies.

V. CONCLUSION

Wave computing, enabled by advancements in metamaterials and EM principles, offers a transformative approach for future wireless communication systems. By leveraging real-time, high-speed, and energy-efficient wave interactions, this paradigm promises to address critical 6G demands, such as ultra-low latency, high data rates, and scalable transceiver hardware architectures. Key applications, including ISAC, EM imaging, AI-driven orchestration, and secure data transmissions, emphasize the potential of wave computing to redefine wireless networks. While challenges, such as precise fabrication of metamaterials and integration with digital systems remain, ongoing research on the field promises to overcome these barriers. Wave computing paves the way for intelligent, adaptive, and energy-efficient wireless networks, establishing a new foundation for 6G, and beyond, wireless connectivity.

ACKNOWLEDGMENT

The work of Zahra Rahimian Omam and Ali Araghi was supported by the United Kingdom's Department of Science, Innovation and Technology (DSIT) under the SCONDA project (<https://uktin.net/SCONDA>), while Hamidreza Taghvaei's work was supported by DSIT under the CORE project (<https://uktin.net/CambridgeshireOpenRAN>). The work of O. Yurduseven, M. García-Fernández and G. Álvarez-Narciandi was partially supported by the Leverhulme Trust through Research Leadership Award under Grant RL-2019-019, and by the UKRI under projects EP/X022943/1 and EP/X022951/1. The work of M. García-Fernández was also supported by grant RYC2023-043020-I funded by MICIU/AEI/10.13039/501100011033 and by FSE+. The work of G. Álvarez-Narciandi was also supported by grant RYC2023-045010-I funded by MICIU/AEI/10.13039/501100011033 and by FSE+. The work of George C. Alexandropoulos was supported by the SNS JU project TERRAMETA under the European Union's Horizon Europe research and innovation programme under Grant Agreement number 101097101.

REFERENCES

- [1] R. Deng, Y. Zhang, H. Zhang, B. Di, H. Zhang, and L. Song, "Reconfigurable holographic surface: A new paradigm to implement holographic radio," *IEEE Veh. Technol. Mag.*, vol. 18, no. 1, pp. 20–28, 2023.
- [2] E. Basar, G. C. Alexandropoulos, Y. Liu, Q. Wu, S. Jin, C. Yuen, O. Dobre, and R. Schober, "Reconfigurable intelligent surfaces for 6G: Emerging applications and open challenges," *IEEE Veh. Technol. Mag.*, vol. 19, no. 3, pp. 27–47, 2024.
- [3] T. Gong, P. Gavriliadis, R. Ji, C. Huang, G. C. Alexandropoulos, L. Wei, Z. Zhang, M. Debbah, H. V. Poor, and C. Yuen, "Holographic MIMO communications: Theoretical foundations, enabling technologies, and future directions," *IEEE Commun. Surveys & Tuts.*, vol. 26, no. 1, pp. 196–257, 2024.
- [4] A. Silva, F. Monticone, G. Castaldi, V. Galdi, A. Alù, and N. Engheta, "Performing mathematical operations with metamaterials," *Science*, vol. 343, no. 6167, pp. 160–163, 2014.
- [5] L. Li, H. Zhao, C. Liu, L. Li, and T. J. Cui, "Intelligent metasurfaces: control, communication and computing," *Light*, vol. 2, no. 1, p. 7, 2022.

- [6] B. Yang, X. Cao, J. Xu, C. Huang, G. C. Alexandropoulos, L. Dai, M. Debbah, H. V. Poor, and C. Yuen, "Reconfigurable intelligent computational surfaces: When wave propagation control meets computing," *IEEE Wireless Commun.*, vol. 30, no. 3, pp. 120–128, 2023.
- [7] A. Araghi and M. Khalily, "Holographic beamforming," in *MIMO Communications - Fundamental Theory, Propagation Channels, and Antenna Systems*. IntechOpen, 2023.
- [8] M. F. Imani, J. N. Gollub, O. Yurduseven, A. V. Diebold, M. Boyarsky, T. Fromenteze, L. Pulido-Mancera, T. Sleasman, and D. R. Smith, "Review of metasurface antennas for computational microwave imaging," *IEEE Trans. Antennas Propag.*, vol. 68, no. 3, pp. 1860–1875, 2020.
- [9] G. Álvarez Narciandi, M. García-Fernández, V. Skouroliakou, and O. Yurduseven, "Dynamic metasurface antenna-based mills-cross aperture for 3-D computational microwave imaging," *IEEE Antennas Wirel. Propag. Lett.*, vol. 23, no. 11, pp. 3377–3381, 2024.
- [10] O. Yurduseven, J. N. Gollub, A. Rose, D. L. Marks, and D. R. Smith, "Design and simulation of a frequency-diverse aperture for imaging of human-scale targets," *IEEE Access*, vol. 4, pp. 5436–5451, 2016.
- [11] M. Camacho, B. Edwards, and N. Engheta, "A single inverse-designed photonic structure that performs parallel computing," *Nat. Commun.*, vol. 12, no. 1, p. 1466, 2021.
- [12] Z. Wang, G. Hu, X. Wang, X. Ding, K. Zhang, H. Li, S. N. Burokur, Q. Wu, J. Liu, J. Tan *et al.*, "Single-layer spatial analog meta-processor for imaging processing," *Nat. Commun.*, vol. 13, no. 1, p. 2188, 2022.
- [13] M. Cotrufoa and A. Alù, "Metamaterials for analog all-optical computation," *Progress in Optics*, vol. 69, p. 211, 2024.
- [14] J. M. Jornet, E. W. Knightly, and D. M. Mittleman, "Wireless communications sensing and security above 100 GHz," *Nat. Commun.*, vol. 14, no. 1, p. 841, 2023.
- [15] A. Anirban, "15 years of topological insulators," *Nat. Rev. Phys.*, vol. 5, no. 5, pp. 267–267, 2023.