

# Bounds and Codes for General Phased Burst Errors

Sebastian Bitzer<sup>1</sup>, Andrea Di Giusto<sup>2</sup>, Alberto Ravagnani<sup>2</sup>, and Eitan Yaakobi<sup>3</sup>

<sup>1</sup>Technical University of Munich, Germany

<sup>2</sup>Eindhoven University of Technology, the Netherlands

<sup>3</sup>Technion – Israel Institute of Technology, Israel

sebastian.bitzer@tum.de, {a.di.giusto, a.ravagnani}@tue.nl, yaakobi@cs.technion.ac.il

**Abstract**—Phased burst errors (PBEs) are bursts of errors occurring at one or more known locations. The correction of PBEs is a classical topic in coding theory, with prominent applications such as the design of array codes for memory systems or distributed storage. We propose a general yet fine-grained approach to this problem, accounting not only for the number of bursts but also the error structure in each burst. By modeling PBEs as an error set in an adversarial channel, we investigate bounds on the maximal size of codes that can correct them. The PBE-correction capability of generalized concatenated codes is analyzed, and asymptotically good PBE-correcting codes are constructed, recovering a classical construction in a specific problem instance.

## I. INTRODUCTION

A classic topic in coding theory is the correction of bursts of errors with a known start location and maximal duration, which arise in various contexts, such as non-volatile memory systems [4]. In mathematical terms, given an array  $\mathbf{X} \in \mathbb{F}_q^{n \times m}$ , the goal is to correct errors restricted to an unknown subset of the columns of  $\mathbf{X}$ . Such error patterns, known as Phased Burst Errors (PBE), were first studied in [7] (single PBE) and [2] (multiple PBEs), and inspired major applications [1].

**This work.** We consider PBEs as an error set in the context of adversarial channels [12]. Let  $\mathcal{E}_1 \subseteq \mathcal{E}_2$  be arbitrary subsets of  $\mathbb{F}_q^n$ , and let  $0 \leq w \leq m$ . We say an array  $\mathbf{X} \in \mathbb{F}_q^{n \times m}$  is an  $(\mathcal{E}_1, \mathcal{E}_2, w)$ -PBE if it has at most  $w$  columns in  $\mathcal{E}_2$ , and the remaining columns belong  $\mathcal{E}_1$ . A code correcting all such patterns is an  $(\mathcal{E}_1, \mathcal{E}_2, w)$ -PBE correcting code, or  $(\mathcal{E}_1, \mathcal{E}_2, w)$ -PBECC for short; we address the following

**Question 1.** *Given  $n, m, \mathcal{E}_1 \subseteq \mathcal{E}_2, w$ , what is the maximum size  $A_q(n, m, \mathcal{E}_1, \mathcal{E}_2, w)$  of a  $(\mathcal{E}_1, \mathcal{E}_2, w)$ -PBECC in  $\mathbb{F}_q^{n \times m}$ ?*

More precisely, we examine the asymptotic behavior for  $m$  growing linearly in  $n$  and  $|\mathcal{E}_1|, |\mathcal{E}_2|$  scaling exponentially with  $n$ . Analyzing these error bursts as an arbitrary error set [9], we derive upper and lower bounds on the size of a maximal code correcting them. As an application of our results, we will consider the case where  $\mathcal{E}_1 = \{\mathbf{0}\}$  and  $\mathcal{E}_2$  is the Hamming balls centered around zero in  $\mathbb{F}_q^n$ , see Fig. 1. In this framework, we compare our new bounds with the classical Hamming and Gilbert-Varshamov bounds, demonstrating that the structure of the PBEs enables an asymptotic improvement in code rate for the same overall error weight.

The structure of generalized concatenated codes aligns naturally with the structure of phased burst errors, making them a suitable candidate for code constructions. We provide

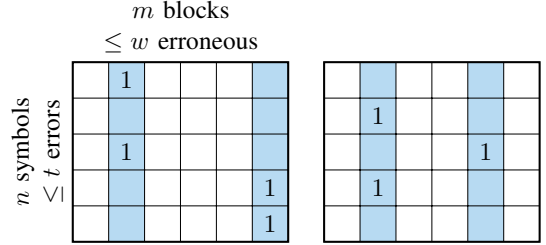


Fig. 1: Two possible Hamming PBEs with  $n = 5, t = 2, m = 6$ , and  $w = 2$ . That is,  $\mathcal{E}_1 = \{\mathbf{0}\} \subset \mathcal{E}_2 = B_2(5, 2)$ .

general guarantees on the PBE-correction capability, which gives rise to explicit constructions. Our analysis demonstrates that the constructed codes are asymptotically good, offering positive rates for all channel parameters with positive GV bound. For Hamming-metric bursts, we recover the classical construction of [16] and improve it in particular cases.

**Related work.** Although the interest in PBEs traces back to [2], [7], [13] (and [1] as a prominent application), many recent works have revisited this topic, sometimes under different terminologies. Most of the literature concerns PBEs in the Hamming metric: in [6], [14], phased bursts are considered, where the error columns can have either high or low Hamming weight. More recently, LDPC codes for correcting phased bursts of erasures were studied in [17], [8]. The performance of a PBEC code under random bursts of errors is investigated in [11]. For cryptographic applications of PBEs and generic error sets, see [3], [10].

**Structure.** Section II introduces the necessary terminology on adversarial channels and arbitrary error sets, and formally state the problem we are going to study. In Section III, we derive bounds on the one-shot capacity of the channels introduced in Section II using the approach of [9] to the study of arbitrary error sets. In Section IV, we investigate the PBE-correction capability of generalized concatenated codes. Based on this analysis, general PBEC codes are constructed, and their performance is compared with the derived bounds.

**Artifacts.** The scripts to generate the figures are available at <https://github.com/sebastianbitzer/pbe>.

## II. THE PBE ADVERSARIAL CHANNEL

### A. Notation

For a set  $A$ , let  $|A|$  denote its cardinality and  $2^A$  its power set. Let  $\mathcal{V}$  be a vector space,  $A, B \subseteq \mathcal{V}$ , then the difference

set of  $A$  and  $B$  is the set  $\Delta(A, B) = \{a - b : a \in A, b \in B\}$ ;  $\Delta(A) = \Delta(A, A)$  is the difference set of  $A$ . For an integer  $s$ ,  $[s] = \{1, \dots, s\}$ .

For  $q$  a prime power and an array  $\mathbf{X} \in \mathbb{F}_q^{n \times m}$ , let  $\text{col}(\mathbf{X})$  denote the multiset of its columns. For a set  $A$ , let  $|A|$  denote its cardinality and  $2^A$  its power set. For  $\mathbf{x} \in \mathbb{F}_q^n$ , we denote by  $\text{wt}_H(\mathbf{x})$  its Hamming weight. For  $0 \leq t \leq n$ , we denote the Hamming-metric ball as  $B_q(n, t) = \{\mathbf{x} \in \mathbb{F}_q^n : \text{wt}_H(\mathbf{x}) \leq t\}$ . For  $T = t/n$ , it holds that

$$q^{F_q(T)n - o(n)} \leq |B_q(n, t)| \leq q^{F_q(T)n}, \quad (1)$$

where  $F_q(T) = H_q(\max\{T, \frac{q-1}{q}\})$  with  $H_q(x)$  the  $q$ -ary entropy function.

### B. Problem Statement

We consider the following general communication framework.

**Definition 1.** Let  $\mathcal{V}$  be a vector space over the finite field  $\mathbb{F}_q$ . An additive adversarial channel on  $\mathcal{V}$  with error set  $\mathcal{E} \subseteq \mathcal{V}$  is a function  $\Omega : \mathcal{V} \mapsto 2^{\mathcal{V}}$  associating to each  $\mathbf{X} \in \mathcal{V}$  its fan-out set  $\Omega(\mathbf{X}) = \{\mathbf{X} + \mathbf{E} : \mathbf{E} \in \mathcal{E}\} = \mathbf{X} + \mathcal{E}$ .

All mentioned channels will respect this definition, and we will simply say that  $\Omega$  is a channel over  $\mathcal{V}$  throughout the paper. This and some of the following definitions also work in more general frameworks, see [12]. A code in  $\mathcal{V}$  is a subset  $\mathcal{C} \subseteq \mathcal{V}$ ; if  $\mathcal{C}$  is a linear subspace, then we say it is a linear code. A code  $\mathcal{C}$  is a one-shot code for  $\Omega$  if for any two distinct  $X, X' \in \mathcal{C}$  we have  $\Omega(\mathbf{X}) \cap \Omega(\mathbf{X}') = \emptyset$ . For a linear code, this is equivalent to  $\mathcal{C} \cap \Delta(\mathcal{E}) = \{\mathbf{0}\}$ , see [9].

**Example 2.** Let  $t \leq n \in \mathbb{N}$ ; a ubiquitous example of an additive adversarial channel is the Hamming Channel  $\text{HC}(n, t)$ , where  $\mathcal{V} = \mathbb{F}_q^n$  and  $\mathcal{E} = \{\mathbf{X} \in \mathbb{F}_q^n : \text{wt}_H(\mathbf{X}) \leq t\} = B_q(n, t)$  is the Hamming ball of radius  $t$ . One-shot codes for this channel are precisely the  $t$ -error correcting codes in  $\mathbb{F}_q^n$ .

The one-shot capacity of a channel  $\Omega$  is defined as

$$C_1(\Omega) := \max \left\{ \frac{\log_q(|\mathcal{C}|)}{\dim(\mathcal{V})} : \mathcal{C} \text{ is a one-shot code for } \Omega \right\}. \quad (2)$$

$C_1(\Omega)$  is the normalized maximum amount of information that can be transmitted using the channel one time and with zero error probability, since by sending an element of a one-shot code through the channel we ensure that the output will be uniquely decodable. This notion is distinct from the zero error capacity of a channel  $C_0(\Omega)$ , which is the maximum rate at which error-free communication can happen using the channel multiple times [15], [12].

Bounds on the one-shot capacity of a channel  $\Omega$  are derived by closely examining its error set [9]. In particular, for a code  $\mathcal{C} \subseteq \mathcal{V}$  with  $|\mathcal{C}||\mathcal{E}| > |\mathcal{V}|$ , the pigeonhole principle implies that if there exist distinct elements  $\mathbf{X}, \mathbf{X}' \in \mathcal{C}$  such that  $\Omega(\mathbf{X}) \cap \Omega(\mathbf{X}') \neq \emptyset$ . Then,  $\mathcal{C}$  cannot be a one-shot code for  $\Omega$ , yielding the following upper bound on  $C_1(\Omega)$ .

**Lemma 3** (Proposition 1, [9]). For any channel  $\Omega$  over  $\mathcal{V}$ ,

$$C_1(\Omega) \leq 1 - \frac{\log_q(|\mathcal{E}|)}{\dim(\mathcal{V})}.$$

A lower bound for the one-shot capacity can be established via an existence result for linear codes. This is achieved by considering families of codes with random-like behavior.

**Definition 4.** A nonempty set  $\mathcal{F}$  of linear codes is balanced if every  $\mathbf{X} \in \mathcal{V} \setminus \{\mathbf{0}\}$  belongs an equal number of codes in  $\mathcal{F}$ .

Balancedness is the combinatorial equivalence of randomness, in the sense that a random linear code contains any nonzero element with the same probability, just like a code sampled uniformly at random from a balanced family. Notice that the family of all linear codes in  $\mathcal{V}$  of a given dimension,  $\mathcal{F}_k = \{\mathcal{C} \subseteq \mathcal{V} : \dim(\mathcal{C}) = k\}$  is balanced. The following result gives a sufficient condition for the existence of a linear one-shot code for a channel  $\Omega$ .

**Theorem 5** (Theorem 1, [9]). Let  $\Omega$  be a channel over  $\mathcal{V}$  with error set  $\mathcal{E}$  containing the zero vector, and let  $\mathcal{F}$  be a balanced family of codes in  $\mathcal{V}$ . If  $|\Delta(\mathcal{E})| \leq q^{n-k}$  then  $\mathcal{F}$  contains a one-shot code for  $\Omega$ . It follows that

$$C_1(\Omega) \geq 1 - \frac{\log_q |\Delta(\mathcal{E})|}{\dim(\mathcal{V})}.$$

**Example 6.** Applying Lemma 3 and Theorem 5 to the channel  $\text{HC}(n, t)$  of Ex. 2, we get the classical Hamming and Gilbert-Varshamov bounds for the rate of block codes respectively. In fact, when  $\mathcal{E} = B_q(n, t)$ , the difference set is simply  $\Delta(\mathcal{E}) = B_q(n, \tau)$ , where  $\tau = \min(n, 2t)$ . The asymptotic versions of the bounds are recovered by applying Eq. (1): we get

$$1 - F_q(\tau/n) \leq C_1(\text{HC}(n, t)) \leq 1 - F_q(t/n) + o(1) \quad (3)$$

Given the link to the classical counterparts, we will refer to Lemma 3 and Theorem 5 as generic Hamming and Gilbert-Varshamov bounds. In this work, we consider a class of channels over  $\mathcal{V} = \mathbb{F}_q^{n \times m}$ , where the error set models the phased bursts mentioned in Section I. For an array  $\mathbf{X} \in \mathbb{F}_q^{n \times m}$ , let  $\text{col}(\mathbf{X})$  denote the multiset of its columns.

**Definition 7.** Let  $q$  be a prime power,  $n, m, w \in \mathbb{Z}_{\geq 0}$  with  $w \leq m$ , and  $\mathcal{E}_1 \subseteq \mathcal{E}_2$  be arbitrary subsets of  $\mathbb{F}_q^n$  s.t.  $\mathbf{0} \in \mathcal{E}_1$ . The set of  $(\mathcal{E}_1, \mathcal{E}_2, w)$  Phased Burst Errors (PBEs) in  $\mathbb{F}_q^{n \times m}$  is the set  $\mathcal{E} = \mathcal{E}(n, m, \mathcal{E}_1, \mathcal{E}_2, w)$ , where

$$\mathcal{E} = \{\mathbf{X} \in \mathbb{F}_q^{n \times m} : \forall \mathbf{x} \in \text{col}(\mathbf{X}), \mathbf{x} \in \mathcal{E}_2 \text{ and } |\{\mathbf{x} \in \text{col}(\mathbf{X}) : \mathbf{x} \in \mathcal{E}_1\}| \geq m - w\}.$$

The Phased Burst Channel (PBC)  $\text{PBC}(n, m, \mathcal{E}_1, \mathcal{E}_2, w)$  is the channel on  $\mathbb{F}_q^{n \times m}$  with error set  $\mathcal{E}$ . A  $(\mathcal{E}_1, \mathcal{E}_2, w)$ -PBE Correcting Code (( $\mathcal{E}_1, \mathcal{E}_2, w$ )-PBECC) is a one-shot code for this channel.

The second condition in the set definition implies that at most  $w$  columns of a PBE are in  $\mathcal{E}_2 \setminus \mathcal{E}_1$  (bad columns), while the others are from  $\mathcal{E}_1$  (good columns). The condition that  $\mathbf{0} \in \mathcal{E}_1$  allows for error-free uses of the channel and is, therefore, natural. The case where  $\mathcal{E}_1 = \{\mathbf{0}\}$  (the bursts of error affect up to  $w$  columns, while the good columns are free of errors) is included in the definition. No constraint on the position of the bad columns is assumed.

For the setting of Definition 7,  $\dim(\mathcal{V}) = nm$  in Eq. (2), and  $C_1(\text{PBC}(n, m, \mathcal{E}_1, \mathcal{E}_2, w)) = \log_q(A(n, m, \mathcal{E}_1, \mathcal{E}_2, w))/nm$ . Hence, Question 1 can be equivalently stated as

**Question 2.** Given  $n, m, \{0\} \subseteq \mathcal{E}_1 \subseteq \mathcal{E}_2 \subseteq \mathbb{F}_q^n$  and  $w$ , what is the one-shot capacity  $C_1(\text{PBC}(n, m, \mathcal{E}_1, \mathcal{E}_2, w))$  of the Phased Burst Channel?

While the two questions are equivalent, Question 2 shifts the focus from the code size to the channel itself, and thus to the error set. Similar to Ex. 6, we are also interested in the asymptotic behavior of  $C_1(\text{PBC}(n, m, \mathcal{E}_1, \mathcal{E}_2, w))$ .

**Definition 8.** Let  $M > 0, W \in [0, 1]$  be fixed constants, then a sequence of PBEs is a sequence  $\text{PBC}(n, M, \mathcal{E}_1, \mathcal{E}_2, W) = (\text{PBC}(n, m, \mathcal{E}_1(n), \mathcal{E}_2(n), w))_{n \in \mathbb{N}}$  such that for any  $n$  we have  $m = Mn$  and  $w = Wm$ . The associated sequence of PBE sets of these channels is denoted by  $\mathcal{E}(n) = \mathcal{E}(n, M, \mathcal{E}_1, \mathcal{E}_2, W)$ . We write  $\text{PBC}(n) = \text{PBC}(n, M, \mathcal{E}_1, \mathcal{E}_2, W)$ ,  $\mathcal{E}(n) = \mathcal{E}(n, M, \mathcal{E}_1, \mathcal{E}_2, W)$  to highlight the dependence on  $n$  when everything else is clear from the context.

Studying the size of a sequence of error sets as  $n \rightarrow \infty$ , we can give asymptotic bounds on the one-shot capacity PBCs, similarly to the ones in Ex. 6 for the Hamming channel. To illustrate the behavior of our general results, we consider Hamming-metric bursts as a particular case of Definition 8.

**Definition 9** (Hamming PBEs). Let  $t \leq n$ . Then, the Hamming Phased Burst Channel is the channel  $\text{H-PBC}(n, m, t, w) = \text{PBC}(n, m, B_q(n, 0), B_q(n, t), w)$ . The associated error set is denoted as  $\text{H-}\mathcal{E}(n, m, t, w)$ .

A graphical representation of two elements of a Hamming PBE channel is given in Fig. 1, error columns are highlighted in light blue, and blanks are zeros. Coding problems related to this channel are widely studied in the literature; see [6], [14]. Unlike other authors, we formulate our problem more generally, studying fundamental bounds and constructions while also considering the asymptotic setting where the number of errors is a fraction of the length.

### III. BOUNDS ON THE MAXIMAL CODE SIZE

This section analyzes the asymptotic size of sequences of PBE sets  $\mathcal{E}(n) = \mathcal{E}(n, M, \mathcal{E}_1, \mathcal{E}_2, W)$  (and their corresponding difference sets) to derive bounds on the one-shot capacity of the associated channel sequence  $\text{PBC}(n, M, \mathcal{E}_1, \mathcal{E}_2, W)$ .

**Definition 10** (Admissible sequences of PBEs and channels). Let  $M > 0$ , and  $W, c_1, c_2, c_{11}, c_{12}, c_{21}, c_{22} \in [0, 1]$  be fixed constants. A sequence of PBE sets  $\mathcal{E}(n, M, \mathcal{E}_1, \mathcal{E}_2, W)$  is admissible if  $|\mathcal{E}_j(n)| = q^{c_j n - o(n)}$  and  $|\mathcal{E}_{ij}(n)| = q^{c_{ij} n - o(n)}$ , where  $\mathcal{E}_{ij}(n) = \Delta(\mathcal{E}_i(n), \mathcal{E}_j(n))$ ,  $i, j = 1, 2$ . The sequence of channels associated with such a sequence of error sets is an admissible sequence of PBCs. For brevity, the parameter  $n$  is omitted when clear from the context.

We begin by estimating the asymptotic size of  $\mathcal{E}(n)$ .

**Theorem 11** (PBE Hamming bound). For an admissible sequence of error sets  $\mathcal{E}(n) = \mathcal{E}(n, M, \mathcal{E}_1, \mathcal{E}_2, W)$ , we have

$$(1 - W)c_1 + Wc_2 - o(1) \leq \frac{\log_q(|\mathcal{E}(n)|)}{M \cdot n^2} \leq (1 - W)c_1 + Wc_2$$

and the one-shot capacity of the corresponding sequence of channels  $\text{PBC}(n) = \text{PBC}(n, M, \mathcal{E}_1, \mathcal{E}_2, W)$  is bounded as

$$C_1(\text{PBC}(n)) \leq R_H + o(1),$$

where  $R_H = 1 - (1 - W)c_1 - Wc_2$ .

*Proof.* Looking at the structure of  $\mathcal{E}(n)$  we find that

$$|\mathcal{E}_1(n)|^{m-w} |\mathcal{E}_2(n)|^w \leq |\mathcal{E}(n)| \leq \binom{m}{w} |\mathcal{E}_1(n)|^{m-w} |\mathcal{E}_2(n)|^w.$$

Using  $m = W \cdot n$ ,  $w = W \cdot m$ , we obtain

$$(1 - W)c_1 + Wc_2 - o(1) \leq \frac{\log_q(|\mathcal{E}(n)|)}{mn} \leq (1 - W)c_1 + Wc_2$$

and the bound on the one-shot capacity follows from the first inequality and Lemma 3.  $\square$

**Example 12.** Let  $M > 0, W \in [0, 1]$ , and for all  $n \in \mathbb{N}$  let  $0 \leq t_n \leq n$  be such that  $\lim_{n \rightarrow \infty} \frac{t_n}{n} = T \in [0, 1]$ . Then, the sequence of Hamming PBE sets  $\text{H-}\mathcal{E}(n, Mn, Tn, Wm)$  (Def. 9) is admissible according to Def. 10. Since the difference set of two Hamming balls is a Hamming ball,  $c_1 = 0$ ,  $c_2 = F_q(T)$ ,  $c_{11} = 0$ ,  $c_{12} = c_{21} = F_q(T)$ , and  $c_{22} = F_q(2T)$ .

**Corollary 13** (Hamming PBE Hamming bound). Let  $\mathcal{E}_1 = \{0\}$ ,  $\mathcal{E}_2 = B_q(n, t)$  with  $t = T \cdot n$ . Then,  $R_H = 1 - W \cdot F_q(T)$ .

Having found an upper bound on  $|\mathcal{E}(n)|$  and the maximum possible code rate in the associated channels (Hamming bound), we now analyze  $|\Delta(\mathcal{E}(n))|$  to obtain a lower (Gilbert-Varshamov) bound on the maximal code rate.

**Theorem 14** (PBE GV bound). For an admissible sequence of error sets  $\mathcal{E}(n) = \mathcal{E}(n, M, \mathcal{E}_1, \mathcal{E}_2, W)$ , it holds that

$$\log_q(|\Delta(\mathcal{E}(n))|) \leq \alpha M n^2 + o(n),$$

where, if  $c_{11} + c_{22} \leq 2c_{12}$ , we have

$$\alpha = \begin{cases} (1 - 2W)c_{11} + 2Wc_{12}, & \text{if } 2W \leq 1, \\ 2(1 - W)c_{12} + (2W - 1)c_{22}, & \text{if } 2W > 1, \end{cases}$$

and otherwise  $\alpha = (1 - W)c_{11} + Wc_{22}$ . In all cases, let  $R_{GV} = 1 - \alpha$ ; then the one-shot capacity of the associated sequence of channels is bounded as

$$C_1(\text{PBC}(n)) \geq R_{GV} - o(1).$$

*Proof.* Any element of  $\Delta(\mathcal{E}(n))$  is of the form  $\mathbf{X} - \mathbf{Y}$  with  $\mathbf{X}, \mathbf{Y} \in \mathcal{E}(n)$ . Let  $\mathbf{X}$  have  $x \leq w$  columns in  $\mathcal{E}_2$  and  $m - x$  columns in  $\mathcal{E}_1$ . Let  $\mathbf{Y}$  have  $y \leq w$  columns in  $\mathcal{E}_2$  and  $m - y$  columns in  $\mathcal{E}_1$ . Then,  $\mathbf{X} - \mathbf{Y}$  with  $z$  columns in  $\mathcal{E}_{22}$  has  $x - z$  columns in  $\mathcal{E}_{12}$ ,  $y - z$  columns in  $\mathcal{E}_{21}$ , and  $m - x - y - z$  columns

in  $\mathcal{E}_{11}$ . Due to  $|\mathcal{E}_{12}| = |\mathcal{E}_{21}|$ , counting possible column vectors and their permutations, we bound  $|\Delta(\mathcal{E}(n))|$  from above as

$$\begin{aligned} & \sum_{x,y,z} \binom{m}{y-z, x-z, z} |\mathcal{E}_{22}|^z |\mathcal{E}_{12}|^{x+y-2z} |\mathcal{E}_{11}|^{m-x-y+z} \\ &= 2^{O(n)} \max_{x,y,z} |\mathcal{E}_{22}|^z |\mathcal{E}_{12}|^{x+y-2z} |\mathcal{E}_{11}|^{m-x-y+z}, \end{aligned}$$

for  $\max\{0, 2w-m\} \leq z \leq \min\{x, y\}$ . Since  $|\mathcal{E}_{11}| \leq |\mathcal{E}_{12}| \leq |\mathcal{E}_{22}|$ , the expression is maximized for  $x = y = w$  and we get

$$|\Delta(\mathcal{E}(n))| \leq 2^{O(n)} |\mathcal{E}_{11}|^{m-2w} \cdot |\mathcal{E}_{12}|^{2w} \max_z \frac{|\mathcal{E}_{11}|^z \cdot |\mathcal{E}_{22}|^z}{|\mathcal{E}_{12}|^{2z}}.$$

If  $|\mathcal{E}_{11}| \cdot |\mathcal{E}_{22}| \leq |\mathcal{E}_{12}|^2$ , the maximum is obtained for the minimal  $z$ ; that is  $z = \max\{0, 2w-m\}$ . For  $2w \leq m$ , we get

$$\frac{\log_q(|\Delta(\mathcal{E}(n))|)}{n \cdot m} \leq (1-2W)c_{11} + 2Wc_{12} + o(1),$$

and for  $2w > m$  the result is

$$\frac{\log_q(|\Delta(\mathcal{E}(n))|)}{n \cdot m} \leq 2(1-W)c_{12} + (2W-1)c_{22} + o(1).$$

In case of  $|\mathcal{E}_{11}| \cdot |\mathcal{E}_{22}| > |\mathcal{E}_{12}|^2$ , the maximum is obtained for the maximum possible  $z$ ; that is  $z = w$  which results in

$$\frac{\log_q(|\Delta(\mathcal{E}(n))|)}{n \cdot m} \leq (1-W)c_{11} + Wc_{22} + o(1).$$

The bound on the one-shot capacity follows from Thm. 5.  $\square$

**Remark 15.** In Theorem 14,  $|\mathcal{E}_{11}| \cdot |\mathcal{E}_{22}| \leq |\mathcal{E}_{12}|^2$  can be considered the standard case, with many choices of  $\mathcal{E}_1 \subset \mathcal{E}_2$  falling into this category:

- **Max-norm:**  $\mathcal{E}_1 = \{-a, \dots, a\}^n$ ,  $\mathcal{E}_2 = \{-b, \dots, b\}^n$ ,  $a \leq b$ ,
  - **Hamming metric:**  $\mathcal{E}_1 = B_q(n, t_1)$ ,  $\mathcal{E}_2 = B_q(n, t_2)$ ,  $t_1 \leq t_2$ ,
  - **Lin. subspaces:**  $\mathcal{E}_1 = \langle \mathbf{e}_1, \dots, \mathbf{e}_r \rangle$ ,  $\mathcal{E}_2 = \langle \mathbf{e}_1, \dots, \mathbf{e}_s \rangle$ ,  $r \leq s$ .
- However, there are also cases where the opposite is true. Let

$$\mathcal{E}_1 = \{0, 3, 7\}^n \subset \mathcal{E}_2 = \{-4, 0, 3, 7, 10\}^n.$$

Then, for  $q$  sufficiently large,  $|\mathcal{E}_{11}| = 7^n$ ,  $|\mathcal{E}_{12}| = 9^n$ , and  $|\mathcal{E}_{22}| = 13^n$ . Hence,  $|\mathcal{E}_{11}| \cdot |\mathcal{E}_{22}| = 91^n$  and  $|\mathcal{E}_{12}| = 81^n$ .

For Hamming PBEs,  $c_{11}c_{22} \leq c_{12}$  is satisfied, and we obtain the following expressions.

**Corollary 16** (Hamming PBE GV bound). *Let  $\mathcal{E}_1 = \{\mathbf{0}\}$ , and  $\mathcal{E}_2 = B_q(n, t)$  with  $t = T \cdot n$ . For  $2W \leq 1$ , the rate of any  $(t, w)$ -PBECC is lower bounded by  $R_{\text{GV}} = 1 - 2W \cdot F_q(T)$ ; else,  $R_{\text{GV}} = 1 - 2(1-W)F_q(T) - (2W-1)F_q(2T)$ .*

Every  $(w \cdot t)$ -error-correcting code in  $\mathbb{F}_q^{nm}$  is trivially  $(t, w)$ -PBEC, and these codes are subject to the Hamming and GV bounds in Ex. 6. It is natural to ask how these rates compare with the presented bounds for Hamming-metric PBEs.

**Comparison 17.** *Let  $R_{\text{H}}$  and  $R_{\text{GV}}$  be the quantities defined in Corollaries 13 and 16. Comparing with the asymptotic Hamming and GV bounds for block codes (Ex. 6) we find*

$$R_{\text{H}} \geq 1 - F_q(WT) \text{ and } R_{\text{GV}} \geq 1 - F_q(2WT),$$

implying that the upper and lower bounds on the rate increase asymptotically when accounting for the structure of the PBEs, instead of blindly correcting any  $tw = TW \cdot nm$  errors.

Finally, we note that there are instances where the rate  $R_{\text{GV}}$  of Cor. 16 cannot be achieved by a  $(t \cdot w)$ -error-correcting code.

**Example 18.** *Let  $q = 2$ ,  $T = \frac{1}{5}$ , and  $W = \frac{1}{12}$ . Then, by the classical Hamming bound, every code correcting a fraction of  $W \cdot T = \frac{1}{60}$  errors has a rate of at most 0.878. For Hamming PBEs, Corollary 16 implies that rate 0.880 is achievable.*

#### IV. CODE CONSTRUCTION

It is natural to align the structure of a code construction with the structure of the errors it is required to correct. Generalized Concatenated Codes (GCCs) follow this principle, coding both within and over different blocks [18]. For particular cases, the correction of burst error was studied in [19], [20]. We refer to [5] for a comprehensive introduction.

In the following,  $[n, k, \Delta(\mathcal{E})]_q$  denotes a  $k$ -dimensional linear code in  $\mathbb{F}_q^n$  that can correct all error patterns  $\mathcal{E}$ . For  $\mathcal{E} = B_q(n, t)$ , we simply write  $[n, k, 2t+1]_q$  as is common.

**Construction 19** (GCC [18]). *Let inner codes  $\mathcal{B}_s \subset \dots \subset \mathcal{B}_1$  be given with  $\mathcal{B}_j = [n, k_j, d_j]_q$ . Let outer codes  $\mathcal{A}_1, \dots, \mathcal{A}_s$  be given with  $\mathcal{A}_j = [m, K_j, D_j]_q^{(k_j - k_{j+1})}$  for  $j < s$  and  $\mathcal{A}_s = [m, K_s, D_s]_q^{k_s}$ . Denote as  $\oplus$  the direct sum and as  $\otimes$  the (tensor) concatenation. Then, a  $s$ -level GCC is defined as*

$$\mathcal{C}(\mathcal{A}_{[s]}, \mathcal{B}_{[s]}) := \bigoplus_{j=1}^{s-1} (\mathcal{A}_j \otimes (\mathcal{B}_j / \mathcal{B}_{j+1})) \oplus (\mathcal{A}_s \otimes \mathcal{B}_s) \subset \mathbb{F}_q^{n \times m}.$$

**Example 20.** *Pick  $\mathcal{B}_1 = [4, 3, 2]_2 \subset \mathcal{B}_2 = [4, 1, 4]_2$  and  $\mathcal{A}_1 = \langle (1, 1) \rangle_{\mathbb{F}_4}$ ,  $\mathcal{A}_2 = \mathbb{F}_2^2$ . Then,  $\mathcal{B}_1 / \mathcal{B}_2 = \langle (1100), (1010) \rangle$  and*

$$\mathcal{C}(\mathcal{A}_{[2]}, \mathcal{B}_{[2]}) = \left\langle \begin{pmatrix} 1 & 0 \\ 1 & 0 \\ 1 & 0 \\ 1 & 0 \end{pmatrix}, \begin{pmatrix} 0 & 1 \\ 0 & 1 \\ 0 & 1 \\ 0 & 1 \end{pmatrix}, \begin{pmatrix} 0 & 0 \\ 1 & 1 \\ 0 & 0 \\ 1 & 1 \end{pmatrix}, \begin{pmatrix} 0 & 0 \\ 0 & 0 \\ 1 & 1 \\ 1 & 1 \end{pmatrix} \right\rangle.$$

Similar to the well-known lower bound on the minimum distance, we can make the following general observation about when Constr. 19 is  $(\mathcal{E}_1, \mathcal{E}_2, w)$ -PBEC.

**Property 1.** *The code  $\mathcal{C}(\mathcal{A}_{[s]}, \mathcal{B}_{[s]})$  constructed in Constr. 19 has dimension  $\sum_{j=1}^s k_j K_j$ .  $\mathcal{C}(\mathcal{A}_{[s]}, \mathcal{B}_{[s]})$  is  $(\mathcal{E}_1, \mathcal{E}_2, w)$ -PBEC if for each level  $j \in [s]$*

$$\begin{aligned} & D_j > 2w \text{ and } \mathcal{B}_j \cap \mathcal{E}_{11} = \{\mathbf{0}\}, \\ \text{or} & D_j > w \text{ and } \mathcal{B}_j \cap \mathcal{E}_{12} = \{\mathbf{0}\}, \\ \text{or} & \mathcal{B}_j \cap \mathcal{E}_{22} = \{\mathbf{0}\}. \end{aligned}$$

*Proof.* The dimension is computed as usual.  $\mathcal{C}(\mathcal{A}_{[s]}, \mathcal{B}_{[s]})$  is  $(\mathcal{E}_1, \mathcal{E}_2, w)$ -PBEC iff  $\Delta \mathcal{E} \cup \mathcal{C}(\mathcal{A}_{[s]}, \mathcal{B}_{[s]}) = \{\mathbf{0}\}$ . This is the case if  $\Delta \mathcal{E} \cup (\mathcal{A}_j \otimes (\mathcal{B}_j / \mathcal{B}_{j+1})) = \{\mathbf{0}\} \forall j \in [s-1]$  and  $\Delta \mathcal{E} \cup (\mathcal{A}_s \otimes \mathcal{B}_s) = \{\mathbf{0}\}$ . Let  $\mathbf{C}$  be nonzero codeword of  $(\mathcal{A}_j \otimes (\mathcal{B}_j / \mathcal{B}_{j+1}))$ . Then,  $\mathbf{C}$  has at least  $D_j$  nonzero columns.  $\mathcal{B}_j \cap \mathcal{E}_{22} = \{\mathbf{0}\}$ : Since no element of  $\Delta(\mathcal{E})$  has a column in  $\mathbb{F}_q^n \setminus \mathcal{E}_{22}$ ,  $D_j > 0$  is sufficient to guarantee that  $\mathbf{C} \notin \Delta(\mathcal{E})$ .

$\mathcal{B}_j \cap \mathcal{E}_{12} = \{\mathbf{0}\}$ : At most  $w$  columns of an element in  $\Delta(\mathcal{E})$  are in  $\mathbb{F}_q^n \setminus (\mathcal{E}_{12} \cup \mathcal{E}_{21})$ . As  $\mathcal{B}_j$  is linear,  $\mathcal{B}_j \cap \mathcal{E}_{12} = \{\mathbf{0}\} \iff \mathcal{B}_j \cap (\mathcal{E}_{12} \cup \mathcal{E}_{21}) = \{\mathbf{0}\}$ . Hence, each nonzero column of  $\mathbf{C}$  is in  $\mathbb{F}_q^n \setminus (\mathcal{E}_{12} \cup \mathcal{E}_{21})$ , and  $D_j > w$  implies  $\mathbf{C} \notin \Delta(\mathcal{E})$ .

$\mathcal{B}_j \cap \mathcal{E}_{11} = \{\mathbf{0}\}$ : At most  $2w$  columns of an element in  $\Delta(\mathcal{E})$  are in  $\mathbb{F}_q^n \setminus \mathcal{E}_{11}$ . Since each nonzero column of  $\mathbf{C}$  is in  $\mathbb{F}_q^n \setminus \mathcal{E}_{11}$ ,  $D_j > 2w$  guarantees that  $\mathbf{C} \notin \Delta(\mathcal{E})$ .

The case  $\mathbf{c} \in (\mathcal{A}_s \otimes \mathcal{B}_s) \setminus \{\mathbf{0}\}$  follows in the same way.  $\square$

In the following, Property 1 is illustrated via the specific case of Hamming PBEs.

**Corollary 21.**  $\mathcal{C}(\mathcal{A}_{[s]}, \mathcal{B}_{[s]})$  is  $(t, w)$ -PBEC if  $\forall j \in [s]$

$$\begin{aligned} & D_j > 2w, \\ \text{or} & D_j > w \text{ and } d_j > t, \\ \text{or} & d_j > 2t. \end{aligned}$$

**Example 22.** Applying Corollary 21, we observe that the code  $\mathcal{C}(\mathcal{A}_{[2]}, \mathcal{B}_{[2]})$  constructed in Ex. 20 is  $(1, 1)$ -PBEC.

Inspired by Property 1 and the construction of [16], we systematically construct  $(\mathcal{E}_1, \mathcal{E}_2, w)$ -PBECCs via the following choice of inner and outer codes.

**Construction 23** (2-level code). Select  $\mathcal{B}_1 = [n, k_1, \mathcal{E}_{11}]_q$ ,  $\mathcal{B}_2 = [n, k_2, \mathcal{E}_{22}]_q$  as inner, and  $\mathcal{A}_1 = [m, K_1, 2w + 1]_{q^{k_1 - k_2}}$ ,  $\mathcal{A}_2 = \mathbb{F}_{q^{k_2}}^m$  as outer codes. By Property 1,  $\mathcal{C}(\mathcal{A}_{[2]}, \mathcal{B}_{[2]})$  is  $(\mathcal{E}_1, \mathcal{E}_2, w)$ -PBEC. We select  $\mathcal{B}_1, \mathcal{B}_2$  on the GV bound and, for sufficiently<sup>1</sup> large  $n$ ,  $\mathcal{A}_1$  MDS. Let  $|\mathcal{E}_{11}| = q^{c_{11} \cdot n + o(n)}$ , and  $|\mathcal{E}_{22}| = q^{c_{22} \cdot n + o(n)}$ . Then, the overall rate is  $R_{2\text{lvl}} - o(1)$  with

$$R_{2\text{lvl}} = 1 - c_{22} + (c_{22} - c_{11}) \max\{1 - 2W, 0\} - o(1).$$

Indeed, Hamming phased bursts recover the code of [16].

**Corollary 24** (2-level Hamming PBE code). Let  $t = T \cdot n$ ,  $w = W \cdot n$ . For  $\mathcal{E}_1 = \{\mathbf{0}\}$ ,  $\mathcal{E}_2 = \mathcal{B}_H^q(n, t)$ , Constr. 23 yields a  $(t, w)$ -PBECC of rate  $R_{2\text{lvl}} = 1 - \min\{1, 2W\} \cdot F_q(2T)$ , which is equivalent to the construction in [16].

**Example 25.** Let  $q = 2$ ,  $n = m$ ,  $T = 0.1$ , and  $W = 0.2$ . Then, the GV bound is  $R_{\text{GV}} = 0.81$ . Construction 23 achieves  $R_{2\text{lvl}} = 0.71$  for  $\mathcal{B}_2$  on the GV bound and  $\mathcal{A}_1$  MDS.

Constr. 23 utilizes only two out of three conditions of Property 1, which allow a direct guarantee on the error-correction capability. This motivates the following generalization.

**Construction 26** (3-level code). Select  $\mathcal{B}_1 = [n, k_1, \mathcal{E}_{11}]_q$ ,  $\mathcal{B}_2 = [n, k_2, \mathcal{E}_{12}]_q$ ,  $\mathcal{B}_3 = [n, k_3, \mathcal{E}_{22}]_q$  as inner codes, and  $\mathcal{A}_1 = [m, K_1, 2w + 1]_{q^{k_1 - k_2}}$ ,  $\mathcal{A}_2 = [m, K_2, w + 1]_{q^{k_2 - k_3}}$ ,  $\mathcal{A}_3 = \mathbb{F}_{q^{k_3}}^m$  as outer codes. By Property 1,  $\mathcal{C}(\mathcal{A}_{[3]}, \mathcal{B}_{[3]})$  is  $(\mathcal{E}_1, \mathcal{E}_2, w)$ -PBEC. For sufficiently<sup>2</sup> large  $n$ , select the inner codes on the GV bound and the outer codes MDS. Let  $|\mathcal{E}_{11}| =$

<sup>1</sup> $|\mathcal{E}_{22}| \cdot q^{-o(n)} \geq m|\mathcal{E}_{11}|$  is sufficient, and often holds for moderate  $n$ .

<sup>2</sup>Here,  $|\mathcal{E}_{22}| \cdot q^{-o(n)} \geq |\mathcal{E}_{12}|m$  and  $|\mathcal{E}_{12}| \cdot q^{-o(n)} \geq |\mathcal{E}_{11}|m$  is sufficient.

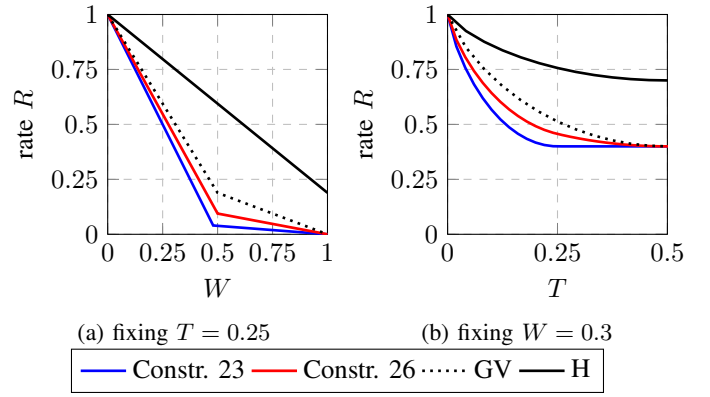


Fig. 2: Comparison of the rates achieved by Constr. 23 and Constr. 26 with the GV and Hamming bound for  $q = 2$ .

$q^{c_{11} \cdot n + o(n)}$ ,  $|\mathcal{E}_{12}| = q^{c_{12} \cdot n + o(n)}$ , and  $|\mathcal{E}_{22}| = q^{c_{22} \cdot n + o(n)}$ . Then, the total rate is  $R_{3\text{lvl}} - o(1)$  with

$$R_{3\text{lvl}} = \begin{cases} 1 - W(c_{12} + c_{22}) - c_{11}(1 - 2W), & \text{if } 2W \leq 1, \\ 1 - c_{12}(1 - W) - c_{22}W, & \text{otherwise.} \end{cases}$$

For Hamming PBEs, the following corollary is obtained.

**Corollary 27** (3-level Hamming PBE code). For  $w = Wn$ ,  $t = Tn$ ,  $\mathcal{E}_1 = \{\mathbf{0}\}$ ,  $\mathcal{E}_2 = \mathcal{B}_H^q(n, t)$ , Constr. 26 yields a  $(t, w)$ -PBECC of rate  $R_{3\text{lvl}} = 1 - WF_q(2T) - \min\{W, 1 - W\}F_q(T)$ .

**Example 28.** For  $q = 2$ ,  $n = m$ ,  $T = 0.1$ , and  $W = 0.2$ , Constr. 26 achieves  $R_{3\text{lvl}} = 0.76$  using inner codes on the GV bound and outer codes MDS. This represents a significant rate improvement compared to the 2-level construction (Ex. 25).

The achievable rates of Constructions 23 and 26 are plotted in Fig. 2 for further parametrizations of the Hamming PBE channel. Constr. 26 improves over Constr. 23 for all shown values of  $W, T$ . Next, a general formal comparison is provided.

**Comparison 29.** The rates of Constr. 23 and Constr. 26 satisfy  $R_{3\text{lvl}} = R_{2\text{lvl}} + \min\{W, 1 - W\}(c_{22} - c_{12})$ . Similarly, a comparison with the GV bound (Theorem 14) yields

$$\frac{R_{\text{GV}} - R_{3\text{lvl}}}{\min\{W, 1 - W\}} = \begin{cases} c_{22} - c_{12}, & \text{if } c_{11} \cdot c_{22} \leq c_{12}^2, \\ c_{12} - c_{11}, & \text{otherwise.} \end{cases}$$

That is, the GV bound is achieved for  $c_{11} = c_{12}$ ,  $c_{12} = c_{22}$ .

Comparison 29 shows that the presented code constructions generally do not achieve the GV bound. On the other hand, efficient decoding of the constructed GCCs is feasible, provided that efficient decoders for the component codes are available.

#### ACKNOWLEDGMENT

The authors thank Hugo Sauerbier Couvée for Remark 15. Sebastian Bitzer acknowledges the financial support by the Federal Ministry of Education and Research of Germany in the program of ‘‘Souverän. Digital. Vernetzt.’’. Joint project 6G-life, project identification number: 16KISK002. Andrea Di Giusto is supported by the European Commission through grant 101072316.

## REFERENCES

- [1] Mario Blaum, Jim Brady, Jehoshua Bruck, and Jai Menon. EVENODD: An Efficient Scheme for Tolerating Double Disk Failures in RAID Architectures. *IEEE Transactions on Computers*, 44(2):192–202, 1995.
- [2] Mario Blaum and Ron M Roth. New Array Codes for Multiple Phased Burst Correction. *IEEE Transactions on Information Theory*, 39(1):66–77, 1993.
- [3] VC da Rocha and Mario Blaum. A Secret-Key Cryptosystem Based on Phased Burst Correcting Codes. In *International Symposium on Communication Theory and Applications*, pages 136–142, 1993.
- [4] Lara Dolecek and Yuval Cassuto. Channel Coding for Nonvolatile Memory Technologies: Theoretical Advances and Practical Considerations. *Proceedings of the IEEE*, 105(9):1705–1724, 2017.
- [5] Ilya I Dumer. Concatenated Codes and their Multilevel Generalizations. *Handbook of Coding Theory*, 1998.
- [6] Ryan Gabrys, Eitan Yaakobi, and Lara Dolecek. Graded Bit-Error-Correcting Codes with Applications to Flash Memory. *IEEE Transactions on Information Theory*, 59(4):2315–2327, 2012.
- [7] Rodney M Goodman, Robert J McEliece, and Masahiro Sayano. Phased Burst Error-Correcting Array Codes. *IEEE Transactions on Information Theory*, 39(2):684–693, 1993.
- [8] Juane Li, Yi Gong, Shu Lin, and Khaled Abdel-Ghaffar. Balanced Incomplete Block Designs, Partial Geometries, and their Associated QC-LDPC Codes. In *International Symposium on Topics in Coding (ISTC)*, pages 1–5. IEEE, 2021.
- [9] Hans-Andrea Loeliger. On the Basic Averaging Arguments for Linear Codes. *Communications and Cryptography: Two Sides of One Tapestry*, pages 251–261, 1994.
- [10] Felice Manganiello and Freeman Slaughter. Generic Error SDP and Generic Error CVE. In *Code-Based Cryptography Workshop*, pages 125–143. Springer, 2023.
- [11] Dan Raphaeli. The Burst Error Correcting Capabilities of a Simple Array Code. *IEEE Transactions on Information Theory*, 51(2):722–728, 2005.
- [12] Alberto Ravagnani and Frank R Kschischang. Adversarial Network Coding. *IEEE Transactions on Information Theory*, 65(1):198–219, 2018.
- [13] Ron M Roth and Gadiel Seroussi. Reduced-Redundancy Product Codes for Burst Error Correction. *IEEE Transactions on Information Theory*, 44(4):1395–1406, 1998.
- [14] Ron M Roth and Pascal O Vontobel. Coding for Combined Block-Symbol Error Correction. *IEEE Transactions on Information Theory*, 60(5):2697–2713, 2014.
- [15] Claude Shannon. The Zero Error Capacity of a Noisy Channel. *IRE Transactions on Information Theory*, 2(3):8–19, 1956.
- [16] Jack Wolf. On Codes Derivable from the Tensor Product of Check Matrices. *IEEE Transactions on Information Theory*, 11(2):281–284, 1965.
- [17] Xin Xiao, Bane Vasić, Shu Lin, Khaled Abdel-Ghaffar, and William E Ryan. Quasi-Cyclic LDPC Codes for Correcting Multiple Phased Bursts of Erasures. In *International Symposium on Information Theory*, pages 71–75. IEEE, 2019.
- [18] Victor Alexandrovich Zinov’ev. Generalized Cascade Codes. *Problemy Peredachi Informatsii*, 12(1):5–15, 1976.
- [19] Victor Alexandrovich Zinov’ev. Generalized Concatenated Codes for Channels with Error Bursts and Independent Errors. *Problemy Peredachi Informatsii*, 17(4):53–62, 1981. In Russian.
- [20] Victor Alexandrovich Zinov’ev and Victor Vasilievich Zyablov. Correction of Error Bursts and Independent Errors Using Generalized Concatenated Codes. *Problemy Peredachi Informatsii*, 15(2):58–70, 1979. In Russian.

## APPENDIX

### A. Proofs Related to the Proposed Bounds

a) *More admissible sequences of error sets and channels:* Throughout this paper, the behavior of our general bounds and constructions is illustrated via Hamming PBEs. In the following, we demonstrate that plenty of other error sets that appear naturally are admissible according to Definition 10, expanding upon Remark 15.

**Max-norm error sets.** Let  $\mathcal{E}_1(n) = \{-a, -a+1, \dots, -a\}^n$  and  $\mathcal{E}_2(n) = \{-b, -b+1, \dots, b\}^n$  with fixed  $a \leq b \leq \frac{q-1}{2}$ . The coefficients for the sizes of  $\mathcal{E}_1$  and  $\mathcal{E}_2$  are computed as  $c_1 = \log_q(2a+1)$  and  $c_2 = \log_q(2b+1)$ . The corresponding difference sets are  $\mathcal{E}_{11} = \{-2a, \dots, 2a\}^n$ ,  $\mathcal{E}_{12} = \mathcal{E}_{21} = \{-a-b, \dots, a+b\}^n$  and  $\mathcal{E}_{22} = \{-2b, \dots, 2b\}^n$  with  $c_{11} = \log_q(\max\{q, 4a+1\})$ ,  $c_{12} = \log_q(\max\{q, 2a+2b+1\})$  and  $c_{21} = \log_q(\max\{q, 4b+1\})$ .

More generally, any error set sequences of the form  $\mathcal{E}_1(n) = (\tilde{\mathcal{E}}_1)^n$ ,  $\mathcal{E}_2(n) = (\tilde{\mathcal{E}}_2)^n$  with fixed  $0 \in \tilde{\mathcal{E}}_1 \subseteq \tilde{\mathcal{E}}_2 \subseteq \mathbb{F}_q$  are admissible according to Definition 10.

**Linear subspaces.** For  $s = S \cdot n$ ,  $t = T \cdot n$  and  $S \leq T$ , let  $\mathbf{e}_1, \dots, \mathbf{e}_s, \dots, \mathbf{e}_t \in \mathbb{F}_q^n$  be linearly independent. We set  $\mathcal{E}_1(n) = \langle \mathbf{e}_1, \dots, \mathbf{e}_s \rangle$  and  $\mathcal{E}_2(n) = \langle \mathbf{e}_1, \dots, \mathbf{e}_s, \dots, \mathbf{e}_t \rangle$ . The coefficients for the sizes of  $\mathcal{E}_1$  and  $\mathcal{E}_2$  are computed as  $c_1 = S$  and  $c_2 = T$ . The corresponding difference sets are  $\mathcal{E}_{11} = \mathcal{E}_1$ ,  $\mathcal{E}_{12} = \mathcal{E}_{21} = \mathcal{E}_{22} = \mathcal{E}_2$ . Hence, cardinality coefficients are  $c_{11} = S$  and  $c_{12} = c_{21} = c_{22} = T$ .

b) *Proof of Corollaries 13 and 16:* Let  $\mathcal{E}_1 = \{\mathbf{0}\}$  and  $\mathcal{E}_2 = B_q(n, t)$  with  $t = T \cdot n$ . Then, according to Eq. (1),  $c_1 = 0$  and  $c_2 = F_q(T)$ .  $\mathcal{E}_1 = \{\mathbf{0}\}$  implies  $\Delta(\mathcal{E}_1, \mathcal{E}_1) = \{\mathbf{0}\}$  and  $\Delta(\mathcal{E}_1, \mathcal{E}_2) = \Delta(\mathcal{E}_2, \mathcal{E}_1) = \mathcal{E}_2$ . Further,  $\Delta(\mathcal{E}_2, \mathcal{E}_2) = B_q(n, \min\{2t, n\})$  because any vector of weight at most  $2t$  can be represented as the sum of two vectors of weight at most  $t$ . Hence,  $c_{11} = 0$ ,  $c_{12} = F_q(T)$ , and  $c_{22} = F_q(2T)$ . Then, Corollaries 13 and 16 follow from Theorems 11 and 14.

c) *Proof of Comparison 17:* Define  $\mathcal{E}_H := \{\mathbf{E} \in \mathbb{F}_q^{n \times m} : \text{wt}_H(\mathbf{E}) \leq w \cdot t\}$ . Then,  $\mathcal{E}_H \supset \mathcal{E}(n, m, B_q(n, 0), B_q(n, t), w)$ , which implies the statement on the corresponding Hamming bounds. The comparison of the GV bounds follows from  $\Delta(\mathcal{E})_H \supset \Delta(\mathcal{E})$ .

### B. Proofs Related to the Code Construction

a) *Properties of Constr. 23:* For the given choice of codes,  $\mathcal{C}(\mathcal{A}_{[2]}, \mathcal{B}_{[2]})$  as given in Constr. 23 is  $(\mathcal{E}_1, \mathcal{E}_2, w)$ -PBEC according to Property 1. For  $|\mathcal{E}_{11}| = q^{c_{11} \cdot n + o(n)}$ ,  $|\mathcal{E}_{22}| = q^{c_{22} \cdot n + o(n)}$ , the inner codes  $\mathcal{B}_1, \mathcal{B}_2$  on the GV bound have dimensions

$$\begin{aligned} k_1 &= n - n \cdot c_{11} - o(n), \\ k_2 &= n - n \cdot c_{22} - o(n). \end{aligned}$$

The code  $\mathcal{A}_1$  can be chosen MDS for  $m \leq q^{k_1 - k_2}$ . Due to

$$q^{k_1 - k_2} \geq q^{n \cdot c_{22}} q^{-n \cdot c_{11} - o(n)} = |\mathcal{E}_{22}| q^{o(n)} |\mathcal{E}_{11}|^{-1},$$

$|\mathcal{E}_{22}| \cdot q^{-o(n)} \geq |\mathcal{E}_{11}| \cdot m$  is sufficient. Then,  $\mathcal{A}_1$  has dimension  $K_1 = \max\{m - 2w, 0\}$ . The dimension of  $\mathcal{C}(\mathcal{A}_{[2]}, \mathcal{B}_{[2]})$  is computed as  $\max\{m - 2w, 0\}(k_1 - k_2) + m \cdot k_2$ . Writing  $W = w/n$ , we obtain

$$nm \cdot (\max\{1 - 2W, 0\}(c_{22} - c_{11}) + (1 - c_{22})) - m \cdot o(n),$$

and the statement on the rate follows by dividing by  $n \cdot m$ .

b) *Properties of Constr. 26:* For the given choice of codes,  $\mathcal{C}(\mathcal{A}_{[3]}, \mathcal{B}_{[3]})$  as given in Constr. 26 is  $(\mathcal{E}_1, \mathcal{E}_2, w)$ -PBEC according to Property 1. For  $|\mathcal{E}_{11}| = q^{c_{11} \cdot n + o(n)}$ ,  $|\mathcal{E}_{12}| = q^{c_{12} \cdot n + o(n)}$ ,  $|\mathcal{E}_{22}| = q^{c_{22} \cdot n + o(n)}$ , the inner codes  $\mathcal{B}_1, \mathcal{B}_2, \mathcal{B}_3$  on the GV bound have dimensions

$$\begin{aligned} k_1 &= n - n \cdot c_{11} - o(n), \\ k_2 &= n - n \cdot c_{12} - o(n), \\ k_3 &= n - n \cdot c_{22} - o(n), \end{aligned}$$

The code  $\mathcal{A}_1$  can be chosen MDS for  $m \leq q^{k_1 - k_2}$ . Due to

$$q^{k_1 - k_2} \geq q^{n \cdot c_{12}} q^{-n \cdot c_{11} - o(n)} = |\mathcal{E}_{12}| q^{o(n)} |\mathcal{E}_{11}|^{-1},$$

$|\mathcal{E}_{12}| \cdot q^{-o(n)} \geq |\mathcal{E}_{11}| \cdot m$  is sufficient. Similarly,  $\mathcal{A}_2$  can be MDS for  $|\mathcal{E}_{22}| \cdot q^{-o(n)} \geq |\mathcal{E}_{12}| \cdot m$ . Then,  $\mathcal{A}_1$  and  $\mathcal{A}_2$  have dimensions  $K_1 = \max\{m - 2w, 0\}$ ,  $K_2 = m - w$ . The dimension of  $\mathcal{C}(\mathcal{A}_{[2]}, \mathcal{B}_{[2]})$  is computed as

$$\max\{m - 2w, 0\}(k_1 - k_2) + (m - w)(k_2 - k_3) + m \cdot k_3.$$

Writing  $W = w/n$ , we obtain

$$\begin{aligned} nm \cdot (\max\{1 - 2W, 0\}(c_{12} - c_{11}) \\ + (1 - W)(c_{22} - c_{11}) + (1 - c_{22})) - m \cdot o(n), \end{aligned}$$

and the statement on the rate follows by dividing by  $n \cdot m$ .

c) *Proof of Comparison 29:* The proof follows by considering each case individually.

$$\begin{aligned} c_{11}c_{22} \geq c_{12}^2, \quad 2W \leq 1 : R_{\text{GV}} - R_{3|\text{v}1} &= (c_{12} - c_{11})W, \\ c_{11}c_{22} \geq c_{12}^2, \quad 2W \geq 1 : R_{\text{GV}} - R_{3|\text{v}1} &= (c_{12} - c_{11})(1 - W), \\ c_{11}c_{22} \leq c_{12}^2, \quad 2W \leq 1 : R_{\text{GV}} - R_{3|\text{v}1} &= (c_{22} - c_{12})W, \\ c_{11}c_{22} \leq c_{12}^2, \quad 2W \geq 1 : R_{\text{GV}} - R_{3|\text{v}1} &= (c_{22} - c_{12})(1 - W). \end{aligned}$$