

# Foundation Models for CPS-IoT: Opportunities and Challenges

Ozan Baris<sup>1</sup>, Yizhuo Chen<sup>2</sup>, Gaofeng Dong<sup>3</sup>, Liying Han<sup>3</sup>,  
Tomoyoshi Kimura<sup>2</sup>, Pengrui Quan<sup>3</sup>, Ruijie Wang<sup>2</sup>, Tianchen Wang<sup>2</sup>,  
Tarek Abdelzaher<sup>2</sup>, Mario Bergés<sup>1</sup>, Paul Pu Liang<sup>4</sup>, Mani Srivastava<sup>3\*</sup>

<sup>1</sup>CMU, <sup>2</sup>UIUC, <sup>3</sup>UCLA, <sup>4</sup>MIT

## Abstract

Methods from machine learning (ML) have transformed the implementation of Perception-Cognition-Communication-Action loops in Cyber-Physical Systems (CPS) and the Internet of Things (IoT), replacing mechanistic and basic statistical models with those derived from data. However, the first generation of ML approaches, which depend on supervised learning with annotated data to create task-specific models, faces significant limitations in scaling to the diverse sensor modalities, deployment configurations, application tasks, and operating dynamics characterizing real-world CPS-IoT systems. The success of task-agnostic foundation models (FMs), including multimodal large language models (LLMs), in addressing similar challenges across natural language, computer vision, and human speech has generated considerable enthusiasm for and exploration of FMs and LLMs as flexible building blocks in CPS-IoT analytics pipelines, promising to reduce the need for costly task-specific engineering.

Nonetheless, a significant gap persists between the current capabilities of FMs and LLMs in the CPS-IoT domain and the requirements they must meet to be viable for CPS-IoT applications. In this paper, we analyze and characterize this gap

\*All authors contributed equally to this research. Junior researchers are listed first in the alphabetical order of their last names, and subsequently the senior researchers similarly. Bergés and Srivastava hold concurrent appointments as Amazon Scholars, and as Professors at their respective universities, but the work in this paper is not associated with Amazon. Contact Author: Mani Srivastava <mbs@ucla.edu>.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).  
*MobiSys '25, June 03–05, 2018, Woodstock, NY*  
© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 978-1-4503-XXXX-X/18/06  
<https://doi.org/XXXXXXX.XXXXXXX>

through a thorough examination of the state of the art and our research, which extends beyond it in various dimensions. Based on the results of our analysis and research, we identify essential desiderata that CPS-IoT domain-specific FMs and LLMs must satisfy to bridge this gap. We also propose actions by CPS-IoT researchers to collaborate in developing key community resources necessary for establishing FMs and LLMs as foundational tools for the next generation of CPS-IoT systems.

## CCS Concepts

• **Computer systems organization** → **Embedded and cyber-physical systems**; • **Human-centered computing** → **Ubiquitous and mobile computing**; • **Computing methodologies** → **Artificial intelligence**.

## Keywords

Cyber-Physical Systems, IoT, Sensing, Foundation Models

## ACM Reference Format:

Ozan Baris<sup>1</sup>, Yizhuo Chen<sup>2</sup>, Gaofeng Dong<sup>3</sup>, Liying Han<sup>3</sup>, Tomoyoshi Kimura<sup>2</sup>, Pengrui Quan<sup>3</sup>, Ruijie Wang<sup>2</sup>, Tianchen Wang<sup>2</sup>, Tarek Abdelzaher<sup>2</sup>, Mario Bergés<sup>1</sup>, Paul Pu Liang<sup>4</sup>, Mani Srivastava<sup>3</sup>. 2024. Foundation Models for CPS-IoT: Opportunities and Challenges. In *Proceedings of Make sure to enter the correct conference title from your rights confirmation email (MobiSys '25)*. ACM, New York, NY, USA, 17 pages. <https://doi.org/XXXXXXX.XXXXXXX>

## 1 Introduction

Cyber-Physical Systems and the Internet-of-Things (referred to as CPS-IoT Systems henceforth) operate through *Perception-Cognition-Communication-Action (PCCA)* loops, leveraging multimodal and multiview sensor data to comprehend physical states, predict future and remote conditions, exchange information with other systems, and execute timely interventions. Recently, CPS-IoT engineering has shifted from mechanistic and statistical models rooted in human expertise to high-dimensional, data-driven models.

Advances in machine learning (ML) and artificial intelligence (AI) research in language, vision, and speech have led to specialized neural models and training algorithms tailored for the CPS-IoT domain. These models demonstrate

notable performance gains across common signal modalities like IMU, radar, lidar, and wireless, addressing tasks such as human activity recognition, acoustic event detection, spatio-temporal tracking, and signal generation. They leverage unique characteristics like spectral domain information while tackling challenges such as sensor placement sensitivity and varying sampling rates.

However, the first generation of ML-based CPS-IoT systems faces several critical limitations. First, the trained models are task-specific, designed for particular tasks and requiring dedicated retraining for each (new) task the system must perform. Second, this task-specific supervised training strategy requires copious amounts of labeled sensor data, which is difficult to obtain because many sensing modalities are not human-interpretable, making retrospective labeling challenging. Moreover, contemporaneous labeling is intrusive, privacy-invading, and low-quality, particularly as many CPS-IoT systems operate in real-time out in the wild; and due to the limited scope of deployments/studies, most labeling strategies typically lead to data imbalance issues. Lastly, these models are often dependent on specific sensor sampling rates, placements, and configurations that vary between deployments.

**Emergence of Foundation Models:** In broader AI/ML research and industry, there is a clear trend toward homogenizing model functionalities. Supervised discriminative models, limited by the high cost and scarcity of labeled data, are increasingly being replaced by generative models trained through self-supervised learning on generic pretext tasks. This shift has led to the rise of *Foundation Models* (FMs), introduced in [12], which are defined as models trained on broad datasets using large-scale self-supervision and adaptable to a wide range of downstream tasks. FMs, such as Large Language Models (LLMs), have revolutionized AI system design by enabling task adaptation via FM-based pipelines rather than bespoke task-specific ones. The success of FMs is driven by three key factors: self-supervised pretraining, scale (of both data and computation), and innovative architectures like transformers [112], structured state-space models [23, 41], and hybrid approaches [66]. While early FMs like BERT emphasized unifying representations requiring task-specific stages, later models with natural language interfaces, such as LLMs and Large Vision Language models, can specify and perform semantically unrelated tasks. Methods for adapting FMs to downstream tasks—ranging from full fine-tuning and task-specific adapters to input prompt tuning, in-context learning, and zero-shot prompting—have further broadened their applicability.

**Foundation Models for CPS-IoT Domain:** Mirroring the rise of FMs in NLP, vision, and speech, the CPS-IoT domain has seen parallel advancements in developing FMs

tailored to its unique challenges. Indeed, the factors driving the emergence of FMs in broader AI/ML are even more critical in the CPS-IoT domain: sensor data types are more diverse, labeling is harder, unlabeled sensor data is far more abundant both absolutely and relatively, tasks are more varied with stricter performance and safety requirements, systems scale more extremely, and platforms are more resource-constrained. Many have recognized the potential of FMs for CPS-IoT, spurring significant efforts to develop task-independent sensor time series representations (e.g., LIMU-BERT [124], ImageBind [38], FOCAL [68]), leverage pretrained LLMs with their world knowledge, sequence processing, and spatiotemporal reasoning for general sensor analysis tasks (e.g., Penetrative AI [123], IoT-LM [79], LLMsense [86]), and address specific tasks (e.g., Chronos [4], MOMENT [39] for forecasting) and applications (e.g., RT-2 [13] for robot control and LSM [82] for wearable health tracking).

**About the Paper:** While there is considerable activity on CPS-IoT-related FMs and the use of LLMs for CPS-IoT, much of it directly extends models, architectures, training methods, and applications from general AI/ML domains like language and vision. At the same time, CPS-IoT systems have distinctive characteristics and needs – arising from their embodied and embedded nature, and their tight coupling with the physical world – which FMs must address. Unlike language, sensor data are discretized samples of continuous spatiotemporal physical signals rather than ordered symbolic sequences. Factors such as sampling rate, policy, quantization strategy, gain factor, location, and orientation affect both the quality and content of the physical world information in the sensor data stream. Likewise, CPS-IoT tasks must consider the spatiotemporal properties of sensor measurements and output actions, as well as latency in producing outputs.

Motivated by these observations and guided by an in-depth analysis of state-of-the-art work and insights from our preliminary research, this paper explores the desiderata for CPS-IoT FMs and lays out a research agenda. This agenda identifies key technical challenges to address and calls for collaborative efforts to create the necessary artifacts to realize it. The ideas in this paper draw on the collective expertise of the multi-institutional authoring team, spanning the entire CPS-IoT system stack and multiple applications, including prior contributions to FMs and LLMs for CPS-IoT.

The paper is divided into three main sections. Section 2 analyzes the state of the art in CPS-IoT-focused FMs and the use of LLMs for this purpose. Section 3 presents preliminary findings from our research, addressing challenges such as resource-constrained platforms, sensor viewpoints, and tasks beyond prediction. Finally, Section 4 synthesizes insights from the earlier sections into a vision for future research and community-driven artifacts.

## 2 State of the Art in CPS-IoT FMs

Existing research in FMs (including LLMs) relevant to CPS-IoT has primarily focused on *perception*, with limited attention to *cognition, communication, and action* of the PCCA loops. To assess the state-of-the-art (SOTA), we first examine perception-related FMs along two axes: sensor modalities handled (single, multiple, and flexible) and tasks performed (fixed, configurable, selectable, and run-time specifiable). We then explore FMs beyond the perception tasks for CPS-IoT.

### 2.1 CPS-IoT FMs for Perception: A Sensor Modality Perspective

Much of the research on CPS-IoT FMs for perception focuses on projecting raw sensor signals into compact representations, or *embeddings*, that encode underlying physical phenomena and are generalizable to various downstream tasks. Self-supervised learning (SSL) is commonly used to learn such representations without requiring task-specific annotations. The trained FM is then adapted to compute desired outputs for a specific downstream task, such as event classification or spatiotemporal localization. This stage is either learned from limited annotated data or designed from first principles and human knowledge. However, learning robust representations for CPS-IoT systems is challenging due to the spatiotemporal characteristics of sensor signals [53, 70] and the significant heterogeneity of sensor modalities across application domains [65]. We categorize prior works on SSL for CPS-IoT FMs into three groups, focusing on single modality, a fixed set of modalities, or a flexible set of modalities.

**2.1.1 Unimodal Models.** Most CPS-IoT FMs focus on mapping a single sensor modality (e.g., image, IMU, sound) into embeddings. SSL frameworks for these FMs either contrast temporally close samples to capture temporal consistency [109, 133] or reconstruct masked portions of time-series [27, 83, 124]. For human activity recognition, the FM in [131] uses a multi-task self-supervision approach employing the arrow of time, permutation, and time warping to enhance generalization. Similarly, ReLCon [125] applies a learnable distance measure and softened contrastive loss to capture motif similarity and domain-specific semantics. Alternatively, many SSL approaches explore frequency representations of raw signals to capture spatiotemporal features. TimesNet [119] transforms 1D time series into 2D tensors to capture multi-periodicity. TFC [137] enforces time-frequency consistency through contrastive learning. AudioMAE [48] builds on MAE [45] architectures to reconstruct masked spectrograms of acoustic signals. PhyMask [54] introduces physics-informed masking for MAE pretraining. Beyond learning techniques, alternative sensing embedding encoder architectures of FMs have been explored, such as frequency transformers [55], mixer models [18, 30], and recently emergent state-space models [11, 99, 134].

**2.1.2 Multimodal Models.** FMs that integrate heterogeneous signals from a fixed set of sensor modalities into joint embeddings have emerged for multimodal CPS-IoT applications [57, 79, 82, 107]. Cosmo [85] enhances modality representations with augmented fusion for contrastive learning. Cocoa [26] improves cross-modal coherence with discriminative objectives on temporally distant samples. FOCAL [68] factorizes the representation into orthogonal shared and private subspaces to capture complementary and shared modality information. Parallel works have explored aligning modalities to handle missing data. Imagebind [38] binds images, text, audio, depth, thermal, and IMU data into a joint embedding space using only image-paired data. Babel [22] proposes expandable networks to incrementally integrate modalities. Similarly, MMBind [87] constructs pseudo-paired data from incomplete multimodal sources for multimodal pretraining.

**2.1.3 Flexible Modality Models.** Existing works have explored FMs that adapt to flexible modalities, as available sensor modalities in CPS-IoT applications often vary due to resource constraints, platform heterogeneity, and operating environment. One approach involves models that infer modality availability at test time. For example, missing modality can be indicated with special input value [89] or with a mask vector [92]. Transformers can use prompt tokens (similar to position embeddings) to mark sensor modality and adapt to missing data [60, 64, 111]. Models can also handle missing modalities at test time by performing probabilistic modality dropout or cross-modal attention masking during training [72]. Another approach trains reconstruction models with modality dropout to generate missing data from the available modalities [118]. Alternatively, models like Perceiver [51] adopt new architecture to handle arbitrary configurations of modalities. Lastly, FMs for univariate time-series forecasting [4, 52, 69] treat all sensor data as timestamped, scaled real-numbered values and can adapt to arbitrary modalities by handling input domain shift with scaling training data, though often unsuccessfully [81].

### 2.2 CPS-IoT FMs for Perception: A Task Perspective

The trend towards increasing homogenization of model functionality in broader AI as reflected in LLMs is also influencing CPS-IoT FMs resulting in an evolution from unifying sensor modality representations to unifying CPS-IoT tasks. Below we analyze the SOTA in CPS-IoT FM from the perspective of breadth of tasks they handle, organizing them into four groups: fixed task, design-time configurable task, run-time selectable task, and run-time specifiable task.

**2.2.1 Fixed Task Models.** These models perform a single specific task but can do so on a broad spectrum of sensor data types either in a zero-shot manner or with some fine-tuning

for performance. The most prominent example of such FMs is time-series forecasting models, often referred to as Time Series FMs (TSFMs) despite their single-task focus, that have recently emerged in academic literature and commercial offerings. Examples include Amazon’s Chronos [4], a family of open-source probabilistic forecasting models based on the T5 architecture [94], Moirai [117], which employs an encoder-only transformer for multivariate time series, LagLlama [95], which leverages the decoder-only Llama architecture [110] for probabilistic forecasting, and TimesFM [24], which uses a decoder-based transformer with residual blocks for multivariate time-series forecasting.

**2.2.2 Configurable Task Models.** FMs focused on representing raw sensor data into embedding vectors fall under this category, such as those discussed in the preceding subsection (e.g., LIMU-Bert [124], FOCAL [68], TimesNet [119] etc.). Pretrained via SSL on a broad spectrum of data, they can be configured for specific tasks by pairing with a downstream stage. Task-specific labeled sensor data is used to train the downstream stage, which may also fine-tune the embedding FM. For many tasks, the downstream stage can be as simple as a linear probe, though more sophisticated models are often used. An excellent example is MOMENT [39], a family of open-source FMs for time-series analysis. It serves as a versatile representation learning FM that, when paired with a fine-tuned linear probe, can handle tasks like imputation, anomaly detection, and long-horizon forecasting, or, with a fine-tuned classification head, can perform classification tasks.

**2.2.3 Selectable Task Models.** Selectable CPS-IoT FMs provide greater flexibility by allowing users to choose from a predefined set of tasks at run-time without requiring *any* additional fine-tuning. These models use a metadata channel to specify the desired task from the fixed set. The MOMENT FM mentioned above can also function as a selectable task model, performing anomaly detection, imputation, short-horizon forecasting, and classification in a zero-shot manner without parameter updates. Similarly, TimeGPT [36] utilizes an encoder-decoder structure to perform zero-shot forecasting and anomaly detection without additional training. UniTS [34], a unified multi-task time-series model, processes input data as tokens and employs a shared architecture for tasks like forecasting, classification, anomaly detection, and imputation. At deployment, prompt tokens—learnable embeddings fine-tuned for specific datasets or tasks—are appended to input tokens to provide task-specific context, enabling adaptation to new tasks or datasets without modifying the frozen pretrained model.

**2.2.4 Run-time Specifiable.** Run-time specifiable tasks enable users to define new tasks at run-time via input specification (e.g., text). In NLP, text-to-text models use task-specific prefixes [94] or text description in modern LLMs [14] for task definitions. In the CPS-IoT domain, recent work leverages LLMs’ internal pretrained world knowledge to ingest task descriptions and exhibit emergent reasoning, planning [43], and optimization [126] abilities. The key difference lies in whether input data (e.g., sensor measurements) and outputs (e.g., state estimates, control actions) are textually embedded, or mapped via adapters to or from the embedding space. Examples of the first approach include PromptCast [127], LLMTIME [40], IoT-LLM [3], Penetrative AI [123] and LLMSense [86]. These works demonstrate that LLMs, with their world knowledge and reasoning abilities [71, 77], excel in zero- and few-shot settings, handling tasks from forecasting to complex inference that go beyond mere sequence processing and pattern matching [42]. The second approach, such as IoT-LM [79] and Time-LLM [52], trains adapters to align a CPS-IoT system’s input, output, or intermediate variables to the backbone LLM’s semantic space, outperforming the first approach but requiring more complex design and fine-tuning. Lastly, some recent works [128, 135, 136] have explored leveraging label semantics for sensing classification without any task-specific training.

## 2.3 Beyond Perception

While existing research towards CPS-IoT FMs has primarily focused on encoding sensory data for perception, there is incipient work on FMs for other stages of the PCCA loops with the emergence of task- and platform-specific AI/ML models. The successes of deep reinforcement learning in robotics [44], autonomous vehicles [58], drones [115], pan-tilt-zoom cameras [97], and building energy and HVAC management [130] catalyzed interest in FMs adaptable to deployments (e.g., different buildings, robotic bodies, etc.) without requiring additional training. Particularly, the robotics community has a burgeoning body of FM research [32, 47] developing general-purpose robots and models generalizable across new platforms. These FMs are often trained as vision-language action (VLA) models [13, 56, 73], or finetuned Vision Language Models (VLMs), to learn policies for tasks like manipulation and navigation from massive vision-language demonstration data with diverse robots [84] and can be used for variety of tasks such as planning [101] in the PCCA loops of robots. Alternatively, LLMs and VLMs are increasingly used via prompting as FMs for CPS-IoT tasks in robotics [29, 113], HVAC control [98], and industrial control [102], as well as tools for generating control code [62, 113], annotating sensor data [46], tasking CPS-IoT resources [67], managing sensor privacy [114], and Q&A over sensor data [50].

### 3 New Insights from Our Research

Given the quickly expanding landscape of FMs for CPS-IoT applications, an interesting question becomes: Are FMs for the CPS-IoT domain simply an adaptation of more general research in AI/ML to new datasets and tasks (such as the approaches summarized in the previous section) or are there fundamental differences in how we should think of FMs for CPS-IoT applications? Several distinguishing characteristics of the CPS-IoT domain impact FM design:

1. *Tight resource/quality trade-offs:* CPS-IoT applications significantly shift acceptable resource/quality trade-offs for practical deployment of AI/ML. For example, recent statistics indicate that the cost of converting a standard car to an autonomous one is significantly higher than the cost of the original vehicle [25]. This is unacceptable and would hinder the pervasive use of mobile intelligence.

2. *Spatial embodiment:* CPS-IoT applications are concerned with world state that evolves in physical time and space. Sensors sample that state from various vantage points with a range of observation modalities. FMs must abstract away from sensor properties, modalities, and locations to representations of the observed phenomena in space and time.

3. *Historical context:* Historical context is critical to interpreting current phenomena. Today’s LLMs are limited in the amount of context they can ingest. While this amount may be sufficient for understanding large passages of text, sensors can be sampled at much larger rates, with arbitrarily old events playing a significant role in interpreting the present. Novel solutions are needed to preserve important context.

4. *Structural constraints:* The physical embodiment of CPS-IoT applications into a world that abides by laws of nature entails the existence of significant amounts of prior knowledge, including laws of physics, system dynamics, and other constraints imposed on the data at multiple levels of abstraction. FMs, in a way, are an expression of the underlying knowledge in a domain. Thus, training and/or inference should allow explicit representation and exploitation of domain constraints to improve reasoning efficiency.

Motivated by the above differences, we discuss a preliminary exploration of challenges arising from these distinguishing properties, solution requirements to address these challenges, and remaining open issues.

#### 3.1 Tight Resource/quality Trade-offs

The integration of future CPS-IoT FMs with private sensor data and user context will favor implementations where the intelligence resides on the edge and not in the cloud. To what extent are improvements required in resource efficiency and inference quality for FMs to run on the mobile device?

3.1.1 *A Preliminary Experiment.* To address the above question, we test two existing general FMs on task-specific IoT

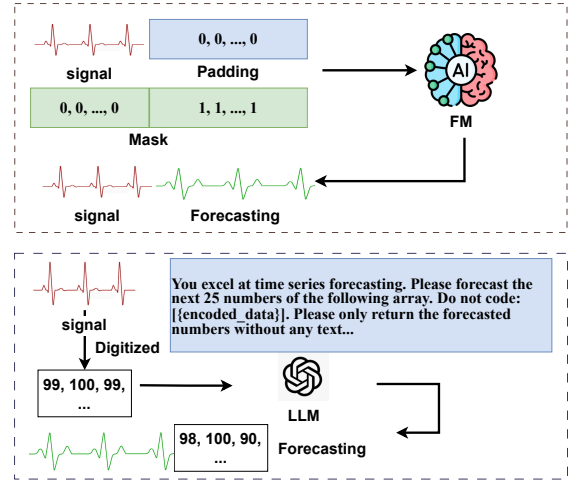


Figure 1: Test settings. Top: TSFM. Bottom: LLM.

data: a time-series FM (TSFM), MOMENT (of which we use two different sizes), and an LLM, Llama-3.2, with 1 billion parameters. Figure 1 illustrates the experimental setup for these models. To assess their effectiveness, we consider two common mobile IoT tasks: extrapolation and imputation, executed on electrocardiogram (ECG) and photoplethysmogram (PPG) signals, downsampled to 50Hz, inspired by mobile health monitoring applications. We also compare these approaches to two classical baselines (variations of ARIMA models using [100]). The first baseline, called ARIMA-pretraining (ARIMA-PT), fits an ARIMA model using an 80-20 training-evaluation split, after which the model remains fixed for evaluation. The second approach, termed ARIMA-online-training (ARIMA-OT), leverages the lightweight nature of ARIMA models to perform test-time fitting. We implement the models on a Google Pixel 8 Pro based on an open-source Java library [106] and the ExecuTorch framework [75]. Memory footprint is assessed by measuring the memory usage change before and after loading and running the model. Cold-start latency is defined as the total duration encompassing both the model loading phase and the execution of a single inference, while warm-start latency measures the time taken for a single inference after the model is already loaded.

Table 1: Accuracy, latency, and memory footprint of models. In the latency column, we evaluate both cold-start latency (left) and warm-start latency (right).

Model	$ECG_{Imp}$	$ECG_{Ext}$	$PPG_{Imp}$	$PPG_{Ext}$	Latency (ms)	Mem. (MB)
ARIMA-OT	0.1387	0.1276	0.0083	0.0070	42.8/11.3	<b>0.33</b>
ARIMA-PT	<u>0.1195</u>	0.1235	0.0077	0.0078	<u>2.0/1.6</u>	<u>0.74</u>
GridARIMA-OT	0.1263	<u>0.1157</u>	0.0102	0.0071	148.7/40.6	2.30
GridARIMA-PT	0.1562	0.1269	<u>0.0072</u>	<u>0.0068</u>	<b>1.8/1.3</b>	12.49
Moment-S	0.1442	0.1392	0.0081	0.0075	217.0/72.5	88.7
Moment-L	<b>0.1030</b>	<b>0.1134</b>	<b>0.0050</b>	<b>0.0061</b>	2359.4/618.2	1207.7
Llama3.2-1B	1.9052	3.3038	4.0773	6.1396	9967.5/7641.7	1662.7

**3.1.2 Experimental Results and Recommendations.** Table 1 shows that the largest of the time-series FMs, MOMENT-L did outperform both versions of ARIMA on both tasks. However, this was accomplished at the expense of 2-3 order of magnitude increase in latency, and over 3 orders of magnitude increase in memory footprint. For example, Moment-L required 1.2 GB of memory and incurred a cold-start latency of 2.3 seconds, compared to 0.74 MB and 2ms cold-start latency for ARIMA-PT. Moreover Llama failed to outperform ARIMA, despite its higher resource consumption than even MOMENT-L. This observation highlights the limitations of today’s general LLMs in processing low-level sensory data directly, suggesting that their strengths lie in handling metadata, high-level reasoning, or language-based analytics, rather than raw time series analysis.

The experiment motivates developing a new generation of FMs specifically designed and optimized for CPS-IoT applications of interest. Such FMs, if successful, might become new architectural abstractions – a part of the mobile OS – that allow handling myriads of user-specific intelligent tasks. But first, one must understand more carefully how CPS-IoT applications differ and what these differences imply in terms of FM design and customization.


### 3.2 Spatial Embodiment

CPS-IoT applications distinguish *world state* (of monitored phenomena) from the *observed* (or *measured*) views as sampled by sensors at specific vantage points. There is usually the notion of a *channel* that propagates state from the source phenomenon to the observers, incurring various distortions along the way. This creates an inconsistency: Ingested FM data are *sensor data* representing distributed local observations. The goal, however, is to represent the actual *world state*. For example, in acoustic monitoring, one may want to recover the real sound, location, and speed of a moving object from projections perceived by individual sensors at different vantage points. CPS-IoT FMs must therefore abstract from the time-series data of individual sensors to representations of the underlying observed phenomena. How can the training of FMs be nudged to represent the observed environment, not sensor data? Said differently, how to ensure the invariance of the representation from the observation instruments and their locations?

**3.2.1 Challenges.** To allow FM training to decouple *local signal projections* from the unified latent semantic representation of the observed phenomena, it needs to understand the *spatial structure* of observations. Arbitrarily placed sensors simply perform an irregular local sampling of the scene. Their positions must be encoded by the FM to understand how the scene is sampled. Traditional positional embeddings,

such as those common for text and images, are typically designed to encode the relative order of input tokens in sequential or grid-based data. In contrast, sensors are not deployed in regular lines or grids. Thus, in multi-view or multi-vantage sensing applications, sensor geo-location embedding (that directly encodes the specific location information of each vantage point) is desirable. Location embeddings should further generalize to differences in absolute positioning that do not impact spatial reasoning. For example, they can encode relative distances, not absolute GPS locations. Alternatively, they can use augmentations that abstract away the absolute locations to ensure that the model focuses on relative positioning features. In addition to the geo-location embedding, timestamp embeddings should also be incorporated to specify the temporal metadata of observations. A multi-vantage model must also understand the relations between vantage points. For example, in vision, geometric transformations and/or neural network-based approaches (e.g., NeRF [76]) can be applied to construct an image from a new angle or vantage point given existing images from other vantage points. To attain the same effect with arbitrary sensors, one training approach could be to mask a portion of a sensor’s time series and reconstruct it from signals at other vantage points, forcing the model to learn signal dependencies on location.

**3.2.2 A Preliminary Experiment.** For a proof of concept, we used a multimodal MAE-based framework that consists of an encoder and a decoder. Input signals from different vantage points are transformed into visual representations (namely, spectrograms). A dedicated encoder processes each modality, and the resulting embeddings are combined in a joint encoder to enable a cross-modal representation. The overall architecture is illustrated in Figure 2.

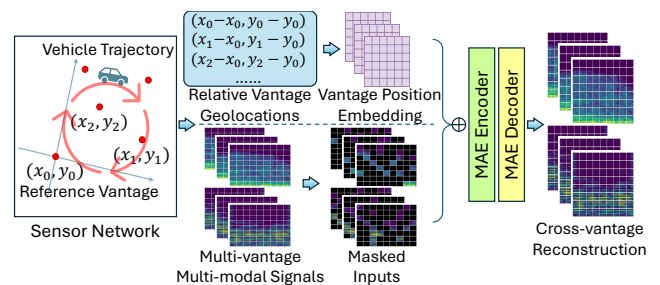

**Figure 2: An architecture for spatial representation learning.**

To encode positional information, the model employs a 3-dimensional learnable positional embedding that integrates time, frequency, and spatial vantage point information. These embeddings are added to the masked input before being processed by the encoder. Notably, relative coordinates of vantage points are encoded instead of absolute locations to ensure the translation invariance of the spatial positional


embeddings. To uncover spatiotemporal dependencies, the raw inputs are divided into patches, with a subset selectively masked across specific vantage points, time steps, or frequency bands. The auto-encoder is then trained to reconstruct the complete stacked spectrograms. This reconstruction process enables the framework to extract spatiotemporal relations in a self-supervised manner by inferring signals across related vantage points, times, and frequency bands.

**3.2.3 Experimental Results and Recommendations.** To test if the newly-trained model can recover physical states of observed phenomena, we use it to perform *target tracking*. Unlike classification, where data from any one sensor might be sufficient for identifying the target, *tracking* requires collective use of multiple sensor signals and positions to learn the equivalent of *localization*. We evaluate it on a self-collected dataset using a network of six Raspberry Pi nodes strategically positioned along vehicle routes to collect acoustic and seismic signals. During the data collection, civilian vehicles were driven by the sensors at varying speeds and directions, with the vehicle’s real-time GPS coordinates recorded for ground-truthing purposes. We present the trained model’s classification and tracking performance in Figure 3 compared to state-of-the-art contrastive baselines [19, 26, 68, 91, 108]. Our method consistently achieves the highest accuracy and F1 score for classification and the lowest Mean Squared Error (MSE) and Mean Absolute Error (MAE) for tracking.

The experiment demonstrates the importance of investigating novel approaches to FM pretraining that nudge the FM to learn representations of *physical world state*, as opposed to merely encoding the projections of that state, comprising sensory time-series signals. This is often called the *inverse problem* [104], as distinguished from forecasting future observations. Many challenges must be solved to develop general mechanisms for distilling unified *sensor-agnostic latent representations of environmental state* (collected from a wide range of sensing modalities and vantage points), and mechanisms for automating *state interpretation*, given world knowledge. The problem is more challenging in cluttered environments, calling for solutions that augment sensor measurements with prior knowledge to disambiguate among multiple competing inverse hypotheses regarding complex state from limited available observations. The final representation should also be generalized across different sensor configurations, abstracting away from specifics such as sensor calibration details, gains, and sampling rates.

### 3.3 Historical Context

The importance of temporal events (that extend over time) to the interpretation of observed physical phenomena makes historical context of present observations an important part of their semantic representation. Most existing work on CPS-IoT applications has focused on short-time perception tasks,

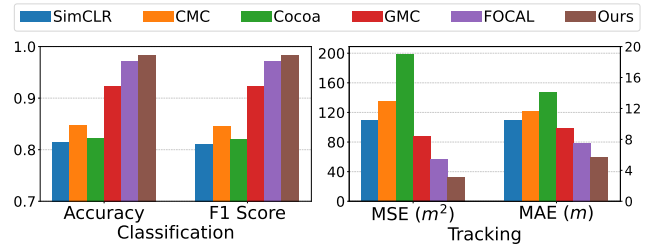

**Figure 3: Performance comparison of multi-node classification (measured by accuracy  $\uparrow$  and F1 score  $\uparrow$ ) and tracking (measured by MSE  $\downarrow$  and MAE  $\downarrow$ ) tasks.**

such as human activity recognition or object detection, which typically require only a few seconds of sensor data for inference. However, to achieve a human-like understanding of the world, a system must capture high-level contextual information over extended periods of time, an aspect often overlooked in current work.

For example, for an outside observer to ascertain that an office building is empty (say, at the end of a work day), it needs the accumulated record of all entry and exit events since the building was last unlocked. Considering a camera with a 30 frame/second rate, an 8-hour work-day generates nearly one million frames, far more than the context window of modern LLMs. It is therefore important to know *what needs to be remembered*. Unfortunately, the key events to remember depend on the situation. To describe different situations, it is useful to define the concept of a *complex event*. A complex event represents a high-level scenario with spatiotemporal rules and patterns that require aggregating and reasoning over numerous short-term activities, which we call *atomic events*. For example, Fig. 4(a) defines a complex event where an intelligent assistant on a mobile device understands a sanitary protocol and alerts users of potential violations. Fig. 4(b) shows a scenario in a smart facility, where a surveillance system detects potentially suspicious activity, such as an unusual parcel hand-off, by analyzing data across distributed cameras.

**3.3.1 Challenges.** Complex event detection (CED) introduces several challenges. First, the pattern of interest (e.g., the trained self-attention matrix of the FM’s encoder) must identify key atomic event occurrences relevant to the complex event while ignoring irrelevant activities. Let us call the latter, “don’t care” elements, or “X.” For example, the sanitary protocol can be represented as “Use restroom  $\rightarrow$  X  $\rightarrow$  Wash hands  $\rightarrow$  X  $\rightarrow$  Eat,” where “X” includes other irrelevant activities like “walking” or “sitting.” Incorporating “X” broadens the range of possible matching sequences, and the temporal duration further amplifies this space exponentially. Second, complex events have much longer time dependencies. In the sanitary protocol example, violation occurs when the person skips “Wash hands” after “Use restroom” and before

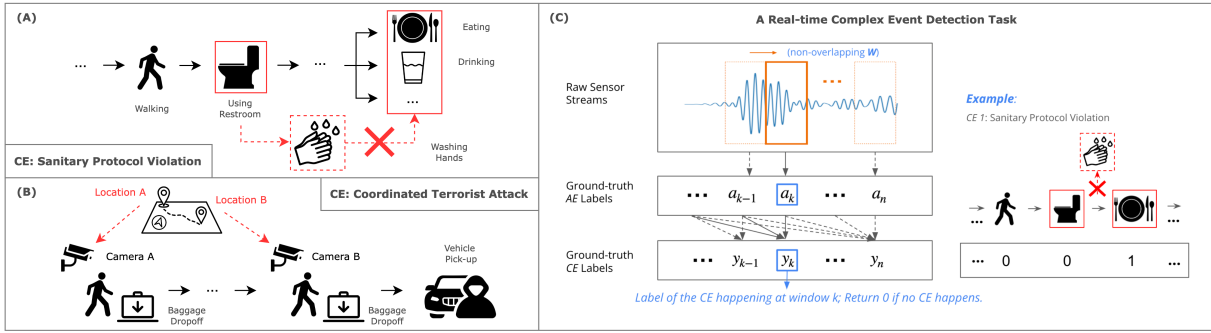


Figure 4: (a) Sanitary protocol violation in smart home health monitoring system. (b) Detecting coordinated terrorist attacks at different locations across the city using the surveillance system. (c) In a real-time complex event detection (CED) task, only the raw sensor streams and ground-truth complex event labels are provided.

"Eat". However, the time gap between those atomic events can be significant. Third, complex events often require immediate attention. For instance, in a nursing monitor system, we shouldn't wait to analyze data until the end of the day. Instead, we need immediate alerts when safety is violated.

Table 2: Evaluation results of LLMs.

	Length	Coarse F1				Conditional F1			
		Acc.	e <sub>1</sub>	e <sub>2</sub>	e <sub>3</sub>	Avg.	e <sub>1</sub>	e <sub>2</sub>	e <sub>3</sub>
<i>Zero-shot</i>									
Qwen2.5-7B	0.04	0.51	0.67	0.67	0.62	0.0	0.18	0.05	0.07
Qwen2.5-14B	0.12	0.60	0.66	0.57	0.61	0.14	0.15	0.04	0.11
GPT-4o-mini	0.04	0.0	0.0	0.64	0.21	0.0	0.0	0.0	0.0
GPT-4o	0.12	0.87	0.78	0.80	0.82	0.14	0.59	0.03	0.25
<i>Few-shot (k = 3)</i>									
Qwen2.5-7B	0.04	0.49	0.68	0.71	0.63	0.0	0.19	0.04	0.08
Qwen2.5-14B	0.14	0.62	0.66	0.60	0.63	0.13	0.13	0.03	0.10
GPT-4o-mini	0.03	0.0	0.0	0.58	0.19	0.0	0.0	0.0	0.0
GPT-4o	0.16	0.87	0.81	0.81	0.83	0.13	0.63	0.14	0.30

3.3.2 *A Preliminary Experiment.* To investigate the performance of existing LLMs on a real-time CED task, we designed a multimodal complex event dataset in a smart health monitoring setting, and created a stochastic simulator that mimics daily human behaviors and synthesizes the corresponding sensor traces using existing IMU and Audio datasets for the underlying atomic activities, WISDM[116] and ESC50[90]. Fig. 4(c) illustrates the task. To help the LLM, we assumed a perfect labeling tool that detects the ground truth text label of the atomic activity and passes it to the LLM. We then explained in the text prompt what constitutes a complex event. We use three metrics to evaluate the LLM's performance. The *Length Accuracy* metric determines if the the complex event labels given by LLMs have the same length as the input sequence. The *Conditional F1 Score* evaluates element-wise (time-wise) *F1* score for three complex event labels, conditioned on the case when the LLM outputs a complex

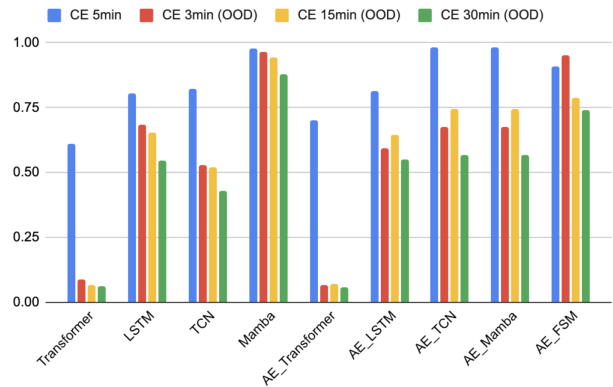


Figure 5: Average F1 scores of models on complex events with different temporal spans.

event sequence with the correct length  $T$ . *Coarse F1 Score* is a sample-wise coarse *F1* score that evaluates complex event labeling at high-level. It does not require a precise match between the predicted and ground-truth complex event labels at every timestamp. It only requires the LLM to recognize a complex event type in the 5-minute sample correctly. Table 2 shows the results. It can be seen that the LLMs performed somewhat poorly at complex event detection for all types of complex events considered.

Two approaches were then considered to building an improved real-time Complex Event Detection (CED) framework. The first uses sequential neural network models like CNNs, Transformers, and RNNs to learn complex event rules in a data-driven manner. The second employs *neurosymbolic* architectures with hand-coded rules, such as DeepProbLog[74] and NeurASP [129], utilizing neural network outputs for probabilistic symbolic computation. The neurosymbolic method we designed integrates neural networks for recognizing atomic activities with user-defined rules for complex event detection. We compare three model types for complex event detection: (1) *End-to-End Models*: Includes Transformer, LSTM, TCN, and Mamba, trained on




sensor latent embedding sequences and complex event labels; (2) *Concept Bottlenecked Models*: Consists of AE + Transformer, AE + LSTM, AE + TCN, and AE + Mamba. These models use a pretrained classifier (AE) to obtain atomic activity labels, which are then used to train the neural backbones; (3) *Neurosymbolic Model*: The AE+FSM model employs the most probable atomic activity label as input for rule-based finite state machines (FSMs).

**3.3.3 Experimental Results and Recommendations.** Figure 5 presents our preliminary results for various models. We also tested these models on out-of-distribution (OOD) complex events lasting 3 minutes, 15 minutes, and 30 minutes, all adhering to the same rules but varying in temporal span. The Mamba and AE+FSM models outperformed others on average. The AE + FSM model incorporates correct complex event rules; its performance declines greatly with longer traces due to cumulative errors from imperfect atomic event inference. While the Mamba model showed the best generalization on the OOD test sets, we still noted a performance drop as the temporal span increased.

The above experiments show that FMs capable of reasoning over long and complex temporal patterns are still lacking. Though LLMs have potential to perform well on CED tasks, the current models still suffer from hallucinations and poor ability in long-chain reasoning. In our preliminary experiments on different model architectures and methods, we also find that state-based methods such as the Mamba model and FSM engines are more suitable when dealing with complex event patterns that may span a long time, as they can compress information into states efficiently. However, CED tasks remain challenging in many ways. For example, it remains to design efficient means to define new types of complex events, allowing the FM to detect them in a zero-shot or a few-shot manner. Input tokenization is another important concern. With meaningful events occurring at multiple granularities, the best size for input time-series sensor data tokens is unclear. Another challenge is to scale context window size and develop mechanisms to efficiently remember old (but important) events in continuous and long sensor streams. In particular, the ability to incorporate human knowledge and the use of neurosymbolic architecture to guide attention seem like key architectural requirements.

### 3.4 Structural Constraints

To solve the inverse problem referred to in Section 3.2, define complex events referred to in Section 3.3, or simply imbue an LLM with specialized domain-specific knowledge [138], one must express structural constraints that encode any explicit prior knowledge about the world. Knowledge graphs (KGs) are an ideal candidate to bridge human-like understanding of the world with the autonomous capabilities of FMs [17], particularly to enable complex and context-aware tasks in

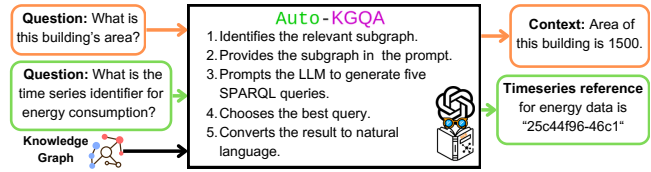

**Figure 6: Example input outputs for our experimentation with AutoKGQA to extract contextual and sensory information.**

CPS IoT systems. The integration of LMMs and KGs has indeed been an active research topic [88]. Specifically, KGs can encode structured relationships and metadata that reflect the architecture and dynamics of the system, as well as describe the data-generating process. They essentially provide two key types of information: (1) contextual information, such as system characteristics, interdependencies, functional hierarchies, and dynamics; and (2) knowledge about the sensor data itself (i.e., metadata). The development of domain-specific KGs for CPS-IoT applications is thus an important endeavor.

A particularly attractive solution is to couple KGs with LLMs so that arbitrary queries for the contextual and metadata information needed to address CPS-IoT tasks can be expressed in natural language, thus creating a sort of dynamic linker that can identify the relevant contextual knowledge needed to achieve arbitrary tasks at runtime. LLMs can be coupled with KGs in at least three ways: LLM-augmented KGs, which use existing pretrained LLMs to perform KG tasks such as Knowledge Graph Question Answering (KGQA, e.g. [6]); KG-enhanced LLMs which use KGs during pretraining and fine-tuning of the LLM; and, though less explored, synergized LLMs + KGs which use both methods to achieve mutually beneficial results [61, 88]. In general, there is a large body of work on LLMs leveraging KGs for a variety of applications [88] outside of CPS-IoT.

**3.4.1 Challenges.** Selecting relevant sensory and contextual data for CPS-IoT applications is challenging due to the diversity and volume of time series data and complex system configurations. CPS-IoT systems can comprise of thousands or millions of sensors/actuators deployed over equally large number of components with exponentially many more relationships, leading to complex and massive KGs. The goal is to automatically retrieve and process relevant contextual information and time series data based on high-level task descriptions by leveraging semantic context and sensor relationships encoded in KGs.

**3.4.2 A preliminary Experiment.** To identify the methodological differences when applying such approaches to the CPS-IoT domain, we conduct a preliminary experiment using buildings as a use case. Figure 6 illustrates our experimentation. Specifically, we examine a scalable LLM-based KGQA

method for information retrieval in CPS IoT systems, focusing on sensory data [6]. The buildings domain is particularly suitable for this investigation due to the maturity of KGs to describe buildings and their CPS-IoT systems, such as the Brick schema [7]. Thus, we used the KG of a real-world building (vm3a) from the Mortar repository [31], which was created with the Brick Schema and contained 1,609 schema terms (T-box) and 61,366 instance-level resources (A-box). We explored the task of calculating the energy use intensity (EUI) of a building, which is determined by dividing a building’s annual energy consumption (kWh) by its total floor area, requiring retrieval of (1) dynamic energy consumption time series and (2) the static building area value. Although, ideally, we would like FMs to take the text describing the full application/task directly, existing KGQA tools are designed for what is described as *simple questions* [49]. Thus, to accommodate to this limitation, we divided the task description into two subqueries: (1) retrieving the total building area, and (2) identify the relevant energy consumption time series reference. This example is valuable because it involves extracting a time series reference (i.e., metadata about a dynamic data source) and building area (i.e., contextual information). Due to human ambiguity being a common challenge in KGQA, we paraphrased each input with varying levels of specificity, as shown in Table 3. For question answering, we employed AutoKGQA [6], a state-of-the-art framework recognized for its domain independence and capability to function without requiring any training/fine-tuning. We tested AutoKGQA with Llama 3.1 405B and GPT-4o, both yielding identical results shown in Table 3. We set a similarity threshold of 0.15 and an LLM temperature of 0 to maximize consistency in the results.

**Table 3: Questions with varying specificity for Building Area (1-5) and Timeseries ID queries (6-10)**

$Q_{id}$	Inputs	405B/4o
1	What is the value of the area of this building?	✓
2	Retrieve the numerical value of this building’s area.	×
3	What is the area of this building?	×
4	Get the area details of a building.	×
5	How large is this building?	×
6	What is the timeseries ID of the timeseries reference of a building electrical meter?	✓
7	Retrieve the unique timeseries ID associated with the timeseries reference of an electrical meter in this building.	✓
8	What is the timeseries ID of a building electrical meter?	×
9	Identify the ID for the data series connected to a specific electrical meter in the building.	×
10	What is the timeseries for the energy consumption of this building?	×

**3.4.3 Experimental Results and Recommendations.** Beyond the established challenges for KGQA known in the literature, we have identified issues unique to CPS IoT systems, below.

*One-to-Many Mapping:* Unlike traditional KGQA questions targeting clear objects (e.g., "Obama," "University of Edinburgh"), CPS concepts are often vague (e.g., "Energy"). LLMs struggle to map such inputs to relevant KG entities. For example, the FAISS relevance-based search for  $Q_{id} = 10$  returned 16 triples, including Building, Energy\_Sensor, and Energy\_Zone, but not Building\_Electrical\_Meter, which the KG used to associate the energy consumption time series. These design discrepancies, influenced by practitioner decisions, lead to variability in class availability, as noted in [10]. Traditional KGQA typically avoids this complexity due to the clear uniqueness of its subjects. A solution such as restricting reasoning to the A-box is insufficient when schema-level (T-box) reasoning, such as class hierarchy inference, is required. Balancing these needs remains a key challenge in adapting KGQA to CPS.

*Size of the Knowledge Graph/Subgraph:* LLM-based KGQA approaches either input the entire KG or extract relevant subgraphs to fit token limits. However, we observed that extraction solely based on semantic similarity often exceeded token limits, as sensor-related inputs pull in all sensor-associated classes. This makes balancing efficiency and relevance difficult. When we tested GPT-4o with prompting relevant subgraphs, they successfully generated all SPARQL queries from the given questions, highlighting that the main challenge lies in supplying LLMs with the appropriate relevant subgraph.

*Relation Linking:* Previous KGQA efforts have attempted to determine the number of hops required from the description of a question (e.g., identifying the zip code of the capital city of China involves two hops)[121]. Building ontologies requires more complex relation linking since users often lack awareness of system configurations. For example, finding the timeseries ID of a building electrical meter ( $Q_{id} = 8$ ) may seem like a single-hop query but involves a multi-hop relationship through hasTimeseriesReference. LLM-based KGQA tools often fail to resolve these intermediary relationships, requiring advanced methods for path discovery.

*Property Extraction.* Some queries involve property-level connections, such as value or hasUnits. For instance, while AutoKGQA identified a building’s area node in  $Q_{id} = 3, 4$ , it failed to retrieve its brick:value. KGQA tools must not only identify nodes but also explore their graph structure to resolve such property connections. Without this capability, query results remain incomplete, limiting real-world utility.

Overall, KGQA for CPS-IoT must offer rich language channels while demonstrating the ability to map vague concepts to diverse schema elements, balancing relevance and efficiency in subgraph extraction, resolving complex multi-hop relationships without explicit input definitions, extracting specific property-level details from implicit references, and enabling generalization to multiple uses or tasks, all while maintaining trust and ensuring sensor/language alignment.

## 4 Quo vadis CPS-IoT FMs?

Despite tremendous advancements in FMs and LLMs for CPS-IoT, the unique characteristics of the domain pose significant limitations. We identify two distinct sets of challenges: (a) technical challenges limiting FMs efficacy for CPS-IoT applications, highlighted as recommendations upon the experiments presented in Section 3; and (b) challenges in developing an ecosystem of software tools, datasets, and benchmarks that facilitate rapid ideate-develop-validate iterations.

### 4.1 Desiderata for FMs & LLMs in CPS-IoT

**4.1.1 Generalizability across sensor configurations.** Language and image modalities exhibit significant consistency and standardization in data representation and interpretation (e.g., words in a language, common image and video formats, etc.). In contrast, sensor data varies significantly within and across modalities, lacking standardized representations and consistent information content. Viewing sensor time series as sequences of values overlooks the intricate dependence of information content on sensor configuration and physical channel. Supervised discriminative models and recently emerging FMs for CPS-IoT enforce strict sensor configuration during training and anticipate similar configurations at test time. Multimodal FMs encounter challenges with novel sensor positions and orientations, particularly for 3D spatial intelligence tasks [120]. CPS-IoT FMs must ingest diverse sensor data and generalize to unseen sensor configurations. This requires architecture and training frameworks that learn sensor representations aware of configurations, either inferred from data or provided via appropriate metadata channels.

**4.1.2 Generalizability across CPS-IoT tasks.** Existing CPS-IoT FMs also fail to generalize across the broad spectrum of tasks encountered in CPS-IoT. As noted in Section 2, current CPS-IoT FMs – both end-to-end models performing entire tasks (e.g., [4, 39, 69]) and those mapping sensor data to embeddings for use with task-specific heads (e.g., [55, 68, 82, 124]) – primarily focus on a single or a small set of tasks, such as forecasting, imputation, and classification. Other than the attempts to use LLMs as general-purpose CPS-IoT FMs, which have been unsatisfactory in both performance and resource usage, no CPS-IoT FMs have yet emerged that can handle the myriad of CPS-IoT tasks, such as complex spatiotemporal events, planning, reasoning, control, etc. The main reason is that current CPS-IoT FMs pursue the low-hanging fruit of adapting advanced language and vision models to sensor data that could be treated as sequences, whereas FMs that generalize to a broader array of CPS-IoT tasks will require more general capabilities of reasoning, optimization, and planning in 4D space-time.

**4.1.3 Sensor Tokenization.** CPS-IoT FMs struggle to segment continuous input modalities effectively. They often require

tokenizing and segmenting long-range sensor data while preserving semantic meaning and local granularities, which is challenging when adapting existing AI systems originally designed for language and vision modalities that have clear tokenization. For example, in NLP, tokenization occurs at the word or sub-word level [93], and in computer vision, it is applied at the level of individual objects within an image [28]. Existing models (e.g., transformers [112]) are designed for discrete tokens with natural vocabulary and segmentation and require preprocessing to segment and discretize continuous sensing signals, which often leads to information loss [103]. Earlier work in statistics and signal processing on change point detection [2, 105] can model the semantic changes in information, such as a sudden change in physical activity frequency, structural collapses, or video scene transitions. Extending these methods for long and continuous sensor data and integrating them end-to-end with CPS-IoT FMs remains challenging. Key questions include whether CPS-IoT FMs should shift focus from sequences of samples representing observed states to key events (state changes) and learn to represent their spatiotemporal relationships.

**4.1.4 Models for continuous and long sensor streams.** Another challenge for CPS-IoT FMs is learning representations from long, continuous sensor streams, particularly for tasks like complex event detection that require reasoning over long periods ([96, 122]. Transformers, while pervasive, scale poorly with respect to sequence length [9]. As a result, many long-range [8], memory-augmented [15], and sparse attention [20] transformers have been proposed to process long-range sensor data. State space models [41, 139] are another recently proposed alternative to transformer-based discrete sequence models by leveraging continuous dynamic systems (i.e., states), enabling them to scale effectively to very long sequence lengths and continuous data. A related challenge is learning information from multiple streams of long-range sensor data, where the task-specific information varies over time [63]. Future work should extend these long-context models (e.g., long-range transformers, memory-based models, state space models) to better capture relationships and interactions between multiple sensor streams that may not be aligned in time or space [64, 65, 111].

**4.1.5 Ability to incorporate human knowledge: Neurosymbolic Architectures.** Current AI systems for language and vision interact only with humans, while CPS-IoT systems also engage with engineered systems with well-understood physics, albeit with perturbations. CPS-IoT systems are also designed to meet precise safety and other requirements, unlike LLM-based chatbots with ambiguous and subjective guardrails. CPS-IoT FMs can leverage human knowledge about system physics and operating constraints to simplify development, especially in data-sparse settings, and enable

rapid adaptation to deployments and changing requirements. This is particularly useful in settings with deployment-to-deployment variation and short-lived deployments. While LLM can process human knowledge via prompts at runtime, they lack sufficient reliability and struggle with complex logical reasoning. An alternative is neurosymbolic [35] CPS-IoT FMs, which combine neural layers with symbolic layers that encode human knowledge and algorithms while capable of run-time fine-tuning. While neurosymbolic models have shown promise in simple CPS-IoT settings [122], considerable challenges remain: computational scaling of symbolic stages; efficient management of uncertainty, noise, and spatiotemporal concepts; methods for efficient training and fine-tuning [21]; and extending beyond perception [78].

**4.1.6 Rich language channel.** Many of these desiderata depend on the CPS-IoT FM having access to auxiliary information at runtime beyond sensory data, such as task description, static context (e.g., sensor configurations), and dynamic context (e.g., environment conditions). Instead of dedicated typed channels for each auxiliary information entity, CPS-IoT FMs could benefit from a general-purpose language channel that integrates tokens from auxiliary data with the sensor data stream when mapping to the latent embedding space. Aligning the language channel with sensor data unifies reasoning and prediction over sensor data and leads to more versatile, explainable, and adaptable models. Preliminary evidence [16] demonstrates the value of such contextual information in time series forecasting tasks. Collecting rich annotations of various sensor inputs through language can enable the development of a unified language to describe, reason, and predict on these sensors [79], just like how unified language descriptions of visual images, objects, and relationships have catalyzed vision language models [33, 65].

**4.1.7 New architectural abstractions.** For CPS-IoT models to gain wide adoption and serve as reusable building blocks for system designers, they must be easy to integrate and optimize with system software and hardware and effectively interact with other custom FMs. Moreover, as we discussed in Section 3.1, FMs, due to their generality, require significant resources in absolute terms and compared to specialized single-purpose models. Therefore, the current practice of each application in a multi-tenant CPS-IoT system bundling its own models is unsustainable with FMs, particularly as most CPS-IoT systems cannot rely on cloud services for various reasons. Therefore, integrating CPS-IoT FMs into the overall system stack requires careful consideration. Given their resource footprint, we believe CPS-IoT FMs will be run-time composable services provided by the platform (i.e., hardware + OS) and shared by multiple applications rather than merely design-time reusable blocks. This ecosystem

requires standardized yet flexible interfaces for CPS-IoT-FMs-as-system-service, along with autotunable models in accuracy-resource-performance space based on the needs of subscribing applications. An example of such CPS-IoT models is the M4 composable multimodal FM [132].

## 4.2 CPS-IoT FM Development Ecosystem

Developing quality FMs is difficult. Yet, in language and vision domains, the co-development of open models, large datasets, diverse benchmarks, and supporting tools has accelerated development. For CPS-IoT FMs with the aforementioned desiderata to emerge, a similar ecosystem is needed to facilitate a virtuous cycle of ideate-develop-validate iterations and application-level development. In particular, there is a need for large-scale unified benchmarks spanning multiple CPS-IoT domains, sensing modalities and tasks. Existing CPS-IoT datasets [1, 5, 37, 59, 80], are often constrained into a few of these dimensions.

One challenge in creating an organic collaboration for CPS-IoT is the non-human-interpretable nature of its data, particularly raw sensory input. Large vision and language models are powered by the abundant internet-scale text, image, and video data aligned with human perception and easily shared online, creating natural incentives for publishing raw data. In contrast, most CPS-IoT sensory data lacks these incentives. Although highly processed, human-interpretable data (e.g., fitness statistics) can be shared, raw sensory data (e.g., IMU) is seldom disclosed. Privacy, intellectual property concerns, sensor heterogeneity, and data volume exacerbate the issue. Most importantly, non-interpretable data offers limited immediate value, significantly reducing incentives for sharing. To create high-quality CPS-IoT FMs, we must incentivize individuals and organizations to share raw sensor and actuator data by offering socially constructed derivative information or new ways for people to experience the raw data that align with their senses.

A second factor is that CPS-IoT systems vary widely in task, sensing, platform, actuator, environment, and safety requirements owing to their diverse applications (e.g., agriculture, aeronautics, buildings, and healthcare). Although all of these systems perform PCCA loops, a single CPS-IoT FM to handle all of them is impractical. However, drawing inspiration from robotics success, targeting application-specific CPS-IoT FMs for energy, healthcare, and transportation may be feasible. These *micro foundation models* ( $\mu$ FMs) are more resource efficient and can be embedded. Although the diversity of each domain still surpasses that of robotics, the development of  $\mu$ FM is more manageable.

## 5 Conclusions

We explored the potential of foundation models (FMs) and large language models (LLMs) in enhancing Cyber-Physical

Systems (CPS) and the Internet of Things (IoT) by addressing challenges in perception, cognition, communication, and action (PCCA) loops. While traditional task-specific machine learning models in CPS-IoT have limitations due to data annotation requirements, sensor heterogeneity, and deployment constraints, FMs offer a transformative approach with their task-agnostic adaptability and self-supervised learning methods. However, while FMs and LLMs hold immense promise for CPS-IoT, their practical adoption require going beyond current approaches that simplistically adapt methods from general NLP and computer vision domains to CPS-IoT. Instead, CPS-IoT FMs, and LLMs targeting CPS-IoT applications, must account for the unique characteristics of sensory data, physical actions, and tasks across the PCCA loops. Not only are the research problems challenging, but solving them would also require community-scale effort at creating a unified ecosystem of data sets, models, and benchmarks. By addressing these gaps, FMs and LLMs could serve as foundational tools for the next generation of CPS-IoT applications, fostering widespread innovation across diverse domains.

## Acknowledgments

This research was funded in part by the Air Force Office of Scientific Research under Cooperative Agreement # FA95502210193, the DEVCOM ARL under Cooperative Agreement # W911NF-17-2-0196, the NIH mDOT Center under Award # 1P41EB028242, the NSF under Award # CNS-2325956 and # CNS-2038817, and the Boeing Company. It was also supported in part by the Pennsylvania Infrastructure Technology Alliance (PITA) and by ACE, one of the seven centers in JUMP 2.0, a Semiconductor Research Corporation (SRC) program sponsored by DARPA.

## References

- [1] Karan Ahuja, Paul Strel, and Christian Holz. 2021. TouchPose: Hand Pose Prediction, Depth Estimation, and Touch Classification from Capacitive Images. In *Proceedings of the 34th Annual ACM Symposium on User Interface Software and Technology*. Association for Computing Machinery, New York, NY, USA, 13 pages. <https://doi.org/10.1145/3472749.3474801>
- [2] Samaneh Aminikhanghahi and Diane J Cook. 2017. A survey of methods for time series change point detection. *Knowledge and information systems* 51, 2 (2017), 339–367.
- [3] Tuo An, Yunjiao Zhou, Han Zou, and Jianfei Yang. 2024. IoT-LLM: Enhancing Real-World IoT Task Reasoning with Large Language Models. *arXiv preprint arXiv:2410.02429* (2024).
- [4] Abdul Fatir Ansari, Lorenzo Stella, Caner Turkmen, Xiyuan Zhang, Pedro Mercado, Huibin Shen, Oleksandr Shchur, Syama Sundar Rangapuram, Sebastian Pineda Arango, Shubham Kapoor, et al. 2024. Chronos: Learning the language of time series. *Transactions on Machine Learning Research* (2024).
- [5] Riku Arakawa, Mayank Goel, Chris Harrison, and Karan Ahuja. 2022. RGBDGaze: Gaze Tracking on Smartphones with RGB and Depth Data. In *International Conference on Multimodal Interaction, ICMI 2022, Bengaluru, India, November 7–11, 2022*. ACM, New York, 329–336. <https://doi.org/10.1145/3536221.3556568>
- [6] Caio Viktor S. Avila, Vânia M.P. Vidal, Wellington Franco, and Marco A. Casanova. 2024. Experiments with text-to-SPARQL based on ChatGPT. In *2024 IEEE 18th International Conference on Semantic Computing (ICSC)*. IEEE, Laguna Hills, CA, USA, 277–284. <https://doi.org/10.1109/ICSC59802.2024.00050>
- [7] Bharathan Balaji, Arka Bhattacharya, Gabriel Fierro, Jingkun Gao, Joshua Gluck, Dezhi Hong, Aslak Johansen, Jason Koh, Joern Ploenigs, Yuvraj Agarwal, Mario Berges, David Culler, Rajesh Gupta, Mikkel Baun Kjærgaard, Mani Srivastava, and Kamin Whitehouse. 2016. Brick: Towards a Unified Metadata Schema For Buildings. In *Proceedings of the 3rd ACM International Conference on Systems for Energy-Efficient Built Environments*. ACM, Palo Alto CA USA, 41–50. <https://doi.org/10.1145/2993422.2993577>
- [8] Iz Beltagy, Matthew E Peters, and Arman Cohan. 2020. Longformer: The long-document transformer. *arXiv preprint arXiv:2004.05150* (2020).
- [9] Assaf Ben-Kish, Itamar Zimerman, Shady Abu-Hussein, Nadav Cohen, Amir Globerson, Lior Wolf, and Raja Giryes. 2024. DeciMamba: Exploring the Length Extrapolation Potential of Mamba. *arXiv preprint arXiv:2406.14528* (2024).
- [10] Imane Lahmam Bennani, Anand Krishnan Prakash, Marina Zafiris, Lazlo Paul, Carlos Duarte Roa, Paul Raftery, Marco Pritoni, and Gabe Fierro. 2021. Query relaxation for portable brick-based applications. In *Proceedings of the 8th ACM International Conference on Systems for Energy-Efficient Buildings, Cities, and Transportation*. ACM, Coimbra Portugal, 150–159. <https://doi.org/10.1145/3486611.3486671>
- [11] Sathya Kamesh Bhethanabhotla, Omar Swelam, Julien Siems, David Salinas, and Frank Hutter. 2024. Mamba4Cast: Efficient Zero-Shot Time Series Forecasting with State Space Models. *arXiv preprint arXiv:2410.09385* (2024).
- [12] Rishi Bommasani, Drew A Hudson, Ehsan Adeli, Russ Altman, Simran Arora, Sydney von Arx, Michael S Bernstein, Jeannette Bohg, Antoine Bosselut, Emma Brunskill, et al. 2021. On the opportunities and risks of foundation models. *arXiv preprint arXiv:2108.07258* (2021).
- [13] Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Xi Chen, Krzysztof Choromanski, Tianli Ding, Danny Driess, Avinava Dubey, Chelsea Finn, et al. 2023. RT-2: Vision-language-action models transfer web knowledge to robotic control. *arXiv preprint arXiv:2307.15818* (2023).
- [14] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. Language models are few-shot learners. In *Proceedings of the 34th International Conference on Neural Information Processing Systems (Vancouver, BC, Canada) (NIPS '20)*. Curran Associates Inc., Red Hook, NY, USA, Article 159, 25 pages.
- [15] Aydar Bulatov, Yury Kuratov, and Mikhail Burtsev. 2022. Recurrent memory transformer. *Advances in Neural Information Processing Systems* 35 (2022), 11079–11091.
- [16] Sameep Chattopadhyay, Pulkit Paliwal, Sai Shankar Narasimhan, Shubhankar Agarwal, and Sandeep P Chinchali. 2024. Context Matters: Leveraging Contextual Features for Time Series Forecasting. *arXiv preprint arXiv:2410.12672* (2024).
- [17] Huajun Chen. 2023. Large knowledge model: Perspectives and challenges. *arXiv preprint arXiv:2312.02706* (2023).
- [18] Si-An Chen, Chun-Liang Li, Nate Yoder, Sercan O Arik, and Tomas Pfister. 2023. Tsmixer: An all-mlp architecture for time series forecasting. *arXiv preprint arXiv:2303.06053* (2023).

- [19] Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. 2020. A simple framework for contrastive learning of visual representations. In *International Conference on Machine Learning (ICML)*.
- [20] Rewon Child, Scott Gray, Alec Radford, and Ilya Sutskever. 2019. Generating long sequences with sparse transformers. *arXiv preprint arXiv:1904.10509* (2019).
- [21] Daniel Cunningham, Mark Law, Jorge Lobo, and Alessandra Russo. 2024. The role of foundation models in neuro-symbolic learning and reasoning. In *International Conference on Neural-Symbolic Learning and Reasoning*. Springer, 84–100.
- [22] Shenghong Dai, Shiqi Jiang, Yifan Yang, Ting Cao, Mo Li, Suman Banerjee, and Lili Qiu. 2024. Advancing Multi-Modal Sensing Through Expandable Modality Alignment. *arXiv preprint arXiv:2407.17777* (2024).
- [23] Tri Dao and Albert Gu. 2024. Transformers are SSMS: Generalized models and efficient algorithms through structured state space duality. *arXiv preprint arXiv:2405.21060* (2024).
- [24] Abhimanyu Das, Weihao Kong, Rajat Sen, and Yichen Zhou. 2023. A decoder-only foundation model for time-series forecasting. *arXiv preprint arXiv:2310.10688* (2023).
- [25] Robert Day. 2019. Accelerating Autonomous Vehicle Technology What challenges do we need to consider for the safe deployment of autonomous vehicles at scale? *IEEE Spectrum* (2019).
- [26] Shohreh Deldari, Hao Xue, Aaqib Saeed, Daniel V Smith, and Flora D Salim. 2022. Cocoa: Cross modality contrastive learning for sensor data. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies* 6, 3 (2022), 1–28.
- [27] Jiaxiang Dong, Haixu Wu, Haoran Zhang, Li Zhang, Jianmin Wang, and Mingsheng Long. 2023. Simmtm: A simple pre-training framework for masked time-series modeling. *Advances in Neural Information Processing Systems* 36 (2023).
- [28] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. 2020. An Image is Worth 16x16 Words: Transformers for Image Recognition at Scale. In *International Conference on Learning Representations*.
- [29] Danny Driess, Fei Xia, Mehdi SM Sajjadi, Corey Lynch, Aakanksha Chowdhery, Brian Ichter, Ayzaan Wahid, Jonathan Tompson, Quan Vuong, Tianhe Yu, et al. 2023. PaLM-E: An embodied multimodal language model. *arXiv preprint arXiv:2303.03378* (2023).
- [30] Vijay Ekambaram, Arindam Jati, Nam Nguyen, Phanwadee Sinthong, and Jayant Kalagnanam. 2023. TSMixer: Lightweight MLP-Mixer Model for Multivariate Time Series Forecasting. In *Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD '23)*. 459–469. <https://doi.org/10.1145/3580305.3599533>
- [31] Gabe Fierro, Marco Pritoni, Moustafa Abdelbaky, Daniel Lengyel, John Leyden, Anand Prakash, Pranav Gupta, Paul Raftery, Therese Peffer, Greg Thomson, and David E. Culler. 2019. Mortar: An Open Testbed for Portable Building Analytics. *ACM Transactions on Sensor Networks* 16, 1 (Dec. 2019), 7:1–7:31. <https://doi.org/10.1145/3366375>
- [32] Roya Firoozi, Johnathan Tucker, Stephen Tian, Anirudha Majumdar, Jiankai Sun, Weiyu Liu, Yuke Zhu, Shuran Song, Ashish Kapoor, Karol Hausman, et al. 2023. Foundation models in robotics: Applications, challenges, and the future. *The International Journal of Robotics Research* (2023), 02783649241281508.
- [33] Zhe Gan, Linjie Li, Chunyuan Li, Lijuan Wang, Zicheng Liu, Jianfeng Gao, et al. 2022. Vision-language pre-training: Basics, recent advances, and future trends. *Foundations and Trends® in Computer Graphics and Vision* 14, 3–4 (2022), 163–352.
- [34] Shanghua Gao, Teddy Koker, Owen Queen, Thomas Hartvigsen, Theodoros Tsiligkaridis, and Marinka Zitnik. 2024. UniTS: A unified multi-task time series model. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*.
- [35] Artur d’Avila Garcez, Marco Gori, Luis C Lamb, Luciano Serafini, Michael Spranger, and Son N Tran. 2019. Neural-symbolic computing: An effective methodology for principled integration of machine learning and reasoning. *arXiv preprint arXiv:1905.06088* (2019).
- [36] Azul Garza and Max Mergenthaler-Canseco. 2023. TimeGPT-1. *arXiv preprint arXiv:2310.03589* (2023).
- [37] A Geiger, P Lenz, C Stiller, and R Urtasun. 2013. Vision Meets Robotics: The KITTI Dataset. *Int. J. Rob. Res.* 32, 11 (sep 2013), 1231–1237. <https://doi.org/10.1177/0278364913491297>
- [38] Rohit Girdhar, Alaaeldin El-Nouby, Zhuang Liu, Mannat Singh, Kalyan Vasudev Alwala, Armand Joulin, and Ishan Misra. 2023. Imagebind: One embedding space to bind them all. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 15180–15190.
- [39] Mononito Goswami, Konrad Szafer, Arjun Choudhry, Yifu Cai, Shuo Li, and Artur Dubrawski. 2024. Moment: A family of open time-series foundation models. *arXiv preprint arXiv:2402.03885* (2024).
- [40] Nate Gruver, Marc Finzi, Shikai Qiu, and Andrew G Wilson. 2024. Large language models are zero-shot time series forecasters. *Advances in Neural Information Processing Systems* 36 (2024).
- [41] Albert Gu and Tri Dao. 2023. Mamba: Linear-time sequence modeling with selective state spaces. *arXiv preprint arXiv:2312.00752* (2023).
- [42] Yu Gu, Boyuan Zheng, Boyu Gou, Kai Zhang, Cheng Chang, Sanjari Srivastava, Yanan Xie, Peng Qi, Huan Sun, and Yu Su. 2024. Is your LLM secretly a world model of the internet? model-based planning for web agents. *arXiv preprint arXiv:2411.06559* (2024).
- [43] Atharva Gundawar, Karthik Valmeekam, Mudit Verma, and Subbarao Kambhampati. 2024. Robust Planning with Compound LLM Architectures: An LLM-Modulo Approach. *arXiv preprint arXiv:2411.14484* (2024).
- [44] Tuomas Haarnoja, Sehoon Ha, Aurick Zhou, Jie Tan, George Tucker, and Sergey Levine. 2018. Learning to walk via deep reinforcement learning. *arXiv preprint arXiv:1812.11103* (2018).
- [45] Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. 2022. Masked autoencoders are scalable vision learners. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*.
- [46] Aritra Hota, Soumyajit Chatterjee, and Sandip Chakraborty. 2024. Evaluating Large Language Models as Virtual Annotators for Time-series Physical Sensing Data. *arXiv preprint arXiv:2403.01133* (2024).
- [47] Yafei Hu, Quanting Xie, Vidhi Jain, Jonathan Francis, Jay Patrikar, Nikhil Keetha, Seungchan Kim, Yaqi Xie, Tianyi Zhang, Hao-Shu Fang, et al. 2023. Toward general-purpose robots via foundation models: A survey and meta-analysis. *arXiv preprint arXiv:2312.08782* (2023).
- [48] Po-Yao Huang, Hu Xu, Juncheng Li, Alexei Baevski, Michael Auli, Wojciech Galuba, Florian Metze, and Christoph Feichtenhofer. 2022. Masked autoencoders that listen. *Advances in Neural Information Processing Systems* 35 (2022), 28708–28720.
- [49] Xiao Huang, Jingyuan Zhang, Dingcheng Li, and Ping Li. 2019. Knowledge graph embedding based question answering. In *Proceedings of the twelfth ACM international conference on web search and data mining*. 105–113.
- [50] Sheikh Asif Imran, Mohammad Nur Hossain Khan, Subrata Biswas, and Bashima Islam. 2024. LLaSA: Large Multimodal Agent for Human Activity Analysis Through Wearable Sensors. *arXiv preprint arXiv:2406.14498* (2024).
- [51] Andrew Jaegle, Felix Gimeno, Andy Brock, Oriol Vinyals, Andrew Zisserman, and Joao Carreira. 2021. Perceiver: General perception with iterative attention. In *International conference on machine learning*.

- PMLR, 4651–4664.
- [52] Ming Jin, Shiyu Wang, Lintao Ma, Zhixuan Chu, James Y Zhang, Xiaoming Shi, Pin-Yu Chen, Yuxuan Liang, Yuan-Fang Li, Shirui Pan, et al. 2023. Time-LLM: Time series forecasting by reprogramming large language models. *arXiv preprint arXiv:2310.01728* (2023).
- [53] Ming Jin, Qingsong Wen, Yuxuan Liang, Chaoli Zhang, Siqiao Xue, Xue Wang, James Zhang, Yi Wang, Haifeng Chen, Xiaoli Li, Shirui Pan, Vincent S. Tseng, Yu Zheng, Lei Chen, and Hui Xiong. 2023. Large Models for Time Series and Spatio-Temporal Data: A Survey and Outlook. <http://arxiv.org/abs/2310.10196> arXiv:2310.10196 [cs].
- [54] Denizhan Kara, Tomoyoshi Kimura, Yatong Chen, Jinyang Li, Ruijie Wang, Yizhuo Chen, Tianshi Wang, Shengzhong Liu, and Tarek Abdelzaher. 2024. PhyMask: An Adaptive Masking Paradigm for Efficient Self-Supervised Learning in IoT. In *Proceedings of the 22nd ACM Conference on Embedded Networked Sensor Systems (SenSys '24)*. 97–111.
- [55] Denizhan Kara, Tomoyoshi Kimura, Shengzhong Liu, Jinyang Li, Dongxin Liu, Tianshi Wang, Ruijie Wang, Yizhuo Chen, Yigong Hu, and Tarek Abdelzaher. 2024. FreqMAE: Frequency-Aware Masked Autoencoder for Multi-Modal IoT Sensing. In *Proceedings of the ACM on Web Conference 2024*. 2795–2806.
- [56] Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan Foster, Grace Lam, Pannag Sanketi, et al. 2024. OpenVLA: An Open-Source Vision-Language-Action Model. *arXiv preprint arXiv:2406.09246* (2024).
- [57] Tomoyoshi Kimura, Jinyang Li, Tianshi Wang, Yizhuo Chen, Ruijie Wang, Denizhan Kara, Maggie Wigness, Joydeep Bhattacharyya, Mudhakar Srivatsa, Shengzhong Liu, Mani Srivastava, Suhas Diggavi, and Tarek Abdelzaher. 2024. VibroFM: Towards Micro Foundation Models for Robust Multimodal IoT Sensing. 10–18. <https://doi.org/10.1109/MASS62177.2024.00014>
- [58] B Ravi Kiran, Ibrahim Sobh, Victor Talpaert, Patrick Mannion, Ahmad A Al Sallab, Senthil Yogamani, and Patrick Pérez. 2021. Deep reinforcement learning for autonomous driving: A survey. *IEEE Transactions on Intelligent Transportation Systems* 23, 6 (2021), 4909–4926.
- [59] Andy Kong, Karan Ahuja, Mayank Goel, and Chris Harrison. 2021. EyeMU Interactions: Gaze + IMU Gestures on Mobile Devices. In *Proceedings of the 2021 International Conference on Multimodal Interaction (Montréal, QC, Canada) (ICMI '21)*. Association for Computing Machinery, New York, NY, USA, 577–585. <https://doi.org/10.1145/3462244.3479938>
- [60] Yi-Lun Lee, Yi-Hsuan Tsai, Wei-Chen Chiu, and Chen-Yu Lee. 2023. Multimodal prompting with missing modalities for visual recognition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 14943–14952.
- [61] DaiFeng Li and Fan Xu. 2024. Synergizing knowledge graphs with large language models: a comprehensive review and future prospects. *arXiv preprint arXiv:2407.18470* (2024).
- [62] Jacky Liang, Wenlong Huang, Fei Xia, Peng Xu, Karol Hausman, Brian Ichter, Pete Florence, and Andy Zeng. 2023. Code as policies: Language model programs for embodied control. In *2023 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 9493–9500.
- [63] Paul Pu Liang, Yun Cheng, Xiang Fan, Chun Kai Ling, Suzanne Nie, Richard J. Chen, and Zihao Deng. 2023. Quantifying & Modeling Multimodal Interactions: An Information Decomposition Framework. In *NeurIPS*.
- [64] Paul Pu Liang, Yiwei Lyu, Xiang Fan, Jeffrey Tsaw, Yudong Liu, Shentong Mo, Dani Yogatama, Louis-Philippe Morency, and Ruslan Salakhutdinov. 2022. High-modality multimodal transformer: Quantifying modality & interaction heterogeneity for high-modality representation learning. *arXiv preprint arXiv:2203.01311* (2022).
- [65] Paul Pu Liang, Amir Zadeh, and Louis-Philippe Morency. 2024. Foundations & trends in multimodal machine learning: Principles, challenges, and open questions. *Comput. Surveys* 56, 10 (2024), 1–42.
- [66] Opher Lieber, Barak Lenz, Hofit Bata, Gal Cohen, Jhonathan Osin, Itay Dalmedigos, Erez Safahi, Shaked Meirum, Yonatan Belinkov, Shai Shalev-Shwartz, et al. 2024. Jamba: A hybrid transformer-mamba language model. *arXiv preprint arXiv:2403.19887* (2024).
- [67] Kaiwei Liu, Bufang Yang, Lilin Xu, Yunqi Guo, Neiweng Ling, Zhihe Zhao, Guoliang Xing, Xian Shuai, Xiaozhe Ren, Xin Jiang, et al. 2024. Tasking Heterogeneous Sensor Systems with LLMs. In *Proceedings of the 22nd ACM Conference on Embedded Networked Sensor Systems*. 901–902.
- [68] Shengzhong Liu, Tomoyoshi Kimura, Dongxin Liu, Ruijie Wang, Jinyang Li, Suhas Diggavi, Mani Srivastava, and Tarek Abdelzaher. 2023. FOCAL: Contrastive Learning for Multimodal Time-Series Sensing Signals in Factorized Orthogonal Latent Space. arXiv:2310.20071 [cs.AI] <https://arxiv.org/abs/2310.20071>
- [69] Xu Liu, Junfeng Hu, Yuan Li, Shizhe Diao, Yuxuan Liang, Bryan Hooi, and Roger Zimmermann. 2024. Unitime: A language-empowered unified model for cross-domain time series forecasting. In *Proceedings of the ACM on Web Conference 2024*. 4095–4106.
- [70] Ya Liu, Yingjie Zhou, Kai Yang, and Xin Wang. 2023. Unsupervised deep learning for IoT time series. *IEEE Internet of Things Journal* 10, 16 (2023), 14285–14306.
- [71] Kevin Lu, Aditya Grover, Pieter Abbeel, and Igor Mordatch. 2022. Frozen pretrained transformers as universal computation engines. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 36. 7628–7636.
- [72] Mengmeng Ma, Jian Ren, Long Zhao, Davide Testuggine, and Xi Peng. 2022. Are multimodal transformers robust to missing modality?. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 18177–18186.
- [73] Yuen Ma, Zixing Song, Yuzheng Zhuang, Jianye Hao, and Irwin King. 2024. A Survey on Vision-Language-Action Models for Embodied AI. *arXiv preprint arXiv:2405.14093* (2024).
- [74] Robin Manhaeve, Sebastijan Dumancic, Angelika Kimmig, Thomas Demeester, and Luc De Raedt. 2018. DeepProbLog: Neural Probabilistic Logic Programming. *CoRR* abs/1805.10872 (2018). arXiv:1805.10872 <http://arxiv.org/abs/1805.10872>
- [75] Meta-AI. 2024. *Executorch, 2024a*. <https://pytorch.org/executorch-overview>
- [76] Ben Mildenhall, Pratul P Srinivasan, Matthew Tancik, Jonathan T Barron, Ravi Ramamoorthi, and Ren Ng. 2021. Nerf: Representing scenes as neural radiance fields for view synthesis. *Commun. ACM* 65, 1 (2021), 99–106.
- [77] Suvir Mirchandani, Fei Xia, Pete Florence, Brian Ichter, Danny Driess, Montserrat Gonzalez Arenas, Kanishka Rao, Dorsa Sadigh, and Andy Zeng. 2023. Large Language Models as General Pattern Machines. In *Conference on Robot Learning*. PMLR, 2498–2518.
- [78] Ludovico Mitchener, David Tuckey, Matthew Crosby, and Alessandra Russo. 2022. Detect, understand, act: A neuro-symbolic hierarchical reinforcement learning framework. *Machine Learning* 111, 4 (2022), 1523–1549.
- [79] Shentong Mo, Russ Salakhutdinov, Louis-Philippe Morency, and Paul Pu Liang. 2024. IoT-LM: Large multisensory language models for the internet of things. *arXiv preprint arXiv:2407.09801* (2024).
- [80] Vimal Molyn, Karan Ahuja, Dhruv Verma, Chris Harrison, and Mayank Goel. 2022. SAMoSA: Sensing Activities with Motion and Subsampled Audio. *Proc. ACM Interact. Mob. Wearable Ubiquitous Technol.* 6, 3, Article 132 (sep 2022), 19 pages. <https://doi.org/10.1145/3550284>

- [81] Ozan Baris Mulayim, Pengrui Quan, Liying Han, Xiaomin Ouyang, Dezhi Hong, Mario Bergés, and Mani Srivastava. 2024. Are Time Series Foundation Models Ready to Revolutionize Predictive Building Analytics?. In *Proceedings of the 11th ACM International Conference on Systems for Energy-Efficient Buildings, Cities, and Transportation*. 169–173.
- [82] Girish Narayanswamy, Xin Liu, Kumar Ayush, Yuzhe Yang, Xuhai Xu, Shun Liao, Jake Garrison, Shyam Tailor, Jake Sunshine, Yun Liu, et al. 2024. Scaling Wearable Foundation Models. *arXiv preprint arXiv:2410.13638* (2024).
- [83] Yuqi Nie, Nam H Nguyen, Phanwadee Sinthong, and Jayant Kalagnanam. 2022. A time series is worth 64 words: Long-term forecasting with transformers. *arXiv preprint arXiv:2211.14730* (2022).
- [84] Abby O'Neill, Abdul Rehman, Abhinav Gupta, Abhiram Maddukuri, Abhishek Gupta, Abhishek Padalkar, Abraham Lee, Acorn Pooley, Agrim Gupta, Ajay Mandlekar, et al. 2023. Open X-Embodiment: Robotic learning datasets and rt-x models. *arXiv preprint arXiv:2310.08864* (2023).
- [85] Xiaomin Ouyang, Xian Shuai, Jiayu Zhou, Ivy Wang Shi, Zhiyuan Xie, Guoliang Xing, and Jianwei Huang. 2022. Cosmo: Contrastive Fusion Learning with Small Data for Multimodal Human Activity Recognition. In *International Conference on Mobile Computing And Networking (MobiCom)*.
- [86] Xiaomin Ouyang and Mani Srivastava. 2024. LLMsense: Harnessing LLMs for High-level Reasoning Over Spatiotemporal Sensor Traces. In *2024 IEEE 3rd Workshop on Machine Learning on Edge in Sensor Systems (SenSys-ML)*. IEEE Computer Society, Los Alamitos, CA, USA, 9–14. <https://doi.org/10.1109/SenSys-ML62579.2024.00007>
- [87] Xiaomin Ouyang, Jason Wu, Tomoyoshi Kimura, Yihan Lin, Gunjan Verma, Tarek Abdelzaher, and Mani Srivastava. 2024. MMBind: Unleashing the Potential of Distributed and Heterogeneous Data for Multimodal Learning in IoT. *arXiv preprint arXiv:2411.12126* (2024).
- [88] Shirui Pan, Linhao Luo, Yufei Wang, Chen Chen, Jiapu Wang, and Xindong Wu. 2024. Unifying large language models and knowledge graphs: A roadmap. *IEEE Transactions on Knowledge and Data Engineering* (2024).
- [89] Srinivas Parthasarathy and Shiva Sundaram. 2021. Training Strategies to Handle Missing Modalities for Audio-Visual Expression Recognition. In *Companion Publication of the 2020 International Conference on Multimodal Interaction (Virtual Event, Netherlands) (ICMI '20 Companion)*. Association for Computing Machinery, New York, NY, USA, 400–404. <https://doi.org/10.1145/3395035.3425202>
- [90] Karol J Piczak. 2015. ESC: Dataset for environmental sound classification. In *Proceedings of the 23rd ACM international conference on Multimedia*. 1015–1018.
- [91] Petra Poklukar, Miguel Vasco, Hang Yin, Francisco S Melo, Ana Paiva, and Danica Kragic. 2022. Geometric Multimodal Contrastive Representation Learning. In *International Conference on Machine Learning (ICML)*.
- [92] Shuwei Qian and Chongjun Wang. 2023. COM: Contrastive Masked-attention model for incomplete multimodal learning. *Neural Networks* 162 (2023), 443–455.
- [93] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. 2021. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning (ICML)*.
- [94] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of machine learning research* 21, 140 (2020), 1–67.
- [95] Kashif Rasul, Arjun Ashok, Andrew Robert Williams, Hena Ghonia, Rishika Bhagwatkar, Arian Khorasani, Mohammad Javad Darvishi Bayazi, George Adamopoulos, Roland Riachi, Nadhir Hassen, Marin Biloš, Sahil Garg, Anderson Schneider, Nicolas Chapados, Alexandre Drouin, Valentina Zantedeschi, Yuriy Nevmyvaka, and Irina Rish. 2024. Lag-Llama: Towards Foundation Models for Probabilistic Time Series Forecasting. <http://arxiv.org/abs/2310.08278> arXiv:2310.08278 [cs].
- [96] Haoyu Ren, Darko Anicic, and Thomas A Runkler. 2021. The synergy of complex event processing and tiny machine learning in industrial IoT. In *Proceedings of the 15th ACM International Conference on Distributed and Event-based Systems*. 126–135.
- [97] Sandeep Singh Sandha, Bharathan Balaji, Luis Garcia, and Mani Srivastava. 2023. Eagle: End-to-end Deep Reinforcement Learning based Autonomous Control of PTZ Cameras. In *Proceedings of the 8th ACM/IEEE Conference on Internet of Things Design and Implementation*. 144–157.
- [98] Tomoya Sawada, Takaomi Hasegawa, Keiichi Yokoyama, and Masahiro Mizuno. 2024. Office-in-the-Loop for Building HVAC Control with Multimodal Foundation Models. In *Proceedings of the 11th ACM International Conference on Systems for Energy-Efficient Buildings, Cities, and Transportation*. 110–120.
- [99] Siavash Shams, Sukru Samet Dindar, Xilin Jiang, and Nima Mesgarani. 2024. SSAMBA: Self-supervised audio representation learning with MAMBA state space model. *arXiv preprint arXiv:2405.11831* (2024).
- [100] Taylor G. Smith et al. 2017-. pmdarima: ARIMA estimators for Python. <http://www.alkaline-ml.com/pmdarima> [Online; accessed <today>].
- [101] Chan Hee Song, Jiaman Wu, Clayton Washington, Brian M Sadler, Wei-Lun Chao, and Yu Su. 2023. LLM-Planner: Few-shot grounded planning for embodied agents with large language models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 2998–3009.
- [102] Lei Song, Chuheng Zhang, Li Zhao, and Jiang Bian. 2023. Pre-trained large language models for industrial control. *arXiv preprint arXiv:2308.03028* (2023).
- [103] Dimitris Spathis and Fahim Kawsar. 2024. The first step is the hardest: Pitfalls of representing and tokenizing temporal data for large language models. *Journal of the American Medical Informatics Association* 31, 9 (2024), 2151–2158.
- [104] Albert Tarantola. 2005. *Inverse problem theory and methods for model parameter estimation*. SIAM.
- [105] Alexander G Tartakovsky, Aleksey S Polunchenko, and Grigory Sokolov. 2012. Efficient computer network anomaly detection by changepoint detection methods. *IEEE Journal of Selected Topics in Signal Processing* 7, 1 (2012), 4–11.
- [106] Workday's Syman Team. 2017. *ARIMA Java library*. <https://github.com/Workday/timeseries-forecast>
- [107] Rahul Thapa, Bryan He, Magnus Ruud Kjaer, Hyatt Moore, Gauri Ganjoo, Emmanuel Mignot, and James Zou. 2024. SleepFM: Multimodal Representation Learning for Sleep Across Brain Activity, ECG and Respiratory Signals. *arXiv preprint arXiv:2405.17766* (2024).
- [108] Yonglong Tian, Dilip Krishnan, and Phillip Isola. 2020. Contrastive multiview coding. In *European Conference on Computer Vision (ECCV)*.
- [109] Sana Tonekaboni, Danny Eytan, and Anna Goldenberg. 2021. Unsupervised Representation Learning for Time Series with Temporal Neighborhood Coding. In *International Conference on Learning Representations (ICLR)*.
- [110] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. 2023. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*



- (2023).
- [111] Yao-Hung Hubert Tsai, Shaojie Bai, Paul Pu Liang, J Zico Kolter, Louis-Philippe Morency, and Ruslan Salakhutdinov. 2019. Multimodal Transformer for Unaligned Multimodal Language Sequences. In *ACL*.
- [112] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Advances in neural information processing systems*. 5998–6008.
- [113] Sai Vemprala, Rogerio Bonatti, Arthur Buckner, and Ashish Kapoor. 2023. *ChatGPT for Robotics: Design Principles and Model Abilities*. Technical Report MSR-TR-2023-8. Microsoft. <https://www.microsoft.com/en-us/research/publication/chatgpt-for-robotics-design-principles-and-model-abilities/>
- [114] Brian Wang, Luis Antonio Garcia, and Mani Srivastava. 2024. PrivacyOracle: Configuring Sensor Privacy Firewalls with Large Language Models in Smart Built Environments. In *2024 IEEE Security and Privacy Workshops (SPW)*. IEEE, 239–245.
- [115] Chao Wang, Jian Wang, Yuan Shen, and Xudong Zhang. 2019. Autonomous navigation of UAVs in large-scale complex environments: A deep reinforcement learning approach. *IEEE Transactions on Vehicular Technology* 68, 3 (2019), 2124–2136.
- [116] Gary Weiss. 2019. WISDM Smartphone and Smartwatch Activity and Biometrics Dataset . UCI Machine Learning Repository. DOI: <https://doi.org/10.24432/C5HK59>.
- [117] Gerald Woo, Chenghao Liu, Akshat Kumar, Caiming Xiong, Silvio Savarese, and Doyen Sahoo. 2024. Unified Training of Universal Time Series Forecasting Transformers. (May 2024). <http://arxiv.org/abs/2402.02592> arXiv:2402.02592.
- [118] Sangmin Woo, Sumin Lee, Yeonju Park, Muhammad Adi Nugroho, and Changick Kim. 2023. Towards good practices for missing modality robust action recognition. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 37. 2776–2784.
- [119] Haixu Wu, Tengge Hu, Yong Liu, Hang Zhou, Jianmin Wang, and Mingsheng Long. 2022. Timesnet: Temporal 2d-variation modeling for general time series analysis. *arXiv preprint arXiv:2210.02186* (2022).
- [120] Jason Wu, Ziqi Wang, Xiaomin Ouyang, Ho Lyun Jeong, Colin Samplawski, Lance Kaplan, Benjamin Marlin, and Mani Srivastava. 2024. FlexLoc: Conditional Neural Networks for Zero-Shot Sensor Perspective Invariance in Object Localization with Distributed Multimodal Sensors. *arXiv preprint arXiv:2406.06796* (2024).
- [121] Yike Wu, Nan Hu, Sheng Bi, Guilin Qi, Jie Ren, Anhuan Xie, and Wei Song. 2023. Retrieve-Rewrite-Answer: A KG-to-Text Enhanced LLMs Framework for Knowledge Graph Question Answering. <http://arxiv.org/abs/2309.11206> arXiv:2309.11206 [cs].
- [122] Tianwei Xing, Luis Garcia, Marc Roig Vilamala, Federico Cerutti, Lance Kaplan, Alun Preece, and Mani Srivastava. 2020. Neuroplex: learning to detect complex events in sensor networks through knowledge injection. In *Proceedings of the 18th conference on embedded networked sensor systems*. 489–502.
- [123] Huatao Xu, Liying Han, Qirui Yang, Mo Li, and Mani Srivastava. 2024. Penetrative ai: Making llms comprehend the physical world. In *Proceedings of the 25th International Workshop on Mobile Computing Systems and Applications*. 1–7.
- [124] Huatao Xu, Pengfei Zhou, Rui Tan, Mo Li, and Guobin Shen. 2021. LIMU-BERT: Unleashing the potential of unlabeled data for IMU sensing applications. In *Proceedings of the 19th ACM Conference on Embedded Networked Sensor Systems*. 220–233.
- [125] Maxwell A Xu, Jaya Narain, Gregory Darnell, Haraldur Hallgrímsson, Hyewon Jeong, Darren Forde, Richard Fineman, Karthik J Raghuram, James M Rehg, and Shirley Ren. 2024. RelCon: Relative Contrastive Learning for a Motion Foundation Model for Wearable Data. *arXiv preprint arXiv:2411.18822* (2024).
- [126] Shengzhe Xu, Christo Kurisummoottil Thomas, Omar Hashash, Nikhil Muralidhar, Walid Saad, and Naren Ramakrishnan. 2024. Large Language Models as Optimizers. *arXiv preprint arXiv:2402.01748* (2024).
- [127] Hao Xue and Flora D Salim. 2023. Promptcast: A new prompt-based learning paradigm for time series forecasting. *IEEE Transactions on Knowledge and Data Engineering* (2023).
- [128] Hua Yan, Heng Tan, Yi Ding, Pengfei Zhou, Vinod Namboodiri, and Yu Yang. 2024. Language-centered Human Activity Recognition. *arXiv preprint arXiv:2410.00003* (2024).
- [129] Zhun Yang, Adam Ishay, and Joohyung Lee. 2023. NeurASP: Embracing Neural Networks into Answer Set Programming. arXiv:2307.07700 [cs.AI] <https://arxiv.org/abs/2307.07700>
- [130] Liang Yu, Shuqi Qin, Meng Zhang, Chao Shen, Tao Jiang, and Xiaohong Guan. 2021. A review of deep reinforcement learning for smart building energy management. *IEEE Internet of Things Journal* 8, 15 (2021), 12046–12063.
- [131] Hang Yuan, Shing Chan, Andrew P Creagh, Catherine Tong, Aidan Acquah, David A Clifton, and Aiden Doherty. 2024. Self-supervised learning for human activity recognition using 700,000 person-days of wearable data. *NPJ digital medicine* 7, 1 (2024), 91.
- [132] Jinliang Yuan, Chen Yang, Dongqi Cai, Shihe Wang, Xin Yuan, Zeling Zhang, Xiang Li, Dingge Zhang, Hanzi Mei, Xianqing Jia, et al. 2024. Mobile Foundation Model as Firmware. In *Proceedings of the 30th Annual International Conference on Mobile Computing and Networking*. 279–295.
- [133] Zhihan Yue, Yujing Wang, Juanyong Duan, Tianmeng Yang, Congrui Huang, Yunhai Tong, and Bixiong Xu. 2022. TS2Vec: Towards Universal Representation of Time Series. In *AAAI Conference on Artificial Intelligence (AAAI)*.
- [134] Chaoly Zeng, Zhanyu Liu, Guanjie Zheng, and Linghe Kong. 2024. C-Mamba: Channel Correlation Enhanced State Space Models for Multivariate Time Series Forecasting. *arXiv preprint arXiv:2406.05316* (2024).
- [135] Xiyuan Zhang, Ranak Roy Chowdhury, Jiayun Zhang, Dezhi Hong, Rajesh K Gupta, and Jingbo Shang. 2023. Unleashing the Power of Shared Label Structures for Human Activity Recognition. In *Proceedings of the 32nd ACM International Conference on Information and Knowledge Management*. 3340–3350.
- [136] Xiyuan Zhang, Diyan Teng, Ranak Roy Chowdhury, Shuheng Li, Dezhi Hong, Rajesh K Gupta, and Jingbo Shang. 2024. UniMTS: Unified Pre-training for Motion Time Series. *arXiv preprint arXiv:2410.19818* (2024).
- [137] Xiang Zhang, Ziyuan Zhao, Theodoros Tsiligkaridis, and Marinka Zitnik. 2022. Self-supervised contrastive pre-training for time series via time-frequency consistency. *Advances in Neural Information Processing Systems* 35 (2022), 3988–4003.
- [138] Yu Zhang, Xiushi Chen, Bowen Jin, Sheng Wang, Shuiwang Ji, Wei Wang, and Jiawei Han. 2024. A Comprehensive Survey of Scientific Large Language Models and Their Applications in Scientific Discovery. *arXiv preprint arXiv:2406.10833* (2024).
- [139] Lianghui Zhu, Bencheng Liao, Qian Zhang, Xinlong Wang, Wenyu Liu, and Xinggang Wang. 2024. Vision mamba: Efficient visual representation learning with bidirectional state space model. *arXiv preprint arXiv:2401.09417* (2024).