

Frequency domain identification for multivariable motion control systems: Applied to a prototype wafer stage

M. van der Hulst* R. A. González* K. Classens* P. Tacx*
N. Dirckx** J. van de Wijdeven** T. Oomen*,***

* *Dept. of Mechanical Engineering, Eindhoven University of
Technology, The Netherlands*

** *ASML, Veldhoven, The Netherlands*

*** *Delft Center for Systems and Control, Delft University of
Technology The Netherlands*

Abstract: Multivariable parametric models are essential for optimizing the performance of high-tech systems. The main objective of this paper is to develop an identification strategy that provides accurate parametric models for complex multivariable systems. To achieve this, an additive model structure is adopted, offering advantages over traditional black-box model structures when considering physical systems. The introduced method minimizes a weighted least-squares criterion and uses an iterative linear regression algorithm to solve the estimation problem, achieving local optimality upon convergence. Experimental validation is conducted on a prototype wafer-stage system, featuring a large number of spatially distributed actuators and sensors and exhibiting complex flexible dynamic behavior, to evaluate performance and demonstrate the effectiveness of the proposed method.

Keywords: Parameter estimation, system identification, multivariable systems, frequency response function

1. INTRODUCTION

System identification involves developing mathematical models using experimental data, often incorporating insights from physical principles (Ljung, 1999). Data-driven parametric models of multi-input multi-output (MIMO) systems are essential to optimize performance of engineered systems as they enable the design of high-performance controllers and observers, provide design validation and feedback, and facilitate online monitoring and fault diagnosis (Steinbuch *et al.*, 2022).

Traditional linear system identification approaches for multivariable systems often rely on black-box model structures that do not consider the underlying structure of the considered physical system. Examples include rational common denominator models and matrix fractional descriptions (MFDs) (Pintelon and Schoukens, 2012). The literature on these model parameterizations is extensive (Glover and Willems, 1974; Correa and Glover, 1984; Vayssettes *et al.*, 2016), yet may not provide the most parsimonious or physically relevant model descriptions when considering practical applications. Many physical systems are more naturally described by a sum of low-order transfer functions. Examples are found in vibrational analysis (Vayssettes and Mercère, 2015; Zhang and Xu, 2019; Dorosti *et al.*, 2018) and control of flexible motion systems (Voorhoeve *et al.*, 2021; Tacx *et al.*, 2024), where models are often represented as a sum of transfer functions

with distinct denominators, corresponding to the individual resonant modes of the system (Gawronski, 2004). Similar approaches are found in thermal analysis of machine frames (Zhu *et al.*, 2008), RLC circuits (Lange and Leone, 2021) and acoustic modeling of room responses (Jian *et al.*, 2022). The estimation of additive transfer function models, which are related to unfactored transfer functions by a partial fraction expansion, offers several advantages. These models enable more efficient parameterization by minimizing the number of parameters needed to represent the system, thereby reducing model complexity and enhancing the statistical estimation properties (Söderström and Stoica, 2001). Furthermore, they provide enhanced physical insight for fault diagnosis (Classens *et al.*, 2022) and improve numerical conditioning, which is crucial for the parametric identification of stiff and high-order systems (Gilson *et al.*, 2018).

When identifying physical systems, estimating continuous-time models offers distinct advantages over discrete-time models. Continuous-time models facilitate the integration of *a priori* knowledge, such as relative degree, and provide more interpretable parameters which directly correspond to physical quantities (Garnier, 2015). Herein, the frequency-domain approach for the parametric identification of continuous-time models has become increasingly popular. Frequency-domain system identification offers several advantages, including data and computational efficiency, flexible data processing, nonparametric noise model estimation, and direct interpretation of system dynamics (Pintelon and Schoukens, 2012).

* This project is funded by Holland High Tech — TKI HSTM via the PPP Innovation Scheme (PPP-I) for public-private partnerships.

Many MIMO frequency-domain identification strategies have been developed for models parametrized in non-additive structures. These methods can largely be categorized into pseudo-linear regression-based approaches (Blom and Van Den Hof, 2010; Sanathanan and Koerner, 1961) and gradient descent methods (Bayard, 1994). In contrast, the estimation of additive model parametrizations has primarily been explored in single-input single-output (SISO) approaches. One such method is vector fitting (Semlyen, 1999), which considers fitting first-order pole models. Recent advancements in additive system identification include the direct continuous-time identification method introduced in González et al. (2024), which is based on the simplified refined instrumental variable method (SRIVC) Young and Jakeman (1980), as well as a block coordinate descent approach with variants for both offline and online parameter estimation González et al. (2023); Classens et al. (2024).

Although additive identification offers several advantages for estimating models of physical systems, most existing methods focus on the SISO setting, while many practical applications require a MIMO formulation. This paper aims to introduce a comprehensive identification method for estimating additive linear continuous-time MIMO systems using frequency-domain data. The main contributions of this paper are:

- C1 A frequency-domain refined instrumental variable method for estimating continuous-time MIMO systems in additive transfer function form.
- C2 Experimental validation of the developed identification on a prototype wafer-stage system.

This paper is organized as follows. First, Section 2 formally introduces the additive model structure and outlines the identification problem considered. In section 3, the identification strategy is presented with experimental validation in Section 4. Finally, conclusions are given in Section 5.

Notation: Scalars, vectors and matrices are written as x , \mathbf{x} and \mathbf{X} , respectively. The imaginary unit is denoted by $j^2 = -1$, and for $\mathbf{z} \in \mathbb{C}^n$, the operation $\Re\{\mathbf{z}\}$ returns the real part of the complex vector \mathbf{z} . For a matrix \mathbf{A} , its transpose is written as \mathbf{A}^\top , and its Hermitian (conjugate transpose) as \mathbf{A}^H . If $\mathbf{x} \in \mathbb{C}^n$ and $\mathbf{Q} \in \mathbb{C}^{n \times n}$ is a Hermitian matrix, then the weighted 2-norm is given by $\|\mathbf{x}\|_{\mathbf{Q}} = \sqrt{\mathbf{x}^H \mathbf{Q} \mathbf{x}}$. For $\mathbf{X} = [\mathbf{x}_1, \dots, \mathbf{x}_n]$, with $\mathbf{x}_i \in \mathbb{C}^n$, the operation $\text{vec}(\mathbf{X}) = [\mathbf{x}_1^\top, \dots, \mathbf{x}_n^\top]^\top$ restructures the matrix into a vector by stacking its columns.

2. SETUP AND PROBLEM FORMULATION

In this section, the experimental setup is presented and the additive model structure is formally introduced. Finally, the identification problem considered is formulated.

2.1 Experimental setup: prototype wafer-stage system

The considered experimental setup depicted in Figure 1 is a prototype wafer stage system. The system is actively controlled in six motion degrees of freedom at a sampling rate of 10 kHz, achieving accuracy in the sub-micrometer range. The stage is magnetically levitated using gravity compensators, achieving a mid-air equilibrium and eliminating any

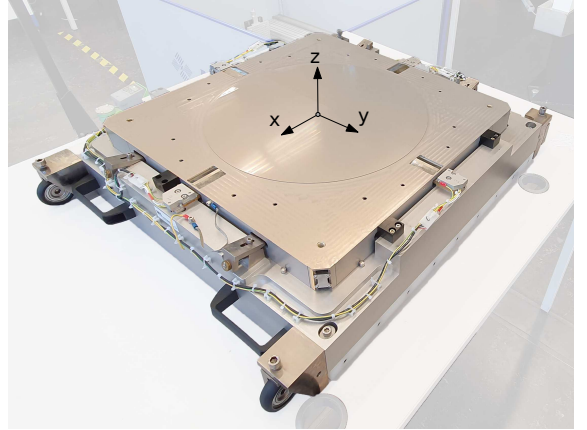


Fig. 1. Experimental setup featuring a prototype wafer-stage system.

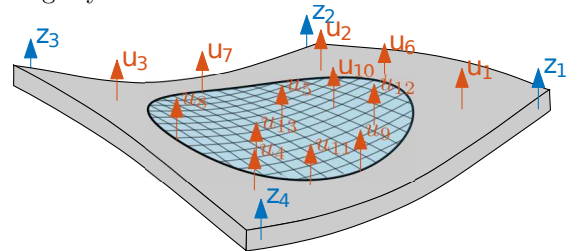


Fig. 2. Schematic overview of the featured actuators u_i and sensors z_i in the out-of-plane direction.

mechanical connections to the fixed world. These systems exhibit pronounced flexible dynamics, which pose significant challenges for controller design, model updating, design feedback, and monitoring techniques. The availability of accurate mathematical models that capture the dynamics of the flexible multivariable system is crucial for effectively addressing these challenges.

The system contains 17 actuators: 13 are in the z direction and two each for the x and y directions. Furthermore, the system includes 7 sensors, 4 for the z -direction, 2 for the x -directions, and a single sensor for the y -direction. Only out-of-plane motions, that is, translation along the z axis, and rotations around the x and y axes, are considered in this paper to facilitate the exposition. An overview of the sensors and actuators considered is provided in Figure 2.

2.2 Model structure

To model the input/output dynamics of the wafer-stage system, an additive model structure is adopted, which is formally introduced in this section. Consider the linear and time-invariant (LTI) model of a MIMO system with n_u inputs and n_y outputs in additive form

$$\mathbf{P}(s, \boldsymbol{\beta}) = \sum_{i=1}^K \mathbf{P}_i(s, \boldsymbol{\theta}_i), \quad (1)$$

with K the number of submodels, s the Laplace variable and $\boldsymbol{\beta}$ and $\boldsymbol{\theta}_i$ the joint and submodel parameter vector. Each submodel $\mathbf{P}_i(s, \boldsymbol{\theta}_i)$ is parametrized according to

$$\mathbf{P}_i(s, \boldsymbol{\beta}) = \frac{1}{s^{\ell_i} A_i(s)} \mathbf{B}_i(s), \quad (2)$$

where at most one submodel may include $\ell_i > 0$ poles at the origin. The scalar denominator polynomial $A_i(s)$

and the matrix numerator polynomial $\mathbf{B}_i(s)$ are such that no complex number z simultaneously satisfies $A_i(z) = 0$ and $\mathbf{B}_i(z) = \mathbf{0}$. To ensure a unique characterization of $\{\mathbf{P}_i(s)\}_{i=1}^K$, it is assumed that at most one submodel $\mathbf{P}_i(s)$ is biproper. The $A_i(s)$ and $\mathbf{B}_i(s)$ polynomials are parametrized as

$$A_i(s) = 1 + a_{i,1}s + \dots + a_{i,n_i}s^{n_i}, \quad (3)$$

$$\mathbf{B}_i(s) = \mathbf{B}_{i,0} + \mathbf{B}_{i,1}s + \dots + \mathbf{B}_{i,m_i}s^{m_i}, \quad (4)$$

where the $A_i(s)$ polynomials are stable, i.e., all roots lie in the left-half plane, and they not share any common roots. The polynomials $A_i(s)$ and $\mathbf{B}_i(s)$ are jointly described by the parameter vector

$$\boldsymbol{\beta} = [\boldsymbol{\theta}_1^\top, \dots, \boldsymbol{\theta}_K^\top]^\top, \quad (5)$$

where $\boldsymbol{\theta}_i$ for $i = 1, \dots, K$ contains the parameters of the i th submodel

$$\boldsymbol{\theta}_i = [a_{i,1}, \dots, a_{i,n_i}, \text{vec}(\mathbf{B}_{i,0})^\top, \dots, \text{vec}(\mathbf{B}_{i,m_i})^\top]^\top. \quad (6)$$

2.3 Identification problem

A dataset of noisy plant frequency response function (FRF) measurements $\mathbf{G}(\omega_k) \in \mathbb{C}^{n_y \times n_u}$ of length N , is assumed to be available for the estimation problem. To estimate continuous-time models from the measured FRF, the pseudo-continuous-time setting is adopted (see Wang and Garnier (2008), Chapter 8 for details). The identification problem is formulated based on the matrix residual, which is computed as the difference between the FRF measurement and the model, according to

$$\mathbf{E}(\omega_k, \boldsymbol{\beta}) = \mathbf{G}(\omega_k) - \mathbf{P}(\xi_k, \boldsymbol{\beta}), \quad (7)$$

where $\xi_k = j\omega_k$. The parameter vector estimate $\hat{\boldsymbol{\beta}}$ is obtained as the minimizer of the weighted least-squares criterion

$$\hat{\boldsymbol{\beta}} = \arg \min_{\boldsymbol{\beta}} \frac{1}{2N} \sum_{k=1}^N \|\text{vec}(\mathbf{E}(\omega_k, \boldsymbol{\beta}))\|_{\mathbf{W}(\omega_k)}^2, \quad (8)$$

where $\mathbf{W}(\omega_k) \in \mathbb{C}^{n_u n_y \times n_u n_y}$ is a frequency-dependent weighting matrix. The problem considered is to estimate additive models as described by (1), that minimizes the cost function in (8), given a dataset of noisy FRF measurements.

3. IDENTIFICATION STRATEGY FOR ADDITIVE MIMO SYSTEMS

In this section, an iterative linear regression method is introduced to solve the nonlinear and nonconvex optimization problem (8), thereby constituting contribution C1.

3.1 Criterion for optimality

The minimizers of the cost function in (8) satisfy the first-order optimality condition

$$\mathbf{0} = \frac{1}{N} \sum_{k=1}^N \Re \left\{ \hat{\boldsymbol{\Phi}}(\omega_k, \boldsymbol{\beta}) \mathbf{W}(\omega_k) \text{vec}(\mathbf{E}(\omega_k, \boldsymbol{\beta})) \right\}, \quad (9)$$

with the gradient

$$\hat{\boldsymbol{\Phi}}(\omega_k, \boldsymbol{\beta}) = \left(\frac{\partial \text{vec}(\mathbf{E}(\omega_k, \boldsymbol{\beta}))}{\partial \boldsymbol{\beta}^\top} \right)^\text{H}. \quad (10)$$

For the considered additive model structure the gradient corresponds to

$$\hat{\boldsymbol{\Phi}}(\omega_k, \boldsymbol{\beta}) = \left[\hat{\boldsymbol{\Phi}}_1^\text{H}(\omega_k, \boldsymbol{\theta}_1) \dots \hat{\boldsymbol{\Phi}}_K^\text{H}(\omega_k, \boldsymbol{\theta}_K) \right]^\text{H}, \quad (11)$$

where $\hat{\boldsymbol{\Phi}}_i(\omega_k, \boldsymbol{\theta}_i)$ for $i = 1, \dots, K$ is given by

$$\hat{\boldsymbol{\Phi}}_i(\omega_k, \boldsymbol{\beta}) = \begin{bmatrix} -\xi_k \mathbf{P}_i(\xi_k, \boldsymbol{\theta}_i) & -\xi_k^{n_i} \mathbf{p}_i(\xi_k, \boldsymbol{\theta}_i) \\ \xi_k^{\ell_i} A_i(\xi_k) & \xi_k^{\ell_i} A_i(\xi_k) \\ \mathbf{I}_{n_u n_y} & \xi_k^{m_i} \mathbf{I}_{n_u n_y} \\ \xi_k^{\ell_i} A_i(\xi_k) & \xi_k^{\ell_i} A_i(\xi_k) \end{bmatrix}^\text{H}, \quad (12)$$

with $\mathbf{p}_i(\xi_k, \boldsymbol{\theta}_i) = \text{vec}(\mathbf{P}_i(\xi_k, \boldsymbol{\theta}_i))$ the vectorized plant of the i th submodel. In the following subsections, the first-order optimality condition (9) will be exploited to derive an estimator for the parameter vector $\hat{\boldsymbol{\beta}}$.

3.2 Refined instrumental variables for additive systems

The condition in (9) is non-linear in the parameter vector $\boldsymbol{\beta}$. A solution is obtained by reformulating (7) to a pseudolinear form which enables the refined instrumental variables approach. For each submodule in the additive model structure, the residual can be reformulated into an unique pseudolinear regression, as stated in the following lemma.

Lemma 1. The pseudolinear regression form of the residual (7) corresponding to the i th submodel is expressed as

$$\text{vec}(\mathbf{E}(\omega_k, \boldsymbol{\beta})) = \tilde{\mathbf{g}}_{f,i}(\omega_k, \boldsymbol{\beta}) - \boldsymbol{\Phi}_i^\top(\omega_k, \boldsymbol{\beta}) \boldsymbol{\theta}_i, \quad (13)$$

with the regressor

$$\boldsymbol{\Phi}_i(\omega_k, \boldsymbol{\beta}) = \begin{bmatrix} -\xi_k \tilde{\mathbf{g}}_i(\omega_k, \boldsymbol{\beta}) & -\xi_k^{n_i} \tilde{\mathbf{g}}_i(\omega_k, \boldsymbol{\beta}) \\ A_i(\xi_k) & A_i(\xi_k) \\ \mathbf{I}_{n_u n_y} & \xi_k^{m_i} \mathbf{I}_{n_u n_y} \\ \xi_k^{\ell_i} A_i(\xi_k) & \xi_k^{\ell_i} A_i(\xi_k) \end{bmatrix}^\top, \quad (14)$$

and where $\tilde{\mathbf{g}}_{f,i}(\omega_k, \boldsymbol{\beta}) = A_i^{-1}(\xi_k) \tilde{\mathbf{g}}_i(\omega_k, \boldsymbol{\beta})$ with $\tilde{\mathbf{g}}_i(\omega_k, \boldsymbol{\beta}) = \text{vec}(\tilde{\mathbf{G}}_i(\omega_k, \boldsymbol{\beta}))$ the residual plant of the i th submodel, defined by

$$\tilde{\mathbf{G}}_i(\omega_k, \boldsymbol{\beta}) = \mathbf{G}(\omega_k) - \sum_{\substack{\ell=1, \dots, K \\ \ell \neq i}} \mathbf{P}_\ell(\xi_k, \boldsymbol{\theta}_\ell). \quad (15)$$

Proof. The residual (7) is rewritten for $i = 1, \dots, K$ according to

$$\mathbf{E}(\omega_k, \boldsymbol{\beta}) = \tilde{\mathbf{G}}_i(\omega_k, \boldsymbol{\beta}) - \frac{\mathbf{B}_i(\xi_k)}{\xi_k^{\ell_i} A_i(\xi_k)}, \quad (16)$$

$$= \frac{1}{\xi_k^{\ell_i} A_i(\xi_k)} \left(\xi_k^{\ell_i} A_i(\xi_k) \tilde{\mathbf{G}}_i(\omega_k, \boldsymbol{\beta}) - \mathbf{B}_i(\xi_k) \right), \quad (17)$$

with $\tilde{\mathbf{G}}_i$ defined in (15). Substituting the numerator and denominator polynomials (3) and (4), and vectorizing both sides, (17) yields

$$\text{vec}(\mathbf{E}(\omega_k, \boldsymbol{\beta})) = \frac{\tilde{\mathbf{g}}_i(\omega_k, \boldsymbol{\beta})}{A_i(\xi_k)} + \dots + \frac{a_{n_i} \xi_k^{n_i} \tilde{\mathbf{g}}_i(\omega_k, \boldsymbol{\beta})}{A_i(\xi_k)} - \frac{\text{vec}(\mathbf{B}_{i,0})}{\xi_k^{\ell_i} A_i(\xi_k)} - \dots - \frac{\xi_k^{m_i} \text{vec}(\mathbf{B}_{i,m})}{\xi_k^{\ell_i} A_i(\xi_k)}. \quad (18)$$

This expression can directly be written in the form (13) by considering (6), thereby completing the proof. \square

The residual formulation in (13) defines K pseudolinear regressions. Introducing the stacked signals

$$\mathbf{Y}(\omega_k, \boldsymbol{\beta}) = \begin{bmatrix} \tilde{\mathbf{g}}_{f,1}(\omega_k, \boldsymbol{\beta}) & \dots & \tilde{\mathbf{g}}_{f,K}(\omega_k, \boldsymbol{\beta}) \end{bmatrix}^\top, \quad (19)$$

$$\boldsymbol{\Phi}(\omega_k, \boldsymbol{\beta}) = \begin{bmatrix} \boldsymbol{\Phi}_1^\top(\omega_k, \boldsymbol{\beta}) & \dots & \boldsymbol{\Phi}_K^\top(\omega_k, \boldsymbol{\beta}) \end{bmatrix}^\top, \quad (20)$$

and the parameter matrix

$$\mathbf{B} = \begin{bmatrix} \boldsymbol{\theta}_1 & & \mathbf{0} \\ & \ddots & \\ \mathbf{0} & & \boldsymbol{\theta}_K \end{bmatrix}, \quad (21)$$

which contains the elements of $\boldsymbol{\beta}$ along the block diagonal, allows to write the equivalent optimality condition (9) for the K subproblem as

$$\sum_{k=1}^N \Re \left\{ \hat{\boldsymbol{\Phi}}(\omega_k, \boldsymbol{\beta}) \mathbf{W}(\omega_k) \left(\mathbf{Y}^\top(\omega_k, \boldsymbol{\beta}) - \boldsymbol{\Phi}^\top(\omega_k, \boldsymbol{\beta}) \mathbf{B} \right) \right\} = \mathbf{0}. \quad (22)$$

The solution to (22) is found iteratively by fixing $\boldsymbol{\beta} = \boldsymbol{\beta}^{(j)}$ at the j th iteration in (19), the regressor (20), and additionally the gradient (11), which leads to the following iterative procedure.

Algorithm 1. Given an initial estimate $\boldsymbol{\beta}^{(0)}$ and maximum number of iterations M , compute a new estimate by iterating

$$\hat{\mathbf{B}}^{(j+1)} = \left[\sum_{k=1}^N \hat{\boldsymbol{\Phi}}(\omega_k, \boldsymbol{\beta}^{(j)}) \mathbf{W}(\omega_k) \boldsymbol{\Phi}^\top(\omega_k, \boldsymbol{\beta}^{(j)}) \right]^{-1} \times \sum_{k=1}^N \hat{\boldsymbol{\Phi}}(\omega_k, \boldsymbol{\beta}^{(j)}) \mathbf{W}(\omega_k) \mathbf{Y}^\top(\omega_k, \boldsymbol{\beta}^{(j)}), \quad (23)$$

where the next iteration $\boldsymbol{\beta}^{j+1}$ is extracted from the block diagonal coefficients of $\hat{\mathbf{B}}^{j+1}$ as in (21).

The convergence point of the iterations described by (23) provides a solution to the first-order optimality condition (9). This ensures that the estimate corresponds to a stationary point of the cost function in (8), thereby guaranteeing (local) optimality.

Remark 1. Note that the iterations described by (23) corresponds to a refined instrumental variable method, where $\hat{\boldsymbol{\Phi}}$ is interpreted as the instrument matrix (Young and Jakeman, 1980). Furthermore, for $K = 1$, the iterations in (23) correspond to the frequency-domain refined instrumental variable method in Blom and Van Den Hof (2010), and by replacing $\hat{\boldsymbol{\Phi}}$ with $\boldsymbol{\Phi}$ to the SK iterations by Sanathanan and Koerner (1961). The method can be considered as a frequency-domain variant of the approach introduced in González et al. (2024) for MIMO systems.

3.3 Initialization

The iterations in (23) require an initial estimate $\boldsymbol{\beta}^{(0)}$ of the model parameters. This section introduces a method for computing the numerator parameters assuming fixed denominator polynomials. This reduces the initialization problem to determining initial pole locations, which are often effectively obtained from, e.g., finite element models or nonparametric FRF models. To this end, assume that the denominator polynomials are fixed at $\bar{A}_i(s)$, and let

$\boldsymbol{\eta}$ represent the parameter vector from (5) without the denominator coefficients. The estimate $\hat{\boldsymbol{\eta}}$ is found as the solution to the convex problem

$$\hat{\boldsymbol{\eta}} = \arg \min_{\boldsymbol{\eta}} \frac{1}{2N} \sum_{k=1}^N \left\| \text{vec}(\mathbf{G}(\omega_k)) - \boldsymbol{\Phi}^\top(\omega_k) \boldsymbol{\eta} \right\|_2^2, \quad (24)$$

where the regressor matrix $\boldsymbol{\Phi}$ is obtained by stacking for each submodel

$$\boldsymbol{\Phi}_i(\omega_k) = \left[\frac{\mathbf{I}_{n_u n_y}}{\xi^{\ell_i} \bar{A}_i(\xi_k)}, \dots, \frac{\xi^{m_i} \mathbf{I}_{n_u n_y}}{\xi^{\ell_i} \bar{A}_i(\xi_k)} \right]^\top, \quad (25)$$

in the same way as (20). Hence, an initial estimate $\boldsymbol{\beta}^{(0)}$ is determined by first providing initial pole locations, which enable the computation of the numerator parameters by solving the convex problem (24) given data.

4. EXPERIMENTAL VALIDATION

This section presents the experimental validation of the introduced identification strategy, thereby providing contribution C2. The considered system is the prototype wafer-stage system introduced in Section 2.

4.1 Model structure

The input/output dynamics of the wafer-stage system containing $n_y = 13$ outputs and $n_u = 4$ inputs, is modeled in the additive structure

$$\mathbf{P}(s, \boldsymbol{\beta}) = \frac{\mathbf{B}_{i,0}}{s^2} + \sum_{i=1}^{n_{\text{flex}}} \frac{\mathbf{B}_{i,0}}{s^2/\omega_i^2 + 2(\zeta_i/\omega_i)s + 1}, \quad (26)$$

where the components of the decomposition are interpreted as rigid-body modes and flexible dynamic modes, with ω_i the resonance frequencies, ζ_i the corresponding damping coefficients, and n_{flex} the number of flexible modes (Gawronski, 2004).

4.2 Nonparametric modeling

As a first step in frequency-domain identification, a nonparametric model needs to be identified. The nonparametric FRF model of the (4×13) plant, representing the out-of-plane dynamics of the wafer-stage system, is obtained using the multi-sine approach described in Pintelon and Schoukens (2012). The experiments are performed in a closed-loop configuration since active control of the mid-air equilibrium is required for stable operation. The plant FRF is derived using the indirect method, where the system is excited by n_u single-axis random-phase multisine signals with a flat amplitude spectrum. The multi-sine excitation includes 10 periods and 10 realizations, resulting in a plant FRF consisting of $N = 4000$ complex data points spanning a frequency range of 0.25 Hz to 2000 Hz. Frequency lines below 20 Hz are discarded during the parametric estimation step, as the rigid-body behavior is poorly captured at lower frequencies in the measurement. The delays introduced by the hold circuit in the digital measurement environment are determined based on the FRF model. The dataset is then compensated for these delays, allowing the delay-corrected FRF to be modeled in continuous time (Wang and Garnier, 2008, Chapter 8).

4.3 Weighting filter design

For the weighting filter an element-wise inverse plant magnitude weighting is selected, given by

$$\mathbf{W}(\omega_k) = \text{diag}\left(\text{vec}\left(|\mathbf{G}(\omega_k)|\right)\right)^{-1}. \quad (27)$$

The inverse plant magnitude weighting effectively transforms the matrix residual (7) from absolute to relative error criterion. This prevents overemphasizing frequencies with a large magnitude, which can dominate the estimation process, especially for systems containing integrator dynamics.

4.4 Initialization and parametric identification

To determine the number of flexible modes, n_{flex} , and their corresponding frequency locations, the Complex Mode Indicator Function (CMIF) is used, as outlined in Shih et al. (1988). The CMIF is computed as the square of the singular values of the FRF matrix evaluated at each frequency point. A mode is indicated by a peak in the CMIF, with the frequency location of the peak corresponding to the damped natural frequency of the flexible mode. Since the setup is a lightly damped system, the damped natural frequency is approximately equal to the natural frequency, and therefore provides for an accurate initial estimate of the frequency location.

In Figure 3, the CMIF of the FRF dataset is provided. Using this approach, $n_{\text{flex}} = 17$ distinct flexible modes are found in the frequency range considered. The frequency locations of the peaks in the CMIF are used to initialize the natural frequencies ω_i . The corresponding damping coefficients are initialized at $\zeta_i = 0.01$ for $i = 1, \dots, n_{\text{flex}}$, which are typical values encountered for lightly damped poles in these systems. The initial modal parameters determine the pole locations, which enables the numerator parameters to be computed using the convex problem (24). Finally, the initial parameter vector $\beta^{(0)}$ is constructed as in (5) and is used to initialize the iterations described by (23).

4.5 Results

The frequency response of the estimated plant model is shown in Figure 4, together with the nonparametric FRF measurement used in the estimation. Furthermore, Figure 5 shows the frequency response of a single plant entry, along with the corresponding residual. The parametric model accurately aligns with the FRF measurement over the complete frequency range, demonstrating the validity of the introduced method. In particular, the high-frequency flexible modes are accurately modeled in the additive structure, which can be challenging to achieve using traditional model structures.

5. CONCLUSION

This paper addresses the parametric identification of multivariable systems using frequency-domain datasets. The introduced method, which uses an iterative regression algorithm to minimize a least-squares criterion, enables direct estimation of additive transfer function models. Many

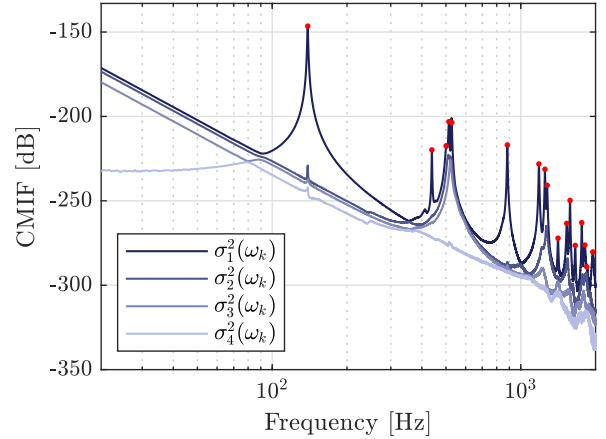


Fig. 3. CMIF plot with $\sigma_i(\omega_k)$ the i th singular value of the FRF and (\bullet) indicating the selected modes.

systems are more naturally described in an additive structure, leading to reduced complexity models, improved conditioning, and enhanced physical insight. The procedure has been successfully tested on a prototype wafer-stage system, providing accurate models over a large frequency range.

REFERENCES

- Bayard, D.S. (1994). High-order multivariable transfer function curve fitting: Algorithms, sparse matrix methods and experimental results. *Automatica*, 30(9), 1439–1444.
- Blom, R.S. and Van Den Hof, P. (2010). Multivariable frequency domain identification using IV-based linear regression. In *Proceedings of the IEEE Conference on Decision and Control*, 1148–1153.
- Classens, K., González, R.A., and Oomen, T. (2024). Recursive Identification of Structured Systems: An Instrumental-Variable Approach Applied to Mechanical Systems. *Submitted for journal publication*.
- Classens, K., Mostard, M., Van De Wijdeven, J., W.P.M.H. Heemels, and Oomen, T. (2022). Fault Detection for Precision Mechatronics: Online Estimation of Mechanical Resonances. In *IFAC-PapersOnLine*, volume 55, 746–751. Elsevier B.V.
- Correa, G.O. and Glover, K. (1984). Pseudo-canonical Forms, Identifiable Parametrizations and Simple Parameter Estimation for Linear Multivariable Systems: Input-Output Models. *Automatica*, 20(4), 429–442.
- Dorosti, M., Fey, R.H., Heertjes, M.F., and Nijmeijer, H. (2018). Iterative Pole–Zero model updating: A combined sensitivity approach. *Control Engineering Practice*, 71, 164–174.
- Garnier, H. (2015). Direct continuous-time approaches to system identification. Overview and benefits for practical applications. In *European Journal of Control*, volume 24, 50–62.
- Gawronski, W. (2004). *Advanced Structural Dynamics and Active Control of Structures*. Springer.
- Gilson, M., Welsh, J.S., and Garnier, H. (2018). A frequency localizing basis function-based IV method for wideband system identification. *IEEE Transactions on Control Systems Technology*, 26(1), 329–335.
- Glover, K. and Willems, J.C. (1974). Parametrizations of Linear Dynamical Systems: Canonical Forms and Identifiability. *IEEE Transactions on Automatic Control*, 19(6), 640–646.
- González, R.A., Classens, K., Rojas, C.R., Welsh, J.S., and Oomen, T. (2024). Identification of additive continuous-time systems in open and closed-loop. *Automatica*, 173(112013).

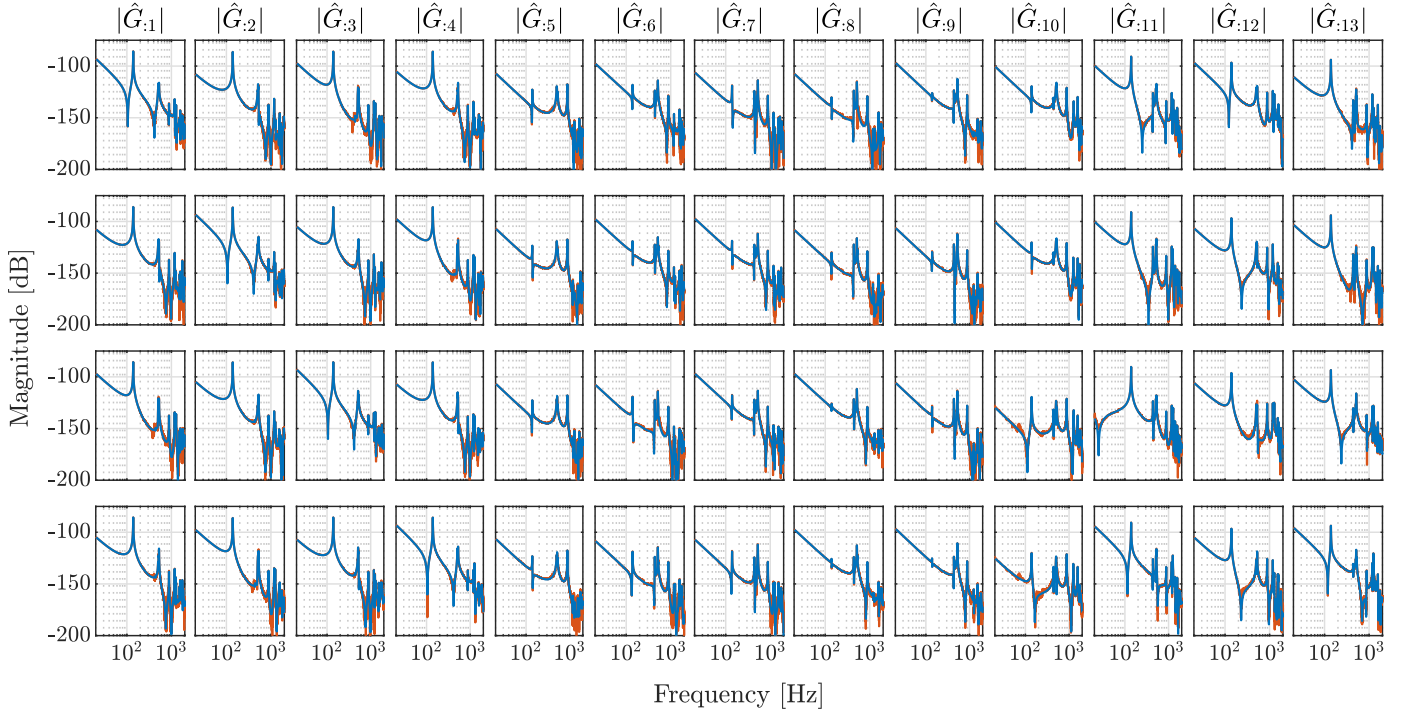


Fig. 4. Element-wise Bode magnitude plot of the the nonparametric FRF measurement (—) and the estimated parametric model (—).

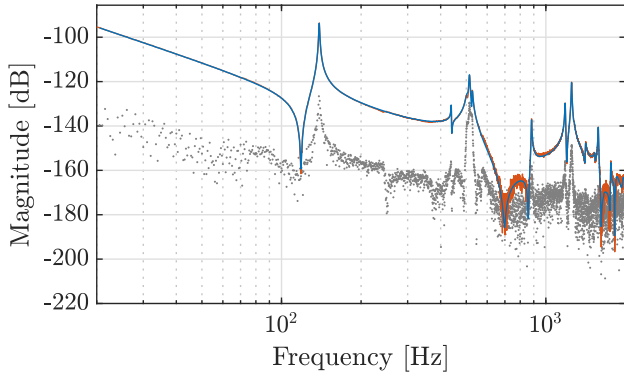


Fig. 5. Bode magnitude plot of the $\hat{G}_{4,13}$ entry, with the nonparametric FRF measurement (—), the estimated parametric model (—) and residual (\circ).

González, R.A., Rojas, C.R., Pan, S., and Welsh, J.S. (2023). Parsimonious identification of continuous-time systems: A block-coordinate descent approach. In *IFAC World Congress*, 56(2), 4216–4221.

Jian, H.M., Chen, Y.S., and Bai, M.R. (2022). Acoustic modal analysis of room responses from the perspective of state-space balanced realization with application to field interpolation. *The Journal of the Acoustical Society of America*, 152(1), 240–250.

Lange, C. and Leone, M. (2021). Broadband Circuit Model for EMI Analysis of Complex Interconnection Networks in Metallic Enclosures of Arbitrary Shape. *IEEE Transactions on Electromagnetic Compatibility*, 63(2), 474–483.

Ljung, L. (1999). *System Identification: Theory For The User*. Prentice Hall, second edition.

Pintelon, R. and Schoukens, J. (2012). *System Identification*. John Wiley & Sons, New Jersey, second edition.

Sanathanan, C. and Koerner, J. (1961). Transfer function synthesis as a ratio of two complex polynomials. Technical report, Atomic Energy Commission, Ohio.

Semlyen, A. (1999). Rational approximation of frequency domain responses by vector fitting. *IEEE Transactions on Power Delivery*, 14(3).

Shih, C.Y., Tsuei, Y.G., Allemang, R.J., and Brown, D.L. (1988). Complex mode indication function and its applications to spatial domain parameter estimation. Technical Report 4.

Söderström, T. and Stoica, P. (2001). *System Identification*. Prentice Hall.

Steinbuch, M., Oomen, T., and Vermeulen, H. (2022). Motion Control, Mechatronics Design, and Moore’s Law. *IEEJ Journal of Industry Applications*, 11(2), 245–255.

Tacx, P., Habraken, R., Witvoet, G., Heertjes, M., and Oomen, T. (2024). Identification of an overactuated deformable mirror system with unmeasured outputs. *Mechatronics*, 99, 103158.

Vayssettes, J. and Mercère, G. (2015). New developments for experimental modal analysis of aircraft structures. In *MATEC Web of Conferences*, volume 20. EDP Sciences.

Vayssettes, J., Mercère, G., and Prot, O. (2016). New developments for matrix fraction descriptions: A fully-parametrised approach. *Automatica*, 66, 15–24.

Voorhoeve, R., De Rozario, R., Aangenent, W., and Oomen, T. (2021). Identifying position-dependent mechanical systems: A modal approach applied to a flexible wafer stage. *IEEE Transactions on Control Systems Technology*, 29(1), 194–206.

Wang, L. and Garnier, H. (2008). *Identification of Continuous-time Models from Sampled Data*. Advances in Industrial Control. Springer London.

Young, P. and Jakeman, A. (1980). Refined instrumental variable methods of recursive time-series analysis. *International Journal of Control*, 31, 741–764.

Zhang, M. and Xu, F. (2019). Variational mode decomposition based modal parameter identification in civil engineering. *Frontiers of Structural and Civil Engineering*, 13(5), 1082–1094.

Zhu, J., Ni, J., and Shih, A.J. (2008). Robust machine tool thermal error modeling through thermal mode concept. *Journal of Manufacturing Science and Engineering*, 130(6), 0610061–0610069.