

# A Hardware Ray Tracer Datapath with Generalized Features

Fangjia Shen, Tim Rogers

**Abstract**—This article documents an open-source hardware ray tracer datapath pipeline module implemented with the Chisel hardware construction language.

The module implements a unified fix-latency pipeline for Ray-Box and Ray-Triangle intersection tests which are the two core, compute-intensive tasks involved in Ray Tracing workloads. Furthermore, the module offers the flexibility of supporting two additional compute modes that can accelerate the computation of Euclidean distance and angular distance (aka cosine similarity) between two vectors, at the cost of minimal additional hardware overhead.

Several design choices are made in favor of creating a composable and easily-modifiable Chisel module. This document also explains the trade-offs of these choices.

**Index Terms**—GPU microarchitecture, pipelined architecture, ray tracing, computer graphics.

## I. INTRODUCTION

**Why we implemented this Ray Tracer Datapath.** We implemented this Ray Tracer Datapath unit as part of a more significant project to study the possibility of extending the functionality of a hardware Ray Tracer. We believe the floating point functional units inside the hardware Ray Tracer Datapath can be reused to process data points other than the 3D-coordinate values of ray/box/triangle primitives. In other words, the hardware Ray Tracer unit can be easily generalized for other tasks, such as calculating the Euclidean or angular distance between two floating point vectors of arbitrary dimension.

**How we implemented this Ray Tracer Datapath** We used Chisel [2] (version 5.0.0) to implement the datapath and test bench. We tested the functional correctness of our implementation against twenty special ray-box/ray-triangle test cases and hundreds of thousands of randomized inputs.

Chisel is a high-level hardware construction language that is extremely flexible and parameterizable. Chisel is implemented as a domain specific language embedded in Scala, so Chisel can exploit any language feature or library Scala provides. Using the `emitSystemVerilog` method defined in package `circuit.stage.ChiselStage`, a hardware module constructed in Chisel can be mapped to a .sv file with comments linking each Verilog statement to its line in the .scala source code (Chisel).

The implementation of floating point functional units (adders and multipliers, as well as rounding circuits) are

F. Shen and T. Rogers are with the Elmore Family School of Electrical and Computer Engineering, Purdue University, West Lafayette, IN 47906, USA. e-mail: {shen449,timrogers}@purdue.edu.

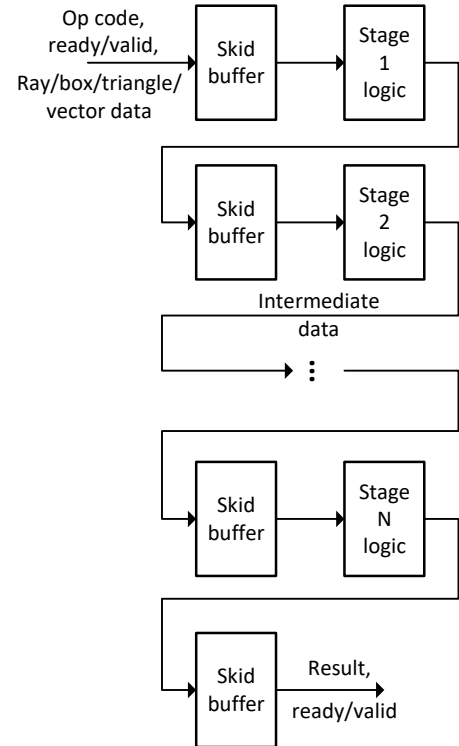


Fig. 1: Top-level diagram of the Ray Tracer Datapath. The IO specification is in Table V. The details of each stage are documented in Tables VII and VIII.

sourced from the open-source berkeley-hardfloat library [6], [3] for Chisel.

**Where to download the source code.** <https://github.com/purdue-aalp/raytracer>

## II. FEATURES

### A. Supported Operations

Our Ray Tracer Datapath supports four kinds of tasks: (1) Ray-Box intersection test, (2) Ray-Triangle intersection test, (3) Euclidean distance calculation, and (4) angular distance (aka. cosine similarity) calculation. The first two operations are what we expected a hardware Ray Tracer found in a contemporary GPU (e.g. the GeForce RTX 40 series) to support. The latter two operations are what we believe can be added to such commodity hardware with minimal overhead.

We assume that the hardware Ray Tracer adopts a unified fixed-latency pipeline like the one shown in Figure 1. This is inspired by the unified Traversal-and-Intersection pipeline proposed by Nah et al. [4]. Geometric primitives are fed alongside

an opcode into a pipeline of computation steps; the output is the result of intersection tests or distance computation.

Below, we briefly describe each of the operation modes.

1) *Ray-Box Intersection*: tests one ray against four axis-aligned bounding boxes (AABB) in 3-dimensional space and outputs the distance of intersections (if an intersection happens) and a list of the boxes' indices sorted in the order of intersection. An AABB is a rectangular cuboid whose edges are parallel to the x-/y-/z-axes. The software version of the ray-box intersection algorithm implemented in our datapath was described by Barnes [1], [5].

2) *Ray-Triangle Intersection*: tests one ray against one triangle in 3-dimensional space and outputs the distance of intersection (if an intersection happens) as a numerator and a denominator. An external circuit has to perform a division to find the true distance of intersection. The software version of the ray-triangle intersection algorithm implemented in our datapath was proposed by Woop, Benthin, and Wald [7].

3) *Euclidean Distance*: calculates the square of the Euclidean distance between two vectors of arbitrary dimension. An external circuit has to perform a square root to find the true Euclidean distance.

$$\vec{a} = (a_1, a_2, \dots, a_n) \quad (1)$$

$$\vec{b} = (b_1, b_2, \dots, b_n) \quad (2)$$

$$d_{Euclidean} = \sqrt{(\vec{a} - \vec{b}) \cdot (\vec{a} - \vec{b})} \quad (3)$$

$$datapath\_output = (\vec{a} - \vec{b}) \cdot (\vec{a} - \vec{b}) \quad (4)$$

$$= \sum_{i=1}^n (a_i - b_i)^2 \quad (5)$$

4) *Angular Distance*: (also known as ‘‘cosine similarity’’) calculates (a) the dot-product of two vectors (the ‘‘query point’’ and the ‘‘candidate point’’) of arbitrary dimension, as well as (b) the squared norm of the ‘‘candidate point’’ vector. To find the actual cosine similarity, an external circuit has to divide the output dot product by the square root of the output squared norm, and then divide the result by the norm of the query point.

$$\vec{q} = (q_1, q_2, \dots, q_n) \quad (6)$$

$$\vec{c} = (c_1, c_2, \dots, c_n) \quad (7)$$

$$d_{angular} = \cos(\theta) = \frac{\vec{q} \cdot \vec{c}}{\|\vec{q}\| \|\vec{c}\|} \quad (8)$$

$$datapath\_output\_a = \vec{q} \cdot \vec{c} \quad (9)$$

$$= \sum_{i=1}^n (q_i \times c_i) \quad (10)$$

$$datapath\_output\_b = \|\vec{c}\|^2 \quad (11)$$

$$= \sum_{i=1}^n c_i^2 \quad (12)$$

Note that the data flow implemented in our datapath for both Euclidean and angular distances are similar: they are both sum-of-products. Therefore, it is possible to calculate the Euclidean/angular distance for vectors of arbitrary dimension

with the help of an accumulator. When processing angular distance jobs, the datapath can process vectors half the length of vectors processed in Euclidean jobs every cycle.

## B. Representation of Data

1) *Box*: An axis-aligned bounding box can be defined by two points: the vertex with the minimum coordinate and the vertex with the maximum coordinate.<sup>1</sup> See Table I.

TABLE I: Representation of a Box

Box		
[31:0] x_min	The minimum point	FP32
[31:0] y_min		
[31:0] z_min		
[31:0] x_max	The maximum point	
[31:0] y_max		
[31:0] z_max		

2) *Triangle*: A triangle in 3-dimensional space is defined by the x/y/z coordinates of its three vertices. See Table II.

TABLE II: Representation of a Triangle

Triangle		
[31:0] A_x	First vertex	FP32
[31:0] A_y		
[31:0] A_z		
[31:0] B_x	Second vertex	
[31:0] B_y		
[31:0] B_z		
[31:0] C_x	Third vertex	
[31:0] C_y		
[31:0] C_z		

3) *Ray*: A ray in 3-dimensional space is defined by two 3-dimensional vectors: its origin (*ori*) and its direction (*dir*), and one scalar: its extent (how far the ray can travel before ‘‘vanishing’’). Due to how the ray-box and ray-triangle intersection algorithms are implemented, several other convenience fields which are derived from these parameters are required as well:

- The element-wise inverse (*inv*) of the direction vector, this is required for the ray-box intersection test:

$$inv\_x \leftarrow 1/dir\_x$$

$$inv\_y \leftarrow 1/dir\_y$$

$$inv\_z \leftarrow 1/dir\_z$$

- Index values (*kx*, *ky*, *kz*) that indicate the dimension in which the ray's direction vector has the greatest component. This is required for the ray-triangle intersection test:

$$maxInd \leftarrow 0$$

$$maxVal \leftarrow dir\_x$$

**if** *dir\_y* > *maxVal* **then**

<sup>1</sup>The ‘‘minimum/maximum’’ coordinate is one of the six vertices that minimizes/maximizes the function  $f(x, y, z) = x + y + z$ .

```

    maxInd ← 1
    maxVal ← dir_y
  end if
  if dir_z > maxVal then
    maxInd ← 2
    maxVal ← dir_z
  end if
  kz ← maxInd
  kx ← (kz + 1)%3
  ky ← (kx + 1)%3
  if dir[kz] < 0.0f then
    swap(kx, ky)
  end if

```

- The shear constants ( $S_x$ ,  $S_y$ ,  $S_z$ ) of the ray, this is required for the ray-triangle intersection test:

```

  Sx ← dir[kx]/dir[kz]
  Sy ← dir[ky]/dir[kz]
  Sz ← 1.0f/dir[kz]

```

See Table III.

TABLE III: Representation of a Ray

Ray			
[31:0] ori_x	origin point	FP32	
[31:0] ori_y			
[31:0] ori_z			
[31:0] dir_x	direction vector		
[31:0] dir_y			
[31:0] dir_z			
[31:0] inv_x			element-wise inverse of direction vector
[31:0] inv_y			
[31:0] inv_z			
[31:0] extent	extent of ray		
[1:0] kz	index of maximum dimension		2 bits
[1:0] kx	index of other two dimensions		
[1:0] ky			
[31:0] Sx	shear constants		FP32
[31:0] Sy			
[31:0] Sz			

4) *Vector*: A vector is simply a sequence of floating point values. We cap the dimension of a vector at 16. Additionally, a bitmask indicating the validity of each element is introduced to represent vectors of lesser dimension. See Table IV.

### C. IO specification

Table V shows all input/output signals of the Ray Tracer Datapath. The datapath is fully pipelined, processes tasks in order, and has an initiation interval of 1 cycle and a fixed input-output latency of 12 cycles. The pipeline has 11 stages and registers both input and output data.

For Euclidean- and angular-distance jobs, the datapath can process vectors of arbitrary dimension by taking multiple beats of input. Internal accumulators save the intermediate results. The accumulator(s) associated with either operation mode

TABLE IV: Representation of a Vector

Vector		
[31:0] x_1	First dimension of vector	FP32
[31:0] x_2	Second dimension of vector	
[31:0] x_3		
[31:0] x_4		
...		
[31:0] x_16		
[15:0] mask	Each bit indicates if a corresponding dimension should be omitted. This allows the datapath to take vectors of arbitrary dimension in possible multiple beats.	16 bits

can be cleared by asserting the `euclidean_reset_accum` signal when the `opcode` signal is set to the corresponding mode. Clearing the Euclidean distance accumulator does not affect the angular distance accumulators, and vice versa. Furthermore, the accumulator(s) for either mode are not affected by jobs of other modes, therefore it is safe to interleave a multi-beat Euclidean-/angular-distance job with other job(s) over an indefinite time frame.

### D. Configurable parameters

The Ray Tracer Datapath has three configurable parameters as a Chisel module. See Table VI.

The input/output and pipeline stage-registered floating point values can be configured as either the standard IEEE 754 FP32 format, or the 33-bit single-precision “internal format” used by the `berkeley-hardfloat` library (aka. `RecFN`). By default, the input/output values are in standard FP32 format; the pipeline stage registers are 33-bit `RecFN` format. Our implementation currently only supports the default on these two parameters.

The Ray Tracer Datapath can also be configured to support/disable Euclidean- and angular-distance modes using the `support_euclidean` parameter. An optional integer value indicates how many dimensions the Euclidean mode can handle per beat; the angular mode always handles half that dimension per beat. This parameter currently can only be either `None` or `Some(16)`. The hardware overhead for supporting these two modes are:

- Widened input/output ports. Any input/output signals with the `euclidean_` or `angular_` prefix are dropped when this parameter is `None`.
- Widened pipeline stage registers. Like the input/output ports, pipeline registers related to the Euclidean-/angular-distance modes are eliminated when this parameter is `None`.
- Four more floating point adders are introduced throughout the pipeline.

## III. DESIGN CHOICES

### A. Pipelined Datapath

As shown in Figure 1, skid buffers are used everywhere a pipeline register is needed. This allows the Ray Tracer

TABLE V: IO Specification of the Ray Tracer Datapath

IO	name	size/type	description
clock	clk		clock signal
input	input_valid	1 bit	Input ready-valid handshake
output	input_ready	1 bit	
input	opcode	2 bits	Indicates what input fields are valid, and what operations to apply. Choose from {OpTriangle, OpQuadbox, OpEuclidean, OpAngular}
input	ray	Ray	A ray
input	aabb_0	Box	Four axis-aligned bounding boxes
input	aabb_1	Box	
input	aabb_2	Box	
input	aabb_3	Box	
input	triangle	Triangle	A triangle
input	euclidean_a	Vector (no mask)	The two vectors for Euclidean/angular distance calculation. Only valid when opcode==opEuclidean or opcode==opAngular; when opcode==opAngular, $x_9 \sim x_{16}$ are always ignored because the pipeline can only process 8 element per vector each cycle for angular distance operations.
input	euclidean_b	Vector (no mask)	(ditto)
input	euclidean_mask	16 bits	A bitmask for both vectors indicating the validity of each dimension
input	euclidean_reset_accum	1 bit	Setting this bit will reset the Euclidean-distance accumulator or angular-distance accumulators for the next job. Only valid when opcode==opEuclidean or opcode==opAngular.
output	otuput_valid	1 bit	Output ready-valid handshake
input	output_ready	1 bit	
output	opcode	2 bits	Indicates what operation was associated with the output.
output	isIntersect	4 bits	A bitmask where the i-th bit indicates whether the j-th input box aabb_j had an intersection with the ray, where j is equal to boxIndex_i. Only valid when opcode==opQuadbox.
output	tmin_out_0	FP32	The value of tmin_out_i represents the distance of intersection from the ray's origin to the input box aabb_j where j is equal to boxIndex_i. These values are sorted from small to large: tmin_out_0 is always the smallest, tmin_out_3 is always the largest. tmin_out_i is only valid when isIntersect[i]==True and opcode==opQuadbox.
output	tmin_out_1	FP32	(ditto)
output	tmin_out_2	FP32	(ditto)
output	tmin_out_3	FP32	(ditto)
output	boxIndex_0	2 bits	Index values that link the tmin_out values to the input boxes. Only valid when opcode==opQuadbox.
output	boxIndex_1	2 bits	(ditto)
output	boxIndex_2	2 bits	(ditto)
output	boxIndex_3	2 bits	(ditto)
output	t_num	FP32	The numerator of the distance of intersection. Only valid when opcode==opTriangle and triangle_hit==True.
output	t_denom	FP32	The denominator of the distance of intersection. Only valid when opcode==opTriangle and triangle_hit==True.
output	triangle_hit	1 bit	Whether the ray hit with the triangle. Only valid when opcode==opTriangle.
output	euclidean_accumulator	FP32	The accumulated value of the sum-of-squares. Only valid when opcode==opEuclidean.
output	euclidean_reset_accum	1 bit	Propagated from the euclidean_reset_accum input. Only valid when opcode==opEuclidean.
output	angular_dot_product	FP32	The accumulated value of the sum-of-products. Only valid when opcode==opAngular.
output	angular_norm	FP32	The accumulated value of the sum-of-squares. Only valid when opcode==opAngular.
output	angular_reset_accum	1 bit	Propagated from the euclidean_reset_accum input. Only valid when opcode==opAngular.
Note: all signals with the "euclidean" or "angular" prefix are gone when parameter support_euclidean is set to None.			

TABLE VI: Configurable parameters of the Ray Tracer Datapath

configurable parameters	type and default value	description
io_recorded_float	Boolean (false)	When set to false, the float values in the input/output conform to the IEEE 754 standard (FP32). Otherwise, the format of input/output float values is the internal 33-bit “recorded format” used by the berkeley-hardfloat library.
internal_recorded_float	Boolean (true)	When set to false, the float values saved in the pipeline stage registers conform to the IEEE 754 standard (FP32). Otherwise, they are saved in the internal 33-bit “recorded format” used by the berkeley-hardfloat library.
support_euclidean	Option[Int] (None)	Setting to None disables support for Euclidean/angular-distance modes. When set to some integer value, the value represents how many dimensions the Euclidean-distance mode can handle in each beat; the maximum dimension accepted in angular-distance mode is always half of this value.

Datapath to be integrated into a larger datapath and propagate back pressure via its valid-ready interfaces. A drawback of this design is increased hardware overhead since each skid buffer contains two registers.

### B. Functional Units are Shared

Floating point functional units like adders and multipliers are distributed across 11 pipeline stages and time-shared among jobs of various modes. We examined the data flow graphs of each operation mode to find a good grouping of computation steps that maximizes the reuse of functional units at each stage. See Table VII for our grouping of computation steps in the data flow of all four operation modes. See Table VIII for the distribution of functional units.

### C. Pipeline Stage Registers are Segregated by Operation Mode

Unlike functional units, pipeline registers are not shared among operation modes. Each operation mode has its own pipeline register at every stage. To be more precise, we defined a bundle type that contains all data fields used in any operation mode at any stage (i.e. all variables that appear in Table VII) and instantiated skid buffers of this same bundle type at every stage. The Chisel compiler (and the subsequent RTL synthesizer) will optimize away dead fields for each stage. This design choice allows easier modifications to the Ray Tracer Datapath because there is only one bundle type to modify, and the designer need not undertake the arduous labor of maintaining a distinct union bitmap of data fields at each stage. The drawback, of course, is added register overhead because only a fraction of the pipeline stage registers contain meaningful data at any time despite dead node elimination.

### D. Floating Point Values are Rounded at Every Stage

As shown in Figure 2, a design choice can be made regarding where to instantiate FP rounding circuits.

If functional units preserve the full precision of calculations but forego any rounding, floating point values will have longer and longer exponent and significand (aka. mantissa) fields

as they undergo computation steps. For example, the full-precision result of adding two FP32 values has 9 exponent bits and 25 significand bits. A pipeline of 9 stages is not prohibitively long, so it is possible to completely abandon rounding in the pipeline and instantiate functional units of different FP formats at different stages. However, irregularities in the data flow of different jobs<sup>2</sup> translate to irregularities in FP formats, so some rounding circuit is still necessary if we want to reuse FP functional unit among various jobs. The placement of these rounding circuits and the fact that different stages need to instantiate functional units of different FP formats makes the pipeline implementation more complex.

If, on the other hand, we mandate a rounding circuit for each functional unit, then the same FP format can used throughout the pipeline, and rounding becomes largely transparent from the pipeline architecture. This is our choice for the Ray Tracer Datapath. The drawback is higher circuit overhead and longer critical paths in each stage.

## IV. CONCLUSION

This article documents an open-source implementation of a hardware ray tracer datapath pipeline written in Chisel. Based upon the assumption that a hardware ray tracer implements a unified pipeline for ray-primitive intersection tests, we enhance the datapath with two additional operation modes to accelerate the calculation of Euclidean distance and cosine similarity between two vectors of arbitrary dimension.

We designed the Ray Tracer Datapath with composability and ease of development in mind, which led to the design choices of (1) using skid buffers as pipeline stage registers, (2) sharing functional units, (3) segregating pipeline stage registers, and (4) rounding intermediate floating point values at every stage.

## APPENDIX A SOURCE FILES

Table IX describes the contents of each source file.

<sup>2</sup>E.g., by the time a job has reached stage 6 as shown in Table VIII, the Triangle job has undergone 2 rounds of adds and 2 rounds of muls, the Euclidean job has undergone 2 rounds of adds and 1 round of mul, the Angular job has undergone 1 round of mul and 1 round of add.

TABLE VII: Data flow of all four operation modes


stage	Box	Triangle	Euclidean	Angular
1	FP32-RecFN conversion			
2	// for each box box.x_min = box.x_min - ray.origin.x box.y_min = box.y_min - ray.origin.y box.z_min = box.z_min - ray.origin.z box.x_max = box.x_max - ray.origin.x box.y_max = box.y_max - ray.origin.y box.z_max = box.z_max - ray.origin.z	A = triangle.A - ray.origin B = triangle.B - ray.origin C = triangle.C - ray.origin	d[1] = a[1] - b[1] d[2] = a[2] - b[2] ... d[16] = a[16] - b[16]	
3	// for each box t_min_x = box.x_min * ray.inv.x t_min_y = box.y_min * ray.inv.y t_min_z = box.z_min * ray.inv.z t_max_x = box.x_max * ray.inv.x t_max_y = box.y_max * ray.inv.y t_max_z = box.z_max * ray.inv.z	Ax = ray.shear.x * A[kz] Ay = ray.shear.y * A[kz] Az = ray.shear.z * A[kz] Bx = ray.shear.x * B[kz] By = ray.shear.y * B[kz] Bz = ray.shear.z * B[kz] Cx = ray.shear.x * C[kz] Cy = ray.shear.y * C[kz] Cz = ray.shear.z * C[kz]	d[1] = d[1] * d[1] d[2] = d[2] * d[2] ... d[16] = d[16] * d[16]	dot_p[1] = a[1] * b[1] norm[1] = b[1] * b[1] dot_p[2] = a[2] * b[2] norm[2] = b[2] * b[2] ... dot_p[8] = a[8] * b[8] norm[8] = b[8] * b[8]
4	// for each box if(ray.dir.x<0) swap(t_min_x, t_max_x) if(ray.dir.y<0) swap(t_min_y, t_max_y) if(ray.dir.z<0) swap(t_min_z, t_max_z) tmin = max(t_min_x, t_min_y, t_min_z, 0.0f) tmax = min(t_max_x, t_max_y, t_max_z, +inf)	Ax = A[kx] - Ax Ay = A[ky] - Ay Bx = B[kx] - Bx By = B[ky] - By Cx = C[kx] - Cx Cy = C[ky] - Cy	d[1] = d[1] + d[9] d[2] = d[2] + d[10] ... d[8] = d[8] + d[16]	dot_p[1] = dot_p[1] + dot_p[5] norm[1] = norm[1] + norm[5] ... dot_p[4] = dot_p[4] + dot_p[8] norm[4] = norm[4] + norm[8]
5	// for each box intersect = (tmin ≤ tmax)	U = Cx * By V = Ax * Cy W = Bx * Ay U_sub = Cy * Bx V_sub = Ay * Cx W_sub = By * Ax		
6		U = U - U_sub V = V - V_sub W = W - W_sub	d[1] = d[1] + d[5] d[2] = d[2] + d[6] d[3] = d[3] + d[7] d[4] = d[4] + d[8]	dot_p[1] = dot_p[1] + dot_p[3] norm[1] = norm[1] + norm[3] dot_p[2] = dot_p[2] + dot_p[4] norm[2] = norm[2] + norm[4]
7		t_num_1 = U * Az t_num_2 = V * Bz t_num_3 = W * Cz		
8		t_denom = U + V t_num = t_num_1 + t_num_2	d[1] = d[1] + d[3] d[2] = d[2] + d[4]	dot_p[1] = dot_p[1] + dot_p[2] norm[1] = norm[1] + norm[2]
9		t_denom = t_denom + W t_num = t_num + t_num_3	d[1] = d[1] + d[2]	dot_p = dot_p[1] + accum_dot_p norm = norm[1] + accum_norm
10	quadsort(box0_tmin, box1_tmin, box2_tmin, box3_tmin)	intersect = t_num>0f && t_denom!=0f && U≥0f && V≥0f && W ≥0f	output = d[1] + accum	
11	RecFN-FP32 conversion			

TABLE VIII: Distribution of Floating Point Functional Units


stage	assets	utilization			
		Ray-Box	Ray-Triangle	Euclidean	Angular
1	FP32 to recFN conversion				
2	24 Adders	24 Adds	9 Adds	16 Adds	
3	24 Multipliers	24 Muls	9 Muls	16 Muls	16 Muls
4	36 Comparators, 8 Adders	36 Compares	6 Adds	8 Adds	8 Adds
5	4 Comparators, 6 Multipliers	4 Compares	6 Muls		
6	4 Adders		3 Adds	4 Adds	4 Adds
7	3 Multipliers		3 Muls		
8	2 Adders		2 Adds	2 Adds	2 Adds
9	2 Adders		2 Adds	1 Add	2 Adds
10	2 Quad-Sorting Networks, 5 Comparators, 1 Adder	2 QuadSorts	5 Compares	1 Add	
11	recFN to FP32 conversion				

TABLE IX: Description of source files

file path	description
src/main/scala/raytracer_datapath/CompareAndSwapRecFN.scala	A two-input sorting network implemented as a specialization of the module RecFNCompareSelect.
src/main/scala/raytracer_datapath/FNHelpers.scala	Helper circuits for flipping the sign or finding the absolute value of floating point numbers.
src/main/scala/raytracer_datapath/IOSpec.scala	Definition of all input/output/internal signal bundles. Circuits that transform such bundles between FP32 and RecFN.
src/main/scala/raytracer_datapath/QuadSortRecFN.scala	A four-input combinatorial sorting network for RecFN, outputs the sorted input values.
src/main/scala/raytracer_datapath/QuadSortRecFNWithIndex.scala	A four-input combinatorial sorting network for RecFN, outputs the input indices based on the sorted order.
src/main/scala/raytracer_datapath/RecFNCompareSelect.scala	A module for conditionally swapping two signals based on the result of comparison between two RecFN inputs.
src/main/scala/raytracer_datapath/SkidBuffer.scala	A skid buffer controller. A SkidBufferStageModule trait that defines the interface for any pipeline stage with an input skid buffer. Some apply methods that wrap arbitrary stateless/stateful logic into a SkidBufferStageModule.
src/main/scala/raytracer_datapath/UnifiedDatapath.scala	The top level module for the ray tracer datapath.
src/test/scala/raytracer_datapath/raytracer_gold/ConversionTools.scala	Testbench helper methods that converts software data structures into hardware-compatible signals.
src/test/scala/raytracer_datapath/raytracer_gold/RaytracerGold.scala	The software-implementation of ray-box/ray-triangle intersection tests.
src/test/scala/raytracer_datapath/raytracer_gold/SW_Data.scala	The software-twin of IOSpec.scala, defines the data structures used in testbenches.
src/test/scala/raytracer_datapath/Datapath_test.scala	Testbench for UnifiedDatapath.
src/test/scala/raytracer_datapath/FNFlipSign_test.scala	Testbench for FNHelpers.
src/test/scala/raytracer_datapath/QuadSortRecFNTest.scala	Testbench for QuadSortRecFN.
src/test/scala/raytracer_datapath/RecFNCompareSelectTest.scala	Testbench for RecFNCompareSelect.
src/test/scala/raytracer_datapath/SkidBufferStageTest.scala	Testbench for SkidBuffer.

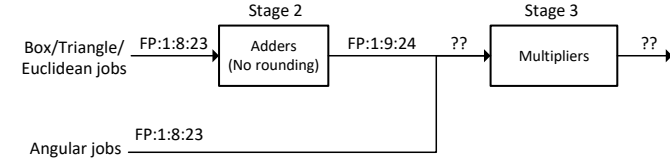

(a) Because not every operation mode needs computation in each stage, irregularities in the data flow translate into irregularities in the floating point formats if **no rounding** was performed. Standalone rounding modules must be inserted in places where necessary, which can complicate pipeline design.

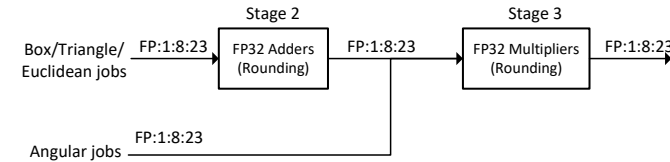

(b) **Rounding** the output value at every functional unit fosters a clean and simple pipeline design because now FP rounding becomes a problem largely transparent from the pipeline architecture.

Fig. 2: A choice can be made regarding mandating a rounding circuit for each functional unit. The notation “FP:a:b:c” represents a floating point format where a-bits are the sign, b-bits are the exponent, c-bits are the significand (dropping the first “1”), e.g.: FP32 is FP:1:8:23.

## REFERENCES

[1] “Fast, branchless ray/bounding box intersections, part 3: Boundaries - tavianator.com,” Jul. 2022. [Online]. Available: <https://tavianator.com/>

- 2022/ray\_box\_boundary.html
- [2] Bachrach, Richards, Lee, Waterman, Avizienis, Wawrzynek, and Asanovic, “Chisel: Constructing hardware in a scala embedded language,” *Design Automation Conference*, p. 1212–1221, Jan. 2012. [Online]. Available: <http://yadda.icm.edu.pl/yadda/element/bwmeta1.element.ieee-000006241660>
- [3] J. Hauser, “Berkeley Hardfloat,” 2022. [Online]. Available: <http://www.jhauser.us/arithmic/HardFloat.html>
- [4] J.-H. Nah, H.-J. Kwon, D.-S. Kim, C.-H. Jeong, J. Park, T.-D. Han, D. Manocha, and W.-C. Park, “Raycore: A ray-tracing hardware architecture for mobile devices,” *ACM Trans. Graph.*, vol. 33, no. 5, sep 2014. [Online]. Available: <https://doi.org/10.1145/2629634>
- [5] Tavianator, “Github - tavianator/ray\_box: Benchmarking ray/bounding box intersection tests.” [Online]. Available: [https://github.com/tavianator/ray\\_box](https://github.com/tavianator/ray_box)
- [6] Ucb-Bar, “Github - ucb-bar/berkeley-hardfloat.” [Online]. Available: <https://github.com/ucb-bar/berkeley-hardfloat>
- [7] S. Woop, C. Benthin, and I. Wald, “Watertight ray/triangle intersection,” *Journal of Computer Graphics Techniques (JCGT)*, vol. 2, no. 1, pp. 65–82, June 2013. [Online]. Available: <http://jcgt.org/published/0002/01/05/>