

The issue of aliasing in PSR B0943+10

II Signal processing arguments

M. Vivekanand*

National Center for Radio Astrophysics, TIFR,
Pune University Campus, P. O. Box 3,
Ganeshkhind, Pune 411007, India.

May 14, 2018

Abstract: Deshpande & Rankin (1999, 2001) claim that the frequency of the very narrow feature, in the spectrum of radio flux variations of PSR B0943+10, is an alias of its actual value. They also claim to have detected an amplitude modulation on the above phase modulation. This paper argues that both these claims are unjustified.

Keywords: pulsars: general – pulsars: individual (PSR B0943+10, PSR B0031–07): stars – neutron — fluctuation spectrum — aliased feature — signal processing — drifting sub pulses.

1 Introduction

The rotation powered radio pulsar PSR B0943+10 exhibits sub pulses that are drifting systematically from period to period within the observable pulse window. This pulsar has a very narrow feature in the longitude resolved spectrum of intensity fluctuations; its Q , defined as its central frequency divided by its width, is relatively high (Taylor & Huetguenin 1971; Backer, Rankin & Campbell 1975; Sieber & Oster 1975). Recently Deshpande & Rankin (1999, 2001; henceforth DR1999 and DR2001) put its Q at ≥ 500 . It has been speculated that this very narrow spectral feature, occurring at 0.465 cycles per pulsar period [cpp], could

*vivek@ncra.tifr.res.in

be an alias of the actual value 0.535 [cpp] (Sieber & Oster 1975). Backer (1973) noted such a general possibility in radio pulsars and claimed, based on the phase information in the fluctuation spectrum, that PSR B2303+30 has an aliased spectral feature. This was contested by Sieber & Oster (1975), who state on their page 326 that “even a phase analysis, contrary to Backer’s statements (Backer 1973), is unable to decide between the two possibilities”, viz., whether the spectral feature is aliased or not. Indeed, in a later paper Backer did not repeat such a claim for PSR B0943+10, whose fluctuation spectrum is similar to that of PSR B2303+30 (Backer, Rankin & Campbell 1975); he quoted the the true value as 0.465 [cpp]. However, DR1999 and DR2001 recently claimed that the spectral feature is indeed an alias; that the actual value is 0.535 [cpp]. In their view Sieber & Oster (1975) “came to the wrong conclusion” (DR2001). They also claim that the weak, symmetrically spaced sidebands, at 0.027 [cpp] away from the above spectral feature “strongly suggest ... a regular, highly periodic amplitude modulation of the ... drifting sub pulse sequences”.

This paper argues that DR1999 and DR2001 are unjustified in drawing these two conclusions. The question, whether PSR B0943+10 has an aliased spectral feature or not, is still unresolved; and the latter observation is as likely, if not more likely, due to an additional phase modulation of the drifting sub pulses.

2 A review of the relevant signal processing

The signal from an ideal pulsar with drifting sub pulses falls under the topic “pulse position modulation” (PPM); it consists of periodically occurring narrow pulses whose positions are modulated by another periodicity. Its general principles can be found in books on electronic communication engineering (see Lathi 1998). The spectrum of a PPM signal when the position modulation is due to a pure “tone” (a single frequency) is given by Panter (1965) on his page 541 and by Schwartz, Bennett & Stein (1966; henceforth SBS1966) on their pages 252 – 253.

2.1 Frequency domain discussion

To begin with let us assume that the drifting sub pulse pattern is PPM due to a pure tone.

The abscissa in fig. 6-2-3 on page 251 of SBS1966 represents the phase of the sampling signal at which a pulse is observed; in our case the sampling signal has the pulsar period P (sec), or frequency $1/P$ Hz or 1 [cpp]. The ordinate represents

the corresponding phase of the modulating signal; in our case it has period $P/3$ pulsar periods (frequency $1/P/3$ [cpp]) which is the repetition time of the drifting sub pulse pattern. The motion in time of the drifting sub pulses in this figure is along a straight line of slope $1/P/3$. In the last para on their page 254, SBS1966 state “the average pulse repetition frequency should be at least twice the highest signal frequency in order to obtain the minimum number of samples necessary for satisfactory signal recovery”; i.e., $1 > 2/P/3$ ($\Rightarrow 1/P/3 < 0.5$) to avoid aliasing. This can be verified by considering two straight lines of slopes < 0.5 and > 0.5 in fig. 6-2-3 of SBS1966.

Thus, the Nyquist sampling criterion is the same for a PPM signal and a canonical pulse amplitude modulation (PAM) signal (amplitude modulation of periodic pulses). DR2001 are wrong when they claim in their conclusion that “A harmonic resolved fluctuation spectrum uses the information within the finite width of the pulse to achieve a Nyquist frequency of 1 [cpp], showing clearly that the primary feature is aliased”. Their average pulse repetition frequency is obviously P (sec); so their Nyquist frequency is only 0.5 [cpp]. Consequently, they are also wrong in concluding that “the primary feature is aliased” based merely upon the Fourier technique; they require **additional and independent information**, as discussed ahead.

Consider a PAM signal in which the amplitude modulation is due to a pure tone of frequency ν [cpp]. The amplitudes occur at frequencies ν [cpp], $1 \pm \nu$ [cpp], $2 \pm \nu$ [cpp], etc; and there is no difference in the amplitude spectra of the original ($\nu < 0.5$) and the aliased ($\nu > 0.5$) signal. However the phase spectra differ. Therefore one can distinguish between the original and aliased PAM signals only by using additional information such as the phase of the modulating signal. In the PPM case, the amplitudes in the spectra occur at frequencies ν [cpp], $1 \pm m \times \nu$ [cpp], $2 \pm m \times \nu$ [cpp], etc., where $m = 1, 2, 3, \dots$ is the order of the harmonic (see eq. 6-2-13 on page 252 of SBS1966). Now, both amplitude and phase spectra differ for the original and aliased signals. Therefore once again, one can distinguish between the original and aliased PPM signals only by using additional information such as the exact shape of the two amplitude spectra. In practice it is impossible to predict this exactly in the current pulsar context.

Fig. 1 simulates the amplitude spectra of a pulsar signal showing the drifting sub pulse phenomenon, modeled as a PPM signal with a saw-tooth modulation in time, for both the original modulating frequency (top panel), and its alias but with the opposite drift direction (bottom panel). The pulsar parameters are taken from DR2001 for PSR B0943+10; however the figure is insensitive to small variations in these parameters. The algorithm was checked by reproducing the spectrum in

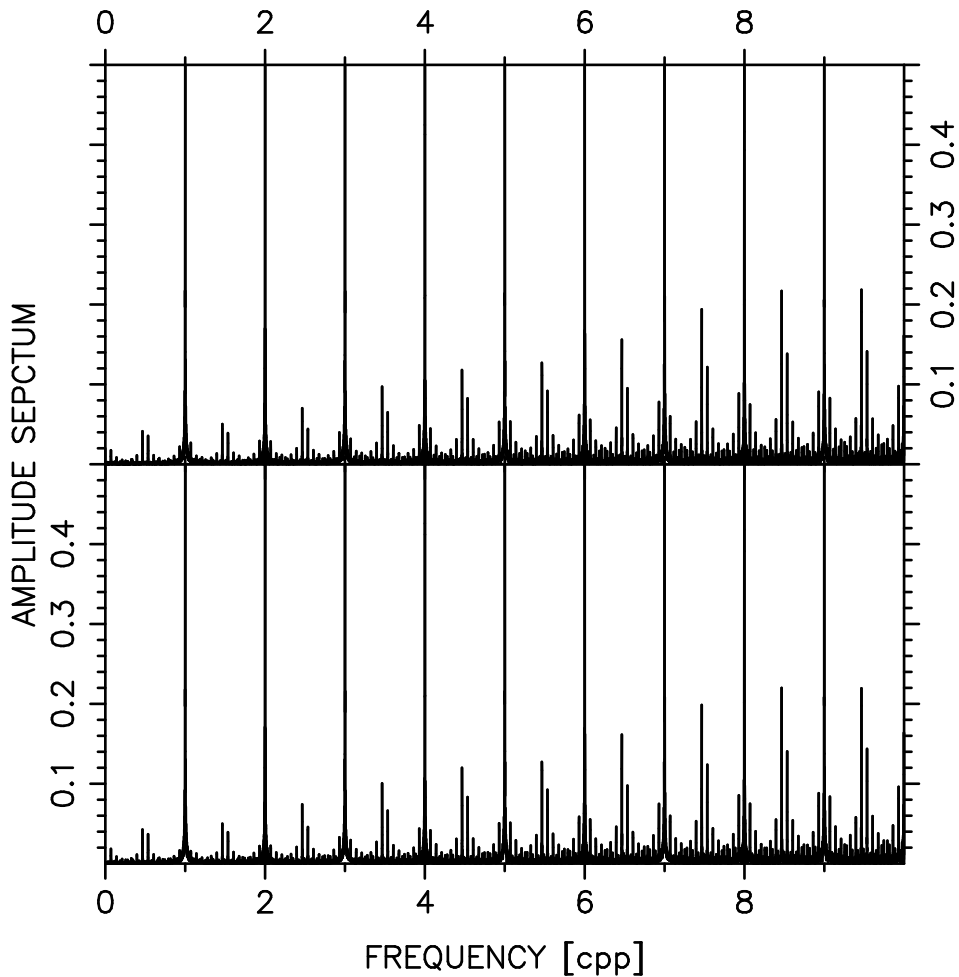


Figure 1: Simulated amplitude spectra of a pulsar signal showing the drifting sub pulse phenomenon. Only a small range of frequency has been shown for better visual comparison. The time series consists of $4 \times 1024 \times 1024$ samples, each of duration 0.25 milli seconds (ms). The pulsar parameters are those of PSR B0943+10, taken from DR2001: period $P = 1.0977$ (sec), Gaussian integrated profile of width $= 0.031 \times P$ (sec), maximum time departure of drifting sub pulses $= 0.021 \times P$ (sec). The sub pulses are assumed to be Gaussian in shape of very narrow intrinsic width, of \approx one sampling interval; making the width a more realistic value merely suppresses the spectra at higher frequencies. The drifting sub pulse phenomenon is modeled as a PPM signal with a saw-tooth modulation in time. **Top panel:** Original modulating frequency $= 0.465$ [cpp], or $P3 = 2.1505376$ periods; **Bottom panel:** aliased modulating frequency $= 0.535$ [cpp], or $P3 = 1.8691589$ periods, and with opposite drift direction.

eq. 6-2-13 of SBS1966. The difference between the two amplitude spectra in fig. 1 is generally $\leq 5\%$ of the maximum amplitude of pulsar harmonics, upto a frequency of 100 [cpp], for the harmonics $m = 1$ to 3. For example, at 59.93 [cpp], the second harmonics differ by $\approx 12.5\%$ in the two panels; but their average amplitude is $\leq 33\%$ of the maximum amplitude. The third harmonics, aliased to 59.605 [cpp], differ by $\approx 9\%$; but their average amplitude is only about 4.5% of the maximum amplitude. At 110.395 [cpp], the harmonics differ by $\approx 20\%$; but their average amplitude is now about 37.5% of the peak amplitude of the pulsar harmonics; this is also insignificant.

Therefore at lower frequencies (< 100 [cpp]; the range analyzed by DR2001) the spectra of the original and the aliased signals should be predicted to an accuracy of $\leq 5\%$ to tell the difference. This is almost impossible, considering other factors ignored here: random variations in shape, size and intensity from pulse to pulse, lack of knowledge of the exact modulating function, the exact shape of the integrated profile, etc. Maybe there is some hope of making better prediction about the higher harmonics ($m > 3$) at higher frequencies (> 100 [cpp]), but DR2001 do not analyze these frequencies. The next section indicates why, if at all, the two spectra can probably be distinguished only at higher frequencies.

2.2 Time domain discussion

Let t_n be the time of occurrence of the n^{th} pulse in a PPM signal that is modulated by a pure tone, of phase ϕ_m , and frequency $1/P3$ [cpp], implying angular frequency $\omega_m = 2\pi/(P3P)$,

$$t_n + \tau \sin(\omega_m t_n + \phi_m) = nP, \quad (1)$$

where τ is the maximum position departure (see eq. 6-2-2 of SBS1966). Let Δt_n be the difference between t_n and nP , its time of occurrence in the un modulated case,

$$\Delta t_n = -\tau \sin(\Phi_n + \omega_m \Delta t_n), \quad (2)$$

where $\Phi_n = 2\pi n/P3 + \phi_m$. In PSR B0943+10, $\tau \approx 0.021P$, and the original $P3 \approx 2.15$, so the phase $\omega_m \tau = 2\pi\tau/(P3P) \approx 0.06$, which is a small quantity. Furthermore, $\Delta t_n \leq \tau$; therefore,

$$\Delta t_n \approx -\tau \sin(\Phi_n) [1 - \tau \{0.5\omega_c - \Delta\omega_m\} \cos(\Phi_n)] \quad (3)$$

where $\omega_c = 2\pi/P$ is the sampling frequency (angular) and $\Delta\omega_m = 0.5\omega_c - \omega_m$. In PSR B0943+10, $\Delta\omega_m (= 2.862 - 2.662 = 0.2)$ is much smaller than either $0.5\omega_c$ or ω_m .

Now consider a PPM signal that is modulated by a pure tone, of phase $\phi'_m = -\phi_m$, and a frequency that is the alias of the earlier one; i.e., of angular frequency $\omega'_m = \omega_c - \omega_m$. Let it have the same magnitude of drift but opposite in direction, i.e., $\tau' = -\tau$; Then it can be shown that

$$\Delta t'_n \approx -\tau \sin(\Phi_n) [1 + \tau \{0.5\omega_c + \Delta\omega_m\} \cos(\Phi_n)], \quad (4)$$

for integer n . For non-integer n , which implies that the pulses start at some arbitrary phase within the period, a constant phase adds to Φ_n in eq. (4).

Now, the observed time series corresponds to either eq. (3) or eq. (4). If one knows its absolute phase, then one directly compares the observation to those two equations, and thus determines if the observed frequency is original or aliased. However, this is rarely the case. So, one has to distinguish between the the time series $\pm 0.25\omega_c\tau^2 \sin(2\Phi_n)$ of eq. (3) and eq. (4). This is possible only if the sampling interval used for the observations is much smaller than the quantity $0.5\omega_c \times \tau^2$, which is ≈ 1.52 ms in PSR B0943+10. However the sampling interval of DR2001 (1.006 ms) is barely smaller than this. Therefore it is probably impossible for DR1999 and DR2001 to distinguish between the original drift frequency and its alias with opposite drift direction. This argument also holds for saw-tooth modulation drifting pattern, which can be Fourier decomposed into harmonics of the fundamental modulating frequency ω_m .

Now one can understand the result of the previous section - a time resolution $\ll 1.52$ ms implies a minimum Nyquist frequency of $\gg 0.5/0.00152 \approx 329$ Hz or 361 [cpp]. Indeed, the spectra in fig. 1 differ most in the range 500 to 900 [cpp], mainly in the higher harmonics $m \gg 3$. For example, the 15th harmonics (aliased) at frequency 679.975 [cpp] differ in amplitude by $\approx 107\%$; and their average amplitude is about 24% of the maximum amplitude of pulsar harmonics.

In summary, DR2001 can hope to distinguish between the original and aliased spectral feature in PSR B0943+10 by predicting the two amplitude spectra at frequencies much larger than 100 [cpp], particularly for the harmonics $m \geq 3$ to 15, and comparing those with observations. This they have not done.

3 Aliasing claim by DR2001

This section discusses the three main arguments that DR2001 appear to offer (their sections 3 and 5) regarding the spectral feature in PSR B0943+10.

3.1 Amplitude spectrum argument

In the longitude resolved spectrum in fig. 1 of DR2001, the narrow spectral feature falls at frequency 0.465 [cpp]. The spectrum of such a signal will naturally have a Nyquist sampling limit of 0.5 [cpp], by definition. To test whether this feature is aliased or not, one needs data with much faster sampling. DR2001 achieve this by obtaining the spectrum of the original time series (including zero padding) which is sampled at 1.006 (ms). The corresponding spectrum certainly shows that the spectral feature is much stronger at 0.535 [cpp] than at 0.465 [cpp] (their fig. 4).

Therefore they argue (on the right side of page 442) that "... the asymmetry between the 0.535 and 0.465 [cpp] features in fig. 4 is so great that we can regard them as a signature of an almost pure phase modulation". This is justified, as seen in fig. 1 above. Then, after a short paragraph offering no new argument or evidence, they state that "We can now be certain that the principal feature in fig. 1 is the alias of a fluctuation the actual frequency which is greater than 0.5 [cpp] ...". This is unjustified.

It is purely fortuitous that the aliased feature is stronger than the original in their fig. 4. It depends upon the specific combination of **true** $P3$, **true** drift direction and the **exact** shape of the IP of PSR B0943+10. Fig. 2 verifies the above argument. It shows the amplitude spectra of PSR B0031-07, another drifting pulsar, observed using Ooty Radio Telescope (ORT). The top panel corresponds to fig. 3 of DR2001. In the bottom panel of fig. 2 the data is altered: the period sequence is retained, but within each period the time sequence is reversed. This could have occurred either due to (1) PSR B0031-07 having the aliased drift frequency but the same drift direction, or (2) it having the original drift frequency but opposite drift direction. The asymmetry has also got reversed in the bottom panel of fig. 2.

3.2 Phase spectrum argument

DR2001 do not use the phase information corresponding to their fig. 4, but use that available in the longitude resolved spectrum (their fig. 1). They compare the rate of change of phase, with longitude, of the 0.465 [cpp] spectral feature, with that of two other much weaker spectral features occurring at 0.071 [cpp] and 0.607 [cpp], which are supposed to be the aliased first and second harmonics of the fundamental. They claim on page 443 that "the harmonicity of these phase rates argues strongly that the 0.071 [cpp] and 0.607 [cpp] features are indeed the aliases of the second and third harmonics of the primary feature ...", which is justified.

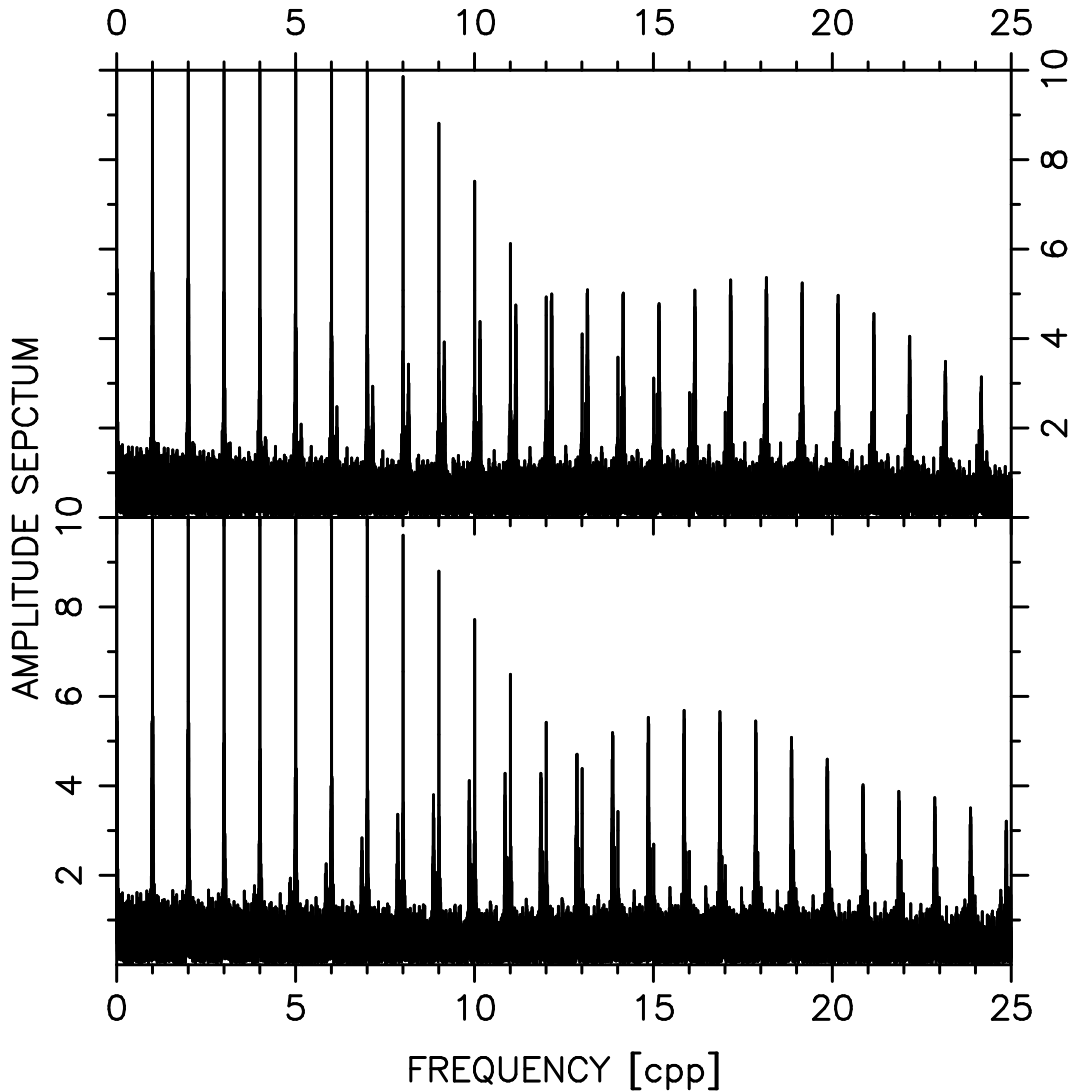


Figure 2: **Top panel:** Amplitude spectrum of 1024 periods of radio flux data of PSR B0031-07, obtained on 1996 March 31 using the ORT. The data was acquired in a gated fashion and later zero padded., as in DR2001. The sampling interval was 6.5 ms and the pulsar has period 0.9430 (sec). Only a small range of frequency has been shown for better visual comparison. **Bottom panel:** The same as in the top panel, except that the time sequence within each period is reversed, while the period sequence itself is retained.

However, this will be true irrespective of whether the original frequency is 0.465 [cpp] or 0.535 [cpp]; this is obvious from Fourier theory. The only difference is the inverted phase relation between the fundamental and its (aliased) harmonics, about which one has no independent information anyway. This author is confused about what DR2001 intended in invoking this discussion. This author is most confused about a sentence in the last para of their section 3, the section that is supposed to justify their claim of aliasing. It goes “The ambiguity, however, between the remaining two possible combinations – namely, $P3 < 2P$ (thus implying negative drift) and $P3 > 2P$ (positive drift) can not be fully resolved through the above analysis, ...”. Presumably this is what Sieber & Oster (1975) implied, with which DR2001 apparently disagreed earlier. It appears that either DR2001 are contradicting themselves, or this author has not understood what was it in PSR B0943+10 that was “otherwise multiply folded” which DR2001 have managed to “unfold” (last para of their section 3).

3.3 “Modulation on modulation” argument

DR1999 claim on their page 1010 that the symmetrical sidebands associated with the primary feature in the fluctuation spectrum represent “an amplitude modulation on the phase modulation”. These sidebands fall 0.027 [cpp] higher and lower than the primary feature. Since $0.535/0.027 \approx 20$, an integer value, DR2001 claim in their conclusion that “it is at this point that we have conclusive evidence that the aliasing question is resolved ...”.

Fig. 3 is similar to fig. 1 except that (1) 4 times fewer samples and 4 times larger sampling interval, and (2) the drifting $P3 = 3$ periods, for better visibility. However, in the top panel the pulsar signal is additionally amplitude modulated by a sinusoid of frequency 0.05 [cpp]; of relative magnitude of modulation of 50%, for the sidebands on the position modulating harmonics to show up significantly. The pulsar harmonics also have the symmetric sidebands, but of much larger amplitude. In the bottom panel of fig. 3 the above signal is instead additionally position modulated, by a sinusoid of the the same frequency, and a maximum time departure of 0.010 [P]. Now also the pulsar harmonics have the symmetric sidebands, but much smaller in amplitude.

From fig. 3 shows that both an additional amplitude modulation or an additional position modulation of the pulsar signal in fig. 1 gives rise to sidebands around the drifting harmonics. However, in the former case the side bands are much stronger around the pulsar harmonics (at 1 [cpp], 2 [cpp], etc.), and in the latter case they are much stronger around the drifting harmonics, which is what

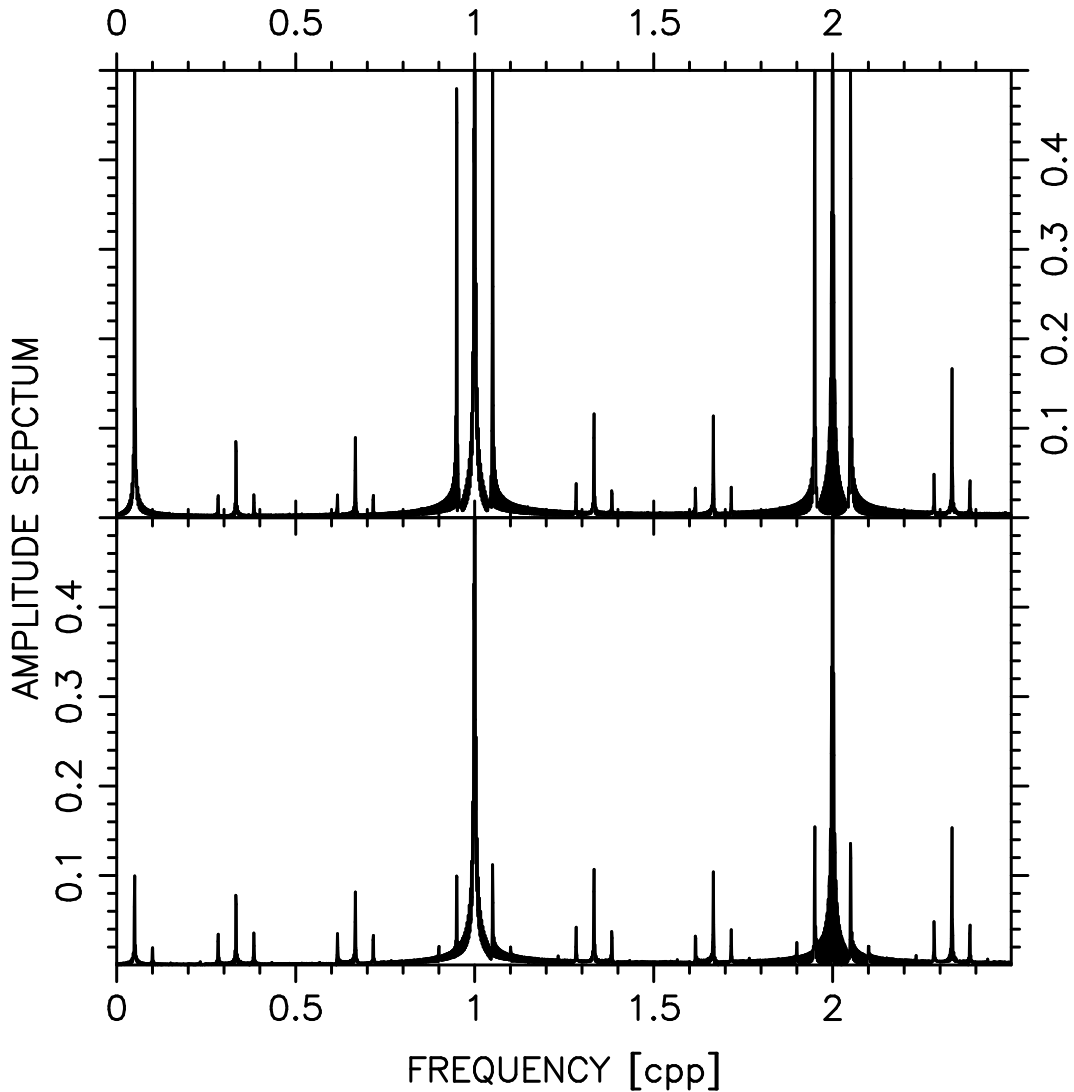


Figure 3: Same as in fig. 1, except (1) 1024×1024 samples used, (2) sampling interval of 1.0 ms, (3) modulating $P3 = 3$ periods. Only a small range of frequency has been shown for better visual comparison. **Top panel:** The PPM signal is additionally amplitude modulated by a tone of period 20 [P], and relative amplitude 0.5. **Bottom panel:** The PPM signal is additionally position modulated by a tone of period 20 [P], and maximum time departure of 0.010 [P].

DR2001 observe. Therefore it is as likely, if not more likely, that DR2001 have noticed an additional position modulation over and above their drifting sub pulse pattern. DR2001 do not reason why they prefer the former over the latter.

The foundation of DR2001 vanishes if they are unable to justify the amplitude modulation of the drifting sub pulses.

4 Summary

DR2001's claim of aliasing in PSR B0943+10 may rest purely upon an arbitrary assumption, that of a very steady "amplitude modulation on the phase modulation". Recent claims (Edwards & Stappers 2002) to have independently verified the results of DR2001 are, in the opinion of this author, not relevant here because (1) they are model dependent, and (2) they work with the phase resolved spectrum, which is inadequate by definition to discuss the issue of aliasing.

This research has made use of NASA's Astrophysics Data System (ADS) Bibliographic Services.

References

- Backer, D. C. 1973, ApJ, 182, 245
- Backer, D. C., Rankin, J. M. & Campbell, D. B. 1975, ApJ, 197, 481
- Deshpande, A. A. & Rankin, J. M. 1999, ApJ, 524, 1008
- Edwards, R. T. & Stappers, B. W. 2002, A&A, 393, 733
- Deshpande, A. A. & Rankin, J. M. 2001, MNRAS, 322, 438
- Lathi, B. P. 1998, Modern digital and analog communication systems, Oxford University press, Oxford
- Panter, P. F. 1965, Modulation, noise and spectral analysis, McGraw Hill Book Co., New York
- Schwartz, M., Bennett, W. R. & Stein, S. 1966, Communication systems and techniques, McGraw Hill Book Co., New York
- Sieber, W. & Oster, L. 1975, A&A, 38, 325

Taylor, J. H. & Hueguenin, G. R. 1971, ApJ, 167, 273