

Piecewise Linear Phase Transitions

Joseph B. Keller

Departments of Mathematics and Mechanical Engineering

Stanford University

October 31, 2018

Abstract

It is shown how simple assumptions lead to piecewise linear behavior, which is observed in certain phase transitions.

In certain phase transitions, some property $F(\varphi)$ of a system is a piecewise linear function of a parameter φ . Its slope $s(\varphi) = dF(\varphi)/d\varphi$ changes discontinuously at a critical value φ_c of φ . An example is provided by the force $F(\varphi)$ required to push a rod into a layer of glass beads of volume fraction φ , $.57 < \varphi < .63$, at constant velocity (Schröter et al., [1]). When the penetration depth is 60mm, $F(\varphi)$ is nearly piecewise linear, with its slope changing nearly discontinuously at $\varphi_c = .60$. (See Figure 1.) We shall show that simple assumptions lead to piecewise linear behavior of $F(\varphi)$. Similar assumptions lead to the sharp transition from one power law to another power law, which occurs in turbulent boundary layer flow. [2].

Suppose the derivative of the slope $s(\varphi)$ is a smooth function $f(s, \varphi)$, which we expand in a Taylor series about some value s_0 , through quadratic terms. Then

$$\frac{ds(\varphi)}{d\varphi} = f(s, \varphi) = f(s_0, \varphi) + f_s(s_0, \varphi)(s - s_0) + \frac{1}{2}f_{ss}(s_0, \varphi)(s - s_0)^2 + O[(s - s_0)^3]. \quad (1)$$

We write the quadratic polynomial in s , on the right side of (1), in terms of its roots α and β . We assume them to be real, with $\alpha < \beta$:

$$\frac{ds(\varphi)}{d\varphi} = \gamma(s - \alpha)(\beta - s) + O[(s - s_0)^3]. \quad (2)$$

When we omit the error term in (2), and approximate α , β and γ by constants, we can solve the resulting differential equation for $s(\varphi)$. Upon setting $s(\varphi_c) = (\alpha + \beta)/2$, we get

$$s(\varphi) = \frac{\alpha + \beta e^{(\beta - \alpha)\gamma(\varphi - \varphi_c)}}{1 + e^{(\beta - \alpha)\gamma(\varphi - \varphi_c)}}. \quad (3)$$

As $\gamma \rightarrow \infty$, the slope $s(\varphi)$ given by (3) becomes discontinuous at φ_c , tending to α for $\varphi < \varphi_c$ and to β for $\varphi > \varphi_c$. For γ finite but large, $s(\varphi)$ changes continuously but rapidly from α to β .

$F(\varphi)$ is obtained by integrating the defining equation $dF/d\varphi = s(\varphi)$, with s given by (3):

$$\begin{aligned} F(\varphi) &= F(\varphi_c) + \int_{\varphi_c}^{\varphi} s(\varphi') d\varphi' \\ &= F(\varphi_c) + \beta(\varphi - \varphi_c) + \frac{1}{\gamma} [\log(1 + e^{(\beta - \alpha)\gamma(\varphi - \varphi_c)}) - \log 2]. \end{aligned} \quad (4)$$

As $\gamma \rightarrow \infty$, $F(\varphi)$ given by (4) tends to the piecewise linear function

$$\begin{aligned} \lim_{\gamma \rightarrow \infty} F(\varphi) &= F(\varphi_c) + \alpha(\varphi - \varphi_c), & \varphi < \varphi_c, \\ &= F(\varphi_c) + \beta(\varphi - \varphi_c), & \varphi > \varphi_c. \end{aligned} \quad (5)$$

This is the form of $F(\varphi)$ shown in Figure 1 and in Figure 2 of [1]. For γ finite, (4) provides a smooth approximation to the piecewise linear function in (5).

In [2] we treated the mean velocity $u(y)$ at distance y from a wall in a turbulent boundary layer flow. We defined the dimensionless shear $s(y) = d \log u / d \log y$, and proceeded as in (1) – (3) with $\varphi = y$ and $\varphi_c = y_c$. Then we integrated the defining equation $d \log u / d \log y = s(y)$, with $s(y)$ given by (3), to obtain $u(y)$. As $\gamma \rightarrow \infty$, the result (3) for $s(y)$ tends to α for $y < y_c$ and to β for $y > y_c$. The result for $u(y)$ tends to Ay^α for $y < y_c$ and to By^β for $y > y_c$, with A and B constants. Previously these two power laws had been shown to fit the experimental data by Barenblatt, Chorin, and Prostokoshin [3].

References

- [1] M. Schröter, S. Nagle, C. Radin, and H. L. Swinney, Phase transition in a static granular system, *Europhysics Letters* **78** (2007) 44004; arXiv: cond-mat/0606459v2 [cond-mat.soft].
- [2] J. B. Keller, “Power laws for turbulent boundary layer flow,” *Phys. Fluids* **14**, L89 (2002).
- [3] G. I. Barenblatt, A. J. Chorin, and V. M. Prostokoshin, “A note on the intermediate region in turbulent boundary layers,” *Phys. Fluids* **12**, 2159 (2000).

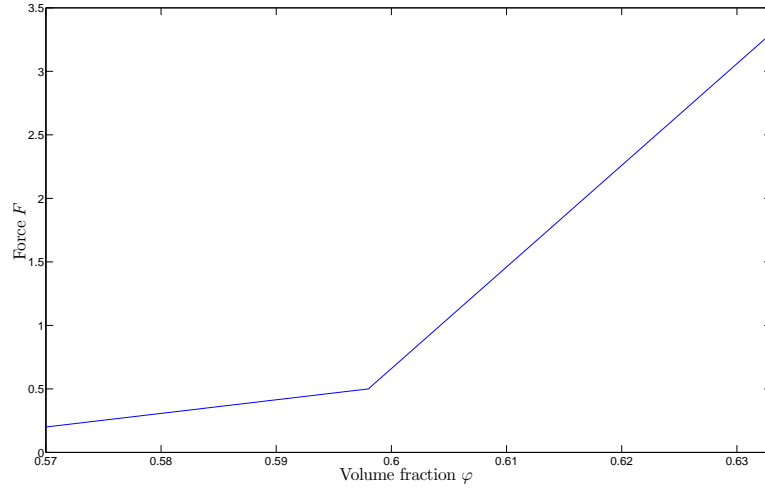


Figure 1. $F(\varphi)$ versus φ given by (5) with $\varphi_c = .598$, $F(\varphi_c) = .5$, $\alpha = 10.7$ and $\beta = 80$.

These values were chosen to make the graph resemble that in Figure 2 of [1], which shows the force $F(\varphi)$ in newtons versus the volume fraction φ for a penetration depth of 60mm.