Non-Euclidean cloaking for light waves

Tomáš Tyc, Huanyang Chen, Che Ting Chan, and Ulf Leonhardt

Abstract—Non-Euclidean geometry combined with transformation optics has recently led to the proposal of an invisibility cloak that avoids optical singularities and therefore can work, in principle, in a broad band of the spectrum [U. Leonhardt and T. Tyc, Science 323, 110 (2009)]. Such a cloak is perfect in the limit of geometrical optics, but not in wave optics. Here we analyze, both analytically and numerically, full wave propagation in non-Euclidean cloaking. We show that the cloaking device performs remarkably well even in a regime beyond geometrical optics where the device is comparable in size with the wavelength. In particular, the cloak is nearly perfect for a spectrum of frequencies that are related to spherical harmonics. We also show that for increasing wavenumber the device works increasingly better, approaching perfect behavior in the limit of geometrical optics.

Index Terms—Electromagnetic cloaking, Transformation optics, Wave propagation

I. INTRODUCTION

LECTROMAGNETIC cloaking is a modern and rapidly developing area of optics. The main objective of cloaking is to encapsulate an object into a cloak, a carefully designed material with special optical properties, such that the object becomes invisible. This is achieved by bending light rays (or wave fronts) such that they flow smoothly around the object and after passing it, restore their original direction, creating the illusion that the space is empty. Several types of cloaks have been proposed [1], [2], [3], [4], [5], [6], [7], some of which have been realized experimentally [8], [9], [10], [11]. All are based on transformation optics [1], [2], [3], [12], [13], [14], [15], the idea that optical media effectively transforms the geometry for light, and all, except [7], require metamaterials [16], [17], [18], [19], [20] for their practical realization. Originally, two different approaches have been used to propose an invisibility cloak.

The proposal by J.B. Pendry [1] used a geometric transformation of Euclidean space to expand a single point into a region of finite volume. Based on ideas of transformation optics, a metamaterial was designed that would lead light around this region, making it invisible. A drawback of this proposal was the necessity of infinite light speed at the boundary of the invisible region, which prevents such a device from working in a broad band of the spectrum. The proposal was realized experimentally for microwaves [8] and provided an inspiration for other similar ideas.

The proposal by U. Leonhardt [2] also applied transformation optics, but used methods of complex analysis for

designing an invisibility cloak that could be made with an isotropic medium. In particular, it took advantage of multivalued analytic functions and the rich structure of Riemann sheets and branch cuts in the complex plane. An important ingredient was a refractive index distribution with focusing properties such that a ray that left the main Riemann sheet could return back to it and continue in the original direction. However, the speed of light in this proposal diverged as well, so it could not work broadband either.

The paradigm of cloaking was changed by the proposal of U. Leonhardt and T. Tyc [3]. They showed that the necessity of infinite light speed can be avoided by further developing the ideas of [2] and proposed a cloaking device based on a combination of transformation optics and non-Euclidean geometry. All optical parameters of the material have non-singular values in the whole space and therefore nothing prevents them, in principle, from working broadband. This proposal may turn invisibility into a practical technology. In contrast to Euclidean cloaking [1], however, non-Euclidean cloaking works perfectly only in the limit of geometrical optics. For wave optics, imperfections emerge due to diffraction and phase delays. These imperfections do not matter, though, in most practical situations, because they become negligible if the size of the device is much larger than the wavelength. At the same time, it would be very useful to know what the character of the imperfections is and how the cloaking device behaves if the validity condition for geometrical optics is not satisfied. This is the purpose of this paper. We present an analysis of wave propagation in the 2D version of the cloaking device [3] and provide computer simulations of wave propagation in the cloak.

The paper is organized as follows. In Sec. II we explain the idea of transformation optics and in Sec. III we describe the non-Euclidean cloaking device. In Sec. IV we calculate the optical properties of the material of the cloak and in Sec. V we analyze theoretically wave propagation in the cloak. In Sec.VI we support our theoretical analysis by numerical simulations of the wave propagation in the cloak and we conclude in Sec. VII.

II. TRANSFORMATION OPTICS

In this section we briefly and intuitively explain the idea of transformation optics, referring to the papers [14], [15] for the full technical details and techniques of calculating the material properties of the optical medium. For simplicity, we will consider the limit of geometrical optics and ignore the polarization of light.

Transformation optics relies on the fact that an optical medium effectively changes the geometry of space perceived by light. What determines light propagation is not the geometric path length, but rather the optical path length, which

T. Tyc is with Institute of Theoretical Physics and Astrophysics, Masaryk University, Kotlarska 2, 61137 Brno, Czech Republic

H. Chen and C. T. Chan are with Department of Physics, The Hong Kong University of Science and Technology, Clear Water Bay, Hong Kong, People's Republic of China

U. Leonhardt is with School of Physics and Astronomy, University of St Andrews, North Haugh, St Andrews KY16 9SS, UK

should be, according to Fermat's principle, stationary (usually minimal, but in some cases it is maximal) for the actual path of the ray. The optical path element is n-times larger than the geometric path element, where n is the refractive index. Hence, the medium creates an effective "optical metric tensor" for light that equals n^2 -times the "geometric metric tensor", and light rays then propagate along geodesics with respect to this optical metric tensor. In case of an anisotropic refractive index (such as in crystals or metamaterials), the transformation of the metric is just slightly more complicated.

Conversely, suppose that light propagates in an empty space (so-called *virtual space*) $\mathbf{R} = (X, Y, Z)$ with a uniform refractive index where ray trajectories are straight lines. If we map this space by some function f to a space $\mathbf{r} = (x, y, z)$ (so-called *physical space*) such that r = f(R), the geometric metric is not preserved in general, because $dx^2 + dy^2 + dz^2 \neq$ $dX^2 + dY^2 + dZ^2$. However, filling physical space with a suitable optical medium, we can compensate for this and make the optical metrics in virtual and physical spaces equal. Then in physical space light will follow the images $f(\mathbf{l})$ of straight lines l of virtual space. By choosing a suitable transformation f, one can achieve various interesting effects such as invisibility [1] or perfect focusing to a single point of light rays coming from all directions [21]. In general the mapping f is not conformal (i.e., it does not isotropically stretch or squeeze an infinitesimal neighborhood of a given point) and therefore the resulting refractive index in physical space is not isotropic.

Remarkably, transformation optics works much more generally than just in the simplified situation we have just described. In particular, it is valid not just in the limit of geometrical optics, but it works equally well for full electromagnetic waves [14]. If the electric permittivity and magnetic permeability are appropriately chosen [14], Maxwell's equations in physical space are equivalent to Maxwell's equations in empty virtual space. It turns out [14] that the tensors of relative electric permittivity and relative magnetic permeability must be proportional to each other to avoid birefringence and therefore to ensure that both light polarizations behave the same way in the medium. Ideally, the two tensors are equal, which gives impedance matching with the vacuum [22] and hence causes no reflection at the interfaces of the device.

III. NON-EUCLIDEAN CLOAKING DEVICE

Next we describe the non-Euclidean cloaking device [3] using pictures and try to give some intuition for the geometric transformation used. We will leave the mathematical details for the next section; a full description of the transformation including all calculations can be found in [23], the Supporting Online Material of [3].

The most distinctive feature of the cloaking device [3] is that virtual space is not just the simple Euclidean space as in other proposals but contains a non-Euclidean part. We will focus on the two-dimensional version of the cloak here; the generalization to three dimensions is relatively straightforward and has been described in [3], [23].

Virtual space consists of two parts: (i) a Euclidean plane P and (ii) a 2-sphere S (surface of a 3D ball). The two parts are

connected along a branch cut, a 1D line that on the sphere corresponds to one quarter of its equator while in the plane it corresponds to a straight line segment. The best way to visualize this is to imagine that the plane is partly wrapped around the sphere so that P and S touch each other along l (see Fig. 1).




Fig. 1. Virtual space consists of a sphere and a plane that are connected along a line segment – branch cut.

A light ray propagating in the plane P that hits the branch cut (at the point X, say) transfers to the sphere S. There it propagates along a geodesic, which is a great circle, and returns to the point X where it transfers back to the plane P and continues in the original direction. In this way, the sphere is invisible and the only feature that can possibly disclose its presence is a time delay of the rays that have entered the sphere.




Fig. 2. When a mirror (gray thick line) is placed along a great circle (equator in the picture), any light ray (yellow line) still returns to its original position at the branch cut (black line) where it entered the sphere but never visits the northern hemisphere; it therefore becomes invisible.

To create an invisible region where an object could be hidden, one can take advantage of the high symmetry of the sphere. Placing a mirror (see Fig. 2) along a suitably chosen great circle on the sphere, the light ray, after two reflections, still returns to the point X but completely avoids the hemisphere hidden behind the mirror; anything placed there becomes invisible.




Fig. 3. Physical space is a plane; the sphere S of virtual space is mapped to the inside of the red curve while the plane P of virtual space is mapped to the outside of the curve. The hidden hemisphere is mapped to the inside of the gray curve which becomes the invisible region of the device.

The physical space of the device is a Euclidean plane filled with an optical medium. The map from virtual to physical space is based on bipolar coordinates and maps both the sphere S and the plane P of virtual space to regions of the physical plane (see Fig. 3). The map contains no singularities, i.e., no points where space would be infinitely stretched or squeezed. Therefore the speed of light in the medium is finite and nonzero everywhere, which is a great advantage compared to Euclidean cloaks. The invisible region is the image of the hidden hemisphere of virtual space.

IV. MATERIAL PROPERTIES OF THE CLOAK

In this paper we focus on a two-dimensional version of the non-Euclidean invisibility cloak that has been described in the previous section. To adjust the two-dimensional situation to real propagation of electromagnetic waves that are governed by Maxwell equations and are therefore intrinsically three-dimensional, we do the following construction. We perform the above described geometric transformation from twodimensional virtual space to the plane xy of physical space and then we add an extra dimension z, making physical space three-dimensional. In calculating the line elements in this 3D physical space, we then have to add the term dz^2 to the line elements corresponding to the two-dimensional situation. We also assume that the wavevector of the incoming wave is perpendicular to the z-axis and hence the phase and amplitude of the wave do not depend on z. This makes the problem effectively two-dimensional, just as required.

To describe the Euclidean part of the cloak, we use bipolar cylindrical coordinates (τ, σ, z) in physical space that are related to the Cartesian (x, y, z) as

$$x = \frac{a \sinh \tau}{\cosh \tau - \cos \sigma}$$
, $y = \frac{a \sin \sigma}{\cosh \tau - \cos \sigma}$, $z = z$. (1)

Here the parameter a determines the size of the cloak. Analogous relations hold in virtual space where x, y and σ are replaced by x', y' and σ' , respectively. The mapping between the two spaces is given in the bipolar cylindrical coordinates by the following relation between σ and σ' :

$$\sigma' = \sigma$$
 for $|\sigma| \le \frac{\pi}{2}$ (2)

$$\sigma' = \sigma \qquad \text{for} \quad |\sigma| \le \frac{\pi}{2} \qquad (2)$$

$$\sigma' = \left(\frac{4\sigma^2}{\pi} - 3|\sigma| + \pi\right) \operatorname{sgn} \sigma \quad \text{for} \quad \frac{\pi}{2} < |\sigma| \le \frac{3\pi}{4} \quad (3)$$

and the coordinates au,z coincide in the two spaces. The line element $ds^2 = dx'^2 + dy'^2 + dz^2$ in virtual space is equal to

$$ds^{2} = \frac{a^{2}}{(\cosh \tau - \cos \sigma')^{2}} (d\tau^{2} + d\sigma'^{2}) + dz^{2}.$$
 (4)

The permittivity and permeability tensors for this region can be then calculated using the same general method [14] as in [23] with the result

$$\varepsilon_i^j = \mu_i^j = \operatorname{diag}\left[\frac{\mathrm{d}\sigma}{\mathrm{d}\sigma'}, \frac{\mathrm{d}\sigma'}{\mathrm{d}\sigma}, \frac{(\cosh \tau - \cos \sigma)}{(\cosh \tau - \cos \sigma')} \frac{\mathrm{d}\sigma'}{\mathrm{d}\sigma}\right].$$
 (5)

The mapping between the non-Euclidean part of virtual space and the corresponding part of physical space is more involved. We will not reproduce here all the corresponding formulas of [23], but rather mention just the most important steps. One starts with a sphere of radius

$$r = -\frac{4}{\pi}a\tag{6}$$

(see Eq. (S43) of [23]) parameterized by spherical coordinates – the latitudal angle θ and the longitudinal angle that is denoted by σ' . This is not yet the sphere of of virtual space, but is related to it by a suitable Möbius transformation (Eq. (S40) of [23]) represented on the sphere via stereographic projection (Eqs. (S37)–(S39) of [23]). Then the coordinates (σ', θ) are mapped to the bipolar coordinates (σ, τ) of physical space as follows. The mapping between σ' and σ is given by Eq. (3) where σ' is set to one of the intervals $[-2\pi, -\pi]$ and $[\pi, 2\pi]$ by adding or subtracting 2π . The corresponding intervals of σ are then $[-\pi, -3\pi/4]$ and $[3\pi/4, \pi]$. The mapping between θ and τ can be derived by combining Eqs. (S41) and (S46) of [23]. This yields after some calculations

$$\theta = 2\arctan(t - 1 + \sqrt{t^2 + 1})\tag{7}$$

with

$$t = \tan\left[\frac{\pi}{4} \left(\frac{\sinh \tau}{\cosh \tau + 1}\right) + \pi/4\right]. \tag{8}$$

The line element of the non-Euclidean part of virtual space is

$$ds^{2} = \frac{16a^{2}}{\pi^{2}} \left[\frac{1 + \cot^{2}(\theta/2)}{1 - 2\cos\sigma'\cot(\theta/2) + 2\cot^{2}(\theta/2)} \right]^{2} \times (d\theta^{2} + \sin^{2}\theta \,d\sigma'^{2}) + dz^{2}. \quad (9)$$

This line element is slightly different from the line element (S47) in [23]. In fact, the latter turned out to be wrong, because it is the line element on the sphere (X'Y'Z') as described in section "Non-Euclidean branch" of [23], while the correct line element should be measured on the sphere (XYZ). The factor in the rectangular parentheses in Eq. (9) expresses the scaling of the line element when going from one sphere to the other, as can be calculated from the transformation (S40) of [23] between the two spheres.

After some algebra, Eq. (9) can be brought into the form

$$ds^{2} = \left[\frac{2(t^{2} + 1 + t\sqrt{t^{2} + 1})}{1 + (t - 1 + \sqrt{t^{2} + 1})^{2}} \right]^{2} \frac{u^{2}}{(\cosh \tau + 1)^{2}} d\tau^{2} + \frac{16a^{2}}{\pi^{2}} \left[\frac{2(t - 1 + \sqrt{t^{2} + 1})}{1 + (t - 1 + \sqrt{t^{2} + 1})^{2}} \right]^{2} u^{2} d\sigma'^{2} + dz^{2}$$
 (10)

with

$$u = \frac{(t-1+\sqrt{t^2+1})^2 + 1}{(t-1+\sqrt{t^2+1})^2 - 2(t-1+\sqrt{t^2+1})\cos\sigma' + 2}.$$
(11)

Following again the general method [14], we finally obtain the permittivity and permeability tensors for the region $3\pi/4 \le |\sigma| \le \pi$ in bipolar cylindrical coordinates:

$$\varepsilon_i^j = \mu_i^j = \operatorname{diag}(\varepsilon_\sigma, \varepsilon_\tau, \varepsilon_z),$$
 (12)

with

$$\varepsilon_{\sigma} = \frac{\pi}{4} \frac{t^2 + 1 + t\sqrt{t^2 + 1}}{t - 1 + \sqrt{t^2 + 1}} \frac{1}{\cosh \tau + 1} \frac{d\sigma}{d\sigma'},$$
(13)

$$\varepsilon_{\tau} = \frac{1}{\varepsilon_{\tau}} \tag{14}$$

$$\varepsilon_z = \frac{16}{\pi} \frac{(t - 1 + \sqrt{t^2 + 1})(t^2 + 1 + t\sqrt{t^2 + 1})}{[1 + (t - 1 + \sqrt{t^2 + 1})^2]^2} \times \frac{u^2(\cosh \tau - \cos \sigma)^2}{\cosh \tau + 1} \frac{d\sigma'}{d\sigma}.$$
 (15)

Figure 4 shows the values of μ_{σ} , μ_{τ} and ε_z in the cloaking region, respectively. We picked these material parameters, because in our simulations we used transverse electric (TE) waves whose electric field is parallel with the z-axis, and in this case the material parameters that influence the wave propagation are only μ_{σ} , μ_{τ} and ε_z . We found numerically that $\mu_{\sigma} \in [0.190, 1]$, $\mu_{\tau} \in [1, 5.274]$ and $\varepsilon_z \in [1, 179.15]$. Clearly, all the values avoid zero and infinity and hence non-Euclidean cloaking requires no optical singularity of the material.

To create the invisible region, a mirror is placed in virtual space along a great circle on the sphere. Since an ideal mirror can be described by a material with infinite permittivity, it retains this property upon a geometric transformation and remains an ideal mirror. Therefore in physical space we simply place the mirror along the curve that is the image of the great circle.

There is also another option for creating an invisible region apart from using the mirror, namely expanding a line of physical space that is not crossed by any ray. We will not consider this option in this paper.

V. WAVE PROPAGATION IN THE INVISIBILITY CLOAK

First we will focus on the situation where there is no invisibility region yet; there is no mirror and the whole sphere of virtual space is accessible to light. Then we proceed to the situation with the mirror.

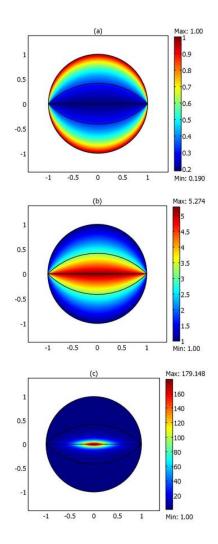


Fig. 4. The values of μ_{σ} (a), μ_{τ} (b) and ε_z (c) in the region of the cloaking device; the black line marks the border between the Euclidean and non-Euclidean region. All the values are non-singular.

To see what happens when a light wave propagates in the cloak, we need to understand the behavior of the waves in the non-Euclidean region of the device. This region is an image of a sphere in virtual space with uniform refractive index. Wave propagation on such a sphere is different from that in an Euclidean space, and the solutions of the wave (or, equivalently, Helmholtz) equation are described by the spherical harmonics $Y_{lm}(\theta,\varphi)$. The situation here is still more complicated, though. The sphere in virtual space is not closed but is "cut" along the branch cut, and the two sides of the branch cut are connected to different parts of the plane of virtual space. Therefore the amplitude and phase of the wave on the two sides of the branch cut need not be the same as would be the case of a normal, connected sphere. The result is that there can be also other waves propagating on this sphere beside the spherical harmonics.

It can happen, though, that the incoming wave in the plane is tuned in such a way that that the wave on the sphere will naturally have the same amplitude and phase at any two points adjacent across the branch cut, so it will behave as a wave on a normal, uncut sphere. Evidently, this can only happen for waves that are resonant on the sphere, i.e., for the modes described by spherical harmonics.

To find the corresponding frequencies, we recall that the spherical harmonics $Y_{lm}(\theta,\varphi)$ are solutions of the Helmholtz equation $\Delta u + k^2 u = 0$ on the sphere. Here l is a non-negative integer and m is an integer satisfying $-l \leq m \leq l$. The corresponding quantized wavevectors satisfy the relation

$$k_l = \frac{\sqrt{l(l+1)}}{r},\tag{16}$$

where r is the radius of the sphere, and depend on l but not on m. This degeneracy with respect to m is related to the high symmetry of the sphere. The corresponding frequencies and wavelengths are then

$$\omega_l = \frac{c}{r} \sqrt{l(l+1)}, \qquad \lambda_l = \frac{2\pi r}{\sqrt{l(l+1)}}.$$
 (17)

We therefore expect that the cloak will behave perfectly for light waves with wavevectors and frequencies given by Eqs. (16) and (17).

Another way of seeing this is the following. A spherical harmonic describes a wave running on the sphere. If we make a loop on the sphere and return to the same place, the value of Y_{lm} returns to its original value. In this sense we can say that a wave described by a spherical harmonic interferes constructively with the version of itself that has traveled around the sphere. And this is exactly what happens to a wave that has entered the sphere via the branch cut it travels on the sphere, is delayed, and then leaves via the other side of the branch cut for the plane again. If such a wave should interfere constructively with the wave that has not entered the sphere at all, the time delay must be equal to a multiple of the period of the wave. Since this happens to waves with wavevectors and frequencies given by Eqs. (16) and (17), these will be the waves for which the cloak will work perfectly.

For waves whose wavelengths do not satisfy the condition (17), the interference of the waves that entered the sphere with those that did not will not be constructive and therefore we can expect that the device will not work perfectly, disturbing the waves.

Note that the constructive interference condition (17) is different from what one might expect by the following (wrong) argument: The waves that enter the sphere will interfere with those that did not and the result of this interference will depend on the time delay corresponding to propagation around the sphere. At first sight, it might seem that this time delay is simply equal to the length of the equator of the sphere $2\pi r$ divided by speed of light c. This would suggest that the device will perform best if this delay is an integer multiple of the period of the light wave $2\pi/\omega$, which would then yield the wavelength of light equal to $\lambda = 2\pi r/m$ with m integer. However, this is different from the correct condition (17). It is the curvature of the sphere that modifies wave propagation compared to a flat, Euclidean space and makes such a simple argument invalid.

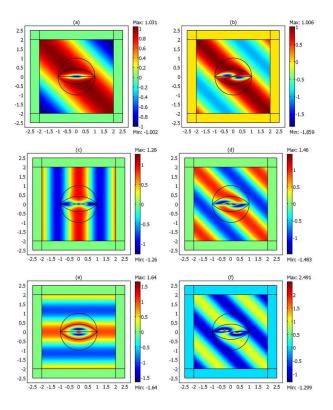


Fig. 5. Wave propagation in the cloaking device for l=1 (a), l=2 (b), l=3 with various angles of incidence (c, d, e), and for l=4 (f). Due to constructive interference the waves are not disturbed.

Next we consider the full version of the non-Euclidean cloak including the mirror. In the limit of geometrical optics, the mirror should make no difference, because a ray entering the sphere of virtual space at some point returns to the same point just as if no mirror were present. Moreover, even from the semi-geometrical optics point of view there should be no change, as the ray picks up a total phase of 2π : one π for each of the two reflections from the mirror.

However, looking at the situation with the mirror fully waveoptically, there should be some change caused by the mirror. Indeed, the mirror imposes a boundary condition on the wave, in particular, the electric field must be zero at the mirror surface. A more detailed analysis shows that instead of 2l+1linearly independent solutions $Y_{lm}(\theta,\varphi)$ of the Helmholtz equation for a given l, there are just l independent solutions that vanish on a given great circle. For example, if the great circle is chosen as the equator (corresponding to $\theta = \pi/2$), then these solutions will be the Y_{lm} themselves, but just those with m having different parity than l. Therefore the waves propagating in the mirror cloak do not have such a freedom as they would if no mirror were present, because of the boundary condition or, equivalently, because of the restricted set of modes. We can then expect that the mirror cloak will not work perfectly even for those wavelengths satisfying the condition (17).

VI. NUMERICAL SIMULATIONS

Now we proceed to numerical simulations of wave propagation in the cloaking device to see whether they confirm

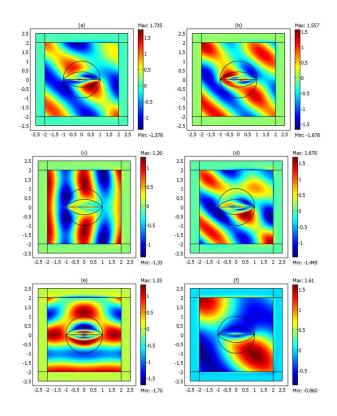


Fig. 6. Wave propagation at the cloaking device with the condition (17) not satisfied for integer l. The values of l are 2.8 (a), 3.2 (b), 3.5 (c, d, e) with various angled of incidence and 1.5 (f). The device does not work perfectly due to destructive (or partially destructive) interference of the waves that did and that did not enter the non-Euclidean part of the device. We see that for half-integer values of l the phase shift of the waves that entered the non-Euclidean part of the device is approximately π , which is obvious especially in the pictures (d) and (e).

the above considerations. Figure 5 shows the propagation of a wave incident on the cloak with wavelength satisfying Eq. (17) with several different values of l and several angles of impact. We see that the wave is not disturbed by the cloak and propagates as if no cloak were present at all.

Furthermore, Fig. 6 shows the propagation of waves that do not satisfy Eq. (17) with integer l. To compare the two cases, we still use, however, the number l as in Eq. (17), but we allow also for its non-integer values. We see from Fig. 6 that for non-integer l the waves are disturbed, just as we predicted. The perturbation is strongest for half-integer values of l, because they are most distant from the resonant integer values. Figure 6 clearly shows the time lag of the waves propagating through the cloaking structure, resulting in phase shifts that are strongest for half-integer l. Nevertheless, the emerging phase fronts are still parallel to the incoming fronts, which indicates that images are faithfully transmitted. However, due to the time lag, two wavefront dislocations are formed, as Fig. 6 also shows. They would cause image distortions at the edges of the non-Euclidean region of the device.

Next we consider the complete cloaking device with mirror. Figure 7 shows the behavior of waves with integer l. Although there is some disturbance of the waves, the perturbation is

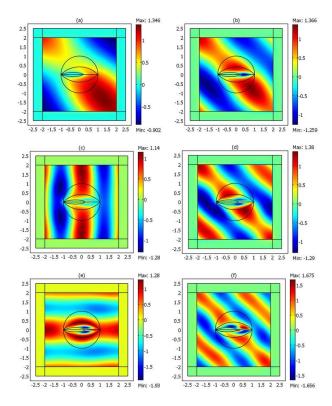


Fig. 7. Same as Fig. 5, that is, l=1 (a), l=2 (b), l=3 (c, d, e), l=4 (f) but with the mirror included. The mirror is the ellipse-like object that encapsulates the invisible region. Clearly, electric field vanishes in this region. Due to the restricted set of modes the performance of the device is no more perfect, but the imperfection is weak.

quite modest. This is quite remarkable if we take into account that the non-Euclidean cloak has originally been proposed for the regime of geometrical optics, and there was absolutely no ambition that it works for wavelengths comparable with the size of the device. Here we see that the cloak can perform very well also outside of geometrical optics, and large wavelengths do not seem to be a problem. Furthermore, Fig. 8 shows that the mirror does not affect the propagation of waves with noninteger values of l. The wave distortions are very similar to the case without the mirror.

Last we look at the behavior for large values of l. Unfortunately, the simulations became soon very difficult and even on a powerful computer converged just up to l=20. We therefore could not numerically test the behavior of the device for larger values. Figure 9 shows the case l=20 and l=19.5 without and with the mirror. We see that while for l=20 the device works nearly perfectly (we think that the imperfections are caused by numerical errors), for l=19.5 the behavior is almost perfect, apart from interference effects on the edges. Extrapolating this for larger l, we can conclude that the cloaking device should indeed work increasingly well.

VII. CONCLUSION

In conclusion, we have analyzed wave propagation in the two-dimensional version of the non-Euclidean cloaking device [3]. We have seen that although the device works perfectly in the geometrical optics limit, there are imperfections due

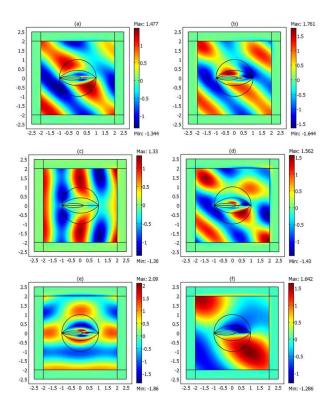


Fig. 8. Same as Fig. 6, that is, l=2.8 (a), l=3.2 (b), l=3.5 (c, d, e) and l=1.5 (f), but with the mirror included. The restricted set of modes causes a slightly different performance of the device compared to the situation without the mirror.




Fig. 9. Wave propagation in the cloak without the mirror (first line) and with it (second line) for l=20 (a), (c) and l=19.5 (b), (d). The device now performs quite well even for the half-integer l.

to interference effects if full wave description is employed. In the situation where there is no hidden region, there exist wavelengths of light for which the device is absolutely perfect. This results from constructive interference between the waves that entered the non-Euclidean part of the cloak and those that did not. This constructive interference occurs for wavelengths that resonate on the non-Euclidean part of the cloak and correspond to frequencies of spherical harmonics. For other wavelengths the interference is not fully constructive and the waves leaving the device are disturbed — the device is not perfect for light waves. The perturbations are caused by the time lag in the device and result in wavefront dislocations.

Although adding the mirror and creating an invisible region causes the cloak to cease working perfectly for the resonant wavelengths, the imperfection is very weak. The performance of the device is much better than originally expected [3]. When the wavelength gets smaller, the performance of the cloaking device gradually improves, becoming perfect in the limit of geometrical optics.

The fact that the non-Euclidean invisibility cloak does not work perfectly for light waves is by far outweighed by the absence of optical singularities and the potential of working broadband. Although non-Euclidean cloaking has been designed for wavelengths much smaller than the size of the device, which is also the case of most practical situations, it is useful to understand the behavior of the device outside this limit, as we have tried to do in this paper. This might help designing other types of non-Euclidean cloaks that could possibly work even for wavelengths comparable with the size of the device.

VIII. ACKNOWLEDGMENTS

We acknowledge support of the grants MSM0021622409 and MSM0021622419, and a Royal Society Wolfson Research Merit Award.

REFERENCES

- J. B. Pendry, D. Schurig, and D. R. Smith, "Controlling Electromagnetic Fields", Science, vol. 312, pp. 1780–1782, May 2006.
- [2] U. Leonhardt, "Optical Conformal Mapping", Science, vol. 312, pp. 1777–1780, May 2006.
- [3] U. Leonhardt and T. Tyc, "Broadband Invisibility by Non-Euclidean Cloaking", *Science*, vol. 323, pp. 110–112, Jan. 2009.
 [4] H. Y. Chen and C. T. Chan, "Transformation media that rotate electro-
- [4] H. Y. Chen and C. T. Chan, "Transformation media that rotate electromagnetic fields", Appl. Phys. Lett., vol. 90, p. 241105, Jun. 2007.
- [5] Y. Lai, H. Y. Chen, Z.-Q. Zhang and C. T. Chan, "Complementary Media Invisibility Cloak that Cloaks Objects at a Distance Outside the Cloaking Shell", *Phys. Rev. Lett.*, vol. 102, p. 093901, Mar. 2009.
- [6] J. Li and J. B. Pendry, "Hiding under the Carpet: A New Strategy for Cloaking", Phys. Rev. Lett., vol. 101, p. 203901, Nov. 2008.
- [7] I. I. Smolyaninov, V. N. Smolyaninova, A. V. Kildishev, and V. M. Shalaev, "Anisotropic Metamaterials Emulated by Tapered Waveguides: Application to Optical Cloaking", *Phys. Rev. Lett.*, vol. 102, p. 213901, 2009.
- [8] D. Schurig, J. J. Mock, B. J. Justice, S. A. Cummer, J. B. Pendry, A. F., and D. R. Smith, "Metamaterial Electromagnetic Cloak at Microwave Frequencies", *Science*, vol. 314, pp. 977–980, 2006.
- [9] R. Liu, C. Ji, J. J. Mock, J. Y. Chin, T. J. Cui, D. R. Smith, "Broadband Ground-Plane Cloak", *Science*, vol. 323, pp. 366–369, 2009.
- [10] J. Valentine, J. Li, T. Zentgraf, G. Bartal, X. Zhang. (2009, Apr.). Dielectric Optical Cloak. [Online]. Available: http://arxiv.org/abs/0904.3602
- [11] L. H. Gabrielli, J. Cardenas, C. B. Poitras, M. Lipson, (2009, Apr.). Title: Cloaking at Optical Frequencies. [Online]. Available: http://arxiv.org/abs/0904.3508

- [12] L. S. Dolin, "On the possibility of comparing threedimensional electromagnetic systems with nonuniform anisotropic fillings", *Isv. Vusov*, vol. 4, pp. 964-967, 1961.
- [13] A. Greenleaf, M. Lassas and G. Uhlmann, "On nonuniqueness for Calderon's inverse problem", *Math. Res. Lett.*, vol. 10, pp. 685–693, Sep. 2003.
- [14] U. Leonhardt and T. G. Philbin, "General relativity in electrical engineering", New J. Phys., vol. 8, p. 247, 2006.
- [15] U. Leonhardt and T. G. Philbin, "Transformation Optics and the Geometry of Light", *Prog. Opt.*, vol. 53, 2009.
- [16] V. M. Shalaev, "Transforming light", Science, vol. 322, pp. 384-386, 2008.
- [17] G. W. Milton, The Theory of Composites. Cambridge University Press, Cambridge, 2002.
- [18] D. R. Smith, J. B. Pendry, M. C. K. Wiltshire, "Metamaterials and negative refractive index", *Science*, vol. 305, pp. 788–792, Aug. 2004.
- [19] C. M. Soukoulis, S. Linden, M. Wegener, "Negative refractive index at optical wavelengths", *Science*, vol. 315, pp. 47–49, Jan. 2007.
- [20] A. K. Sarychev, V. M. Shalaev, Electrodynamics of Metamaterials. World Scientific, Singapore, 2007.
- [21] U. Leonhardt and T. Tyc, "Superantenna made of transformation media", New J. Phys., vol. 10, p. 115026 (2008).
- [22] J. D. Jackson, Classical Electrodynamics. Wiley, 1999.
- [23] U. Leonhardt and T. Tyc. (2009, January). Broadband Invisibility by Non-Euclidean Cloaking. Science. Supporting online material of [3]. [Online]. Available: http://www.sciencemag.org/cgi/data/1166332/DC1/1



Che Ting Chan received his BS degree in Physics from the University of Hong Kong in 1980 and his PhD degree from UC Berkeley in 1985. He is currently a Chair Professor of Physics at HKUST, and the director of William Mong Institute of Nano Science and Technology (WMINST). Dr. Chan's research interest has been in the area of photonic crystals, metamaterials and nano-materials. Dr. Chan is a Fellow of the American Physical Society.



Tomáš Tyc was born in Brno, Czechoslovakia (now Czech Republic) on February 7th, 1973. He received his Master degree and Ph.D. in theoretical physics from Masaryk University in Brno in 1996 and 1999, respectively. In his research Tomáš Tyc initially investigated correlations in free electron beams, later he switched to quantum optics and quantum information theory. In 2007 he focused on optics, in particular on theory of invisibile cloaks and transformation optics. He obtained habilitation (Associate professorship) from Masaryk University

in 2006. He was a Research Fellow at University of Vienna (2000), Macquarie University Sydney (2001, 2002), University of Calgary (2004), and University of St Andrews (2007, 2008). Beside his research interests, he likes to popularize science and makes shows on physics of everyday life for general public.



Ulf Leonhardt was born in Schlema, in former East Germany, on October 9th 1965. He studied at Friedrich-Schiller University Jena, Germany, at Moscow State University, Russia, and at Humboldt University Berlin, Germany. He received the Diploma in Physics from Friedrich-Schiller University in 1990 and the PhD in Theoretical Physics from Humboldt University in 1993. Ulf Leonhardt was a research associate at the Max Planck Research Group Nonclassical Radiation in Berlin 1994-1995, a visiting scholar at the Oregon Center for Optics in

Eugene, Oregon, 1995-1996, a Habilitation Fellow of the German Research Council at the University of Ulm, Germany, 1996-1998, and a Feodor-Lynen and Gran-Gustafsson Fellow at the Royal Institute of Technology in Stockholm, Sweden, 1998-2000. Since April 2000 he is the Chair in Theoretical Physics at the University of St Andrews, Scotland. In 2008 he was a Visiting Professor at the National University of Singapore. Ulf Leonhardt is the first from former East Germany to win the Otto Hahn Award of the Max Planck Society. For his PhD thesis he received the Tiburtius Prize of the Senate of Berlin. In 2006 Scientific American listed him among the top 50 policy business and research leaders for his work on invisibility devices. In 2008 he received a Royal Society Wolfson Research Merit Award. He is a Fellow of the Institute of Physics and of the Royal Society of Edinburgh.



Huanyang Chen was born in Fujian, China, on August 5, 1983. He received his B.Sc. and Ph.D. in physics from Shanghai Jiao Tong University, Shanghai, China, in 2005 and in 2008. He was a Research Assistant and a Post-Doctoral Fellow in the group of Professor Che Ting Chan at Department of Physics, the Hong Kong University of Science and Technology, Hong Kong, China, from 2006 to 2009. He will join Suzhou University, Jiangsu, China after September 2009. His research interests include photonic band gaps, negative index materials, meta-

material design and transformation optics. He has published several original papers on transformation optics and cloaking.