

Helium metastable dynamics in sheath or bulk dominated rf micro-plasma jets

B Niermann¹, T Hemke², A Wollny², M Böke¹, R P Brinkmann², T Mussenbrock², and J Winter¹

¹Ruhr-Universität Bochum, Institute for Experimental Physics II, Universitätsstraße 150, 44801 Bochum, Germany

²Ruhr-Universität Bochum, Institute for Theoretical Electrical Engineering, Universitätsstraße 150, 44801 Bochum, Germany

E-mail: `benedikt.niermann@rub.de`

Abstract. Space resolved concentrations of helium He (3S_1) metastable atoms in an atmospheric pressure radio-frequency micro-plasma jet were measured using tunable diode laser absorption spectroscopy. The spatial profile of metastable atoms in the volume between the electrodes was deduced for various electrode gap distances. Density profiles reveal the sheath structure and reflect the plasma excitation distribution, as well as the dominance of the α -mode discharge. Gap width variations show the transition from a normal glow plasma to a pure sheath discharge. In order to analyze and verify the experimentally observed profiles of the metastable atoms a 2-dimensional simulation model was set up. Applying an appropriate He/N₂/O₂ chemistry model the correlation between the metastable profiles and the underlying excitation mechanisms was obtained.

1. Introduction

Understanding the energy transfer processes in micro-plasmas is one of the key issues to develop new applications and reliable process control. In this context metastable species play a decisive role. Due to their long lifetime metastables collide more frequently with other particles. The metastable density in micro-discharges is several orders of magnitude lower than the density of the ground-state atoms. However, compared to most other species the density is significant and the electron collision excitation cross sections of some helium levels out of the metastable states exhibit values which are several orders of magnitude larger and have much lower thresholds than those for the ground state [1, 2]. Among these metastable atoms the He (3S_1) level plays a decisive role, since helium is used as a feed gas in many micro-discharges. This work reports the measurement and simulation of He (3S_1) atoms in an atmospheric pressure micro-plasma jet, providing a simple design by featuring an α -mode RF discharge between two bare metallic electrodes.

Reliable techniques are needed for the systematic investigation of plasma characteristics and dynamics. This is essential for the optimization of plasma sources and process control. Application of conventional diagnostics, especially invasive ones, is often impossible regarding the small dimensions, high operating pressures, and high power densities. In this context absorption spectroscopy is a widely used technique to measure e.g. absolute concentrations of particles in plasma discharges, since it is non-invasive, highly sensitive and provides a sufficient spatial resolution [3, 4]. We have applied tunable diode laser absorption spectroscopy (TDLAS) to record the spectral profiles of the lowest helium metastable state, deducing absolute densities for various discharge conditions [5]. The here used jet configuration is a well analyzed and value proven discharge. It was studied already under several experimental and theoretical approaches, describing the discharge characteristics in detail [6, 7, 8]. The new approach of the measurements at hand focuses on the variation of the gap width and determination of the sheath/bulk structure and influences on the distribution of excited species in the discharge.

To verify the experimental results and to adequately describe the actual excitation mechanisms a reliable model is needed. By means of the 2D hybrid model *nonPDPSIM* we perform simulations which take into account both the discharge region as well as the effluent of the jet.

2. The atmospheric pressure micro-plasma jet

The atmospheric pressure micro-plasma jet is a capacitively coupled, non-thermal glow-discharge plasma at high pressures. The design concept of this discharge is based on the plasma jet introduced by Selwyn et al. in 1998 [9] and advanced by Schulz-von der Gathen et al. [6] termed μ APPJ. The feed gas flows between two closely spaced stainless steel electrodes driven at 13.56 MHz radio-frequency in a parallel plate configuration

(Figure 1). Electrodes, plasma volume and effluent are enclosed by quartz windows, giving direct optical access to the plasma itself and the effluent volume behind the electrodes. The discharge uses helium as feed gas with typical gas velocities around 100 ms^{-1} . The electric field between the electrodes causes a breakdown in the gas and produces a plasma with electron temperature and density of about 1 to 2 eV and 10^{10} cm^{-3} , respectively [7, 8]. Atoms and molecules in the feed gas become excited, dissociated or ionized by electron impacts. Since the electrons are not in thermal equilibrium with the ions and neutrals, the gas temperature remains a few tens Kelvin above room temperature [10].

The presented jet configuration features a dielectric extension of the gas channel to assure controlled gas flow in the effluent behind the plasma. Electrodes and dielectric extensions are 40 mm and 50 mm in length, respectively. The distance between the two windows is fixed to 1 mm while the electrode gap width is variable between 0.2 mm and 30 mm. The ratio of sheath and plasma bulk can therewith continuously be adjusted.

2.1. TDLAS set-up

The small dimensions of micro-discharges and their operation at atmospheric pressures are a challenge for optical diagnostics, since high sensitivity and high spatial resolution are required. For the absorption spectroscopic measurements a standard TDLAS set-up was used. The absorption profile was recorded by scanning the laser frequency across the absorption line. Figure 2 shows a sketch of the experimental setup. The laser beam from the DL passed through two beam splitters. A part of the beam was guided to a Fabry-Perot interferometer (1 GHz free spectral range), a second part through a low pressure reference cell to perform the calibration of the laser frequency. The part of the beam transmitted through the first beam splitter was attenuated by neutral density filters with an optical density in the order of 3, and focused into the discharge with a beam power of less than $2 \mu\text{W}$ at $100 \mu\text{m}$ spot size, to avoid any saturation effects. After passing the discharge the beam was guided through a set of apertures and filters to suppress the emission from the plasma by reducing the collection angle and blocking wavelengths different than the observed transitions. The transmitted beam intensity was measured by photodiodes with on-chip transimpedance amplifier. For an effective measurement of the absorption signal across the jet axes, the discharge casing was mounted on a small movable stage featuring three electronically controlled stepping motors to adjust, with high precision, the discharge cell position in all spatial dimensions. This set-up allows the positioning of the jet with an accuracy of about $5 \mu\text{m}$ and automated xz -mapping of the complete plasma volume (In y -axis all measurements presented in this paper are space averaged).

Since the absorption rate of the laser light by metastable atoms is very low, in the order of 10^{-3} after 1 mm absorption length, lock-in technique was used to measure the changes in signal intensity. Applying lock-in technique requires the pulsing of the signal to be measured. This was realized by pulsing the RF-power coupled into the system,

which consequently leads to a pulsing of the metastable density in the discharge. The pulse frequency was chosen to 4 kHz and a duty cycle of 50 %.

Absolute metastable densities were derived from the transmittance $\frac{I}{I_0}$ and the Beer-Lambert law. Therefore four signals have to be acquired:

$$\begin{aligned} L(\nu) &- \text{Plasma and Laser on,} \\ L_0(\nu) &- \text{Plasma off, Laser on,} \\ P(\nu) &- \text{Plasma on, Laser off,} \\ B(\nu) &- \text{Plasma and Laser off (background),} \end{aligned}$$

to calculate the transmittance spectra and correlate them with the plasma properties by

$$\frac{I(\nu)}{I_0(\nu)} = \frac{L(\nu) - P(\nu)}{L_0(\nu) - B(\nu)} = e^{-k(\nu) \cdot l}, \quad (1)$$

where $I(\nu)$ and $I_0(\nu)$ are the intensities of transmitted radiation with and without the presence of absorbing species, $k(\nu)$ is the absorption coefficient and l the path length through the absorbing medium [11]. The absorption coefficient is connected to the population density of metastable atoms by

$$k(\nu) = \frac{1}{4\pi\epsilon_0} \cdot \frac{\pi(e^2)}{cm_e} \cdot f_{ik} \cdot N_i \cdot F(\nu), \quad (2)$$

where f_{ik} is the oscillator strength of the line, N_i the density of the lower level, and $F(\nu)$ a normalized function ($\int_0^\infty F(\nu) \cdot d\nu = 1$) representing the absorption lineshape. All other terms have their usual definitions. The absolute metastable density can then be given by

$$\int_0^\infty \ln \left(\frac{I_0(\nu)}{I(\nu)} \right) d\nu = S = \frac{e^2 f_{ik} l}{4\epsilon_0 m_e c} \cdot N_i, \quad (3)$$

where S is the area under the absorption curve that provides the line-averaged density of the absorbing species.

2.2. Simulation set-up

The 2D simulations are performed on a non-structured numerical grid with the hybrid fluid-dynamics code *nonPDPSIM* which has been originally designed and realized by Kushner and co-workers. A detailed description of the code and a number of successful application can be found in [12, 13, 14, 15]. Basic simulations of an radio-frequency driven He/O₂ plasma jet and its effluent accounting for the plasma dynamics and the lateral gas flow can be found in [16]. Here, we just briefly discuss the implemented equations and the underlying physics.

The code *nonPDPSIM* simulates the dynamics of weakly ionized plasmas in the regime of medium to high pressure. It takes into account the physics and chemistry of charged particles – electrons with mass m_e and charge $-e$, ions with mass m_j and charge q_j – and of the excited as well as the ground state neutrals (mass m_j). For all

species j , the continuity equations (particle balances) are simultaneously solved, where $\vec{\Gamma}_j$ is the particle flux density and S_j is the source and loss term, respectively:

$$\frac{\partial n_j}{\partial t} = -\nabla \cdot \vec{\Gamma}_j + S_j. \quad (4)$$

The fluxes are calculated from the momentum balances in the drift-diffusion approximation evaluated in the local center-of-mass system. D_j and μ_j are the diffusion constant and the mobility (if applicable) of species j . Further, \vec{E} is the electrical field, and \vec{v} is the mass-averaged advective velocity of the medium:

$$\vec{\Gamma}_j = n_j \vec{v} - D_j \nabla n_j + \frac{q_j}{|q_j|} \mu_j n_j \vec{E}. \quad (5)$$

For the electron fluid, additionally an energy balance equation is solved taking into account Ohmic heating and the energy losses due to elastic and inelastic interaction with the neutrals and ions as well as heat conduction,

$$\frac{\partial}{\partial t} \left(\frac{3}{2} n_e T_e \right) = \vec{j} \cdot \vec{E} - \nabla \cdot \left(-\kappa_e \nabla T_e + \frac{5}{2} T_e \vec{\Gamma}_e \right) - n_e \sum_i \Delta \epsilon_i k_i n_i. \quad (6)$$

To capture the non-Maxwellian behavior of the electrons, all electronic transport coefficients (the mobility μ_e , the diffusion constant D_e , and the thermal conductivity κ_e) as well as the electronic rate coefficients in eqs. (4) and (5) are calculated by the local mean energy method: A zero-dimensional Boltzmann equation for the electron energy distribution $f(\epsilon)$ and the transport and rate coefficients is solved for the locally applicable gas composition and various values of the electrical field. The tabulated data are then consulted in dependence of the fluid dynamically calculated electron temperature T_e .

The plasma equations are coupled to a modified version of the compressible Navier-Stokes equations which are solved for the gas density ρ , the mean velocity \vec{v} , and the gas temperature T . The contributions to the energy equation from Joule heating include only ion contributions; the heat transfer from the electrons is included as a collisional change in the enthalpy. The scalar pressure p is given by the ideal gas law.

Finally, the potential Φ is calculated from Poisson's equation. (The code works in the electrostatic approximation such that $\vec{E} = -\nabla \Phi$.) The charge density on its right hand side stems from the charged particles in the plasma domain and from the bound charges ρ_s at the surfaces. The coefficient $\varepsilon = \varepsilon_0 \varepsilon_r$ represents the permittivity of the medium:

$$-\nabla \cdot \varepsilon \nabla \Phi = \sum_j q_j n_j + \rho_s. \quad (7)$$

The surface charges are governed by a separate balance equation, where σ is the conductivity of the solid materials and the subscript s indicates evaluation on the surface:

$$\frac{\partial \rho_s}{\partial t} = \left[\sum_j q_j (-\nabla \cdot \vec{\Gamma}_j + S_j) - \nabla \cdot (\sigma (-\nabla \Phi)) \right]_s. \quad (8)$$

The dynamical equations are complemented by an appropriate set of boundary conditions. Electrically, the walls are either powered or grounded. With respect to the particle flow, they are either solid, or represent inlets or outlets: The flow is specified to a given flux, while the outlet flow is adjusted to maintain the pressure. Finally, it is worth mentioning that the actual implementation of the equations poses some difficulties due to the vast differences in the time scales of the dynamics of the plasma and the neutrals. These difficulties are overcome by the methods of time-slicing and subcycling.

The described code is employed to simulate the μ APPJ depicted in Figure 1 with varying electrode gap sizes of 1.8 mm, 1.0 mm and 0.3 mm. We choose these values to characterize the three distinct regimes of plasma bulk-sheath ratios. The simulation resolves two Cartesian dimensions x and z . In direction y , translational invariance is assumed.

By leaks in the gas supply system as well as intrusion of air from the exit nozzle of the jet, the amount of nitrogen and oxygen in the feed gas is significant and has to be taken into account for the modeling approach. We mimic the impurities of the experimental setting according to [17] by adding 0.016 % of nitrogen and 0.004 % oxygen in the chemical (Oxygen species strongly contribute to the electronegativity of the plasma while nitrogen has an impact on the quenching of the helium metastable density.) The flow rate of the gas mixture injected in the jet is adjusted to achieve advective gas velocities of 100 ms^{-1} . The outlet is controlled to maintain a constant pressure. Finally, the secondary electron emission coefficient of the surfaces is set equal to 0.1.

3. Results and discussion

3.1. Spatial distribution of He metastable atoms

Figure 3 shows 2D-maps of the He ($^3\text{S}_1$) metastable density in the discharge volume. The top map shows experimental results whereas the bottom map shows simulation data. The horizontal and vertical axis span the exact area between the electrodes. The map of the experimental data, which covers 2,000 reading points (40 vertical x 50 horizontal) of the absorption signal, in the plasma volume is in good qualitative and quantitative agreement with the simulation results.

A variety of effects determines the metastable distribution in the horizontal and the vertical axis. In horizontal direction the density profile is governed mainly by two effects. One is the alignment of the electrodes, since the electric field distribution strongly influences the electron energy. In the present experimental case the electrode gap is marginally larger on the rear side of the jet, resulting in a slight decrease of densities from left to right. A second impact is given by impurities entering the jet through the exit nozzle, therewith quenching the metastable atoms. Since the jet is running permanently in contact with the ambient atmosphere the intrusion of nitrogen and oxygen into the plasma channel is significant, and decreases the metastable density especially in the first millimeters from the nozzle. The small fluctuations in the horizontal profile (which are

not resolved by the simulation model) can be attributed to turbulences, imperfections in the surface of the electrodes or singularities in the walls of the gas channel.

The vertical metastable profile is less determined by these environmental factors but by the electron density and temperature distribution. The observed structure is consistent with the sheath structure in an RF discharge. Directly in front of the electrodes, the metastable density is low since the electron density is too low for an efficient excitation and ionization of the ground state atoms (see also Figure 4, below). Metastables reach their highest densities some $10\ \mu\text{m}$ away from the electrode at the plasma-sheath interface, where in the negative glow area most excitation and ionization processes occur. Here in the sheath/bulk interface the electron energy is highest. In the bulk, the electric field strength and therewith the electron temperature is low (see also Figure 5, below), yielding to a lower metastable production rate. The asymmetry in the vertical profile of the simulated data can be attributed to stochastic effects in the simulation since it is not averaged over many RF-cycles due to runtime considerations, while the measurements are averaged over several 10^6 cycles.

3.2. Gap width variations

Due to the variability of the electrode gap the micro-plasma jet offers the possibility to continuously tune the sheath/bulk ratio and therewith the vertical excitation profile. Figure 4 shows the He metastable profile for gap widths between 2.7 and 0.25 mm. These values represent the limits where the pure helium discharge can be operated in α -mode. With decreasing gap width the breakdown voltage decreases while approaching the Paschen minimum. Although the outer power coupling to the discharge for each gap width is different, one can clearly observe a systematic increase of the metastable density in the maximum with smaller gap width. A quantitative description of this increase is difficult, since the gap width correlates with a variety of discharge parameters, like the impedance, the power coupling or the gas velocity, that all influence the species' density.

The graphs show a steep rise of the density in front of the electrode surface with a maximum in the sheath/bulk interface, while in the bulk the density is low. The density distribution suggest that diffusion processes play a minor role for the metastable profile. At atmospheric pressure the mean free path of the electrons is short. High energetic electrons are lost in the sheath and can not contribute to the excitation in the plasma bulk. Although the metastable lifetime is comparatively long, in the order of $1\ \mu\text{s}$, the metastable diffusion to the bulk can be neglected likewise. De-excitation of these species is dominated by three-body collision with ground state atoms as well as quenching reaction with impurities, like molecular nitrogen and oxygen. For gap widths larger than 1 mm the two excitation areas are clearly separated by the plasma bulk. Lowering the electrodes distance leads to the coalescence of the two sheath regions, and an excitation profile where highest densities are in the center of the gap. For electrode distance of just a few hundred μm the plasma transforms to a pure “sheath discharge”. These experimental findings are supported by the results from the numerical

simulation. Figure 5 (top) shows the metastable profile for selected gap widths, the related electron densities and electron temperatures are given in Figure 5 (bottom). Due to the admixture of oxygen into the feed gas the electronegativity of the plasma has to be taken into account. The electron temperature profile for a gap widths of 1.8 mm represents the excitation pattern of the metastable atoms. The temperatures are highest in the sheath/bulk interface, with a maximum of about 3 eV. Lowering the gap widths results, like in the experiment, in a convergence of the two sheaths. For a low gap widths of 0.3 mm the electron density decreases significantly, while temperatures reach values of almost 4 eV. This behavior suggests that the high energy tail of the EEDF is getting more pronounced. Since the high electron energies enhance the production of metastable atoms, the simulation again supports the qualitative observation of very high metastable densities for low gap widths.

4. Summary

We have shown that the experimental results for metastable distributions in micro-plasma jet discharges can be reproduced qualitatively and quantitatively by a 2D numerical model, therewith revealing the underlying excitation mechanisms of the discharge. By varying the gap width it was proven that the simulation model reliably mimic the experimental results for a large span of sheath bulk ratios. This offers now new possibilities in the analysis of extreme discharge conditions, like γ -mode structures and very small gap widths showing effects like no quasi-neutrality all over the discharge volume.

Acknowledgments

This project is supported by DFG (German Research Foundation) within the framework of the Research Unit FOR 1123 and the Research Department 'Plasmas with Complex Interactions' at Ruhr-University Bochum.

References

- [1] Katsch H M, Quand E and Schneider T 1996 *Plasma Physics and Controlled Fusion* **38** 183
- [2] Flohr R, Melzer A and Piel A 1993 *Plasma Sources Sci. Technol.* **3** 206
- [3] Miclea M, Kunze K, Heitmann U, Florek S, Franzke J and Niemax K 2005 *J. Phys. D, Appl. Phys.* **38** 1709
- [4] Tachibana K, Kishimoto Y and Sakai O 2005 *Journal of Applied Physics* **97** 123301
- [5] Niermann B, Böke M, Sadeghi N and Winter J 2010 *Eur. Phys. J. D* **60** 489
- [6] Schulz-von der Gathen V, Buck V, Gans T, Knake N, Niemi K, Reuter S, Schaper L and Winter J 2007 *Contrib. Plasma Phys.* **47** No. 7 510
- [7] Schaper L, Reuter S, Waskoenig J, Niemi K, Schulz-von der Gathen V and Gans T 2009 *J. Phys. Conf.* **162** 012013
- [8] Waskoenig J, Niemi K, Knake N, Graham L M, Reuter S, Schulz-von der Gathen V and Gans T 2010 *Pure and Applied Chemistry* **82** 1209
- [9] Schütze A, Jeong J Y, Babayan S E, Park J, Selwyn G S and Hicks R F 1998 *IEEE Trans. Plasma Sci.* **26** 1685
- [10] Knake N, Reuter S, Niemi K, Schulz-von der Gathen V and Winter Jörg 2008 *J. Phys. D: Appl. Phys.* **41** 194006
- [11] Sadeghi N 2004 *J. Plasma Fusion Res.* **80** 767
- [12] Babaeva N Y, Arakoni R and Kushner M J 2007 *J. Appl. Phys.* **101** 123306
- [13] Kushner M J 2004 *J. Appl. Phys.* **95** 846
- [14] Babaeva N Y and Kushner M J 2007 *J. Appl. Phys.* **101** 113307 (2007)
- [15] Babaeva N Y and Kushner M J 2009 *Plasma Sources Sci. Technol* **18** 035009
- [16] Hemke T, Wollny A, Gebhardt M, Brinkmann R P and Mussenbrock T 2011 *submitted to J Phys D* arXiv:1104.3288v1 [physics.plasm-ph]
- [17] Niermann B, Kanitz A, Böke M, and Winter J 2011 <http://arxiv.org/1105.0833>

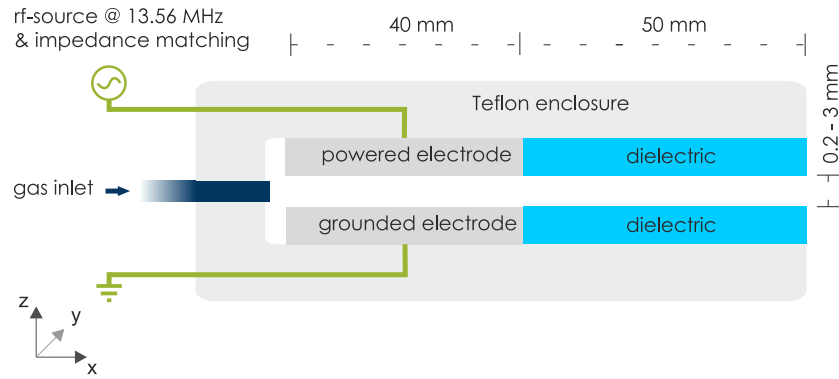


Figure 1. Sketch of the micro-plasma jet discharge, which is also the simulation domain. Shown is a 2-dimensional cross-section through plane that is spanned by the two electrodes.

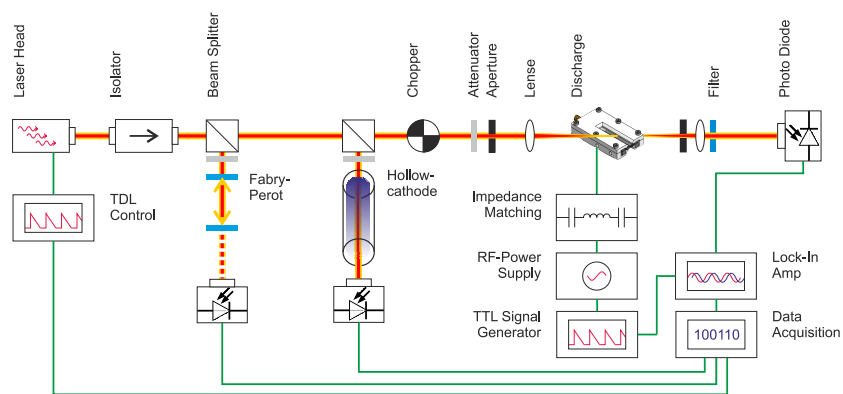


Figure 2. TDLAS setup.

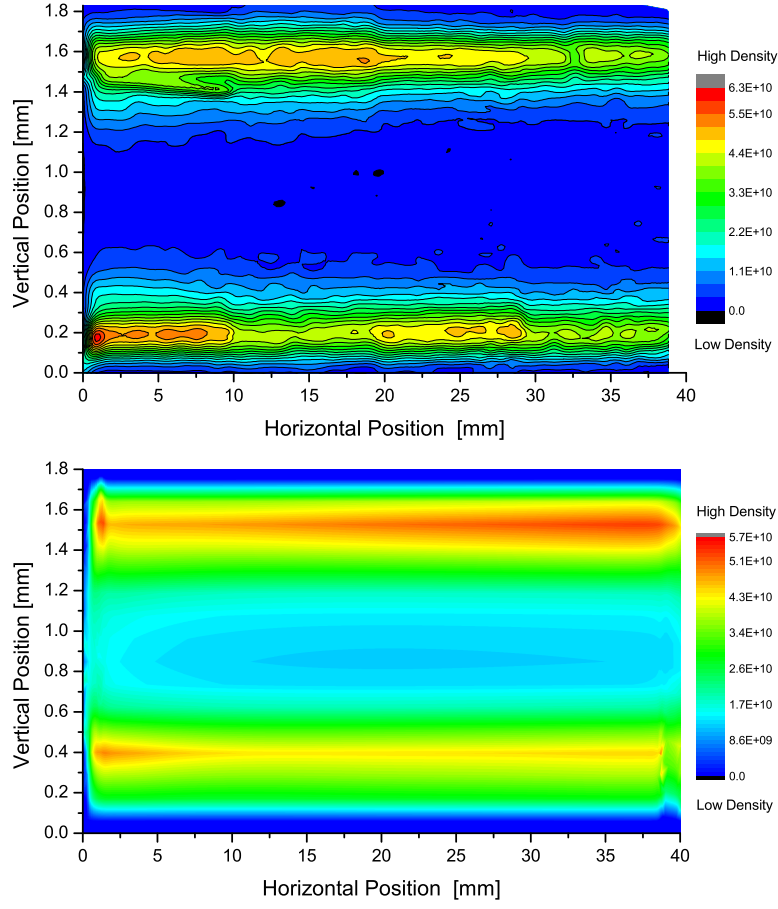


Figure 3. Top: 2-dimensional map of the measured metastable density in the discharge volume for the $\text{He } 2^3\text{S}_1 \rightarrow 2^3\text{P}_{1,2}^0$ transition. Powered electrode at the top, grounded electrode at the bottom. Electrode gap width was 1.8 mm. Densities are given in cm^{-3} . **Bottom:** Simulation results for the spatial distribution of the He metastables.

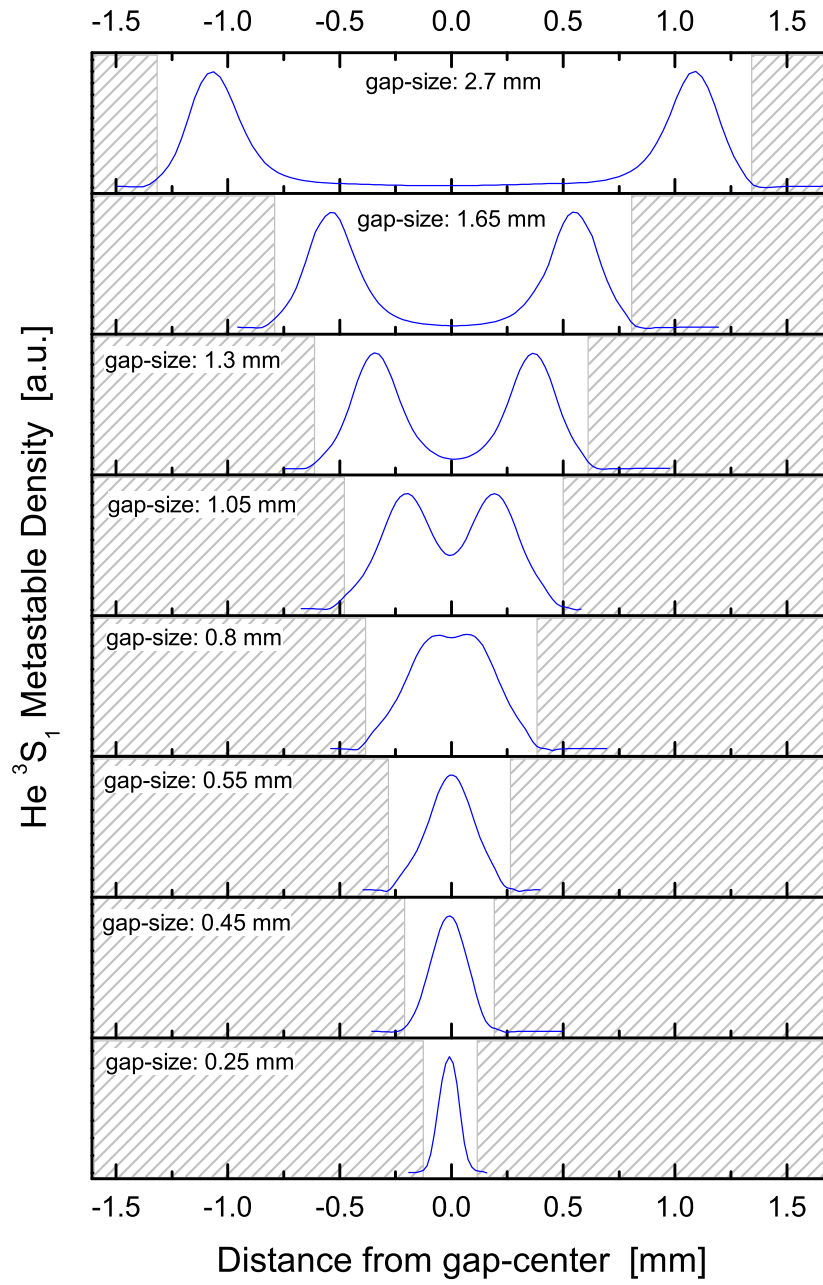


Figure 4. Measured vertical metastable profile for gap widths between 2.7 mm and 0.25 mm.

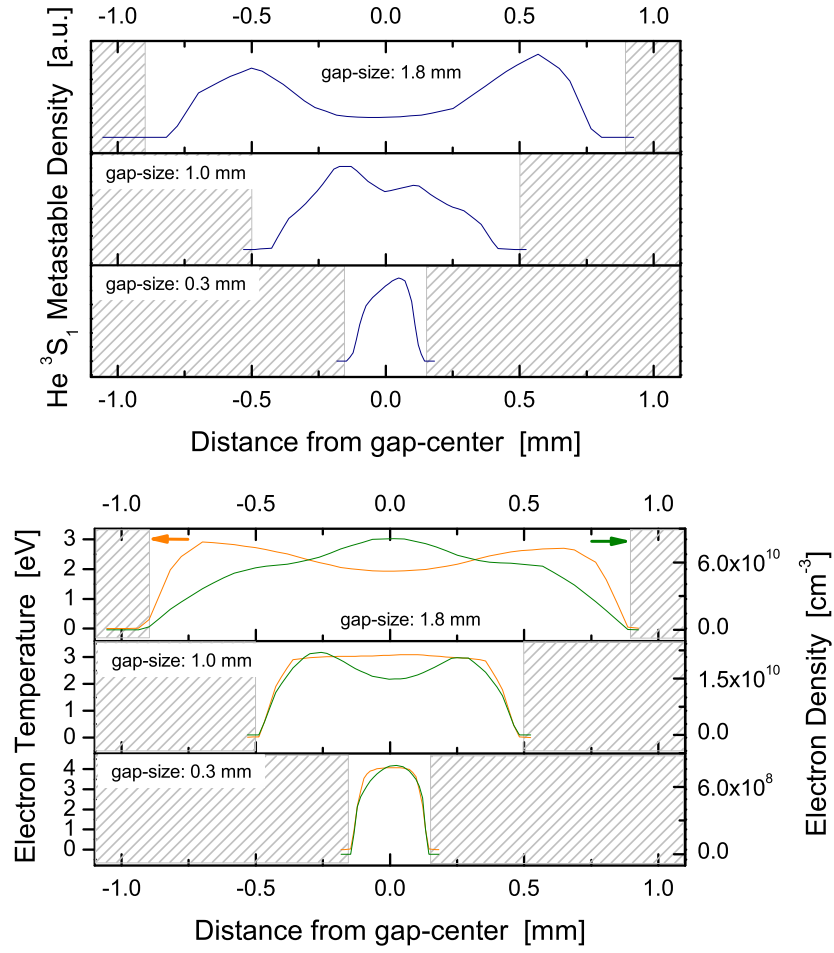


Figure 5. Top: Simulation results of characteristic metastable profiles for various gap widths. **Bottom:** Simulation results of electron density and electron temperature profiles for various gap widths.