

Boundary conditions for matrix of variations in refractive waveguides with rough bottom

I.P. Smirnov

Institute of Applied Physics RAS,
46 Ul'yanova Street, Nizhny Novgorod, Russia

Abstract

The solution of the Helmholtz equation in optical semiclassical approximation is associated with the calculation of ray paths and matrices of variations. The transformation rules for elements of matrices on the boundaries of the waveguide are obtained.

Key words: geometry acoustics, matrix of variations, boundary conditions

Consider a two-dimensional underwater acoustic waveguide with the sound speed $c = c(r, z)$ being a function of depth, z , and range, r , and curve bottom $z = z_b(r)$.

It is well-known that in optical semiclassical approximation the sound wave field can be expressed through parameters of ray trajectories governed by the Hamilton equation [1]

$$\begin{cases} \frac{d}{dr}z = \frac{\partial H}{\partial p}, \\ \frac{d}{dr}p = -\frac{\partial H}{\partial z}, \end{cases} \quad (1)$$

with the Hamilton function

$$H = -\sqrt{n^2 - p^2}.$$

The variable $p = n \sin \vartheta$ is the ray pulse, ϑ is ray grazing angle, $n = n(r, z) = c_0/c(r, z)$ is the refractive index, where c_0 is a reference sound speed.

To find a ray trajectory starting from the source point (r_0, z_0) at the angle ϑ_0 we must solve the system (1) with the initial conditions $z = z_0$, $p =$

$n(r_0, z_0) \sin \vartheta_0$. As there exist phase restriction for the variable z then we need in boundary conditions for variables in addition to the system (1). The conditions have the form

$$\begin{cases} p \rightarrow p(1 - 2N_z(N_r t_r/t_z + N_z)), \\ z \rightarrow z, \end{cases}$$

where $\vec{t} = (t_r, t_z) = (\cos \vartheta, \sin \vartheta)$ is direction vector of the ray, $\vec{N} = (N_r, N_z) = (\cos \alpha, \sin \alpha)$ is internal normal to the boundary at the point of ray reflection.

Calculations of amplitudes of the sound pressure deals with the *matrix of variations*

$$q = \begin{vmatrix} q_{11} & q_{12} \\ q_{21} & q_{22} \end{vmatrix} \equiv \begin{vmatrix} \frac{\partial p}{\partial p_0} & \frac{\partial p}{\partial z_0} \\ \frac{\partial z}{\partial p_0} & \frac{\partial z}{\partial z_0} \end{vmatrix}$$

governed by the equation

$$\frac{d}{dr} q = Kq \quad (2)$$

were

$$K \equiv \begin{vmatrix} -\frac{\partial^2 H}{\partial z \partial p} & -\frac{\partial^2 H}{\partial z^2} \\ \frac{\partial^2 H}{\partial p^2} & \frac{\partial^2 H}{\partial z \partial p} \end{vmatrix}.$$

Starting value for matrix q is the identity matrix. Coefficients of the linear system (2) vary through the ray trajectory. When the ray reaches the waveguide boundary matrix q suffers a transformation of the form

$$q \longrightarrow \kappa q.$$

The transformation matrix

$$\begin{aligned} \kappa &= \begin{vmatrix} \kappa_{11} & \kappa_{12} \\ \kappa_{21} & \kappa_{22} \end{vmatrix}, \\ \kappa_{11} &= -\frac{t_{1r}}{t_r}, \quad \kappa_{12} = \left(-\mathfrak{K} n t_{1r} + N_z \left(\frac{t_r^2 + t_{1r}^2}{2t_r t_{1r}} - N_r^2 \right) \frac{\partial n}{\partial z} + N_r N_z \frac{\partial n}{\partial r} \right) \frac{2}{t_N}, \\ \kappa_{21} &= 0, \quad \kappa_{22} = -\frac{t_r}{t_{1r}}, \end{aligned} \quad (3)$$

where

$$\vec{t}_1 = \vec{t} - 2\vec{N}N_t = (t_{1r}, t_{1z}) \quad (4)$$

is the direction of a ray after reflection of it from the bottom, $N_t = \langle \vec{t}, \vec{N} \rangle$.

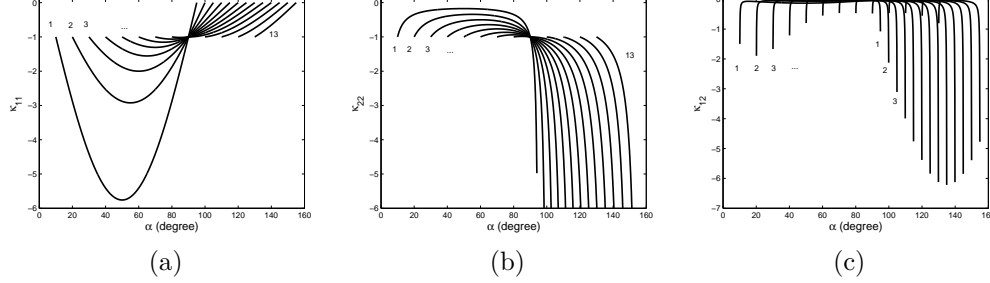


Figure 1: Coefficients κ_{11} (a), κ_{22} (b) and κ_{12} (c) for fixed ray gracing angles ϑ versus angle α ; the curve number k corresponds to the angle $\vartheta = -90^\circ + 10^\circ k$; the curve at the point of reflection $\mathfrak{K} = 0.02$, derivatives $n'_z = 0.01$, $n'_r = 0$.

In particular case on the free surface $z = 0$ and also on the horizontal bottom $z = \text{const}$ we have

$$\kappa = \left\| \begin{array}{cc} -1 & 2\frac{n'_z}{t_z} \\ 0 & -1 \end{array} \right\|$$

As $\kappa_{12} \neq 0$ when $n'_z \neq 0$ then horizontal planes scatter rays in inhomogeneous media.

In homogeneous waveguide with $n = \text{const}$ we obtain from (3)

$$\kappa = \left\| \begin{array}{cc} -\frac{t_{1r}}{t_r} & -\mathfrak{K}nt_{1r}t_r\frac{2}{N_t} \\ 0 & -\frac{t_r}{t_{1r}} \end{array} \right\|$$

To prove formula (3) let consider a narrow beam of rays, bounded by the rays with similar pulses p and \tilde{p} . Let the incident points of the rays be (r, z) and $(\tilde{r} = r + \delta r, \tilde{z} = z + \delta z)$, direction vectors \vec{t} and $\vec{\tilde{t}}$, normals \vec{N} and $\vec{\tilde{N}}$, respectively.

From geometrical reason (Fig. 2b) we receive

$$\begin{aligned} \delta r &\simeq \frac{t_r N_z}{N_t} \Delta z, \\ \delta z &\simeq -\frac{t_r N_r}{N_t} \Delta z. \end{aligned}$$

First, we find the laws of reflection of the beam, neglecting the change of the normal vector at the site of incidence on the surface, that is, assum-

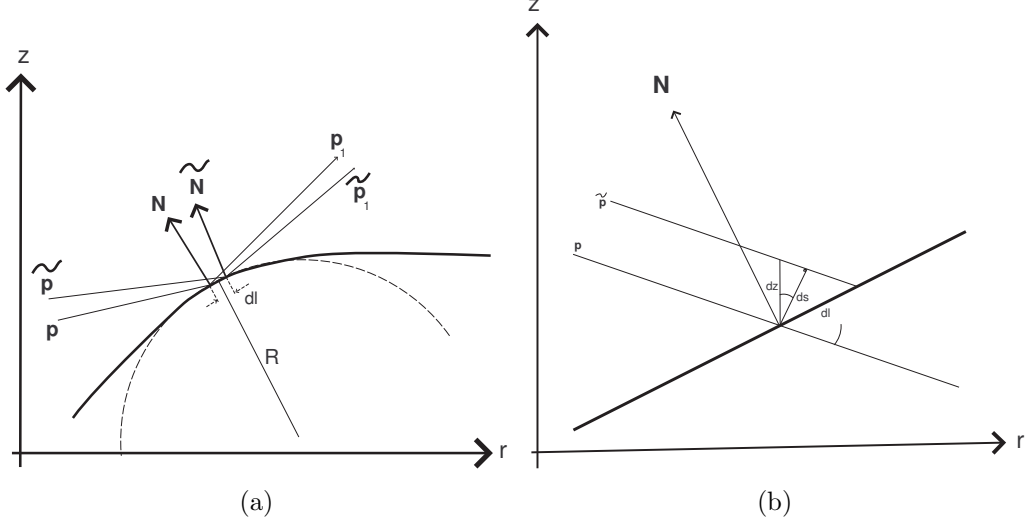


Figure 2: Scheme reflection of a narrow beam of rays from the curved surface with normal vector \vec{N} and the radius of curvature R .

ing a flat surface. For the increment of $z = z(r) - z(r)$ we have in this approximation

$$\begin{aligned}
z_1(r + \delta r) &= z_1(r) + \frac{d}{dr}z_1\delta r = z(r) + \frac{t_{1z}}{t_{1r}}\delta r, \\
\tilde{z}_1(r + \delta r) &= \tilde{z}(r) + \frac{d}{dr}\tilde{z}\delta r = \tilde{z} + \frac{\tilde{t}_z}{\tilde{t}_r}\delta r, \\
\Delta z_1 \equiv z_1(r + \delta r) - \tilde{z}_1(r + \delta r) &= \Delta z + \left(\frac{t_{1z}}{t_{1r}} - \frac{\tilde{t}_z}{\tilde{t}_r} \right) \delta r \simeq \\
&\simeq \left(1 + \frac{t_r N_z}{N_t} \left(\frac{t_{1z}}{t_{1r}} - \frac{t_z}{t_r} \right) \right) \Delta z = -\frac{t_r}{t_{1r}} \Delta z. \tag{5}
\end{aligned}$$

For $\Delta p = p(r) - \tilde{p}(r)$ we have analogously:

$$\begin{aligned}
p_1(r + \delta r) &= p_1(r) + \frac{d}{dr}p_1\delta r = \\
&= p(r) - 2N_z \left(N_r \sqrt{n^2 - p^2(r)} + p(r) N_z \right) + \frac{n'_z}{t_{1r}}\delta r, \\
\tilde{p}_1(r + \delta r) &= \tilde{p}(r + \delta r) - 2N_z \left(N_r \sqrt{n^2(r + \delta r, z + \delta z) - \tilde{p}^2(r + \delta r)} + \tilde{p}(r + \delta r) N_z \right), \\
\tilde{p}(r + \delta r) &= \tilde{p}(r) + \frac{d}{dr}\tilde{p}\delta r = \tilde{p}(r) + \frac{n'_z}{t_r}\delta r, \\
\Delta p_1 &\equiv p_1(r + \delta r) - \tilde{p}_1(r + \delta r) = \\
&\simeq \Delta p - 2N_z N_r \left(\sqrt{n^2 - p^2(r)} - \sqrt{n^2(r + \delta r, z + \delta z) - \tilde{p}^2(r + \delta r)} \right) - \\
&\quad - 2N_z (p(r) - \tilde{p}(r + \delta r)) N_z + \left(\frac{d}{dr}p_1 - \frac{d}{dr}\tilde{p} \right) \delta r = \\
&= \Delta p \left(1 - 2N_z^2 + 2N_z N_r \frac{t_z}{t_r} \right) + \left(\frac{d}{dr}p_1 - \frac{d}{dr}\tilde{p} \left(1 - 2N_z^2 + 2N_z N_r \frac{t_z}{t_r} \right) \right) \delta r + \\
&\quad + 2N_z N_r \frac{n}{\sqrt{n^2 - p^2(r)}} (n'_r \delta r + n'_z \delta z) = \\
&= -\frac{t_{1r}}{t_r} \Delta p + \left[\left(\frac{t_r}{t_{1r}} + \frac{t_{1r}}{t_r} - 2N_r^2 \right) n'_z + 2N_r N_z n'_r \right] \frac{N_z}{N_t} \Delta z. \tag{6}
\end{aligned}$$

Here we have used the identity

$$\begin{aligned}
1 - 2N_z^2 + 2N_z N_r \frac{t_z}{t_r} &\equiv -\frac{t_{1r}}{t_r}, \\
1 + \frac{t_r N_z}{N_t} \left(\frac{t_{1z}}{t_{1r}} - \frac{t_z}{t_r} \right) &\equiv -\frac{t_r}{t_{1r}}.
\end{aligned}$$

Now take into account the effect of the curvature of the surface at the point of reflection, neglecting variations in \vec{t} and n . Let the radius of curvature of the bottom surface is equal to R , and she curvature $\mathfrak{K} = 1/R$.

We have

$$\begin{aligned}
dN_z &= d \sin \alpha = N_r d\alpha, \\
dN_r &= d \cos \alpha = -N_z d\alpha.
\end{aligned}$$

Differentiating (4), we obtain

$$\begin{aligned}
-dt_{1z}/2 &= dN_z \langle \vec{t}, \vec{N} \rangle + N_z \langle \vec{t}, d\vec{N} \rangle = \\
&= dN_z \left(\langle \vec{t}, \vec{N} \rangle + t_z N_z \right) + N_z t_r dN_r = \\
&= \left(N_r (2t_z N_z + t_r N_r) - N_z^2 t_r \right) d\alpha = -t_{1r} d\alpha.
\end{aligned}$$

Then (see Fig. 2b)

$$d\alpha \simeq -\mathfrak{K} dl = -\mathfrak{K} \frac{\delta r}{N_z} = -\mathfrak{K} \frac{t_r}{N_t} \Delta z,$$

so when multiplied by n we get

$$\Delta p_1 = 2nt_{1r} d\alpha \simeq -2\mathfrak{K} n \frac{t_{1r} t_r}{N_t} \Delta z. \quad (7)$$

After summation of (6), (7) and passing to the limit as $\Delta p_0 \rightarrow 0$ we obtain (3).

I wish to thank A.L. Virovlyansky for useful discussions.

References

- [1] A.L. Virovlyansky. Ray theory of long-range sound propagation in the ocean (in Russian). Nizhny Novgorod: IAP RAS, 2006.