

Simulation of incompressible two-phase flow in porous media with large timesteps

Daniel A. Cogswell*, Michael L. Szulczewski

Aramco Services Company: Aramco Research Center-Boston, 400 Technology Square, Cambridge, Massachusetts 02139, USA

Abstract

Multiphase flow in porous media occurs in several disciplines including petroleum reservoir engineering, petroleum systems' analysis, and CO₂ sequestration. While simulations often use a fully implicit discretization to increase the time step size, restrictions on the time step often exist due to non-convergence of the nonlinear solver. Here this problem is addressed for the Buckley-Leverett equations, which model incompressible, immiscible, two-phase flow with no capillary potential. The equations are recast as a gradient flow using the phase-field method, and a convex energy splitting scheme is applied to enable large timesteps, even for high degrees of heterogeneity in permeability and viscosity. By using the phase-field formulation as a homotopy map, the underlying hyperbolic flow equations can be solved with large timesteps. For a heterogeneous test problem, the new homotopy method allows the timestep to be increased by more than six orders of magnitude relative to the unmodified equations while maintaining convergence.

Keywords: Reservoir simulation, two-phase flow, phase-field method, homotopy, multigrid

1. Introduction

Timestep restrictions during simulation of fluid flow through extremely heterogeneous porous media remain a significant limiting factor in petroleum reservoir models [1]. The equations of flow in porous media [2, 3, 4] suffer from severe timestep restrictions as the permeability and viscosity contrast become increasingly heterogeneous [5, 6, 7], even when solved with a fully implicit discretization. Often there is no choice but to significantly reduce the timestep in order to regain convergence. Improved numerical methods have helped [8, 5, 6, 7], but the problem persists because it originates from the shape of the fractional flow function which leads to divergence of the iterative method used to solve the discrete nonlinear equations.

Either the numerical method or the equations themselves must be modified to achieve convergence for large timesteps. Previous efforts have focused on the numerical method with the use of line-search [8], trust-region [5, 7], or continuation methods [6]. Here we focus on regularizing the equations themselves with the addition of an energy constraint. Gradient flows, where evolution equations are derived from energy functionals, offer an attractive alternative formulation for the flow equations. In particular, the phase-field method has emerged as an effective way to solve free boundary problems without explicitly tracking interfaces, and models of fluid flow have been rigorously derived from thermodynamic principles [9, 10, 11, 12]. Phase-field methods offer numerical advantages as well, since they guarantee monotonically decreasing energy of the solution. For example, Feng and Wise [13, 14] recently showed that a Cahn-Hilliard-Darcy system has an unconditionally energy-stable and unconditionally uniquely solvable discretization. The combination of these two properties implies that equations solved using Newton's method will always converge.

*Corresponding author

Email address: cogswell@alum.mit.edu (Daniel A. Cogswell)

The phase-field method has had limited application to flow in porous media, however, and convex energy splitting has not yet been applied to address timestep restrictions. Cueto-Felgueroso and Juanes developed a phase-field model of unsaturated flow, and successfully simulated gravity fingering in soil [15, 16] and bubble motion in a capillary tube [17, 18]. Chen and Yan [19] applied a phase-field model of fluid displacement to viscous fingering in a heterogeneous permeability field, but did not employ fractional flow functions for unsaturated flow.

In this paper, the phase-field method is extended to multiphase flow in porous media. For simplicity, we consider two-phase flow with incompressible, immiscible fluids and no capillary potential, relative permeability hysteresis, or gravitational effects. The equations that model this flow are often referred to as the Buckley-Leverett equations [2, 4]. Using the phase-field method, this system is augmented to include a macroscopic surface tension that is analogous to an artificial viscosity [20], and then employ a semi-implicit temporal discretization based on a convex splitting of the free energy. In a related system—two-phase flow in a Hele-Shaw cell—this discretization leads to a system of equations that has been proven to be unconditionally and uniquely solvable [13, 14]. We do not prove unconditional or unique solvability for the modified Buckley-Leverett system, but demonstrate that the method enables arbitrarily large time steps on a test problem with permeability heterogeneity and different fluid viscosities. Homotopy [21, 22] is used to eliminate the physical effects of macroscopic surface tension on the solution to the original equations; surface tension is progressively decreased after each iteration of the nonlinear solver until the surface tension terms are negligibly small or zero. With this approach it is possible to solve the unmodified set of equations using timesteps several orders of magnitude larger.

2. Equations

The traditional equations for incompressible, immiscible two-phase flow in porous media with no capillary potential¹ or gravitational effects are [3]:

$$\phi \frac{\partial S_i}{\partial t} + \nabla \cdot (\mathcal{F}_i \vec{v}_t) = q_i \quad (1a)$$

$$\nabla \cdot \vec{v}_t = q_t \quad (1b)$$

$$\vec{v}_i = -k \lambda_i \vec{\nabla} p \quad (1c)$$

The first equation is the saturation evolution equation, the second is a continuity equation, and the third is Darcy’s Law for flow in a porous medium. The porosity is ϕ (assumed here to be constant), S_i is the saturation of phase i , p is pressure, \mathcal{F}_i is the fraction of the flowing stream comprised of phase i , $\vec{v}_t = \vec{v}_o + \vec{v}_w$ is the total velocity, k is the permeability tensor of the porous material, and $\lambda_i = \frac{k_{ri}}{\eta_i}$ is the transmissibility of phase i , with relative permeability k_{ri} and viscosity η_i . The source term $q_i = \sum_j q_{ij} \delta(\vec{x} - \vec{x}_j)$ is the sum of injection/production rates of phase i over all wells j , where $\delta(\vec{x} - \vec{x}_j)$ is a Dirac delta function that indicates the location of well j . When the two phases are oil and water, $q_t = q_w + q_o$ is the total injection/production of fluid across all wells, which is the sum of water and oil injection/production.

The fractional flow of a phase is the ratio of its transmissibility to the total transmissibility of all phases, which for a two-phase system of oil and water, is $\mathcal{F}_w = \frac{\lambda_w}{\lambda_w + \lambda_o}$. An example of such a function and its corresponding relative permeability functions are shown in Fig. 1 in the absence of gravity. The fractional flow function can be generally characterized as a sigmoidal curve defined between two saturations that place a bound on the range of saturations where flow occurs. In practice the relative permeability functions can often be fit with a power law function [4] (pg. 146). If the slope of the fractional flow function approaches zero, fundamental difficulties are encountered with the convergence of Newton-based methods, which will now be discussed.

¹Here we refer to capillary potential as a pressure difference between phases that causes flow, which is separate from the Laplace pressure due to the curvature of an interface between fluids.

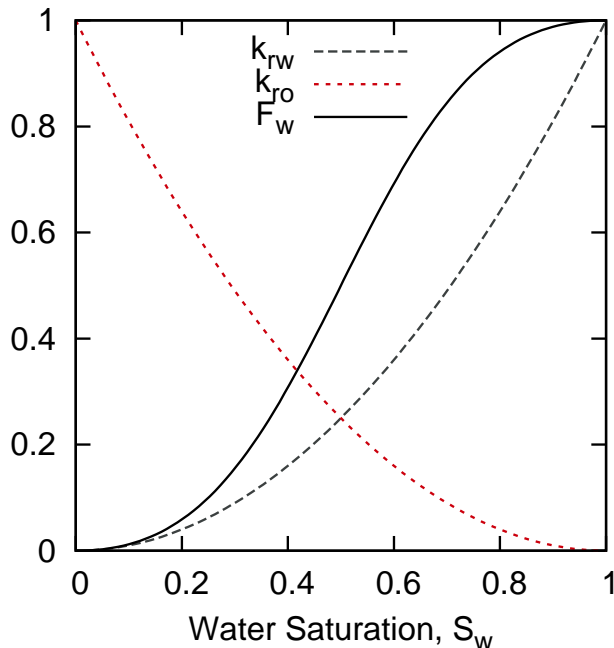


Figure 1: Example relative permeabilities of water and oil, $k_{rw} = S_w^2$ and $k_{ro} = (1 - S_w)^2$, and the corresponding fractional flow function for water in a porous material for $\eta_w = \eta_o = 1$.

2.1. Convergence Analysis

Newton's method is frequently used to solve the Buckley-Leverett equations (Eq.1). While an analysis of the method's convergence should address the discretized nonlinear equations, here only the fractional flow function is analyzed. This choice is made for simplicity, but is supported by work suggesting that the nonlinearity of the discretized equations is dominated by the nonlinearity of the fractional flow function [5, 7]. With this in mind, it is posited that an analysis of the fractional flow function alone may yield insight into the convergence of the discrete nonlinear equations. For example, in Section 3 it is shown that this analysis informs the choice of functions for convex splitting.

The difficulty with Newton's method and fractional flow functions can be appreciated by applying the classical convergence analysis of Kantorovich [23], from which it is straightforward to show that Newton's method is not guaranteed to converge from an arbitrary guess for many choices of the fractional flow function. Kantorovich's theorem (specifically, the version based on the assumptions of Mysovskikh [23], Theorem 5, pg. 539) states that for a real function $f(x)$ and an initial guess x_0 , Newton's method is guaranteed to converge quadratically to a root when $f'(x)$ is invertible and the following condition is obeyed:

$$\frac{|f(x_0)|}{|f'(x_0)|^2} K \leq 2 \quad (2)$$

where $K = \sup |f''(x)|$ is the Lipschitz coefficient that places a bound on the second derivative over the domain of interest [24]. Kantorovich's analysis also applies to vector-valued functions [23] (Theorem 1, pg. 545) if the absolute values in Eq. 2 are replaced with the appropriate vector or matrix norms, $f'(x_0)$ is the Jacobian, and K is the square root of the largest singular value of the Hessian of $f(x_0)$. By examining Eq. 2 it can be reasoned that initial guesses that are either close to the true solution $f(x^*) = 0$ or that have a large slope $f'(x_0)$ are likely to converge, while starting points of zero slope where $f'(x_0) = 0$ will not converge. Convergence from other starting points will depend on the shape of the function, as is illustrated in Fig. 2 for finding the root of $\mathcal{F}_w(x) - .5$ with Newton's method.

Kantorovich's analysis provides motivation for restarting a diverging initial guess from an inflection point where $f''(x_0) = 0$, as has been suggested in other work [5, 7]. Due to the generally sigmoidal shape

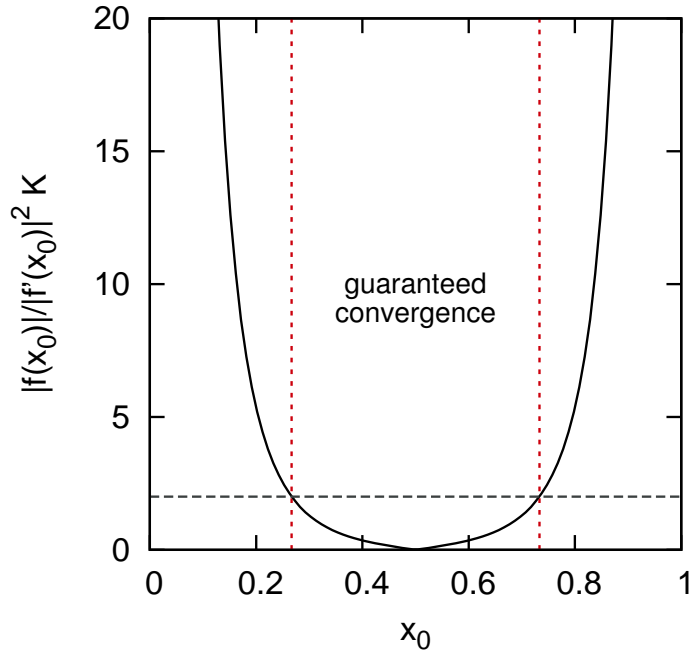


Figure 2: The Kantorovich theorem (Eq. 2) for convergence to a root of $F_w(x) - .5$ from an initial guess x_0 , where F_w is the fractional flow curve in Fig. 1.

of fractional flow functions, the inflection point is likely to have a large slope. The condition in Eq. 2 for quadratic convergence is more likely to be met when $f'(x_0)$ is large, but convergence is not guaranteed. However, a convexification of the underlying equations can ensure that starting points which are far from a solution will not become stuck at points of vanishing slope. This can be accomplished with the addition of an energy functional and the application of variational methods, which ensure that the solution always evolves toward its minimum energy.

2.2. Macroscopic surface tension

The two-phase flow equations will now be recast as a phase-field model with the introduction of surface tension at the macroscopic scale of Darcy flow. Fig. 3 illustrates the difference between the Darcy regime, where the porous material is treated as homogeneous, and the microscopic regime, where surface tension and the heterogeneity of the porous material play microscopic roles. In the Darcy regime, macroscopic surface tension is implemented here with a gradient energy, following the phase-field method. As we will show, this macroscopic surface tension stabilizes the two-phase flow equations in an analogous way to artificial viscosity, which is often added to fluid dynamics simulations for numerical reasons. Although macroscopic surface tension may have a physical interpretation in some systems, notably gravity fingering in soils where it was incorporated via a gradient energy [15, 16], here macroscopic surface tension is treated as an artificial quantity added to achieve numerical convergence for large timesteps.

Following previous phase-field models of binary fluids [10, 11, 12], a free energy functional for two-phase flow may be defined as:

$$F = \int \frac{1}{2} \rho |\vec{v}|^2 + H f(\xi) + \frac{1}{2} \kappa |\vec{\nabla} \xi|^2 dV \quad (3)$$

where ξ is an order parameter that varies between 0 and 1 and indicates which phase is present. The first term is the kinetic energy of the fluid, the second is chemical free energy, and the third is surface energy. $f(\xi) = \xi^2(1 - \xi)^2$ is a double-well function, and the gradient energy κ and barrier height H are related to the surface tension $\gamma = \sqrt{\frac{\kappa H}{18}}$, and the width of the diffuse interface $W = \sqrt{\frac{8\kappa}{H}}$ [9]. This is by no means the

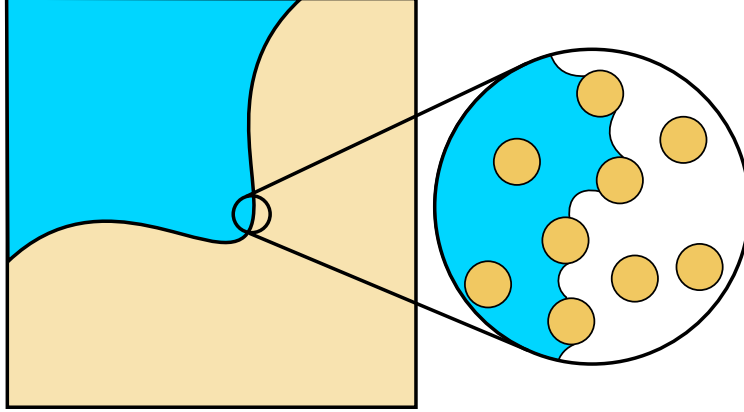


Figure 3: Illustration of the difference between a microscopic interface in a porous material and a macroscopic interface at the Darcy scale.

only choice for the double-well function, although it has the advantage of being a simple polynomial with an analytic expression for γ and δ .

In the Darcy regime, viscous forces dominate over inertial forces and kinetic energy does not contribute to the energy functional [12]:

$$F = \int Hf(\xi) + \frac{1}{2}\kappa|\vec{\nabla}\xi|^2 dV \quad (4)$$

Assuming H and κ are constants, Eq. 4 may also be written in terms of γ and W as:

$$F = 3\gamma \int \frac{4}{W}f(\xi) + \frac{W}{4}|\vec{\nabla}\xi|^2 dV \quad (5)$$

which illustrates that the total free energy of the system scales with surface tension. This is an important observation, as γ is the parameter that will enable large timesteps with the use of a homotopy method, as discussed in Sec. 3.1.

In porous media, the order parameter is identified as the saturation $\xi = S_w$, and the advection-diffusion equation for incompressible flow becomes:

$$\phi \frac{\partial S_w}{\partial t} + \nabla \cdot (\mathcal{F}_w \vec{v}_t) = \nabla \cdot \left(\frac{k}{\bar{\eta}} \vec{\nabla} \hat{\mu}_w \right) + q_w \quad (6a)$$

$$\nabla \cdot \vec{v}_t = q_t \quad (6b)$$

$$\vec{v}_i = -k\lambda_i \left[\vec{\nabla} p + \kappa \nabla \cdot (\vec{\nabla} S_i \otimes \vec{\nabla} S_i) \right] \quad (6c)$$

where $\hat{\mu}_w = \frac{\delta F}{\delta S_w} = Hf'(S_w) - \kappa \nabla^2 S_w$ is the variational derivative of Eq. 4, and $\bar{\eta} = \frac{2\eta_w\eta_o}{\eta_w + \eta_o}$ is the harmonic average of the viscosities of the two fluids. This set of equations models a Cahn-Hilliard-Darcy system (CHD) with nonlinear relative permeability functions incorporated. The new terms that have been added are proportional to the surface tension, and the magnitude of this quantity controls the degree to which the CHD system differs from the porous media equations (Eq. 1). The new saturation equation (Eq. 6a) is a natural extension of the Buckley-Leverett saturation equation [2, 3] with a macroscopic surface tension incorporated on the right hand side of the equation according to the phase-field method. The Darcy velocity in Eq. 6 now includes a capillary stress tensor, $\kappa(\vec{\nabla} S_i \otimes \vec{\nabla} S_i)$, which is necessary to enforce zero traction at the interface [10, 11, 25]. The CHD formulation reduces to the phase-field model of Hele-Shaw cells [12] for the particular choice of $k_{rw} = S_w$ and $k_{ro} = 1 - S_w$, in which case the gradient energy rigorously depicts the interface between the two fluids.

3. Numerical methods

Making an appropriate convex energy splitting (i.e. a semi-implicit discretization) leads to unconditionally energy-stable and unconditionally solvable discretization of gradient flows [26, 27, 28]. Each term in the energy functional is assigned to either implicit or explicit treatment based on the sign of the eigenvalues of its Hessian matrix, an approach that has previously been applied to the Cahn-Hilliard-Hele-Shaw system [13, 14]. Building upon this approach, the splitting technique is applied to the CHD system with nonlinear relative permeability functions, represented by Eq. 6. The double-well function is split into $f(S_w) = f_c(S_w) + f_e(S_w)$ with a contractive part $f'_c(S_w) > 0$ and an expansive part $f'_e(S_w) < 0$.

There are many possible ways to choose the convex splitting, and whether there is an optimal choice remains an open question. An obvious first choice of functions is $f_c(S_w) = S_w^2 + S_w^4$ and $f_e(S_w) = -2S_w^3$, and this choice was found to work in practice. However, a better choice can be made by considering the Kantorovich convergence criterion, Eq. 2, which guarantees quadratic convergence. It is desirable that the phase-field term $\nabla \cdot \left(\frac{k}{\eta} \vec{\nabla} \hat{\mu}_w \right)$ have a Lipschitz coefficient of zero, so it does not contribute to the Lipschitz coefficient of the CHD system and Eq. 2 is more likely to be met. This can be achieved by choosing $f_c(S_w)$ such that the Hessian of $f'_c(S_w)$ is zero (i.e. $f''_c(S_w) = 0$). The choice of $f_c(S_w) = S_w^2$ and $f_e(S_w) = -2S_w^3 + S_w^4$ obeys this criterion and was observed to converge more efficiently, and as a result was the splitting choice used in this work.

The form of the double-well function itself may also be altered based on physical considerations. For example, if flow does not occur over the entire range of saturations it may be necessary to move the locations of the energy wells. Convex splitting can still be applied to a function of the form $f(S_w) = (S_w - S_{wc})^2(1 - S_w - S_{or})^2$, where the position of the wells are specified by S_{wc} , the connate water saturation, and S_{or} , the residual oil saturation.

The following discretization is then obtained when heterogeneous permeability, fractional flow functions, viscosity contrast, and source terms are included:

$$\frac{S_w^{n+1} - S_w^n}{\Delta t} + \nabla \cdot (\mathcal{F}_w \vec{v}_t)^{n+1} = \nabla \cdot \left(\frac{k}{\eta} \vec{\nabla} \hat{\mu}_w^{n+1} \right) + q_w^{n+1} \quad (7a)$$

$$\hat{\mu}_w^{n+1} - H f'_c(S_w^{n+1}) + \kappa \nabla^2 S_w^{n+1} = H f'_e(S_w^n) \quad (7b)$$

$$\nabla \cdot \vec{v}_t^{n+1} = q_t^{n+1} \quad (7c)$$

The first equation is the discretized saturation equation, the second is an update equation for the diffusion potential $\hat{\mu}$, and the third is a continuity equation. Since the phase-field term in Eq. 6a has a $\nabla^4 S$ term, it is numerically beneficial to break the equation into two second-order equations, Eq. 7a and 7b, which can then be treated with standard finite volume methods. Whereas the CHD system (Eq. 6) has two unknowns, S_w and p , the discretized system (Eq. 7) has three unknowns, S_w , $\hat{\mu}_w$, and p .

The Darcy velocity (Eq. 6c) can be modified for numerical convenience by converting it to the potential form [25, 29]:

$$\vec{v}_i = -k \lambda_i \left[\vec{\nabla} \bar{p} - \hat{\mu}_w \vec{\nabla} S_w \right] \quad (8)$$

where $-\hat{\mu}_w \vec{\nabla} S_w$ is a continuum forcing term, and the pressure \bar{p} in Eq. 8 has been defined as $\bar{p} = p + H f(S_w) + \frac{1}{2} \kappa |\vec{\nabla} S_w|^2$. This form is mathematically equivalent to Eq. 6c but more numerically suitable since the inversion of an outer product of gradients is avoided.

Aside from the semi-implicit treatment in Eq. 7b which resulted from the convex energy splitting procedure, all of the remaining terms were treated fully implicitly. Equation 7 was discretized in space using the finite volume method [30]. Upwind values of the transmissibilities, λ_i , were chosen based on the sign of $\vec{\nabla} \bar{p} + \hat{\mu}_w \vec{\nabla} S_w$ at each cell face, and the permeability at each cell face was calculated as the harmonic mean of the permeabilities in adjacent cells.

Multigrid methods, previously demonstrated to be an efficient way to solve two-phase flow in porous media with discontinuous permeability [31, 32], were used to solve Eq. 7 (supplemented by Eq. 8) for the variables S , $\hat{\mu}$, and \bar{p} . The Full Approximation Scheme (FAS) nonlinear multigrid method was used with a

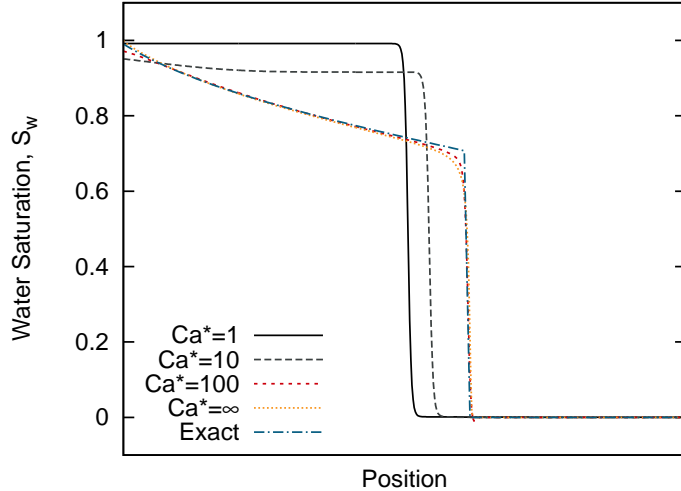


Figure 4: Comparison of CHD at different capillary numbers with the Buckley-Leverett solution, using the relative permeabilities $k_{rw} = S_w^2$, $k_{ro} = (1 - S_w)^2$ and $\eta_w = \eta_o$. All solutions were calculated with $\Delta t = 1$ (i.e. no homotopy), which is the largest stable timestep for $Ca^* = \infty$.

Red-Black Gauss-Seidel smoother [33, 34] and F(2,2) cycles, which were found to be the most efficient. The cell-centered restriction operator (i.e. averaging) was used along with bilinear interpolation [34].

3.1. Homotopy map

Although the phase-field formulation offers convergence for large timesteps, it comes at the price of solving a modified physical problem. It is possible, however, to use the phase-field formulation as a homotopy map [21, 22] so that the Buckley-Leverett problem can be solved directly with large timesteps. Using homotopy, the phase-field solution is continuously transformed into the underlying Buckley-Leverett solution as $\gamma \rightarrow 0$.

By progressively decreasing γ during the iterations to a solution at each timestep, it is possible to solve the unmodified Buckley-Leverett equations with large timesteps. After each multigrid cycle, γ is multiplied by a constant w , where $0 < w < 1$. Small values of w reach the solution to the unmodified equations in fewer iterations, but a too small w can cause a loss of convergence of the homotopy method. The progression of the guess after each multigrid cycle is illustrated in Fig. 6 for the 2D test problem discussed in section 4.2. Although the choice of γ and w will likely vary from problem to problem, $w = .5$ was effective for this test problem.

4. Results

4.1. Comparison to the Buckley-Leverett solution

A well-known model for the displacement of one fluid by another in porous sand was developed by Buckley and Leverett [2], who analyzed the fractional flow function (Fig. 1) and showed that it was possible to derive an analytic solution for the shock that developed. Comparison of the phase-field solution to this analytic solution provides one way of quantifying the influence of the macroscopic surface tension γ in the CHD model.

Fig. 4 compares the Buckley-Leverett solution to the CHD solution for different capillary numbers, with the macroscopic capillary number is defined as:

$$Ca^* = \frac{\eta |\vec{v}_t|}{\gamma} \quad (9)$$

| Variable | Description | Value |
|------------------|--------------------------------|--------------------|
| k_{rw} | relative permeability of water | S_w^2 |
| k_{ro} | relative permeability of oil | $(1 - S_w)^2$ |
| \tilde{q} | injection rate of water | .25 |
| $\tilde{\eta}_w$ | viscosity of water | 1 |
| $\tilde{\eta}_o$ | viscosity of oil | 100 |
| $\tilde{\gamma}$ | macroscopic surface tension | 2×10^{-3} |
| \tilde{W} | interfacial width | 6 |

Table 1: Nondimensional parameters (see Appendix A) for the 2D flow simulation in Fig. 5.

In the limit $Ca^* \rightarrow \infty$ (i.e. $\gamma \rightarrow 0$) the Buckley-Leverett equations (Eq. 1) are recovered. At large capillary numbers, viscous forces dominate and the CHD solution is very close to the analytic solution. As Ca^* decreases, surface tension begins to play a role. For $Ca^* \leq 10$, artificial surface tension strongly impact the solution, which exhibits a plateau at increasing larger water saturations at decreasingly smaller Ca^* . This trend was also observed in the simulations of Cueto-Felgueroso and Juanes [17, 18] in the context of bubble motion in a Hele-Shaw cell. For $Ca^* \geq 100$, however, surface tension has a small impact and the solution of the CHD equations agree with the Buckley-Leverett solution.

Although Fig.4 shows the Buckley-Leverett solution over a wide range of Ca^* for curiosity, only a small amount of surface tension is actually required to regain numerical convergence with the homotopy progression of Section 3.1. For instance, Δt in Fig. 4 can be increased by several orders of magnitude by starting the homotopy solution with a capillary number of $Ca^* = 100$, where surface tension has little effect. However, the benefit of homotopy becomes much more clear in the presence of heterogeneity and strong viscosity contrast, which we will now examine in 2D.

4.2. Porous flow in 2D

Porous flow through a highly heterogeneous permeability field in 2D provides a more realistic and rigorous comparison of the phase-field model and the classical model. A heterogeneous permeability field, shown in Fig. 5a, was generated using a modified exponential covariance function [35] with an autocovariance of $s = 5$ and a correlation length of 5 grid cells. Water was injected at the top left cell, and an oil/water mix was removed from the lower right cell. The results of the simulation are shown in Fig. 5c-g. Additional simulation parameters are listed in Table 1, where tilde notation indicates dimensionless variables. The nondimensionalization scheme can be found in Appendix A.

This problem, although conceptually simple, was designed to place a severe timestep restriction on the Buckley-Leverett equations given by Eq. 1. The maximum stable timestep is approximately $\Delta \tilde{t} = 1$, and thousands of timesteps are required to simulate water breakthrough. Choosing larger time steps results in a solution that does not converge. In contrast, the CHD model discretized with a convex energy splitting (Eq. 7) converges for large $\Delta \tilde{t}$ when $\tilde{\gamma}$ is sufficiently large, and it was found that the timestep can be increased to $\Delta \tilde{t} = 10^8$ without a loss of convergence. With such a large $\Delta \tilde{t}$ however, the reservoir goes from full to completely flooded in just one timestep, and important flow phenomena are completely over-stepped.

Figure 5b shows the progression of the homotopy method during the first nine iterations of the first timestep of the 2D test problem with $\Delta \tilde{t} = 10^6$. The progression illustrates how the homotopy method helps to find a guess that eventually converges to the solution. The initial iteration goes from full to flooded everywhere, and then as $\tilde{\gamma}$ is decreased over successive iterations the detailed structure of the flow emerge.

Figure 5 shows that, for practical purposes, the timestep may be increased by three to four orders of magnitude using the homotopy method without significantly affecting the calculated water cut at the producer, $\frac{q_w}{q_t}$, a main quantity of interest in reservoir simulation. Further increases in $\Delta \tilde{t}$, while stable, do not provide sufficient temporal resolution to capture water breakthrough. Truncation error introduced by the first-order time integration scheme may also be a concern, but could be addressed with an adaptive timestepping scheme. Removing the timestep restriction means that $\Delta \tilde{t}$ can be chosen as desired to balance the running time of the simulation and the timestep truncation error incurred.

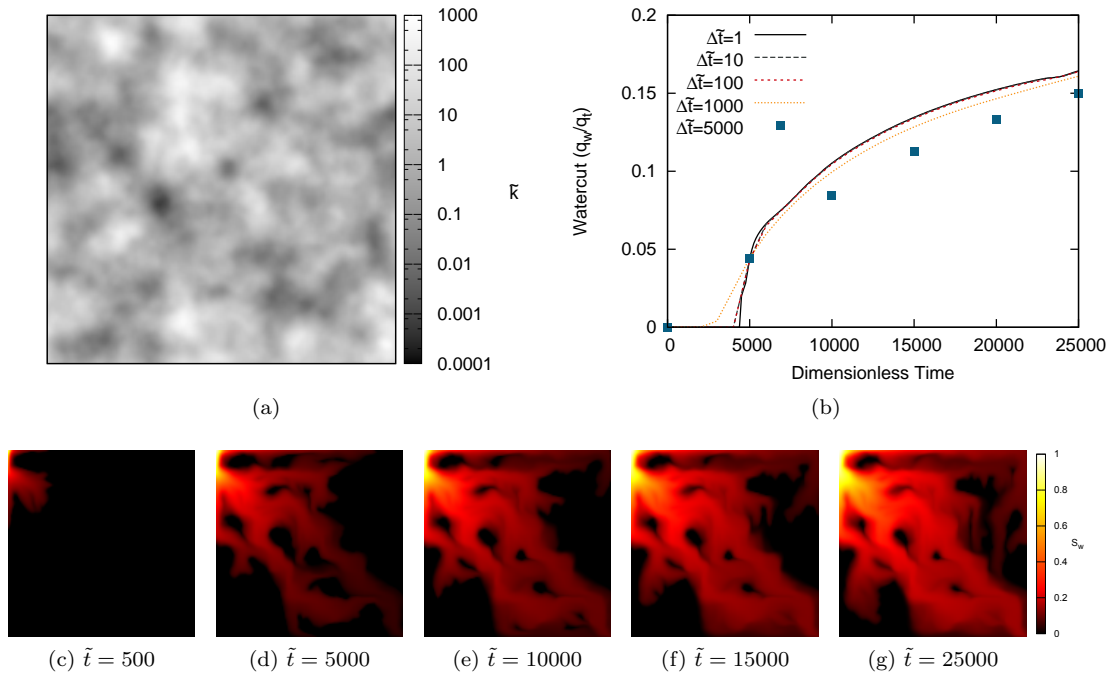


Figure 5: Simulation of two-phase flow in 2D using the CHD model as a homotopy map. The largest stable timestep for the traditional equations is $\Delta\tilde{t} = 1$. The homotopy approach allows the timestep to be increased by more than three orders of magnitude without significantly affecting the calculated watercut. (a) Plot of the permeability field, \bar{k} . (b) Water saturation at the producing well as a function of time, calculated for several different $\Delta\tilde{t}$. (c)-(g) Snapshots of the simulation.

Finally, the effect of homotopy on the computational running time of the simulation is of practical importance. Although the homotopy method permits much larger timesteps, more iterations are required for convergence. The running time of the solver was measured for different $\Delta\tilde{t}$, using relative error, $\|d\|/\|d_0\| < 10^{-6}$, as a stopping criterion for the multigrid iterations, where $\|d_0\|$ is the L_1 norm of the initial defect. Figure 7 compares the computational speedup to the relative increase in $\Delta\tilde{t}$, and shows a nearly linear speedup with Δt over six orders of magnitude.

5. Conclusion

Despite decades of sophisticated improvements to non-linear solvers, timestep restrictions during the simulation of porous flow remains a limiting factor in the simulation of large oil reservoirs. In this work it was shown that the restriction arises from limitations with Newton's method, which is not always guaranteed to converge, and that a viable solution is to convexify the flow equations, which obviates the need for specialized solvers. Two-phase incompressible flow without capillary potential was solved for large timesteps by introducing a macroscopic surface tension and employing a convex energy splitting scheme, following the phase-field approach. The numerical advantages of the modified model were investigated, and it was shown to be robust to high degrees of heterogeneity in permeability and viscosity contrast. Using a homotopy approach where the phase-field solution is continuously transformed into the underlying fractional flow solution by progressively decreasing the surface tension, the maximum stable timestep for a 2D simulation of fluid displacement could be increased by more than four orders of magnitude. We expect that this homotopy scheme will be valuable for the petroleum migration stage of basin simulation, and because

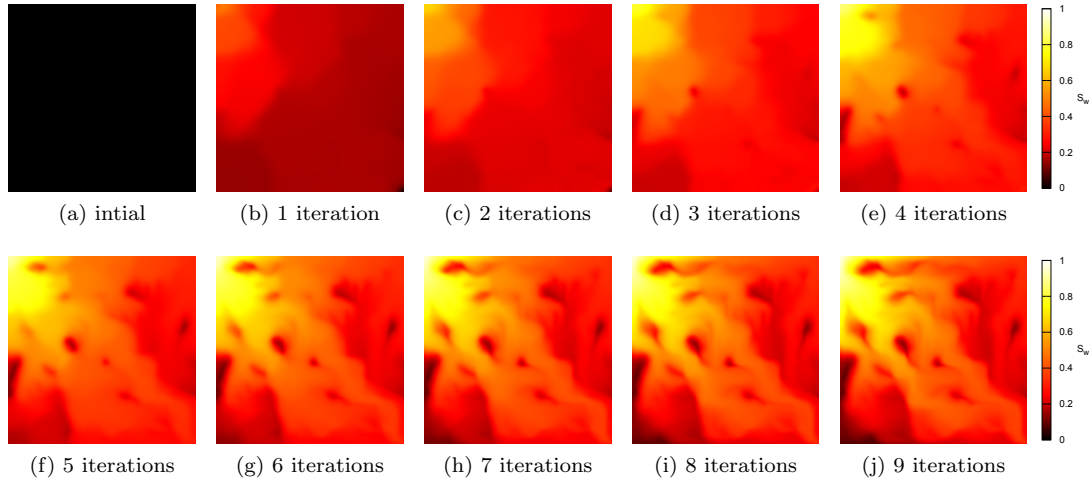


Figure 6: Progression of the homotopy solution during one timestep with a very large $\Delta\tilde{t} = 10^6$. Each frame shows the solution after successive multigrid iterations where γ is decreased by a factor $w = .25$ after each iteration.

phase-field models can be derived for multiphase flow, anticipate that the method will be extendable to more complicated reservoir models such as three-phase flow, dual-permeability dual-porosity, and black oil.

Acknowledgments

We would like to thank S.M. Wise for kindly answering questions about his unconditionally energy-stable discretization of the Cahn-Hilliard-Darcy system, and X. Liang for valuable discussion about the convergence of Newton’s method. We thank A.H. Dogru of Saudi Aramco for his support and encouragement. This work was supported by Saudi Aramco’s EXPEC Advanced Research Center.

Appendix A. Nondimensionalization

The evolution equations are nondimensionalized by defining a porosity ϕ , a time scale τ , a length scale L , and a characteristic pressure p_0 , which has units of energy density since one Pa is a J/m^3 . The nondimensional parameters are show in the following table:

| Variable | Symbol | SI Units | Nondimensionalization |
|-----------------|-------------------|--------------|--|
| time | t | s | $\tilde{t} = \frac{t}{\phi\tau}$ |
| pressure | p | Pa | $\tilde{p} = \frac{p}{p_0}$ |
| permeability | k | m^2 | $\tilde{k} = \frac{k}{L^2}$ |
| viscosity | η | $Pa \cdot s$ | $\tilde{\eta} = \frac{\eta}{p_0\tau}$ |
| gradient energy | κ | J/m | $\tilde{\kappa} = \frac{\kappa}{p_0L^2}$ |
| barrier height | H | J/m^3 | $\tilde{H} = \frac{H}{p_0}$ |
| source | q_{ij} | m^3/s | $\tilde{q}_{ij} = \frac{\phi\tau}{L^3} q_{ij}$ |
| Dirac delta | $\delta(\vec{x})$ | m^{-3} | $\tilde{\delta}(\vec{x}) = L^3\delta(\vec{x})$ |

References

References

- [1] L. S. K. Fung, A. H. Dogru, Parallel unstructured-solver methods for simulation of complex giant reservoirs, SPE J. 13 (4) (2008) 440–446. doi:10.2118/106237-PA.

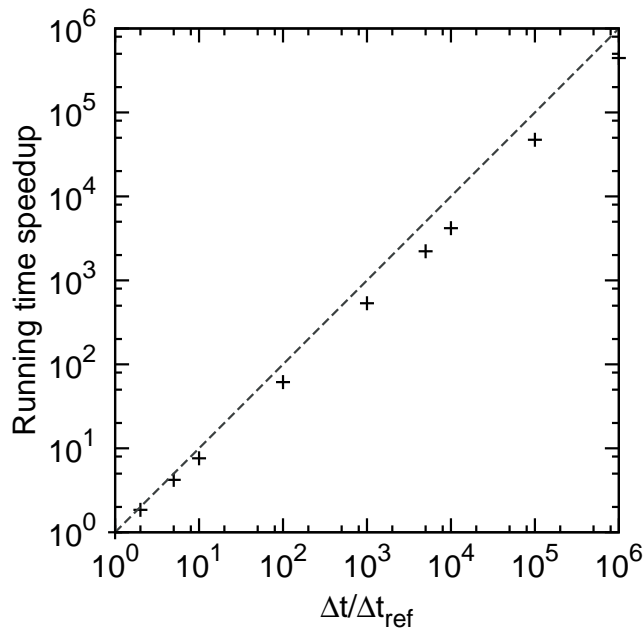


Figure 7: Computational speedup with increasing Δt for the test problem in Figure 5. The dashed reference line indicates linear scaling of speedup with the timestep increase.

- [2] S. E. Buckley, M. C. Leverett, Mechanism of fluid displacement in sands, *T. Am. I. Min. Met. Eng.* 146 (1942) 107–116. doi:10.2118/942107-G.
- [3] D. W. Peaceman, *Fundamentals of Numerical Reservoir Simulation*, Developments in Petroleum Science: 6, Elsevier Scientific Pub. Co., 1977.
- [4] G. F. Pinder, W. G. Gray, *Essentials of Multiphase Flow in Porous Media*, John Wiley & Sons, 2008.
- [5] P. Jenny, H. A. Tchelepi, S. H. Lee, Unconditionally convergent nonlinear solver for hyperbolic conservation laws with s-shaped flux functions, *J. Comput. Phys.* 228 (20) (2009) 7497–7512. doi:10.1016/j.jcp.2009.06.032.
- [6] R. M. Younis, H. A. Tchelepi, K. Aziz, Adaptively localized continuation-Newton method nonlinear solvers that converge all the time, *Soc. Petrol. Eng. J.* 15 (2) (2010) 526–544. doi:10.2118/119147-PA.
- [7] B. Li, H. A. Tchelepi, Nonlinear analysis of multiphase transport in porous media in the presence of viscous, buoyancy, and capillary forces, *J. Comput. Phys.* 297 (2015) 104–131. doi:10.1016/j.jcp.2015.04.057.
- [8] C. N. Dawson, H. Klfe, M. F. Wheeler, C. S. Woodward, A parallel, implicit, cell-centered method for two-phase flow with a preconditioned Newton-Krylov solver, *Comput. Geosci.* 1 (3) (1997) 215–249. doi:10.1023/A:1011521413158.
- [9] J. W. Cahn, J. E. Hilliard, Free energy of a nonuniform system. i. Interfacial free energy, *J. Chem. Phys.* 28 (2) (1958) 258–267. doi:10.1063/1.1744102.
- [10] J. Lowengrub, L. Truskinovsky, Quasi-incompressible Cahn-Hilliard fluids and topological transitions, *P. Roy. Soc. A-Math. Phys.* 454 (1978) (1998) 2617–2654. doi:10.1098/rspa.1998.0273.
- [11] D. M. Anderson, G. B. McFadden, A. A. Wheeler, Diffuse-interface methods in fluid mechanics, *Annu. Rev. Fluid Mech.* 30 (1998) 139–165. doi:10.1146/annurev.fluid.30.1.139.
- [12] H. G. Lee, J. S. Lowengrub, J. Goodman, Modeling pinchoff and reconnection in a Hele-Shaw cell. i. The models and their calibration, *Phys. Fluids* 14 (2) (2002) 492–513. doi:10.1063/1.1425843.
- [13] S. M. Wise, Unconditionally stable finite difference, nonlinear multigrid simulation of the Cahn-Hilliard-Hele-Shaw system of equations, *J. Sci. Comput.* 44 (1) (2010) 38–68. doi:10.1007/s10915-010-9363-4.
- [14] X. B. Feng, S. Wise, Analysis of a Darcy-Cahn-Hilliard diffuse interface model for the Hele-Shaw flow and its fully discrete finite element approximation, *Siam J. Numer. Anal.* 50 (3) (2012) 1320–1343. doi:10.1137/110827119.
- [15] L. Cueto-Felgueroso, R. Juanes, Nonlocal interface dynamics and pattern formation in gravity-driven unsaturated flow through porous media, *Phys. Rev. Lett.* 101 (2008) 244504. doi:10.1103/PhysRevLett.101.244504.
- [16] L. Cueto-Felgueroso, R. Juanes, A phase field model of unsaturated flow, *Water Resour. Res.* 45 (2009) W10409. doi:10.1029/2009wr007945.
- [17] L. Cueto-Felgueroso, R. Juanes, Macroscopic phase-field model of partial wetting: Bubbles in a capillary tube, *Phys. Rev. Lett.* 108 (14) (2012) 144502. doi:10.1103/PhysRevLett.108.144502.
- [18] L. Cueto-Felgueroso, R. Juanes, A phase-field model of two-phase Hele-Shaw flow, *J. Fluid Mech.* 758 (2014) 522–552. doi:10.1017/jfm.2014.512.
- [19] C.-Y. Chen, P.-Y. Yan, A diffuse interface approach to injection-driven flow of different miscibility in heterogeneous porous media, *Phys. Fluids* 27 (8) (2015) 083101. doi:10.1063/1.4928906.

- [20] J. VonNeumann, R. D. Richtmyer, A method for the numerical calculation of hydrodynamic shocks, *J. Appl. Phys.* 21 (1950) 232–237. doi:10.1063/1.1699639.
- [21] S. N. Chow, J. Mallet-Paret, J. A. Yorke, Finding zeroes of maps: homotopy methods that are constructive with probability one, *Math. Comput.* 32 (143) (1978) 887–899. doi:10.2307/2006493.
- [22] L. T. Watson, Globally convergent homotopy methods: A tutorial, *Appl. Math. Comput.* 31 (1989) 369 – 396. doi:10.1016/0096-3003(89)90129-X.
- [23] L. V. Kantorovich, *Functional analysis*, Pergamon Press, 1982.
- [24] J. H. Hubbard, B. B. Hubbard, *Vector Calculus, Linear Algebra, and Differential Forms: A Unified Approach*, Matrix Editions, 2009.
- [25] D. Jacqmin, Calculation of two-phase Navier-Stokes flows using phase-field modeling, *J. Comput. Phys.* 155 (1) (1999) 96–127. doi:10.1006/jcph.1999.6332.
- [26] D. J. Eyre, An unconditionally stable one-step scheme for gradient systems, Unpublished article (1998) <http://www.math.utah.edu/~eyre/research/methods/stable.ps>.
URL <http://www.math.utah.edu/~eyre/research/methods/stable.ps>
- [27] D. J. Eyre, Unconditionally gradient stable time marching the Cahn-Hilliard equation, in: *Symposium on Computational and Mathematical Models of Microstructural Evolution at the 1998 MRS Spring Meeting*, Vol. 529 of *Materials Research Society Symposium Proceedings*, 1998, pp. 39–46. doi:10.1557/PROC-529-39.
- [28] B. P. Vollmayr-Lee, A. D. Rutenberg, Fast and accurate coarsening simulation with an unconditionally stable time step, *Phys. Rev. E* 68 (6) (2003) 13. doi:06670310.1103/PhysRevE.68.066703.
- [29] X. B. Feng, Fully discrete finite element approximations of the Navier-Stokes-Cahn-Hilliard diffuse interface model for two-phase fluid flows, *Siam J. Numer. Anal.* 44 (3) (2006) 1049–1072. doi:10.1137/050638333.
- [30] R. J. Leveque, *Finite Volume Methods for Hyperbolic Problems*, Cambridge University Press, 2004.
- [31] R. Teigland, G. E. Fladmark, Cell-centered multigrid methods in porous media flow, in: W. Hackbusch, U. Trottenberg (Eds.), *Multigrid Methods III*, Birkhuser Basel, 1991, pp. 365–376. doi:10.1007/978-3-0348-5712-3_27.
- [32] B. G. Ersland, R. Teigland, Comparison of two cell-centered multigrid schemes for problems with discontinuous coefficients, *Numer. Meth. Part. D. E.* 9 (3) (1993) 265–283. doi:10.1002/num.1690090306.
- [33] A. Brandt, O. E. Livne, *Multigrid Techniques: 1984 Guide With Applications to Fluid Dynamics*, Revised Edition, Society for Industrial and Applied Mathematics, 2011.
- [34] U. Trottenberg, C. Oosterlee, A. Schuller, *Multigrid*, Elsevier Academic Press, 2001.
- [35] L. W. Gelhar, C. L. Axness, 3-dimensional stochastic-analysis of macrodispersion in aquifers, *Water Resour. Res.* 19 (1) (1983) 161–180. doi:10.1029/WR019i001p00161.