

Structured linear fractional parametric controller design with \mathcal{H}_∞ performances

C. Poussot-Vassal *

September 25, 2018

Abstract

This paper proposes an simple but yet effective approach to structured parametric controller design in a linear fractional form. The main contribution consists in using structured \mathcal{H}_∞ oriented optimization tools in an original manner to either (i) construct a parametric controller or (ii) a family of controllers with varying performances. Practical and numerical issues are also discussed to provide readers and practitioners a simple way to deploy the proposed process. The overall approach is illustrated through two numerical academical (but still complex) examples illustrating two applications: first, a parametric controller design adapted to a parameter dependent model of a clamped beam and, second, a controller with parameter dependent performance applied on a building model.

1 Introduction

1.1 Motivating context and problem formulation

In numerous industrial applications, the n -th order n_u inputs n_y outputs linear dynamical model describing a system can either be given in an invariant form as $\mathbf{H}(s) = C(sI_n - A)^{-1}B + D \in \mathcal{H}_\infty^{n_y \times n_u}$, equipped with realization $\mathcal{S} : (A, B, C, D)$ defined as

$$\dot{\mathbf{x}}(t) = A\mathbf{x}(t) + B\mathbf{u}(t), \mathbf{y}(t) = C\mathbf{x}(t) + D\mathbf{u}(t), \quad (1)$$

or in a parametric form $\mathbf{H}(s, \mathbf{p}) = C(\mathbf{p})(sI_n - A(\mathbf{p}))^{-1}B(\mathbf{p}) + D(\mathbf{p}) \in \mathcal{H}_\infty^{n_y \times n_u}$, equipped with realization $\mathcal{S}(\mathbf{p}) : (A(\mathbf{p}), B(\mathbf{p}), C(\mathbf{p}), D(\mathbf{p}))$ defined as

$$\dot{\mathbf{x}}(t) = A(\mathbf{p})\mathbf{x}(t) + B(\mathbf{p})\mathbf{u}(t), \mathbf{y}(t) = C(\mathbf{p})\mathbf{x}(t) + D(\mathbf{p})\mathbf{u}(t), \quad (2)$$

where $\mathbf{x}(t) \in \mathbb{R}^n$, $\mathbf{u}(t) \in \mathbb{R}^{n_u}$, $\mathbf{y}(t) \in \mathbb{R}^{n_y}$ and $\mathbf{p} \in \mathcal{P} \subseteq \mathbb{R}^{n_p}$ represent the state, input, output and parameter vectors, respectively. Moreover, the \mathcal{P} subspace is closed, the Laplace variable is denoted s and the A , $A(\mathbf{p})$, B , $B(\mathbf{p})$, C , $C(\mathbf{p})$, D and $D(\mathbf{p})$ matrices are of appropriate dimension¹.

*Onera - The French Aerospace Lab, F-31055 Toulouse, France; email: charles.poussot-vassal@onera.fr

¹Throughout this paper, we denote $\mathcal{H}_2^{n_y \times n_u}$ (resp. $\mathcal{H}_\infty^{n_y \times n_u}$) or simply \mathcal{H}_2 (resp. \mathcal{H}_∞), the open subspace of \mathcal{L}_2 (resp. \mathcal{L}_∞) with matrix-valued function $\mathbf{H}(s)$ with n_y outputs, n_u inputs, $\forall s \in \mathbb{C}$, which are analytic in $\operatorname{Re}(s) > 0$ (resp. $\operatorname{Re}(s) \geq 0$)

Remark 1 (Parametric vs. LPV) *It is noteworthy to distinguish the **parametric** form with the Linear Parameter Varying (**LPV**) one. Indeed while in the latter case the parameter \mathbf{p} is considered as varying, in the former one (which we consider in this paper), the parameter can simply be a frozen physical system coefficient (e.g. the geometrical parameters of an aircraft wing [1], or the section of an open-channel [2]). Parametric models can appear when the system's model is \mathbf{p} dependent [3] or when the \mathbf{p} parameter is an artificial one that characterizes the closed-loop performances (see the section examples).*

In the parametric case $\mathbf{H}(s, \mathbf{p})$ (2), it is interesting being able constructing a controller, function of the parameter \mathbf{p} value, that reaches a given performance level. Similarly, in the invariant case $\mathbf{H}(s)$ (1), for practical reason, one can be interested in constructing a family of (parametric) \mathbf{p} dependent controllers, achieving varying performances, which can be tested and directly adjusted on the real system during tests validations². Parametric controller design is then clearly a challenging task for many industrial applications since it provides the possibility to tune the control performance according to the plant configuration or to provide practitioners the ability to test a family of control laws in a simpler manner.

More specifically, in the considered framework, given a model as in (1) or (2), we aim at synthesizing a n_K -th order \mathbf{p} dependent controller $\mathbf{K}^*(s, \mathbf{p}) \in \mathcal{H}_\infty^{n_u \times n_y}$ described as in the following a Linear Fractional (**LF**) structure:

$$\mathbf{K}^*(s, \mathbf{p}) = \mathcal{F}_u(\mathbf{K}(s), \Delta), \quad (3)$$

that ensures closed-loop stability and achieve some \mathcal{H}_∞ performances (the performance is more precisely defined later). Let $\mathbf{K}(s) \in \mathcal{K} \subseteq \mathcal{H}_\infty^{n_u \times n_y}$, $\Delta = \mathbf{p}I_{n_\Delta} \in \mathbb{R}^{n_\Delta \times n_\Delta}$ and $\mathcal{F}_u(\cdot)$ denotes the upper linear fractional operator [5], defined as (for appropriate partitions of M and Δ) by $\mathcal{F}_u(M, \Delta) = M_{22} + M_{21}\Delta(I - M_{11})^{-1}M_{12}$.

Obviously, many solutions have been derived in the literature to design such a parametric controller (3) (with varying structure). Among the methods, the so-called **LPV** community did provide a lot of very interesting tools and procedures (still, mostly oriented to varying parameters, see *e.g.* [6]). Moreover, the robust control community also introduced a set of mathematical results in this sense such as the Linear Fractional Representation (**LFR**) framework and the associated control set-up (see *e.g.* the approaches addressing the \mathcal{H}_∞ norm [7, 8, 9, 10] or the \mathcal{H}_2 one [11]). Moreover, the Youla parametrization also provides a framework to this aim (see *e.g.* [12] for more details). For additional information on these subjects, reader is invited to refer to the many results of *e.g.* C. Scherer [13, 14], P. Apkarian [15, 16, 10], G. Balas [17, 18] and co-workers.

1.2 Contributions and outlines

The result provided in this paper aims at addressing the problem of structured parametric controller design (3) in the linear framework for (1) and (2) models. More specifically, a simple but yet very effective methodology to design such

²This last case is particularly interesting when real tests are costly and engineers cannot stop the process, re-tune the law and re-start the tests. An illustration of this situation can be found in aeronautics, *e.g.* for aircraft flight and ground tests, as in [4].

\mathbf{p} dependent controller (or controller family) achieving \mathcal{H}_∞ performances, is detailed in the rest of the paper. In addition, using the recently developed structured \mathcal{H}_∞ oriented optimization tools made available in MATLAB through the `hinfstruct` method [10], we also provide a detailed approach with numerical issues to deal with this problem in order to give practitioners keys to solve this kind of problem.

The remaining of the paper is organized as follows: the main result, *i.e.* the synthesis of a structured parametric linear fractional controller achieving \mathcal{H}_∞ performances is detailed in Section 2. Then, Section 3, provides practitioners some numerical and practical issues to easily optimize such a controller. Numerical examples are given in Section 4 detailing the design of a structured parametric controller in a linear fractional form for two interesting cases: first, based on a parametric model of a clamped beam, and secondly, based on a non-parametric model of a building, but including parametric closed-loop performances. Discussions close the paper in Section 5.

2 Main result: structured linear fractional parametric controller synthesis

2.1 Problem formulation with \mathcal{H}_∞ performances

Let us consider a linear dynamical model of the form (1) or (2). As evoked in the introductory part, we aim at designing a \mathbf{p} dependent parametric controller in linear fractional form that ensures some \mathcal{H}_∞ performances. As it is standard in the robust framework, let us first define the following generalized plant $\mathbf{T}(\mathbf{p}) = \mathbf{W}_i(s)\mathbf{H}(s, \mathbf{p})\mathbf{W}_o(s, \mathbf{p})$, where, $\mathbf{W}_i(s)$ and $\mathbf{W}_o(s, \mathbf{p})$ are the weighting filters defying the input and parametric (or not) output signals. Both $\mathbf{W}_i(s)$ and $\mathbf{W}_o(s, \mathbf{p})$ are constructed by the user to define the desired performances attenuation and its bandwidth. The associated state-space realization is then given by³,

$$\begin{cases} \dot{\mathbf{x}}(t) &= A(\mathbf{p})\mathbf{x}(t) + B_1(\mathbf{p})\mathbf{w}(t) + B_2(\mathbf{p})\mathbf{u}(t) \\ \mathbf{z}(t) &= C_1(\mathbf{p})\mathbf{x}(t) + D_{11}(\mathbf{p})\mathbf{w}(t) + D_{12}(\mathbf{p})\mathbf{u}(t) \\ \mathbf{y}(t) &= C_2(\mathbf{p})\mathbf{x}(t) + D_{21}(\mathbf{p})\mathbf{w}(t) + D_{22}(\mathbf{p})\mathbf{u}(t) \end{cases} \quad (4)$$

where $\mathbf{x}(t) \in \mathbb{R}^n$, $\mathbf{w}(t) \in \mathbb{R}^{n_w}$, $\mathbf{u}(t) \in \mathbb{R}^{n_u}$, $\mathbf{z}(t) \in \mathbb{R}^{n_z}$ and $\mathbf{y}(t) \in \mathbb{R}^{n_y}$ are the states, exogenous input, single control input, performance output and measurement signals, respectively. Then, the associated performance transfer from $\mathbf{w}(t)$ to $\mathbf{z}(t)$, parametrized by \mathbf{p} , is defined as,

$$\mathbf{T}(s, \mathbf{p}) = \mathbf{W}_i(s)\mathbf{H}(s, \mathbf{p})\mathbf{W}_o(s, \mathbf{p}). \quad (5)$$

Then, mathematically, the \mathcal{H}_∞ parametric control design objective consists in finding the optimal controller $\mathbf{K}^*(s, \mathbf{p})$ such that,

$$\mathbf{K}^*(s, \mathbf{p}) := \arg \min_{\mathbf{K} \in \mathcal{K}} \max_{\mathbf{p} \in \mathcal{D}} \left\| \mathcal{F}_l \left(\mathbf{T}(s, \mathbf{p}), \mathcal{F}_u(\mathbf{K}(s), \Delta) \right) \right\|_{\mathcal{H}_\infty} \quad (6)$$

³Note that according to the original plant, the parameter dependency can either come from the system model itself, if described by (2), or from the performance weighting filters $\mathbf{W}_o(s, \mathbf{p})$.

$$K^* := \arg \min_{K \in \mathbb{R}^{n_K n_{\Delta} n_u \times n_K n_{\Delta} n_y}} \max_{\mathbf{p} \in \mathcal{D}} \left\| \mathcal{F}_l \left(\mathbf{T}(s, \mathbf{p}), \mathcal{F}_u \left(\mathcal{F}_u \left(K, \frac{1}{s} I_{n_K} \right), \Delta \right) \right) \right\|_{\mathcal{H}_{\infty}} \quad (9)$$

$$K^* := \arg \min_{K \in \mathbb{R}^{n_K n_{\Delta} n_u \times n_K n_{\Delta} n_y}} \max_{\mathbf{p}_j \in \mathbb{R} \quad j=1, \dots, M} \left\| \mathcal{F}_l \left(\mathbf{T}(s, \mathbf{p}_j), \mathcal{F}_u \left(\mathcal{F}_u \left(K, \frac{1}{s} I_{n_K} \right), \Delta_j \right) \right) \right\|_{\mathcal{H}_{\infty}} \quad (10)$$

where $\mathcal{F}_l(\cdot)$ denotes the lower linear fractional operator defined as $\mathcal{F}_l(P, \Delta) = P_{11} + P_{12} \Delta (I - P_{22})^{-1} P_{21}$, $\mathbf{T}(s, \mathbf{p}) \in \mathcal{H}_{\infty}$ is the parameter dependent generalized plant performance transfer, $\Delta \in \mathbb{R}^{n_{\Delta} \times n_{\Delta}}$ is a user-defined diagonal structure gathering the parametric variation of $\mathbf{p} \in \mathcal{P} \subseteq \mathbb{R}^{n_p}$ (\mathcal{P} is a closed set). Finally, $\mathbf{K}(s) \in \mathcal{K} \subseteq \mathcal{H}_{\infty}$ is the controller (dynamical operator) to be found. This last dynamical system might then be structured as (i) a full block or (ii) a sparse matrix, affine or not (see next Section 2.3 for details on how to structure such operator),

2.2 Solution as a linear fractional form

We aim at solving (6) with a controller in a linear fractional form. Consequently the, controller description can be recast as:

$$\mathcal{F}_u(\mathbf{K}(s), \Delta) := \mathcal{F}_u \left(\mathcal{F}_u \left(K, \frac{1}{s} I_{n_K} \right), \Delta \right), \quad (7)$$

where,

$$K = \begin{bmatrix} A_K & B_w & B_u \\ C_z & D_{zw} & D_{zu} \\ C_y & D_{yw} & D_{yu} \end{bmatrix} \in \mathbb{R}^{n_K n_{\Delta} n_u \times n_K n_{\Delta} n_y}. \quad (8)$$

Then, problem (6) turns to seek for K^* such that it solves the problem given in (9).

It is now clear that if a solution of (9) is found, then one can reconstruct the parametric controller $\mathbf{K}^*(s, \mathbf{p})$ through relation (7). Nevertheless, (9) still requires to solve for all $\mathbf{p} \in \mathcal{P}$, which leads in practice to a infinite number of \mathcal{H}_{∞} problems to compute. As in the existing robust control framework, an alternative consists in solving the above problem for a finite number $M \in \mathbb{N}$ of evaluation \mathbf{p}_j ($j = 1, \dots, M$) values of \mathbf{p} , as exposed in (10).

If a solution of (10) is found, then, following (7), the optimal parametric controller $\mathbf{K}^*(s, \mathbf{p})$ in linear fractional form is obtained. Its implementation is then straightforwardly done on any computer-aided system. Before entering into numerical considerations, that are crucial for successful application, let us now be more specific on the controller subset \mathcal{K} , defining the controller structure and on the implications on the matrix K (8).

2.3 Considerations about \mathcal{K} and parameter dependency

Now the theoretical problem have been set-up and, let us provide some insight on the parametrization of the solution through the \mathcal{K} subspace, the Δ block and especially the K matrix (8).

2.3.1 The \mathcal{K} subspace and K structure

with reference to the original optimisation problem (6), the decision variable is $\mathbf{K}(s)$ which belongs to \mathcal{K} . Let us derive some specific user cases of sets \mathcal{K} and its implication on the problem solved in (10):

- if $\mathcal{K} = \mathcal{H}_\infty^{(n_u \times n_y)}$, then, K (8) is a full block matrix. This stands as the most generic case where all variables in K are adjustable and the controller obtained might be proper and the dependency with \mathbf{p} is rational.
- if $\mathcal{K} = \mathcal{H}_2^{(n_u \times n_y)}$, then, K (8) is a full block matrix except for the D_{yu} term and D_{zu} and/or D_{yw} which are null. The controller obtained controller is strictly proper (rolls-off in high frequencies) and the dependency with \mathbf{p} might be rational too.

2.3.2 The parametric dependency (rational vs. affine) and K structure

in addition, with reference to (8), let us recall the controller realization at \mathbf{p}_j , associated with the linear fraction operators as

$$\mathbf{K}(\Delta_j) := \begin{pmatrix} A_K + B_w \Delta_j M_j C_z, B_u + B_w \Delta_j M_j D_{zu}, \\ C_y + D_{yw} \Delta_j M_j C_z, D_{yu} + D_{yw} \Delta_j M_j D_{zu} \end{pmatrix}$$

where $M_j = (I_{n_\Delta} - D_{zw} \Delta_j)^{-1}$. Then,

- if $D_{zw} \neq 0$, $\mathbf{K}(s, \mathbf{p})$ parameter dependency is rational,
- if $D_{zw} = 0$, $\mathbf{K}(s, \mathbf{p})$ parameter dependency is affine.

We will see in the example that this selection can impact the solution. Still reader should keep in mind that the rational case theoretically provides a less conservative solution than the affine one. However, this conservative property is balanced by a more complex parametrization, which in practice can be a brake in the optimization procedure (see later).

2.3.3 The parametric dependency order n_Δ

in problem (10), we consider the Δ block being known. Obviously, in the complete problem, this variable is not known by advance and additional research should be done to consider it as a tuning variable, and this is not the scope of this work. However, it is known from the **LFR** community that such block is diagonal and thus provides a repetition of the parameters \mathbf{p} . In this preliminary study we simply focus on the case where $\Delta = \mathbf{p}I_{n_\Delta} \in \mathbb{R}^{n_\Delta \times n_\Delta}$. Then, the only tuning variable that a user has to deal with is the dimension n_Δ . So far, as illustrated later in the examples, no clear solution on the mechanism to implement is known and the optimal choice is dependent on both the complexity and representativeness of this structure. However, it is to be kept in mind that a $n_\Delta = 0$ implies a non parametric controller (*i.e.* classical controller) and $n_\Delta > 0$ lead to parametric control with an enhanced performance with accompanied with an increasing complexity.

3 Numerical issues discussion

3.1 Problem parametrization

As detailed above, the considered optimization problem (10) is then function of $K \in \mathbb{R}^{n_K n_\Delta n_u \times n_K n_\Delta n_y}$ and $M \in \mathbb{N}$. The optimization problem parametrization contains $n_K^2 n_\Delta^2 n_u n_y$ real variables to solve. Obviously, n_u, n_y are imposed by the sensors and actuators set-up of the control problem, one still has to choose n_Δ (the parametric complexity) and n_K (the controller order). While problem of n_Δ has already been evoked in the above section, the remaining coefficient to deal with is the order n_K of the controller. This later is generally taken low to achieve a reduced order controller. However even with a low n_K , the parameter number increase in a square way. Consequently it is consistent to simplify the number of parameters. With reference to (8), one way to deal with this, is to consider the following tridiagonal A_K matrix structure:

$$A_K = \begin{pmatrix} \times & \times & 0 & \dots & & \dots & 0 \\ \times & \times & \times & 0 & & \dots & 0 \\ 0 & \times & \times & \times & 0 & \dots & 0 \\ \vdots & 0 & \ddots & \ddots & \ddots & \ddots & 0 \\ 0 & \dots & 0 & \ddots & & \times & 0 \\ 0 & \dots & & 0 & \times & \times & \times \\ 0 & \dots & & & 0 & \times & \times \end{pmatrix}. \quad (11)$$

Representing the A_K matrix as it, is non conservative in theory and provides a considerable few variable to tune. It has show an effectiveness in many numerical applications (from model identification, approximation and control).

3.2 Initialization of the optimization problem

Still, it is well known that problem (10) is NP complex and no global optimal solution can be guaranteed [10, 9]. Therefore, from a practical point of view, the initialization phase play a crucial role. This why, after having parametrized the above problem, the author advice any user to initialize the problem of parametric controller design K (8) as follows: set A_K, B_u, C_y and D_{yu} to gain values obtained with *e.g.* an un-parametrized \mathcal{H}_∞ optimization problem solved at the nominal \mathbf{p} value. Then, set B_w, C_z, D_{zw}, D_{zu} and D_{yw} to null value.

3.3 Parametric controller stability issue

As a practical remark, one might look for a parametric controller which is stable. For safety reasons, this kind of requirement is often requested in applications such as aeronautics, hydraulic systems. to address this constrain, following the linear fractional formulation of the problem, in addition to the problem (10), the following constrain can also be solved simultaneously:

$$\left\| W_K \mathcal{F}_u \left(\mathcal{F}_u \left(K, \frac{1}{s} I_{n_K} \right), \Delta \right) \right\|_{\mathcal{H}_\infty} < \gamma \quad (12)$$

where $W_K \in \mathcal{H}_\infty$ is a weighting function and γ is the performance objective of the \mathcal{H}_∞ control problem.

3.4 A Matlab based solution

To give a more practical insight of the practical solution, let us provide a few lines of MATLAB code to implement an such approach in a very simple way (note that here, a full block K structure is considered). Let first define the integral operator and $K \in \mathbb{R}^{n_K n_\Delta n_u \times n_K n_\Delta n_y}$ matrix as :

```
Is = tf(1, [1 0]);
K0 = [A Bw Bu; Cz Dzw Dzu; Cy Dyw Dyu];
K = realp('K',K0);
```

Then, by considering the generalized plants $\mathbf{T}(s, \mathbf{p}_j) = \mathbf{T}\{j\}$ (for $j=1, \dots, M$) already set-up, construct the optimization problem (10) as (where $n_K = nk$, $n_\Delta = ndelt$)

```
Ttot = [];
for j = 1:M
Deltaj = eye(ndelt)*p(j);
Klfj = lft(Deltaj, lft(Is*eye(nk, nk), K));
Ttot = append(Ttot, lft(T{j}, Klfj));
Ttot = append(Ttot, Klfj*Wk);
end
```

With reference to the loop of the above code, the first line corresponds to the evaluation of the Δ block at \mathbf{p}_j , the second, to the evaluation of $\mathbf{K}(s, \mathbf{p}_j)$ and the third/fourth to the concatenation of the $\mathcal{F}_l(\mathbf{T}(s, \mathbf{p}_j), \mathcal{F}_u(\mathcal{F}_u(K, \frac{1}{s}I_{n_K}), \Delta_j))$ in the structure \mathbf{Ttot} . Note also that $\mathbf{Klfj} * \mathbf{Wk}$ is added to ensure controller stability and a given roll off dictated by W_K , as in (12). Finally, the above problem is solved through the `hinfstruct` function as:

```
[Kopt, gamma, info] = hinfstruct(Ttot);
```

This leads to the K matrix which cans then be used to construct $\mathbf{K}(s, \mathbf{p})$ easily.

4 Numerical examples

Let us now, based on two academic examples, illustrate the efficiency of the proposed approach. To this aim, two use-cases are considered. The first one is a parametric model representing a clamped beam which length $L = \mathbf{p}$ is the model parameter. Obviously, this parameter is not time / state dependent but simply a geometrical parameter of the system. The second use-case is a linear model of a building for which parametric performances are reached.

4.1 Clamped beam parametric model

The first considered example is the Timoshenko clamped beam, which model is made available in [19]. This model is a single input single output model ($n_u = 1$, $n_y = 1$), and its dynamical matrices are obtained by finite element meshing. In the considered case, we select a meshing of 6 nodes. The resulting model is then of dimension $n = 60$. In addition, one interesting point of this model is that it is parametrizable with the length L of the beam. In our case we consider this length varying between 10 and 20m. In this case, it means that the model (2) is available and one obtains $\mathbf{H}(s, L) = C(sI_n - A(L))^{-1}B + D \in \mathcal{H}_\infty^{1 \times 1}$. The objective considered in this case is to minimize the \mathcal{H}_∞ norm of the only input/output transfer (the extremity vertical force to the vertical displacement)

with a parametric controller $\mathbf{K}^*(s, L)$. More specifically, the following generalized plant is considered:

$$\begin{cases} \dot{\mathbf{x}}(t) &= A(L)\mathbf{x}(t) + B\mathbf{w}(t) + B\mathbf{u}(t) \\ \mathbf{z}(t) &= C\mathbf{x}(t) \\ \mathbf{y}(t) &= C\mathbf{x}(t) \end{cases}. \quad (13)$$

To be complete, a stability (and bandwidth) constrain is also added to the problem with $W_K = \frac{10^{-1}}{s/100+1}$, in (12). Then, the procedure exposed in Section 2 is applied for $L = \{10, 12.5, 15, 17.5, 20\}$ (*i.e.* $M = 5$) and for different n_K and n_Δ values. Then, the \mathcal{H}_∞ norm of the single input single output transfer $\mathbf{T}(s, L)$ is evaluated for varying frozen values of $L \in [10 \ 20]$. Some results are reported on Figures 1 and 2.

With reference to Figures 1 and 2, multiple comments can be done. First, as expected, a nominal controller \mathbf{K}_N , synthesized on the mean value of the parameter (black dashed curves) cannot perform well over the entire range of parametric variation while the parametric ones obtained in linear fractional form does \mathbf{K}_{LF} (rational: red solid curves and affine: blue sh dotted). Then, by comparing the two obtained \mathbf{K}_{LF} controller performances, both provide a performance level below the one obtained during the synthesis (see γ values in the legend), which confirms the effectiveness and consistency of the proposed approach. Interestingly, on Figure 1, the increase of n_Δ do not necessarily lead to a better attenuation, especially in the rational case (since it adds a lot of variables). This not the case on Figure 2. This first experiments shows how easy it is to construct a parametric controller that performs way better than an un-parametric one.

4.2 Parametric control performances

In the second application, we consider the invariant Los Angeles Hospital building model extracted from COMpleib [20]. It is a single input single output model of dimension $n = 48$ representing the oscillation from a ground to the top of the building. For the purpose of our study, we first have normalized the system so that the \mathcal{H}_∞ norm of the open-loop model is equal to one. Then, the generalized plant has been constructed to that the objective of the controller is to attenuate the first amplification peak (around $w_\infty \approx 5.2rad/s^{-1}$). Here we aim at finding a family of controller, parametrized along $\mathbf{p} \in [0.5 \ 1.5]$, an exogenous parameter, that achieve a varying attenuation level on this peak. This attenuation level is classically measured through the \mathcal{H}_2 norm of the transfer function from $\mathbf{w}(t)$ to $\mathbf{z}(t)$. To do so, the following generalized plant has been constructed (with varying performances):

$$\begin{cases} \dot{\mathbf{x}}(t) &= A\mathbf{x}(t) + B\mathbf{w}(t) + B\mathbf{u}(t) \\ \mathbf{z}(t) &= C(\mathbf{p})\mathbf{x}(t) \\ \mathbf{y}(t) &= C\mathbf{x}(t) \end{cases}. \quad (14)$$

In addition we impose the following controller structure ($w_m = w_\infty$, $\alpha = 10$ and $m = 0.1$),

$$Wk = 1/\mathbf{p} \frac{s^2/(\alpha w_m)^2 + 2ms/w_m + \alpha^{-2}}{s^2/w_m^2 + 2ms/w_m + 1}. \quad (15)$$

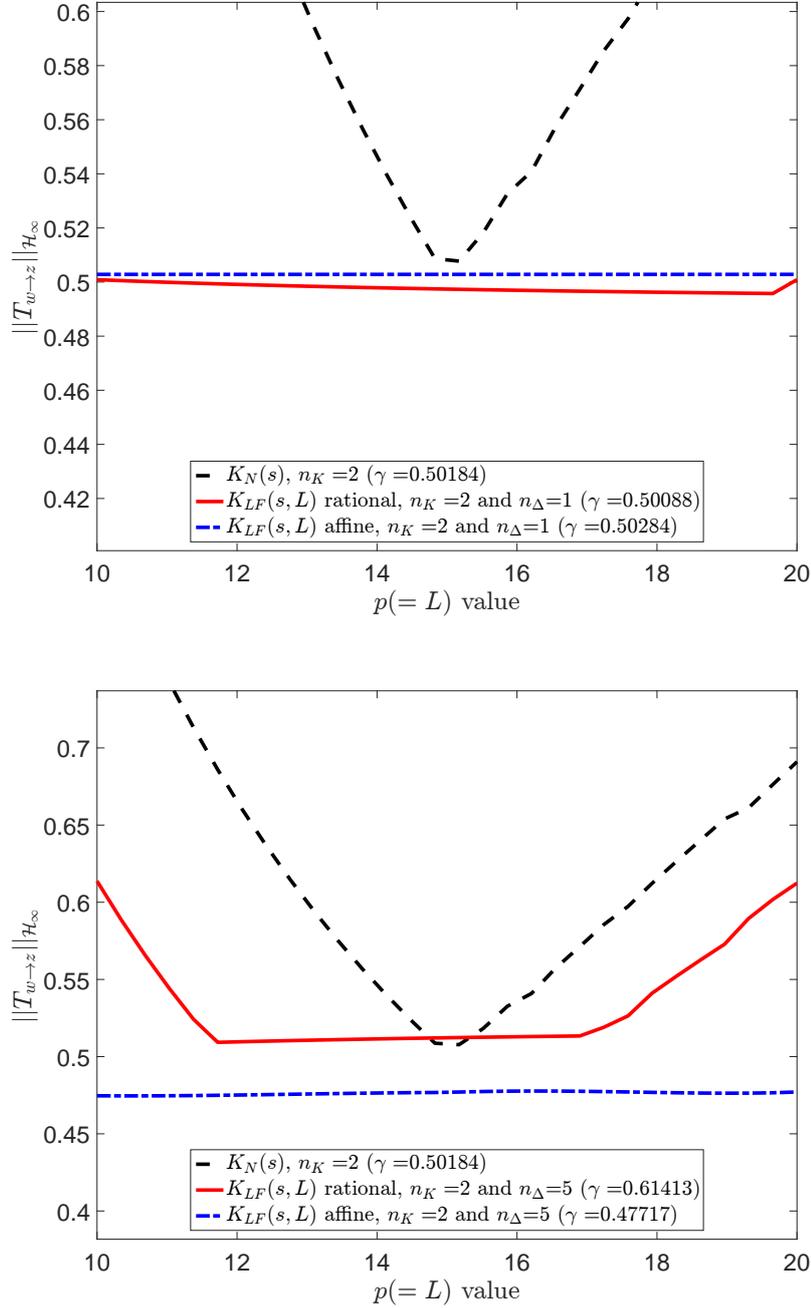


Figure 1: Left frame $n_\Delta = 1$ and $n_K = 2$, right frame $n_\Delta = 5$ and $n_K = 2$. \mathcal{H}_∞ performances for varying length L values of the Timoshenko clamped beam. With $\mathbf{K}_N(s)$, a non parametric controller synthesized on the nominal case ($L = 15$ black dashed), $\mathbf{K}_{LF}(s, L)$ rational (resp. $\mathbf{K}_{LF}(s, L)$ affine) a parametric and rational (resp. affine) controller synthesized using M configurations (red solid, resp. blue dash dotted).

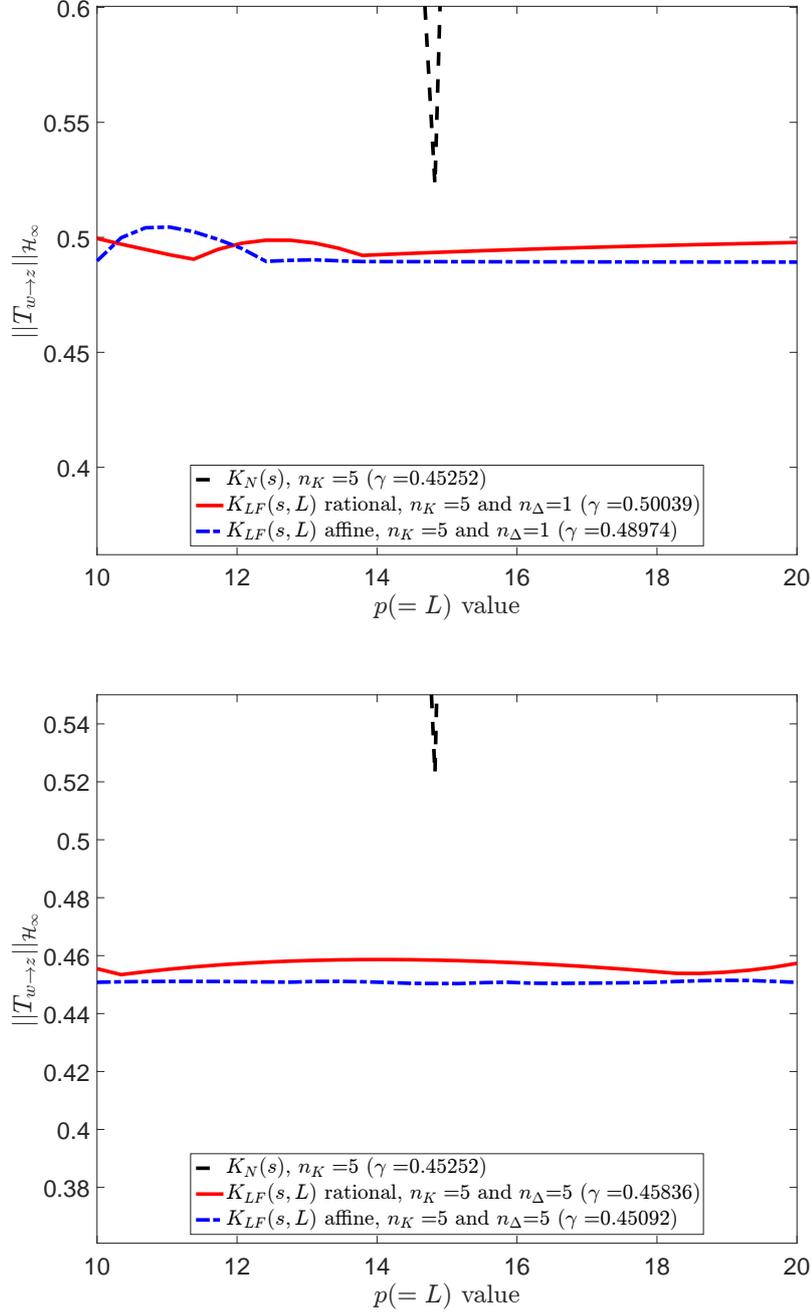


Figure 2: Left frame $n_\Delta = 1$ and $n_K = 5$, right frame $n_\Delta = 5$ and $n_K = 2$. \mathcal{H}_∞ performances for varying length L values of the Timoshenko clamped beam. With $\mathbf{K}_N(s)$, a non parametric controller synthesized on the nominal case ($L = 15$ black dashed), $\mathbf{K}_{LF}(s, L)$ rational (resp. $\mathbf{K}_{LF}(s, L)$ affine) a parametric and rational (resp. affine) controller synthesized using M configurations (red solid, resp. blue dash dotted).

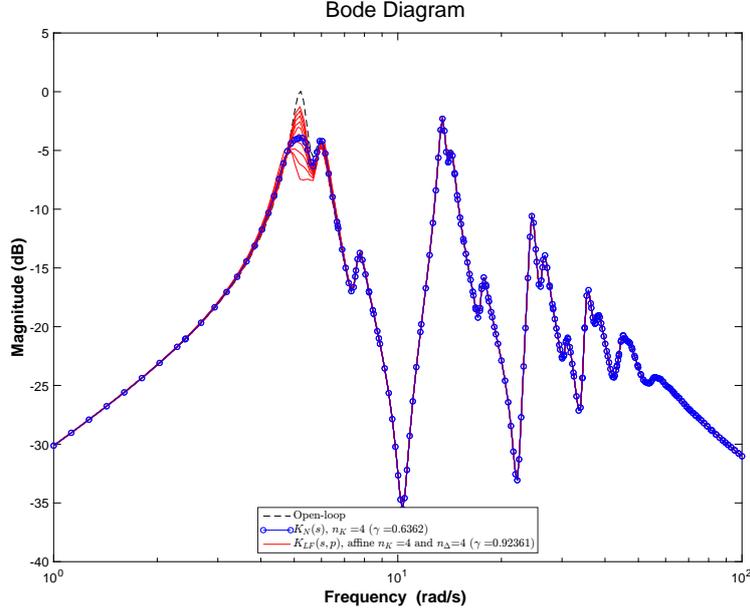


Figure 3: Bode diagram of the open-loop (dashed black), the closed-loop obtained with the nominal control $\mathbf{K}_N(s)$ (obtained for $\mathbf{p} = 1$, blue rounded), and the parametric controller $\mathbf{K}_{LF}(s, \mathbf{p})$ (solid red lines).

Figure 3 provides the obtained frequency responses, comparing the open-loop (black dashed), the closed-loop obtained with the nominal control $\mathbf{K}_N(s)$ (obtained for $\mathbf{p} = 1$, blue rounded), and the parametric controller $\mathbf{K}_{LF}(s, \mathbf{p})$ (solid red lines).

It appears that the control law well reduces the amplification in the region of the first peak with both controllers, as expected by the designer. More interestingly, the parametric controller set $\mathbf{K}_{LF}(s, \mathbf{p})$ shows to provide varying attenuation level performances as \mathbf{p} varies. this property is highlighted on Figure 4 which illustrates the \mathcal{H}_2 attenuation performances as \mathbf{p} vary from its minimal to maximal value. The bigger \mathbf{p} is, the better the attenuation is. One of the very nice property is that for the value of $\mathbf{p} = 1$, $\mathbf{K}_{LF}(s, 1)$, provides similar performances than the un-parametrized control $\mathbf{K}_N(s)$.

This kind of property, is, in practice, very important if one aims at implementing a controller and try the performances on the real system. As a matter of consequence, the proposed parametric control design show to very well behave, even on quite complex set-up.

5 Conclusions and perspectives

In this paper, a new simple but effective approach to design low order multiple input multiple output parametric linear fractional controller achieving \mathcal{H}_∞ performances, has been introduced. The proposed framework is based on the

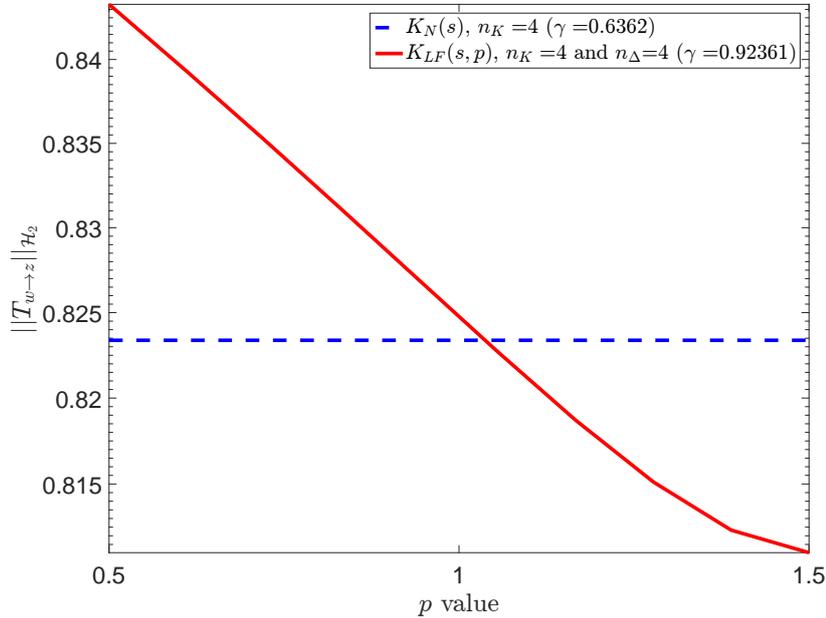


Figure 4: \mathcal{H}_2 performance evaluation function of the \mathbf{p} tuning parameter. Red solid line: looped systems with $\mathbf{K}_{LF}(s, \mathbf{p})$, and dashed blue for $\mathbf{K}_N(s)$.

recent developments in \mathcal{H}_∞ oriented optimization, which are made available in [10]. The pivotal idea is based on the specific structure of the control operator, *i.e.* the fractional representation. To the author’s feeling, this simple structure, linked with dedicated optimization tools, makes this approach both simple and mathematically well posed, and stands as a nice solution for many practitioners faced to parametric models and controller synthesis. Obviously, the results in this paper are not restricted single parameter dependency but yet, it is to be kept in mind that extension to multiple parameters will require dedicated attention due to the complexity increase in the optimization and in the selection of the n_Δ dimensions. Nevertheless, the approach quickness should be exploited in further developments. Following previous experimental results discussed in [4, 21, 22], on-going work will implement this strategy on a real aircraft during flight experiments.

References

- [1] R. Gadiant, E. Lavretsky, and K. Wise, “Very Flexible Aircraft Control Challenge Problem,” in *Proceedings of the AIAA Guidance, Navigation, and Control Conference*, Minneapolis, Minnesota, USA, August 2012.
- [2] V. Dalmás, G. Robert, C. Poussot-Vassal, I. Pontes Duff, and C. Seren, “From infinite dimensional modelling to parametric reduced order approximation: Application to open-channel flow for hydroelectricity,” in *Proceed-*

ings of the 15th European Control Conference, Aalborg, Denmark, July 2016, pp. 1982–1987.

- [3] P. Vuillemin, F. Demourant, J.-M. Biannic, and C. Poussot-Vassal, “Stability analysis of a set of uncertain large-scale dynamical models with saturations: application to an aircraft system,” *IEEE transactions in Control Systems Technology*, vol. 25, no. 2, pp. 661–668, March 2017.
- [4] C. Meyer, J. Prodigue, G. Broux, O. Cantinaud, and C. Poussot-Vassal, “Ground test for vibration control demonstrator,” in *Proceedings of the 13th International Conference on Motion and Vibration Control*, Southampton, United Kingdom, July 2016, pp. 1–12.
- [5] J.-F. Magni, “Linear fractional representation toolbox for use with matlab,” Onera, Toulouse, France, Tech. Rep., 2006. [Online]. Available: <http://w3.onera.fr/smac/>
- [6] S. Wang, H. Pfifer, and P. Seiler, “Robust Synthesis for Linear Parameter Varying Systems Using Integral Quadratic Constraints,” *Automatica*, vol. 68, pp. 111–118, 2016.
- [7] P. Gahinet and P. Apkarian, “An linear matrix inequality approach to \mathcal{H}_∞ control,” *International Journal of Robust and Nonlinear Control*, vol. 4, no. 4, pp. 421–448, January 1994.
- [8] D. Henrion, D. Arzelier, D. Peaucelle, and J. B. Lasserre, “On parameter dependent Lyapunov functions for robust stability of linear systems,” in *Proceedings of the 43rd IEEE Conference on Decision and Control*, Atlantis, Paradise Island, Bahamas, December 2004, pp. 887–892.
- [9] J. V. Burke, D. Henrion, A. S. Lewis, and M. L. Overton, “HIFOO - A MATLAB Package for Fixed-order Controller Design and \mathcal{H}_∞ Optimization,” in *Proceedings of the IFAC Symposium on Robust Control Design*, Toulouse, France, 2006.
- [10] P. Apkarian and D. Noll, “Nonsmooth \mathcal{H}_∞ Synthesis,” *IEEE Transaction on Automatic Control*, vol. 51, no. 1, pp. 71–86, January 2006.
- [11] C. E. de Souza and A. Trofino, “Gain Scheduled \mathcal{H}_2 Controller Synthesis for Linear Parameter Varying systems via Parameter-dependent Lyapunov Functions,” *International Journal of Robust and Nonlinear Control*, vol. 16, pp. 243–257, November 2005.
- [12] J. Neering, R. Draï, M. Bordier, and N. Maiz, “Multiobjective robust control via youla parametrization,” in *IEEE International Conference on Control Applications*, Munich, Germany, October 2006, pp. 1450–1456.
- [13] C. W. Scherer, “Mixed $\mathcal{H}_2/\mathcal{H}_\infty$ control for time-varying and linear parametrically-varying systems,” *International Journal of Robust and Nonlinear Control*, vol. 6, no. 9-10, pp. 929–952, november 1996.
- [14] C. Scherer, P. Gahinet, and M. Chilali, “Multiobjective Output-Feedback Control via LMI Optimization,” *IEEE Transaction on Automatic Control*, vol. 42, no. 7, pp. 896–911, July 1997.

- [15] P. Apkarian and P. Gahinet, "A Convex Characterization of Gain-Scheduled \mathcal{H}_∞ Controllers," *IEEE Transaction on Automatic Control*, vol. 40, no. 5, pp. 853–864, May 1995.
- [16] P. Gahinet, P. Apkarian, and M. Chilali, "Affine Parameter-Dependent Lyapunov Functions and Real Parametric Uncertainty," *IEEE Transaction on Automatic Control*, vol. 41, no. 3, pp. 436–442, March 1996.
- [17] I. Fialho and G. Balas, "Road Adaptive Active Suspension Design using Linear Parameter Varying Gain-Scheduling," *IEEE Transaction on Control System Technology*, vol. 10, no. 1, pp. 43–54, January 2002.
- [18] A. Hjartarson, P. Seiler, and G. Balas, "LPV Aeroservoelastic Control using the LPVTools Toolbox," in *AIAA Atmospheric Flight Mechanics Conference*, 2013.
- [19] H. Panzer, J. Hubele, R. Eid, and B. Lohmann, "Generating a Parametric Finite Element Model of a 3D Cantilever Timoshenko Beam Using Matlab (Vol. TRAC-4, Nov. 2009)," Technical Reports on Automatic Control, Tech. Rep., November 2009.
- [20] F. Leibfritz, "COMPl_elb, COncstraint Matrix-optimization Problem Library - a collection of test examples for nonlinear semidefinite programs, control system design and related problems," Universitat Trier, Tech. Rep., 2003.
- [21] C. Poussot-Vassal, F. Demourant, A. Lepage, and D. Le Bihan, "Gust load alleviation: identification, control and wind tunnel testing of a 2D aeroelastic airfoil," *IEEE transactions on Control Systems Technology*, accepted 2017.
- [22] C. Meyer, G. Broux, J. Prodigue, O. Cantinaud, and C. Poussot-Vassal, "Demonstration of innovative vibration control on a Falcon Business Jet," in *Proceedings of the International Forum on Aeroelasticity and Structural Dynamics*, Como, Italy, June 2017.