

Running the Network Harder: Connection Provisioning under Resource Crunch

Rafael B. R. Lourenço*, Massimo Tornatore*[†], Charles U. Martel*, and Biswanath Mukherjee*

*University of California, Davis, USA, E-mail:[rlourenco, cumartel, bmukherjee]@ucdavis.edu,

[†]Politecnico di Milano, Italy, E-mail:massimo.tornator@polimi.it.

Abstract—The increased network flexibility introduced by new technologies, such as Software-Defined Networking, let operators consider running their networks at higher utilization levels. Traditionally, networks were operated at a small fraction of their capacities (30-40%); recently, however, operators are considering running their networks harder (60% utilization and above). Higher utilization can increase the network operator’s revenue, but this gain comes at a cost: daily traffic fluctuations and failures might overload the network. We call such network congestion situations *Resource Crunch*. Dealing with Resource Crunch requires certain types of flexibility in the system. We focus on settings with flexible bandwidth requirements, e.g., allocated connections can tolerate service degradation. This can allow a new connection to be provisioned — a connection that would otherwise be blocked. In these situations, the network operator needs to make an informed decision, since degrading a high-paying connection to allocate a low-value connection is not sensible. We offer strategies for deciding whether or not to serve a connection (and which other connections to degrade) focusing on maximizing profits during Resource Crunch. Our solutions use a new abstraction of the network state, called a Connection Adjacency Graph (CAG), to devise an efficient methods to decide whether or not to serve a demand, and which other connections to degrade. The concept of CAG is further elaborated, and we investigate an optional optional simplification step capable of reducing the problem’s complexity. Finally, we compare our method to existing greedy approaches and show that our method outperforms them during Resource Crunch.

Index Terms—Resource Crunch, High Utilization, Network Congestion, Connection Provisioning, Service Degradation, Flexible Bandwidth, Profit Maximization.

I. INTRODUCTION

Communication networks are designed to provide high availability for existing connections and high acceptance rates for new demands (i.e., new service requests). Traditionally, this dual goal has been achieved by deploying significant excess capacity (*over-provisioning*), commonly utilizing only 30-40% of the total capacity. The importance of over-provisioning is threefold: it provides redundancy for allocated connections, it accommodates traffic variations (both predictable daily fluctuations and unpredictable traffic surges, such as flash crowds), and it serves as a cushion for traffic growth. There is great interest in using excess capacity, since it creates opportunities to generate revenue from previously-idle assets [2].

In this study, we define *Resource Crunch* as situations in which the network is temporarily faced with a larger offered load than it can possibly carry. The events that can cause Resource Crunch are either sudden increases in offered traffic (i.e., demand arrivals) and/or capacity reductions (i.e., due to failures). In traditional networks, if a Resource Crunch occurs,

some of the offered demands will not be served. Accordingly, the over-provisioning in traditional networks mitigates the chances of Resource Crunch occurrences.

Recent technological advances, such as Software-Defined Networking (SDN), allow networks to be operated at higher levels of utilization, thanks to the increased flexibility they provide. Some practical wide-area SDN networks today report average link utilization above 60% [1], [3]. This higher utilization enables a larger revenue per unit of capacity when compared to traditional networks. As the forecast compound annual growth rate of general Internet traffic is very high [4], many traditional networks will be pushed to higher levels of utilization to maintain profitability. A high level of utilization, however, increases the chances of Resource Crunch occurring. Thus, to shift from the traditional paradigm of low capacity utilization to a new paradigm of running the network harder, it is necessary to be prepared for Resource Crunch.

Dealing with Resource Crunch requires introducing new levels of flexibility in the system. Specifically, we consider Service Level Agreements (SLAs) with flexible bandwidth requirements. As network traffic can be classified according to Classes of Service [1], [5], [6], we consider that each type of service has different bandwidth flexibilities. In that sense, demands request a certain bandwidth if it is available, but might be satisfied with some smaller bandwidth, down to a predefined minimum. Thus, connections might undergo *service degradations* (i.e., bandwidth throttling) to make room for an incoming demand, for example. We consider that an allocated connection generates a certain amount of revenue; however, if it undergoes a degradation, it generates less revenue. In our study, we consider three classes of service [1], namely: Interactive (no bandwidth flexibility), Elastic (some bandwidth flexibility), and Background (large bandwidth flexibility), but our study can be generalized for more service classes.

An illustrative example detailing the fluctuations of traffic offered/carried through a period of days is shown in Fig. 1. The green curves exemplify how the load carried by a traditional network remains, on average, at a low percentage of the total deployed capacity, in this case 40%. The dark blue curve shows how the same network could be used to carry a higher amount of traffic, reaching 72% average utilization. At such higher utilization, however, Resource Crunch situations (red shaded areas) can occur. The dashed light-blue curve is the minimum required bandwidth of all the offered demands considering the acceptable degradation of each demand. In this example, the minimum required bandwidth never surpasses the total deployed capacity, indicating that, during Resource

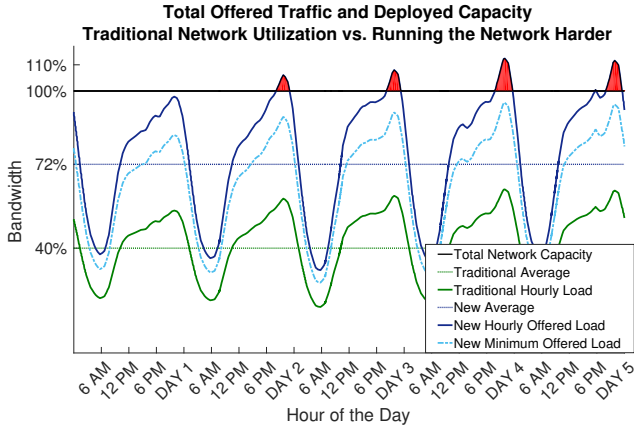


Figure 1. Aggregate daily traffic variation with respect to the total network capacity (the green curves are based on real data collected from the London InterNet eXchange Traffic Statistics Report [7], from April 7 to 12, 2017, when the average peak-to-valley ratio of the offered traffic was 2).

Crunch, there is a way to serve all offered demands, albeit at the expense of degrading some of them.

During a Resource Crunch, if a new demand arrives, the network might be unable to serve it at its requested bandwidth. We call these demands *crunched demands*. When a demand is crunched, the network operator has to decide whether or not to serve it (possibly by degrading some existing connections). If the demand is blocked, however, there might be penalties ranging from negative impacts on revenue to damages to the company’s reputation. Our study investigates how to make that decision such that the operator’s profits are maximized, i.e., revenue generated from the served connections subtracted by penalties incurred from not serving some demands.

To solve this problem, we propose a novel representation of the network state: *Connection Adjacency Graph (CAG)*. It describes how allocated connections interact and how much revenue is lost when throttling any of them. With the CAG, we develop an effective method to solve the problem and analyze its complexity.

The rest of this study is organized as follows: in Section II, we review related literature; in Section III, Resource Crunch is discussed; in Section IV, we review bandwidth-flexible connectivity demands and how they affect revenue; in Section V, we study the problem of connection provisioning with degradation during Resource Crunch; in Section VI, we solve the problem using the CAG; in Section VII, we analyze the complexity of the CAG and propose a method to reduce it; we present illustrative results in Section VIII; and we conclude in Section IX.

II. RELATED WORK

The idea of running the network at high average link utilization has been studied through different perspectives. Achieving high utilization is a motivation to use certain technologies, such as SDN [1]. This study, however, tackles the problem from an implementation perspective. Its approach is based on filling the excess capacity with low-priority traffic that can be dropped if necessary, hence, carrying the same amount of high-priority traffic as a traditional network would.

Some studies have analyzed the problem of provisioning demands to achieve some utility maximization. In [3], [8] the goal consists of maximizing an abstract measure called *fair share*. The problem of, given a set of demands, a network, and some objective (e.g., availability, revenue, etc.), how to serve the demands such that the objective is maximized was also studied by [9], [10]. Our work differs from these studies in the following ways:

- 1) Differently from [3], [8], we aim at having a joint decision of path and bandwidth allocation;
- 2) Demands arrive at any time and must be served as soon as possible, hence, we need a solution that works dynamically, instead of statically (as in [9], [10]);
- 3) As demands arrive, we want to decide whether or not to serve that demand (and through what path) while affecting other connections the least, i.e., we do not perform re-routing of existing connections; and
- 4) We consider demands that have bandwidth flexibility.

Similar problems to ours have been analyzed in other works, however, without our goal of maximizing the network operator’s profits. In [11], service degradation was used to reduce blocking and increase network survivability. Flexibility in both time-to-complete and desired bandwidth was studied in [12], to allow for reliable multi-path provisioning, and in [13] for deadline-driven scheduling. Considering the optical and electrical layers, [14] proposed a service degradation scheme using multi-path routing for minimum-cost network design, and [15] analyzed the problem of provisioning degraded services while assuring Quality of Service (QoS). The algorithm proposed in [15] is similar to [16]; however, the latter aims at maximizing the network operator’s revenue. These algorithms greedily search for a shortest path and serve a crunched demand by executing degradations in that path from a lower priority (e.g., cheapest) to a higher priority (e.g., more expensive).

Our investigation also relates to admission control literature, as deciding whether or not and how to serve incoming requests is a central part of our study. In [17], the authors propose a dynamic-programming-based solution to solve the dual problem of routing connections and provisioning their bandwidth, focusing on video-streaming services in an SDN environment. The authors provision network resources to incoming requests while maximizing revenues in the long run, given expected video-transmission rates. To the best of our knowledge, this is the only related work that also jointly focuses on admission control and routing of flows in wired networks.

Flow admission control is used to implement inter-technology load balancing in a possible 5G architecture in [18]. An admission-control mechanism that prevents new flows to enter the network when available paths become congested is presented in [19]. In general, previous works either do not focus on severe congestion scenarios, such as a Resource Crunch, or do not consider the throttling of already-provisioned connections to serve new requests when they arrive, as our work does.

III. RESOURCE CRUNCH

In a network being run harder, a Resource Crunch can occur when a new demand arrives and/or a failure occurs.

A. Arrival of New Demands

As a new demand arrives, the total offered load to the network increases. Demand arrivals can be categorized as:

1) *Hourly/Daily Traffic Fluctuations*: On an hourly scale, the offered traffic changes according to time of the day, as shown in Fig. 1 and explored by several studies [20], [21]. These changes have a periodic-like behavior, roughly repeating everyday. Their peaks may generate Resource Crunch (see red areas of Fig. 1). Because of this periodicity, a crunch could last for a while until the offered traffic decreases.

2) *Traffic Surges*: This study is also applicable for sudden traffic peaks generated by unpredicted increases in traffic, such as those due to Flash Crowd [22].

3) *Traffic Growth*: Traffic growth can also cause Resource Crunch when network upgrades are not adequately dimensioned. Such long-duration Resource Crunch is not the subject of this study and is an open problem for future research.

B. Failures

Failures can cause Resource Crunch even if the offered load remains the same. This is because failures reduce the amount of available capacity (e.g., lowering the black line of Fig. 1). Traditional networks are typically engineered to endure some (usually simple) failures. However, in a network running at high utilization, failures and disasters might cause a Resource Crunch. In fact, natural (e.g., an earthquake) or man-made disasters (e.g., a Weapon of Mass Destruction) may inflict widespread damage to communication infrastructure [23], causing Resource Crunch even in traditional networks.

IV. SERVICE CLASSES AND THEIR REVENUE IMPACTS

A. Service Classes

Network traffic can be classified in several ways. The IEEE P802.1p standard specifies eight different traffic types for QoS implementation at the MAC level. However, as studied in [5] and summarized in [1], three classes of service are typically enough to describe traffic seen in practice. In this section, we provide an overview of each of them [1] and discuss their relationship with revenue. Table I summarizes these classes of service and adds some illustrative numbers (prices, bandwidths, and ratios) that will be utilized in Section VIII. Our work, however, is applicable to any number of service classes a network might have.

1) *Interactive*: These services directly impact end user experience (e.g., serving a user query), and they cannot suffer degradation. Also, they have the highest impact on revenue.

2) *Elastic*: These services are more flexible than Interactive Services, and end users either have more flexibility in terms of their utilization experience (as when making a video call, or sending an e-mail), or are not directly impacted by them (as when replicating a data update between Data Centers). We assume these services can be degraded, and they have less impact on revenue than Interactive Services.

3) *Background*: These services relate to maintenance activities that are not directly accessible to end users (backup migration, synchronization, configuration, etc). We consider that these services can be significantly degraded (more than Elastic Services), and they have the smallest impact on revenue.

Table I. Service Classes and their Impacts on Revenue.

Service Class	% of Total Traffic	Requested Bandwidth per Demand	Min. Required	Revenue Increase (\$/(Gbit · km))	Cost of Blocking (\$/(Gbit · km))
Interactive	15%	2 Gbps	2 Gbps	0.0000075	0.0000375
Elastic	25%	3 Gbps	2 Gbps	0.000006	0.000003
Background	60%	5 Gbps	2 Gbps	0.00000375	0.0

B. Revenue Impacts: Connection Prices and Blocking Costs

Now, we discuss how connections of different service classes impact revenue (i.e., the network operator's income). For a telecom operator, the relationship of bits to money tends to be direct. For a company such as Amazon, Google, or Microsoft, this relationship might involve different variables.

We consider that the revenue generated by a connection depends on the geographical distance between the source and destination of that connection. This removes distortions that paths longer than the shortest might create if a pricing based on the number of network hops was utilized instead¹.

The cost of blocking a demand is also considered in this study. This cost is a monetary representation of the damages to the image of the company, of the importance the operator places in each type of traffic, and other possible damages it might suffer from refusing service to a demand. In our results presented later, we assume blocking costs amount to 50% of the minimum revenue increase that would be generated from a demand (i.e., considering how long the demand would last), except for Background traffic that has no blocking cost.

Numerically, we base the prices used in the results of Section VIII and presented in Table I, on the bandwidth prices of Microsoft Azure [25]. We assume that transferring 1 GByte of Interactive data generates, on average, \$0.09. For a US-wide network, where the average source-destination distance is 1500 km, the revenue per Gbit per kilometer that an Interactive demand generates is, thus, \$0.0000075. For example, if an average-distance Interactive connection lasts 8 seconds, allocated at 1 Gbps bandwidth (totaling 1 GByte), the revenue generated is:

$$\frac{\$0.0000075}{\text{Gbit} \cdot \text{km}} \times 1500 \text{ km} \times 1 \text{ Gbps} \times 8 \text{ s} = \$0.09$$

¹The longer a connection is, the more revenue it generates; also, the greater the bandwidth it utilizes, the more revenue it generates (other Service Level Objectives can also impact revenue). Generalizing the revenue impact of a connection as its price, telecom markets favor value-based pricing instead of cost-based pricing [24]. In cost-based pricing, the price of a connection is directly proportional to the amount of resources utilized by that connection (e.g., the number of links it traverses). This approach does not consider the fact that, if a non-shortest path solution is offered to a client, a competitor that can provision a shorter path (providing the same bandwidth at a lower price) would be preferred. Thus, we consider a value-based pricing approach, through which the operator values its services based on the prices being used by its market competitors; to that end, we base the price of a connection on the geographical distance from its source to destination.

V. PROBLEM OF SERVING CRUNCHED DEMANDS

Now, we first state the problem of Provisioning with Degradation under Resource Crunch (Section V-A); then, we provide some definitions that will be utilized in this study (Section V-B); finally, we use an example to show why a shortest-path approach is not sufficient to solve the problem (Section V-C).

A. Problem Statement

Provisioning with Degradation under Resource Crunch

I. Given:

- Network topology: nodes, links, capacities;
- A set of allocated connections: revenues, paths, requested and minimum bandwidths; and
- A *crunched demand*: bandwidth, source-destination nodes, offered revenue, blocking cost.

II. *Output*: A decision of whether or not to serve the demand. If yes, then also a set of other demands to be degraded, how much to degrade each of them, and the path on which to place the crunched demand.

III. *Constraints*: Link capacities, connection's minimum bandwidths, crunched demand minimum bandwidth, all connections are non-splittable.

Our study considers a special version of the problem, focusing on **Profit Maximization Provisioning with Degradation under Resource Crunch**. Our goal is to *maximize profits, measured by revenue generated from served connections after subtracting the cost of blocking demands*. We simplify the problem by only allocating crunched demands at their minimum required bandwidth (if such provisioning is possible). This allows for minimum perturbation of existing connections while conserving capacity for future demands.

B. Definitions

For a crunched demand to be served, the following conditions must be met:

- A set of allocated connections must be found such that, after executing a service degradation to these connections, capacity will be freed from the crunched demand's source to its destination (i.e., service degradations create a **freed path** in the network);
- The *freed path* must have enough capacity to serve the minimum required bandwidth of the crunched demand. Then, we call the selected set of allocated connections a **candidate degradation set**;
- Serving that demand by executing these service degradations must be a **Profitable Decision**.

We define **Profitable Decision** as the positive result of the following decision:

i. Given:

- Crunched demand d_c , its potential revenue increase $rev(d_c)$, and its blocking cost $block(d_c)$;
- Candidate degradation set $S_{degrade}$ and revenue that would be lost with it $cost(S_{degrade})$ (also called **degradation cost**).

ii. Decide whether:

$$[rev(d_c) + block(d_c)] \geq cost(S_{degrade})$$

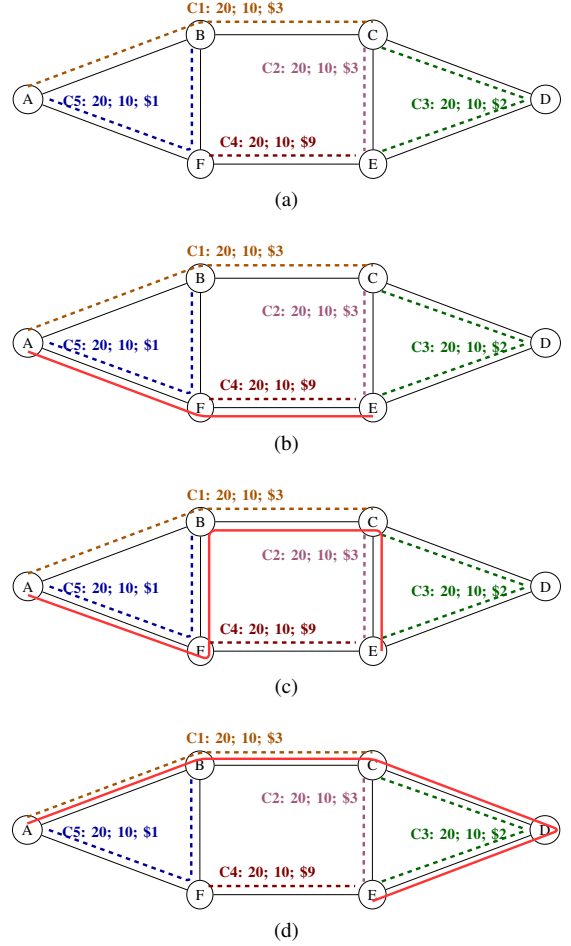


Figure 2. In this illustrative example, the initial state of the network can be seen in 2a. Each link has 20 Gbps capacity. Five connections are initially allocated, each of their labels are organized as “Connection Number: Allocated Bandwidth in Gbps; Minimum Bandwidth in Gbps; Revenue per Gbit”. Distances are accounted for in the prices shown. Because all links are fully occupied, when a new demand, from node A to node E, arrives requesting 10 Gbps, it is crunched. This demand offers to pay \$6 per Gbit, and has a blocking cost of \$30.

Now, we define the **optimum candidate degradation set** as the candidate set that reduces the operator's revenue the least, among all possible candidate sets that free a path from a crunched demand's source to its destination.

The **optimum candidate degradation set** allows for the best **Profitable Decision** to be made. In other words, since $rev(d_c)$ and $block(d_c)$ of crunched demand d_c are immutable, the optimum candidate degradation enables the scenario with the best chances of being profitable to be considered.

We refer to the bandwidth that can be freed-up from a connection as its **degradable bandwidth**.

C. Using Shortest Path to Solve the Problem

When a demand is crunched, one approach to decide whether or not to serve it (and where to allocate it) is to find the (k-)shortest path(s) between its source and destination. Then, select the cheapest set of connections that intersect that path such that, once degraded, a freed path would be created. Finally, if performing these degradations is profitable, execute them and serve the demand. In general, this is the approach of [11], [15], [16].

This approach chooses the service degradations that will be executed based on what connections traverse some specific path (namely, one of the k -shortest). Such an approach may not perform very well, as can be seen in Fig. 2b. Consider that a crunched demand from A to E arrives. The shortest path is shown in solid red. This approach does not find a profitable solution, since degrading 10-Gbps connections C4 and C5 would decrease the total revenue \$100 and the crunched demand would only increase the revenue \$60 (while its blocking cost is \$30). Hence, by using the shortest path, the crunched demand is blocked although a solution exists.

Alternatively, a shortest-path algorithm could be executed taking as weights the degradation costs of connections. Also in this case, the solution found is inaccurate. This inaccuracy leads to blocking of crunched demands unnecessarily and, when crunched demands are not blocked, it does not necessarily find an good solution. For example, consider executing Dijkstra’s algorithm taking as weights the degradation costs. The final path found by such an algorithm is shown in solid red in Fig. 2c. The total degradation cost of that path is \$70. Since the crunched demand is offering \$60 and has a blocking cost of \$30, it would be allocated. However, if the blocking cost of the crunched demand was zero, it would be rejected.

Note that the *optimum candidate degradation set* consists of connections C1 and C3. Degrading them by 10 Gbps would decrease revenue by \$50, which is less than the revenue increase offered by the crunched demand (without even considering its blocking cost). This degradation allows for the crunched demand to be served by the solid red path of Fig. 2d.

Intuitively, the example of Fig. 2 indicates that the current problem is of a complex nature, and guaranteeing an optimum solution for any scenario through a polynomial procedure might be infeasible. In Section VI, we propose a better polynomial-time algorithm to solve this problem, which, in certain cases, can find the *optimum candidate degradation set*.

VI. PROVISIONING UNDER RESOURCE CRUNCH

We first provide a high-level description of the proposed algorithm. It consists of multiple steps, most of which use the Connection Adjacency Graph (CAG) — introduced in Section VI-B — to assist in finding a cheap candidate degradation set. CAG allows the decoupling of the problem, hence, *we utilize it to find a cheap (possibly the cheapest) candidate degradation set, and then, if serving the crunched demand is a profitable decision, we provision the crunched demand through the shortest freed path*. Finally, because the problem is of complex nature (which will be discussed further), we propose some simplifications to reduce its complexity in Section VI-C.

A. PROVISIONER Algorithm

Fig. 3 shows the high-level structure of the *Provisioning Under Resource Crunch (PROVISIONER)* algorithm. Each of the Processes A, B, C, D, E, and F shown in the flowchart will be introduced in the following sections; however, we now give an overall explanation of how they fit together.

The algorithm starts with a crunched demand α , and executes a procedure to find a candidate set of allocated

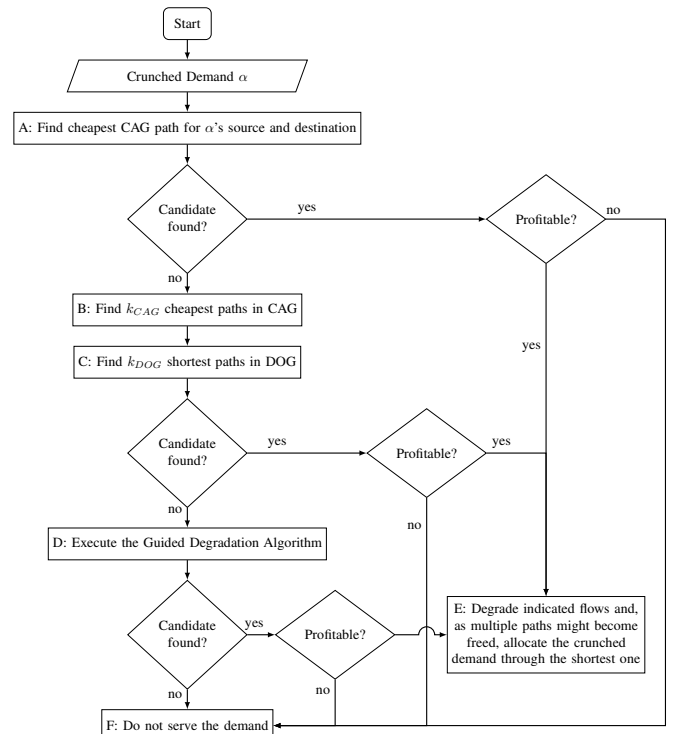


Figure 3. PROVISIONER algorithm. “Candidate found?” decision boxes check whether a possible path to allocate the crunched demand is found and if that path has enough capacity to carry the crunched demand.

connections to be degraded, with the help of the CAG, to serve demand α (Process A). If this procedure does not find a candidate set, the algorithm tries to find another candidate set through two steps. The first step (Process B) consists of finding a series of candidate sets and then combining these candidate sets (Process C) with the assistance of the Degradation Oriented Graph (explained in Section VI-C). If a candidate set is still not found, the algorithm executes a Guided Degradation Algorithm (Process D), also presented in Section VI-C. If the candidate set is still not found or not profitable, then α is blocked.

The algorithm can achieve optimality in certain cases. If a candidate is found through Process A, then results are necessarily optimum. Processes B and C might still find an optimum solution. Process D, even though not optimum, has a good chance of finding a candidate set that is reasonably good. Increasing parameters k_{CAG} and k_{DOG} , increases the chances of finding optimal solutions.

Aside from the flowchart of Fig. 3, the algorithm also uses a *registry of degraded connections* (both served crunched demands and degraded connections). This registry is ordered first by the revenue of each connection (highest first); secondly, by the hop-length of each connection (fewer hops first). Thus, when an allocated connection departs, the degraded connections listed there are upgraded to a higher bandwidth, if possible, i.e., to the highest possible bandwidth, up to the demand’s required bandwidth. With this registry, for example, it is possible for a crunched demand (allocated at its minimum bandwidth — as all crunched demands are initially allocated at their minimum required bandwidths) to be subsequently

upgraded to a higher bandwidth as soon as some other connection departs.

B. Connection Adjacency Graph (CAG)

The main observation when choosing a path to allocate a crunched demand is that, when a connection is degraded, it frees capacity throughout its entire path, and not only on the single link that we are currently observing. Referring to Fig. 2, if connections C5 and C4 are degraded to make room for a crunched demand from A to E, capacity will be freed not only through links A-F and E-F, but also on link B-F. Hence, rather than forcibly degrade services to free capacity throughout some predefined path (similar to the first approach of Section V-C), it might be more beneficial to traverse longer paths by fully utilizing the capacity freed by a connection once we choose to degrade it.

To capture the observation above, we introduce a novel representation of the network state, the Connection Adjacency Graph (CAG). CAG is a directed, weighted graph that provides an abstract view of how connections interact, allowing for cheap degradation candidates to be found. To generate it, we use the following steps:

- 1) For each connection in the network that has some degradable capacity, create a vertex (called a vertex) and associate with each vertex a list of the physical nodes on the path of that connection;
- 2) For any link (i, j) in the network which has free capacity, we create a dummy connection between i and j which has cost zero to degrade, and an associated vertex.
- 3) For each pair of vertices l, k , add directed edges (l, k) and (k, l) if both connections l and k have at least one physical node in common;
- 4) Each edge entering a vertex l has a weight equal to the cost of degrading one unit of bandwidth of the connection associated with l ;
- 5) For a crunched demand from s to t , create a dummy source vertex and connect it to each vertex that is associated with node s (as usual the edge weight is the cost of degrading one unit of bandwidth for the vertex's connection). Similarly, create a dummy destination node, and connect each vertex associated with t to it (edges with zero weight).

The CAG can be kept in memory and only updated as connections arrive/depart. When a connection is provisioned, it is necessary to add a vertex representing it in the CAG. It is also necessary to check if that connection exhausted any previously-free capacity on any of its links. In that case, the vertices that represented those free capacities must be removed from the CAG (after adding the new vertex). When a connection departs, it is necessary to check if it is liberating any free capacity on any link that was previously fully occupied. In this case, it is necessary to add vertices representing the new free capacities to the CAG (while removing the vertex of the departing connection). CAG would also allow for other weighting schemes (which will not be studied in this work).

As an example, the initial state of the network shown in Fig. 2a is represented by the CAG of Fig. 4a. Notice how

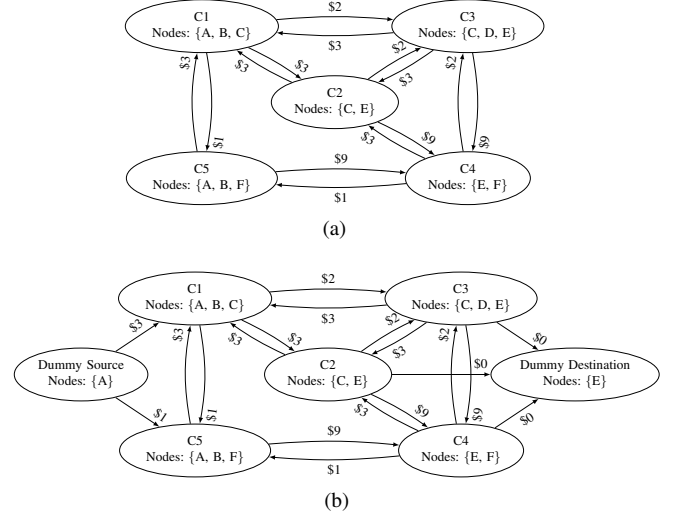


Figure 4. CAGs representing the network of Fig. 2. 4a shows the network in state 2a. 4b shows the CAG after the crunched demand from A to E arrives. Note the cheapest path in 4b: Dummy Source - C1 - C3 - Dummy Destination.

the physical topology of Fig. 2a is abstracted in the CAG. When the crunched demand from node A to node E of the previous example arrives, we can add a pair of dummy vertices representing those nodes, as shown in the CAG of Fig. 4b.

Remark 1. All paths that we refer to are simple paths. We define a **singleton path** as a simple path in the physical network whose edges have either free capacity or degradable capacity of at most one connection in each of the path's links.

In other words, a *singleton path* is a path whose edges do not include degradable capacities of more than one connection in the same link, nor include some combination of free capacity and degradable capacity in the same link.

Lemma 1. A *singleton path* maps to a CAG path.

Proof. Since a singleton path traverses a set of free capacities or degradable capacities of connections (one per link), that singleton path can be represented in the CAG as the path going, in the same order, through the vertices that represent those free capacities and connections. \square

Lemma 2. Degradation cost of one unit of bandwidth in a *singleton path* is the weight of the CAG path which represents that *singleton path*.

Proof. Since weights of CAG edges are costs of degrading the connection that each edge points to, then a path in CAG has the weight equivalent to the cost of degrading the connections that form the equivalent singleton path. \square

Theorem 1. A *cheapest source-to-destination CAG path* represents the *cheapest possible candidate degradation set* that allows for some capacity to be freed from a crunched demand's source to its destination.

Proof. By contradiction, suppose there exists a cheaper candidate degradation set. Consider, also, the singleton path that traversed all connections and free capacities in that cheaper candidate set. However, since any singleton path can be mapped to a CAG path, there must exist a CAG path that

represents such singleton path (Lemma 1). Since the degradation cost of that singleton path is the same weight of the CAG path that represent it (Lemma 2), that candidate degradation set cannot be cheaper than the cheapest set found before. \square

Some simplifications have been made so far. To consider the *Profit Maximization Provisioning with Degradation under Resource Crunch* problem in its entirety, we consider two opposite scenarios, i.e., we separately analyze the case where crunched demands fit in the degradable bandwidths of allocated connections (i.e., in a singleton path) and the case where they do not. We study each of them with the assistance of the CAG in the following subsections.

1) Crunched demands that fit in degradable bandwidths:

In the PROVISIONER algorithm, when a crunched demand arrives, it finds the cheapest path in the CAG from that source to destination. This is the first procedure to be executed in the algorithm and it generates the first degradation candidate set.

If the crunched demand requests a minimum bandwidth that can be allocated in a path freed by that CAG path, then an optimum result is found. This is because:

- i. There exists no other cheaper degradations that could free a path for the crunched demand, and
- ii. The path freed from that degradation is sufficient to fit the minimum requested bandwidth of such demand, and thus it is not necessary to free up more capacity to serve that crunched demand.

With such degradation candidate set, the operator can then decide if serving the crunched demand is a Profitable Decision.

If the algorithm decides to serve the crunched demand at this point, it only requires a shortest-path computation on top of the CAG; an identification of the connections in such shortest-path; and a service degradation of such connections. In other words, given an in-memory CAG, the time complexity up to this point is that of the shortest-path algorithm (in case of Dijkstra, worst-case is $O(V^2)$, where V is the number of degradable connections in the network), plus the complexities of traversing the shortest-path links (worst-case $O(V)$, however, that is only possible if the shortest path traverses *all* connections in the network, an extremely unlikely situation) and executing service degradations (this procedure is technology dependent, but should be of constant time complexity).

Not all demands fit in the degradable capacity of a cheapest degradation, however. In the example of Figs. 2 and 4, the crunched demand from A to E only requests 10 Gbps and every other connection can be degraded in 10 Gbps; however, this is a simplification for illustrative purposes.

2) Crunched demands that do not fit in degradable bandwidths: This scenario accounts for Processes B and C of Fig. 3. In this case, the cheapest degradation found in Process A does not free enough capacity in the network for the crunched demand to be served.

Thus, there are three possible assumptions in this case:

- a. There might exist a more expensive degradation that could free enough capacity for the crunched demand;
- b. It might be necessary to degrade more than one connection per link in the physical network (or to use the

free capacity along with the degradable capacity of some connection) to serve the crunched demand;

- c. The network might be so populated by degraded connections that it is simply not possible to further degrade other connections to make room for the crunched demand.

Unlike the previous scenario, we know of no polynomial time procedure for optimally solving the problem of Section V. The best solutions we know require checking different combinations of degradations among all degradable connections — a problem whose time complexity is not in P . If an optimal solution is required, the following steps can find it:

- 1) Find all source-to-destination CAG paths;
- 2) List all combinations of all the CAG paths found before;
- 3) Among all the combinations listed, select the set that (together) free non-singleton paths with enough capacity for the crunched demand to be served (note that some combinations might not help in finding a larger-capacity non-singleton path); and
- 4) Among the selected combinations, choose the cheapest.

Consider, for example, that when a degradation is performed, a path is freed in the physical network with capacity 10 Gbps, since only 10 Gbps were freed in at least one of its links (i.e., the bottleneck link). Consider, now, that a second degradation is executed such that this degradation increased the freed capacity on those bottleneck links to a total of 20 Gbps. Note that each degradation is mapped to different singleton paths, and executing both of them generated a non-singleton path of larger capacity (as it traverses the degraded capacity of two connections on the bottleneck links).

This approach will find the cheapest combination of candidate degradation sets, since it executes a brute-force-like investigation of all possible degradations. However, there might exist a factorial number of CAG simple paths and, among them, there might exist an exponential number of combinations. Thus, optimality in this case is not guaranteed through a polynomial-time procedure.

Since this is an on-line problem whose solution must be fast, we give up optimality and, in Section VI-C, we avoid this brute-force approach by introducing simplifications to the algorithm while maintaining its polynomial time complexity.

C. Dealing with the Time Complexity of the Problem

We introduce two methods to deal with the complexity presented in Section VI-B2. Both these methods rely on the following simplification of the problem: instead of taking into account all possible CAG paths, as mentioned in the brute-force approach, we only consider the k_{CAG} shortest paths (which can overlap both in vertices and edges). This simplification is represented by Process B of Fig. 3 .

After calculating the k_{CAG} shortest paths, we utilize the Degradation Oriented Graph (DOG) to combine them in an efficient manner. Note that two or more singleton paths can only form a larger-capacity non-singleton path when they share at least one link (although this is not a sufficient condition). Thus, DOG only combines CAG paths when such combination might lead to singleton paths being joined to form a larger-capacity non-singleton path. It is Process C of Fig. 3 and will be described in Section VI-C1.

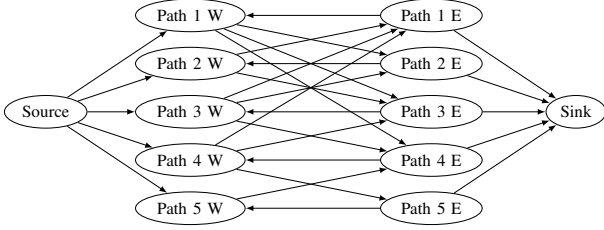


Figure 5. The DOG of the 5 cheapest CAG paths of Fig. 4b. These paths are (CAG Path 1) Source - C1 - C2 - Destination; (CAG Path 2) Source - C1 - C3 - Destination; (CAG Path 3) Source - C1 - C2 - C3 - Destination; (CAG Path 4) Source - C5 - C1 - C3 - Destination; (CAG Path 5) Source - C5 - C1 - C2 - C3 - Destination.

If a candidate degradation set is not found after Processes *B* and *C*, we use the Guided Degradation Algorithm (GDA) to look for a good candidate. GDA is represented by Process *D* of Fig. 3 and will be presented in Section VI-C2.

Note that both Processes *B* and *C* only introduce two *k*-shortest-path computations, each of them with typical time complexity² of $O(k \cdot N(M + N \cdot \log(N)))$, where N is the number of vertices in the CAG or in the DOG (for each Process), and M is the number of edges in each of these graphs, respectively. Thus, these steps maintain the polynomial time complexity of the algorithm. The GDA algorithm, as will be shown, also introduces simple computations that keep Provisioner in the polynomial time-complexity range.

1) **Degradation Oriented Graph:** DOG is a directed bipartite graph, and, to generate it, follow the steps:

- 1) Create two vertices for each of the k_{CAG} cheapest CAG paths: west vertex and east vertex. Add an edge going from east vertex to west vertex;
- 2) Connect the west vertices to all other east vertices whenever the singleton paths that map to the CAG paths they represent have at least one physical link in common;
- 3) Add a source and connect it to all west vertices. Add a sink and connect all east vertices to it;
- 4) All edges in the DOG have weight equals to 1.

An example of a DOG can be seen in Fig. 5, where five paths of the CAG of Fig. 4b were considered.

Since there might exist a factorial number of DOG paths, we introduce a second level of simplification: we only look for the k_{DOG} shortest paths in the DOG. For the results presented in this study, we set $k_{CAG} = 15$ and $k_{DOG} = 30$.

After all k_{DOG} combinations of the k_{CAG} cheapest CAG paths are investigated to find a candidate degradation set, it might be the case that no combination can free enough capacity for the crunched demand to be served. In this scenario, we utilize the Guided Degradation Algorithm.

2) **Guided Degradation Algorithm:** Represented by Process *D* of Fig. 3, this algorithm works by augmenting the amount of degradable capacity in a given path. Once the k_{CAG} cheapest paths are known, this algorithm finds other cheap connections whose degradation might aid in liberating more capacity in the path initially freed by that candidate degradation set of the CAG path. Effectively, GDA induces

free capacity throughout a path similar to what the greedy shortest-path approach of Section V-C did; however, instead of looking for a shortest path, GDA uses as a starting point a path whose initial liberation is cheap (which might not be the shortest physical path). The algorithm works as follows:

- 1) For each CAG cheapest path, find the k_{GDA} -shortest singleton paths that would be freed by performing the degradation indicated by the CAG path;
- 2) For each k_{GDA} singleton path P_{single} found, consider all links that do not have enough freed capacity for the crunched demand. For each of them, find at most the δ cheapest connections that overlap the link and add them all to a set S_{cheap} ;
- 3) Order the elements of S_{cheap} according to:

$$f(c) = \frac{com(c, P_{single})}{len(P_{single})} \cdot cost(c)^{-1}$$

where c is a connection listed in S_{cheap} ; $com(c, P_{single})$ is the number of links in common between c and the singleton path; and $cost(c)$ is the degradation cost of c ;

- 4) Pop elements out of the ordered S_{cheap} until enough capacity is freed along the singleton path or until the set is emptied. When a path for the crunched demand is found, record it and its degradation cost and proceed;
- 5) Finally, compare the cost of liberating each of the paths found and return the cheapest combination.

This algorithm either finds a degradation candidate set or the crunched demand is blocked. The time complexity of the GDA is polynomial, i.e., the number of iterations in the performed is equal to number of CAG paths; and, in each iteration:

- a. Finding k_{GDA} -shortest paths is a polynomial procedure;
- b. In each link, at most δ connections are considered;
- c. Sorting connections is also a polynomial procedure.

VII. CAG SPACE COMPLEXITY

As the CAG represents the connections allocated in the network, its size can grow significantly. In fact, the number of vertices in the CAG is:

$$|V_{CAG}| = N_{conn}^{degr} + e_{free}$$

where N_{conn}^{degr} is the number of degradable connections in the network and e_{free} is the number of links with some free capacity. Note that the CAG becomes an order-zero graph if no connection has any degradable capacity and all links are fully occupied.

The number of edges in the CAG depends on how many other connections are adjacent to each connection (i.e., share at least one physical node in their paths). In practice, this number is not large for the average connection since non-congested routing approaches tend to favor shorter routes, which in a fairly meshed topology ends up limiting the chances that each single connection will interact with a large number of other connections. However, the worst-case scenario occurs if every single connection is adjacent to every other connection — in this case, the total number of edges of the CAG is:

$$max(|E_{CAG}|) = |V_{CAG}| \cdot (|V_{CAG}| - 1)$$

²Using Yen's *k*-shortest-path algorithm, with Fibonacci heap and Dijkstra's shortest-path.

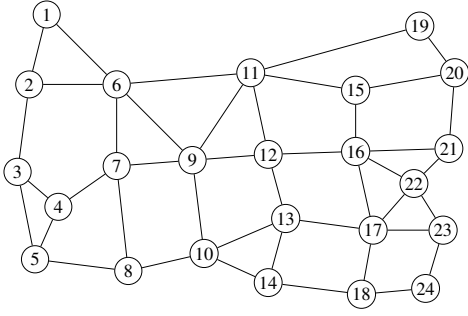


Figure 6. 24-node US-wide topology used in this study.

where V^{CAG} is the number of vertices in the CAG.

In practice, the CAG size rarely gets close to the aforementioned bounds. Usually, traffic that flows through core networks is aggregated into a smaller representation of the actual number of connections served — which includes service class aggregation. This results in CAGs that are easily manageable within memory. Also, note that the CAG does not need to be reconstructed from scratch at each new crunched demand, but it is updated whenever new connections are served or when allocated connections depart. Finally, note that as connections are degraded, the CAG reduces in size, making it smaller the longer the Resource Crunch lasts. Thus, the CAG can be kept in memory where the only computations performed on it (aside from addition/removal of vertices) are shortest-path-related computations, which are fast even for large simple directed graphs, such as the CAG.

A. Reduced CAG

In Section VI-C, we introduced techniques to reduce the time complexity of the Provisioner algorithm. In cases where the CAG size complexity becomes a limiting factor, we present a method to construct a *reduced CAG*. As this procedure reduces the precision of the Provisioner algorithm, we suggest it only be used if strictly necessary and that is why we do not present it as a regular part of the algorithm flowchart of Fig. 3.

If, however, reducing the CAG size is necessary the following procedure should be performed before running the algorithm presented in Fig. 3:

- 1) Find the k -shortest paths in the physical network that connect the crunched demand's source to its destination;
- 2) Construct a CAG for the current crunched demand based on connections that traverse any of the links from the k -shortest paths from the previous step;
- 3) Run the algorithm of Fig. 3 using the CAG constructed in the previous step.

We explore the performance of this optimization in the next section.

VIII. ILLUSTRATIVE NUMERICAL EXAMPLES

A. Simulation Settings

A dynamic network simulation was implemented to evaluate the performance of the proposed algorithm. Our focus is to analyze Resource Crunch caused by traffic fluctuations. A

period of five consecutive days was simulated where Resource Crunch happened every day, as follows:

- a. New demands arrive with exponential inter-arrival times. The mean inter-arrival times vary throughout the day to reflect the daily traffic fluctuations, in a cyclical pattern similar to that of Fig. 1. For simplification purposes, we consider that these variations have a sinusoidal shape;
- b. All connections have exponentially-distributed durations of mean 30 minutes;
- c. New demands are generated such that 15% of offered traffic is Interactive, 25% is Elastic, and 60% is Background (see Table I);
- d. Demands uniformly select a source-destination pair and request for a certain amount of bandwidth from end-to-end according to its type.

We consider the topology of Fig. 6, with 100 Gbps links in both directions. Three scenarios were considered:

- **Scenario 1:** offers a traffic whose daily variations have a peak-to-valley ratio of 2. The average link utilization is 75%. Average mean inter-arrival time throughout the day is six seconds;
- **Scenario 2:** has a peak-to-valley ratio of 3.5, and average link utilization 50%. Average mean inter-arrival time throughout the day is ten seconds;
- **Scenario 3:** has a peak-to-valley ratio of 5 and average link utilization 50%. Average mean inter-arrival time throughout the day is ten seconds.

Note that Resource Crunch happens whenever the average number of crunched demands goes above a threshold. On average, for Scenario 1, Resource Crunch happens every day from 5 PM to 1 AM (8 hours); for Scenario 2, it happens from 7:30 PM to 10:30 PM (3 hours); and for Scenario 3, from 6:30 PM to 11:30 PM (5 hours).

We compare our results with three greedy algorithms and a baseline approach. The baseline approach consists of not resorting to service degradation whatsoever. In this case, during Resource Crunch, the network simply rejects the incoming crunched demands. The greedy approaches are based on [10], [14], [15], with small changes to account for the distance-based pricing scheme being considered:

- **Greedy Cheapest:** consists of the approach of V-C;
- **Greedy Expensive:** similar to the above but sorts connections from most-revenue-generating to least;
- **Greedy Expensive k :** same as Greedy Expensive, but considers the k -shortest paths ($k = 5$).

The registry of degraded demands explained in Section V-A is utilized by PROVISIONER and all the greedy approaches.

B. Profit, Revenue, and Cost Impacts

Fig. 7 shows how each approach performs relative to the baseline. In Fig. 7a, with regards to blocking costs; in Fig. 7b, with regards to revenue increases; and, in Fig. 7c, with regards to profit increases. These results consider the entire Resource Crunch of each day, throughout the five days.

PROVISIONER performs better in two ways: it favors crunched demands that have higher impact on revenue, while

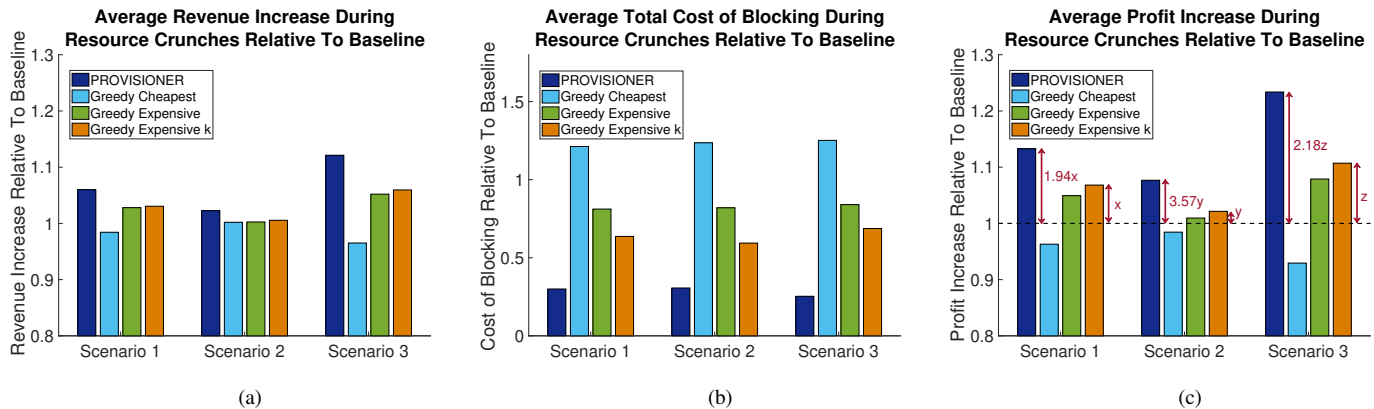


Figure 7. Impact of PROVISIONER compared to greedy approaches relative to the baseline. These results consider the state of the network immediately before the Resource Crunch compared to the state of the network immediately after the crunch is resolved.

degrading the demands that have lower revenue impacts (7b); and it blocks demands that have lower blocking costs (7a). This dual behavior results in a significant improvement over the greedy approaches when comparing their effects on profits in 7c. The profit increases of Fig. 7c are directly related to the peak offered traffic and inversely related to the duration of the Resource Crunch (as will be explained in the following paragraphs). This leads Scenario 3 (with a shorter duration than 1, and higher peak than 2) to a higher overall profit increase when compared to the baseline.

The bars in Fig. 7c compare the profit increases of each approach to the baseline. However, if we contrast the approaches among themselves, it is clear that PROVISIONER performs much better than the second-best algorithm (*Greedy Expensive k*). The red arrows in Fig. 7c show the comparison between PROVISIONER and *Greedy Expensive k*.

Greedy Cheapest has a poor overall performance. Since it tries to degrade cheapest connections, it tends to degrade shorter ones. With that, each crunched demand only frees enough capacity to place itself. After a while, the network gets crowded with crunched demands and thus loses overall degradable capacity. Thus, new crunched demands are blocked due to a lack of degradable capacity. The other greedy approaches, however, free more capacity as they degrade more expensive connections (i.e., longer connections).

Fig. 8 shows the impact of Resource Crunch on different classes of traffic. In 8a, the cost of blocking incoming demands is shown. As Background traffic has zero blocking cost, it is not included. PROVISIONER performs better because it favors high-paying traffic while other approaches do not, i.e., Interactive traffic is more likely to be served.

Results of 8b are the number of blocked demands of each traffic class. Note that different classes account for different percentages of the overall offered traffic (see Table I). Fig. 8b shows how PROVISIONER does not waste resources by allocating low-value Background demands.

In Fig. 9, the average path length of crunched demands that are served is shown. *Greedy Cheapest* has an average path length close to the physical network average shortest-path length. As *Greedy Expensive* does not favor short crunched demands, it generates a higher average path length for the crunched demands it serves, and *Greedy Expensive k* behaves similarly, however, using even longer paths.

As shown in Fig. 9, PROVISIONER serves demands through longer paths compared to *Greedy Cheapest* and *Greedy Expensive*. This higher occupation of the network hinders the search of cheap degradations for future crunched demands. Thus, the shorter the Resource Crunch lasts, the better PROVISIONER performs. So, shortest-path routing is not necessarily more revenue efficient, as short durations of

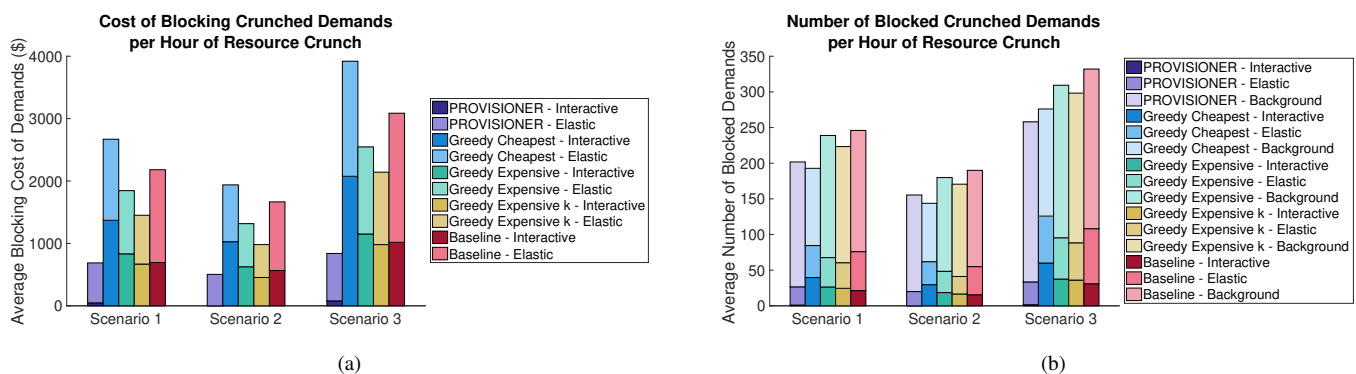


Figure 8. Hourly view of crunched demands by type of traffic. Background traffic has zero blocking cost.

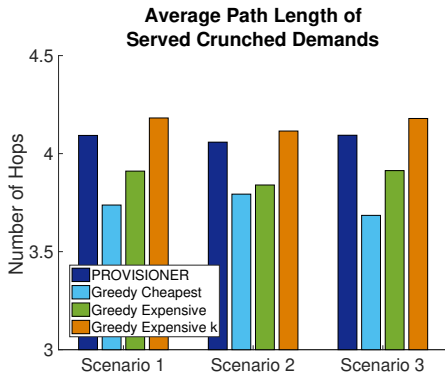


Figure 9. Average length of crunched demands that are served.

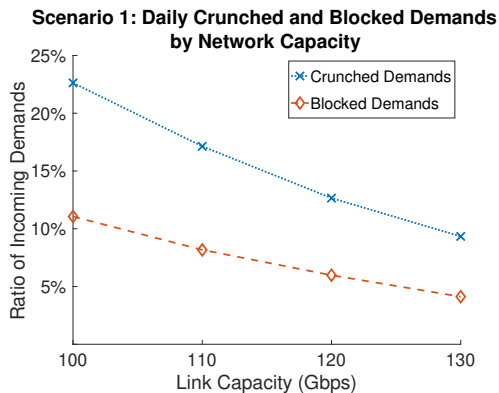


Figure 10. Ratio of crunched and blocked demands for different network capacities in Scenario 1.

Resource Crunch and demands (average 30 minutes) make longer paths worthwhile.

In Fig. 10, we analyze how PROVISIONER performs for different network capacities and a fixed traffic profile. We maintain the offered load of Scenario 1 and increase all link capacities from 100 Gbps to 130 Gbps. For 100 Gbps, Resource Crunch lasts for 8 hours; for 110 Gbps, it lasts for 3 hours and 30 minutes; for 120 Gbps, for 1 hour and 30 minutes; and for 130 Gbps it lasts for half hour each day (approximate durations). The blue curve shows the ratio of demands that are crunched throughout the day. The orange curve shows the ratio of demands that are blocked, i.e., after PROVISIONER tried to allocate them (if during Resource Crunch). As Resource Crunch gets smaller, PROVISIONER is used less, leading to lower impact in the blocking ratio. For very small Resource Crunch, the orange curve converges to the regular blocking ratio of the network.

C. Reduced CAG

So far, the results presented all utilize the full version of the CAG as introduced in Section VI. Now, we compare how the profit increase is affected by utilizing the reduced CAG of Section VII instead of the full CAG. As Fig. 11 shows, on the network of Fig. 6, finding the six shortest paths is already sufficient to achieve a performance almost 90% similar to that of the full CAG.

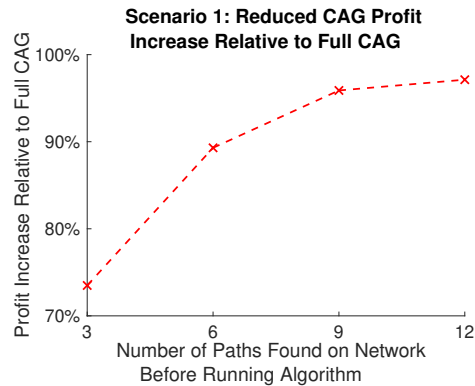


Figure 11. Performance of the reduced CAG, proposed in Section VII, compared to the CAG constructed based upon all the connections of the network (i.e., the full CAG) under different k shortest paths.

The size of the reduced CAG also affects the number of shortest paths found in the CAG and in the DOG, in Processes B and C. In fact, by reducing the CAG before executing these Processes, the solution space is limited to a small set of candidates regardless of the number of shortest paths found in Processes B and C. As a result, by using the reduced CAG, it becomes unnecessary to find a large number of shortest paths.

IX. CONCLUSION

In this work, we observed that increasing the average network utilization might lead to the occurrence of Resource Crunch. In such situation, it is important to have an intelligent method to decide how to degrade services to serve incoming demands that would otherwise be blocked. We showed how the use of bandwidth-flexible demands helps in dealing with Resource Crunch. The Connection Adjacency Graph, a useful tool to represent the network state, was introduced. The size of the CAG was also discussed and, in case it grows too large, we proposed a simple method to reduce its size at the cost of precision. We showed how the decision of whether or not to serve a crunched demand (and, if so, where to allocate it) is of complex nature. With the CAG, we proposed the PROVISIONER algorithm. We compared the results of our method with existing greedy approaches and showed how our method outperforms them. The results confirmed that the CAG is efficient in maximizing profits, that it gives priority to high-paying traffic, and that shortest-path routing is not the best option to maximize revenues during Resource Crunch.

Future work includes analyzing splittable connections, and predicting how and when network upgrades should be performed in a high-utilization network.

X. ACKNOWLEDGMENTS

R. Lourenço was funded by CAPES Foundation (Proc. 13220-13-6). M. Tornatore acknowledges the research support from COST Action CA15127. This work was supported in part by DTRA grant HDTRA1-14-1-0047.

REFERENCES

- [1] C.-Y. Hong *et al.*, "Achieving high utilization with software-driven WAN," in *Proc. ACM SIGCOMM*, vol. 43, no. 4, 2013.

- [2] F. Dikbiyik, L. Sahasrabudde, M. Tornatore, and B. Mukherjee, "Exploiting excess capacity to improve robustness of WDM mesh networks," *IEEE/ACM Trans. Netw.*, vol. 20, no. 1, Feb. 2012.
- [3] S. Jain *et al.*, "B4: Experience with a globally-deployed software defined WAN," *Proc. ACM SIGCOMM*, vol. 43, no. 4, 2013.
- [4] Cisco, "Visual Networking Index," *White paper at cisco.com*, 2016.
- [5] Y. Chen *et al.*, "A first look at inter-data center traffic characteristics via Yahoo! datasets," in *Proc. IEEE INFOCOM*, 2011.
- [6] A. Gerber and R. Doverspike, "Traffic types and growth in backbone networks," in *Proc. IEEE/OSA OFC/NFOEC*, 2011.
- [7] LINX. (2017) London InterNet eXchange - Traffic Stats. [Online]. Available: <https://www.linx.net/>
- [8] A. Kumar *et al.*, "BwE: Flexible, hierarchical bandwidth allocation for WAN distributed computing," in *Proc. ACM SIGCOMM*, 2015.
- [9] M. Chiang, S. H. Low, A. R. Calderbank, and J. C. Doyle, "Layering as optimization decomposition: A mathematical theory of network architectures," *Proceedings of the IEEE*, vol. 95, no. 1, 2007.
- [10] X. Lin *et al.*, "Utility maximization for communication networks with multipath routing," *IEEE T. Aut. Con.*, vol. 51, no. 5, 2006.
- [11] S. S. Savas, C. Ma, M. Tornatore, and B. Mukherjee, "Backup re-provisioning with partial protection for disaster-survivable software-defined optical networks," *Photonic Network Comm.*, vol. 31, no. 2, 2016.
- [12] W. Zhang *et al.*, "Reliable adaptive multipath provisioning with bandwidth and differential delay constraints," in *Proc. IEEE INFOCOM*, 2010.
- [13] D. Andrei, M. Tornatore, M. Batayneh, C. U. Martel, and B. Mukherjee, "Provisioning of deadline-driven requests with flexible transmission rates in WDM mesh networks," *IEEE/ACM Tra. on Net.*, vol. 18, no. 2, 2010.
- [14] V. Gkamas, K. Christodoulouopoulos, and E. Varvarigos, "A joint multi-layer planning algorithm for IP over flexible optical networks," *IEEE/OSA Journal of Lightwave Technology*, vol. 33, no. 14, 2015.
- [15] Z. Zhong, J. Li, N. Hua, G. B. Figueiredo, Y. Li, X. Zheng, and B. Mukherjee, "On QoS-assured degraded provisioning in service-differentiated multi-layer elastic optical networks," in *Proc. IEEE GLOBECOM*, Dec 2016.
- [16] A. Roy, M. F. Habib, and B. Mukherjee, "Network adaptability under resource crunch," in *Proc. IEEE ANTS*, 2014.
- [17] J. Yang *et al.*, "Joint admission control and routing via approximate dynamic programming for streaming video over software-defined networking," *IEEE Trans. on Multimedia*, vol. 19, no. 3, March 2017.
- [18] S. Namal, I. Ahmad, A. Gurtov, and M. Ylianttila, "SDN based inter-technology load balancing leveraged by flow admission control," in *Proc. IEEE SDN4FNS*, Nov 2013.
- [19] J. Doma *et al.*, "Admission control in flow-aware multi-topology adaptive routing," in *Proc. IEEE ICNC*, Feb 2015.
- [20] B. Ager *et al.*, "Anatomy of a large European IXP," in *Proc. ACM SIGCOMM*, 2012.
- [21] C. Labovitz *et al.*, "Internet inter-domain traffic," in *Proc. ACM SIGCOMM*, vol. 40, no. 4, 2010.
- [22] I. Ari, B. Hong, E. L. Miller, S. A. Brandt, and D. D. Long, "Managing flash crowds on the Internet," in *Proc. IEEE/ACM MASCOTS*, 2003.
- [23] B. Mukherjee, M. F. Habib, and F. Dikbiyik, "Network adaptability from disaster disruptions and cascading failures," *IEEE Communications Magazine*, vol. 52, no. 5, May 2014.
- [24] A. Hinterhuber, "Towards value-based pricing - An integrative framework for decision making," *Indust. Market. Manag.*, vol. 33, no. 8, 2004.
- [25] Microsoft. (2017) Microsoft Azure: Bandwidth Pricing Details. [Online]. Available: <https://azure.microsoft.com/en-us/pricing/details/bandwidth/>