

Stabilization of Itô Stochastic T-S Models via Line Integral and Novel Estimate for Hessian Matrices

Shaosheng Zhou, Yingying Han, Baoyong Zhang

Abstract—This paper proposes a line integral Lyapunov function approach to stability analysis and stabilization for Itô stochastic T-S models. Unlike the deterministic case, stability analysis of this model needs the information of Hessian matrix of the line integral Lyapunov function which is related to partial derivatives of the basis functions. By introducing a new method to handle these partial derivatives and using the property of state-dependent matrix with rank one, the stability conditions of the underlying system can be established via a line integral Lyapunov function. These conditions obtained are more general than the ones which are based on quadratic Lyapunov functions. Based on the stability conditions, a controller is developed by cone complementarity linearization algorithm. A non-quadratic Lyapunov function approach is thus proposed for the stabilization problem of the Itô stochastic T-S models. It has been shown that the problem can be solved by optimizing sum of traces for a group of products of matrix variables with linear constraints. Numerical examples are given to illustrate the effectiveness of the proposed control scheme.

Index Terms—Hessian matrix, line integral Lyapunov function, quadratic optimization, stochastic nonlinear system, T-S model.

I. INTRODUCTION

The past few decades have witnessed the significant advances of Takagi-Sugeno (T-S) fuzzy systems, see, for example [1]–[4] and references therein. The main motivation should be attributed to their capabilities that allow them to represent and handle some sort of qualitative information such as operators' experience, experts' knowledge and so forth involved in the plants. The practical experience of these skilled operators and experts' knowledge are usually summarized and expressed in language, and fuzzy set theory can convert such sort of qualitative information into quantitative data in light of membership functions. For stability analysis and stabilization of fuzzy systems, many researchers have resorted to a quadratic Lyapunov function approach [5]–[7]. The main drawback concerning this approach lies in the fact that it is difficult for a common positive definite matrix to satisfy the stability conditions of all local linear models. In this situation, the non-quadratic Lyapunov function is a helpful alternative [8]–[12]. It has been

shown that the stability and stabilization results based on non-quadratic Lyapunov function are less conservative than those based on common quadratic ones. It is worth noting that unlike their discrete-time counterpart, continuous-time T-S models induce the problem of handling derivatives of the fuzzy basis functions that emerge when the basis dependent Lyapunov function is employed to derive stability and stabilization results [9], [13], [14]. In such case, the upper bounds of the time derivatives of the fuzzy basis functions are used to analyze stability performance and to develop a controller. Since the time derivatives of fuzzy basis functions are related to the vector field that governs the T-S models and are dependent on the state and control of the systems, their upper bounds are not always readily available, and sometimes they do not even exist. To overcome these difficulties, the authors in [15] proposed a novel fuzzy Lyapunov function that was formulated as a line integral of a vector along a path from the origin to the current state. By using this line integral function, the stability results did not involve the upper bound of the time derivatives of fuzzy basis functions. The main issues in [15] are that the T-S fuzzy model have a specific premise structure and that the stabilization results are provided by bilinear matrix inequalities.

When a fuzzy system is disturbed by random perturbations, the system turns to be a stochastic fuzzy one. Recently, T-S fuzzy descriptions have been introduced to study the analysis and synthesis problem of stochastic nonlinear systems [14], [16]–[18]. The local uniqueness results for the solutions of fuzzy stochastic differential equations were provided in [19]. For uncertain nonlinear stochastic time-delay systems, a fuzzy controller was developed to guarantee the robust asymptotic stability and attenuation performance [20]. In [21], by using Lyapunov method and stochastic analysis approaches, the delay-dependent stability criterion was presented for T-S fuzzy Hopfield neural networks with parametric uncertainties and stochastic perturbations. For a class of T-S model based stochastic systems, the stabilization problem was investigated in [7]. It should be pointed out that most analysis or synthesis results of the T-S model based stochastic systems mentioned above are obtained by using or partly using a common quadratic Lyapunov function.

Motivated by [15] and [7], this paper proposes a line integral Lyapunov function approach to stability analysis and stabilization for a class of Itô stochastic T-S model based nonlinear systems. By using the line integral Lyapunov function proposed in [15], more general sufficient conditions for the stochastic asymptotic stability of the class of systems can be established. The control design is facilitated by the

This work was supported by the National Natural Science Foundation of P. R. China under Grants 61673149.

Corresponding author: Shaosheng Zhou is with Institute of Information and Control, Department of Automation, Hangzhou Dianzi University, Hangzhou Zhejiang 310018, P. R. China (e-mail: sszhou65@163.com).

Yingying Han is with Institute of Information and Control, Department of Automation, Hangzhou Dianzi University, Hangzhou Zhejiang 310018, P. R. China (e-mail: yyhan0826@163.com).

Baoyong Zhang is with the School of Automation, Nanjing University of Science and Technology, Nanjing Jiangsu 210094, P. R. China (e-mail: baoyongzhang@njjust.edu.cn).

introduction of some additional matrix variables and a cone complementarity linearization algorithm. These variables decouple the coupling terms in the obtained stability conditions and make the control design feasible. It will show that the solution of the controller design problem can be obtained by solving a minimization problem with linear constraints.

The organization of this paper is as follows. Section 2 formulates the problem and presents some preliminary results. In Section 3, stochastic stability analysis is given. Controller design is presented in Section 4 and a numerical example is given in Section 5 to illustrate the effectiveness of the proposed approach. Finally, the paper is concluded in Section 6.

Throughout this paper, a real symmetric matrix $P > 0$ (≥ 0) denotes P being a positive definite (or positive semidefinite) matrix, and $A > (\geq) B$ means $A - B > (\geq) 0$. I is used to denote an identity matrix with proper dimensions. The trace of a square matrix A is denoted by $\text{tr}A$ and the notation A^τ represents the transpose of the matrix A . The expression A^S stands for the sum of A and A^τ . For symmetric matrices, we use $*$ as an ellipsis for a block matrix that is induced by symmetry. The notation $(\Omega, \mathcal{F}, \mathcal{P})$ represents the probability space with Ω the sample space, \mathcal{F} the σ -algebra of subsets of the sample space and \mathcal{P} the probability measure on \mathcal{F} . Matrices, if not explicitly stated, are assumed to be compatible for algebraic operations.

II. PROBLEM FORMULATION AND PRELIMINARIES

Consider an Itô stochastic T-S model described by the following rules:

Plant Rule i : If x_1 is $F_1^{\alpha_{i1}}$, \dots , and x_n is $F_n^{\alpha_{in}}$, then

$$dx = (A_i x + B_i u) dt + C_i x dW(t)$$

where $i = 1, \dots, s$, s is the total number of fuzzy rules; $x = (x_1, \dots, x_n)^\tau \in \mathbb{R}^n$, $u \in \mathbb{R}^p$ are the state vector and the control input, respectively; for each pair $(i, j) \in \{1, \dots, s\} \times \{1, \dots, n\}$, $F_j^{\alpha_{ij}}$ is the fuzzy set in the i th rule based on the premise variable x_j with α_{ij} specifying which x_j -based fuzzy set is used in the i th If-Then rule. $W(t)$ is a Wiener process on a complete probability space $(\Omega, \mathcal{F}, \mathcal{P})$ adapted to a filtration $\{\mathcal{F}_t\}_{t \geq 0}$; $A_i \in \mathbb{R}^{n \times n}$, $B_i \in \mathbb{R}^{n \times p}$ and $C_i \in \mathbb{R}^{n \times n}$ are known real constant matrices. In what follows, for notational convenience, we denote the two sets $\{1, \dots, s\}$ and $\{1, \dots, n\}$ by \mathcal{S} and \mathcal{N} respectively. Assume that for any $j \in \mathcal{N}$, the number of all the x_j -based fuzzy sets used in the s fuzzy rules is s_j with s_j a certain positive integer. The superscript α_{ij} in the fuzzy set $F_j^{\alpha_{ij}}$ is an ordered index of all the s_j x_j -based fuzzy sets $\{F_j^{\alpha_{ij}}\}_{\alpha_{ij}=1}^{s_j}$ which will play a role in the following development. If $\alpha_{ij} = \rho_j$, $i \in \mathcal{S}$, which means that in the i th fuzzy rule the premise variable $x_j(t)$ belongs to the ρ_j th fuzzy set $F_j^{\rho_j}$, one can see that

$$1 \leq \rho_j \leq s_j, \quad j \in \mathcal{N}.$$

For $i \in \mathcal{S}$, $j \in \mathcal{N}$ and $x_j \in \mathbb{R}$, let $w_j^{\alpha_{ij}}(x_j)$ be the membership function of fuzzy set $F_j^{\alpha_{ij}}$. The normalized membership functions are defined by

$$\mu_j^{\alpha_{ij}}(x_j) = \frac{w_j^{\alpha_{ij}}(x_j)}{\sum_{\alpha_{ij}=1}^{s_j} w_j^{\alpha_{ij}}(x_j)}, \quad i \in \mathcal{S}, \quad j \in \mathcal{N}. \quad (1)$$

which satisfy

$$0 \leq \mu_j^{\alpha_{ij}}(x_j) \leq 1, \quad \sum_{\alpha_{ij}=1}^{s_j} \mu_j^{\alpha_{ij}}(x_j) = 1. \quad (2)$$

Then, the fuzzy basis functions can be defined by

$$h_i(x) = \prod_{j=1}^n \mu_j^{\alpha_{ij}}(x_j), \quad x \in \mathbb{R}^n, \quad i \in \mathcal{S}. \quad (3)$$

One also has $0 \leq h_i(x) \leq 1$, $\sum_{i=1}^s h_i(x) = 1$. The Itô stochastic T-S model can be expressed by

$$dx = \sum_{i=1}^s h_i(x) (A_i x + B_i u) dt + \sum_{i=1}^s h_i(x) C_i x dW(t). \quad (4)$$

The premise variables in the plant rules described above are chosen as the state variables $\{x_j\}_{j \in \mathcal{N}}$ which is necessary in stochastic stability analysis and control design of the Itô stochastic T-S model in (4). For an admissible control u and an initial state x_0 , the trajectory $x(t)$ of system (4) is vector-valued stochastic processes which can be viewed as a mapping $x = (x_1, \dots, x_n)^\tau : \mathbb{R}_+ \times \Omega \rightarrow \mathbb{R}^n$ with $\mathbb{R}_+ := [0, \infty)$. Since the range of the mapping (or system state) x is \mathbb{R}^n , the antecedent parts that x_j is $F_j^{\alpha_{ij}}$ in the i th plant rule make sense. Also $x(t)$ can be regarded as the observation of vector-valued stochastic processes as pointed out in [16].

This paper intends to develop a line integral Lyapunov function approach to stability analysis and stabilization for the Itô stochastic T-S model (4). We first adopt the stochastic stability concept and the main tool of stability analysis for very general Itô stochastic dynamic systems. Consider an Itô stochastic differential equation on \mathbb{R}^n of the form

$$dx = f(x, t) dt + g(x, t) dW(t) \quad (5)$$

where $f : \mathbb{R}^n \times \mathbb{R}_+ \rightarrow \mathbb{R}^n$, $g : \mathbb{R}^n \times \mathbb{R}_+ \rightarrow \mathbb{R}^n$ satisfy the usual linear growth and local Lipschitz conditions for existence and uniqueness of solutions to (5), $W(t)$ is a Wiener process adapted to a filtration $\{\mathcal{F}_t\}_{t \geq 0}$ that contains all \mathcal{P} -null sets and is right continuous. Let $x = 0$ be the equilibrium point of (5), that is, $f(0, t) = 0$, $g(0, t) = 0$ and $x(t; t_0, x_0)$ be a trajectory of system (5) with initial value $x(t_0) = x_0 \in \mathbb{R}^n$.

Definition 1: [22] The equilibrium point $x = 0$ of equation (5) is said to be

- i) stochastically stable or stable in probability if for every pair of $\epsilon \in (0, 1)$ and $r > 0$, there exists a $\delta = \delta(\epsilon, r, t_0) > 0$ such that $\mathcal{P}\{|x(t; t_0, x_0)| < r, \text{ for all } t \geq t_0\} \geq 1 - \epsilon$ whenever $|x_0| < \delta$. Otherwise, it is said to be stochastically unstable.
- ii) stochastically asymptotically stable if it is stochastically stable and, moreover, for every $\epsilon \in (0, 1)$, there exists a $\delta_0 = \delta_0(\epsilon, t_0) > 0$ such that $\mathcal{P}\{\lim_{t \rightarrow \infty} x(t; t_0, x_0) = 0\} \geq 1 - \epsilon$ whenever $|x_0| < \delta_0$.
- iii) stochastically asymptotically stable in the large if it is stable and, moreover, for all $x_0 \in \mathbb{R}^n$, $\mathcal{P}\{\lim_{t \rightarrow \infty} x(t; t_0, x_0) = 0\} = 1$.

Now, we are in a position to introduce the line integral Lyapunov function that was first proposed in [15]. A line

integral function $V : \mathbb{R}^n \rightarrow [0, \infty)$ is defined by

$$V(x) = 2 \int_{\Gamma(0,x)} \bar{f}^\tau(\Psi) d\Psi := 2 \int_{\Gamma(0,x)} \sum_{i=1}^s h_i(\Psi) \Psi^\tau P_i d\Psi \quad (6)$$

$$P_i = \bar{P} + D_i > 0 \quad (7)$$

$$\bar{P} = \begin{bmatrix} 0 & p_{12} & \cdots & p_{1n} \\ p_{12} & 0 & \cdots & p_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ p_{1n} & p_{2n} & \cdots & 0 \end{bmatrix} \quad (8)$$

$$D_i = \begin{bmatrix} d_{11}^{\alpha_{i1}} & \cdots & 0 \\ \vdots & \ddots & \vdots \\ 0 & \cdots & d_{nn}^{\alpha_{in}} \end{bmatrix} \quad (9)$$

where $\Gamma(0, x)$ denotes a path from the origin to the current state x ; $\Psi \in \mathbb{R}^n$ is a dummy vector for the integral and $d\Psi$ is an infinitesimal displacement vector. To illustrate that $V(x)$ defined in (6) is a Lyapunov function, the following fact is adopted from [15].

Fact 1: The line integral $V(x)$ defined by (6) is path-independent, continuously differentiable, positive definite and also satisfies

$$V(x) \rightarrow \infty, \quad \|x\| \rightarrow \infty.$$

It can be also seen from above fact and (6) that the line integral Lyapunov function $V(x)$ is a non-quadratic one. The following simple fact reveals the relationship between line integral Lyapunov function and quadratic Lyapunov function.

Fact 2: For the line integral Lyapunov function $V(x)$ in (6), if there exists a positive definite matrix P , such that the matrices $\{P_i\}_{i \in \mathcal{S}}$ satisfy $P_1 = \cdots = P_s = P$, then $V(x)$ becomes a quadratic function $x^\tau P x$, that is, for any $x \in \mathbb{R}^n$

$$V(x) = 2 \int_{\Gamma(0,x)} \Psi^\tau P d\Psi = x^\tau P x.$$

For stability analysis of system (4) based on line integral Lyapunov function $V(x)$ in (6), the row gradient vector $\partial V(x)/\partial x^\tau$ is needed. Due to the path independence of the line integral, $\partial V(x)/\partial x^\tau$ can be calculated by the following Fact 3.

Fact 3: Consider the line integral Lyapunov function $V(x)$ in (6). The row gradient vector $\partial V(x)/\partial x^\tau$ is calculated by

$$\frac{\partial V(x)}{\partial x^\tau} = 2x^\tau P(x) := 2 \sum_{i=1}^s h_i(x) x^\tau P_i. \quad (10)$$

The line integral Lyapunov function based stability analysis of the model in (4) is involved in the Hessian matrix $\frac{\partial^2 V(x)}{\partial x \partial x^\tau}$ of $V(x)$ in (6) which is related to partial derivatives of the fuzzy basis functions $\{h_i(x)\}_{i=1}^s$. This also leads to the problem of handling derivatives of membership functions (MFs) [9], [13], [14]. In what follows, we give a new method to deal with the derivatives of MFs. Consider the normalized membership functions $\{\mu_j^{\alpha_{ij}}(x_j), (i, j) \in \mathcal{S} \times \mathcal{N}\}$ defined by (1). Notice that for a fixed pair $(i, j) \in \mathcal{S} \times \mathcal{N}$, the function $\mu_j^{\alpha_{ij}}(x_j)$ is a scalar-valued one with only one argument x_j . So we can give an assumption for the derivatives of these functions. The assumption will form our starting point for stochastic stability analysis of the model (4).

Assumption 1: Assume for any $(i, j) \in \mathcal{S} \times \mathcal{N}$ and $x_j \in \mathbb{R}$, that the normalized membership function $\mu_j^{\alpha_{ij}}(x_j) : \mathbb{R} \mapsto [0, 1]$ is differentiable and that there exists a known constant $\beta_{ij} > 0$ satisfying

$$\left| x_j \frac{d}{dx_j} (\mu_j^{\alpha_{ij}}(x_j)) \right| \leq \beta_{ij}. \quad (11)$$

Remark 1: It is important to point out that normalized membership functions $\mu_j^{\alpha_{ij}}(x_j), i \in \mathcal{S}, j \in \mathcal{N}$ defined by (1) are state x_j dependent and not the trajectory $x_j(t)$ dependent. Therefore, the derivative $\frac{d}{dx_j} (\mu_j^{\alpha_{ij}}(x_j))$ is the derivative of a scalar function with respect to its one argument x_j . If the membership functions are regarded as trajectory dependent and their derivatives are regarded as time derivatives, the time derivatives of fuzzy basis functions will be related to the vector field that governs the T-S model. Such a case makes the time derivatives of fuzzy basis functions difficult to handle [9]. So Assumption 1 is different from the ones in [13], [14], [23] where upper bounds of time derivatives of fuzzy basis functions are required.

Remark 2: Assumption 1 implies that not only all the normalized membership functions $\mu_j^{\alpha_{ij}}(x_j)$ are differentiable, but also they should satisfy

$$\begin{aligned} -\frac{\beta_{ij}}{x_j} &\leq \frac{d}{dx_j} (\mu_j^{\alpha_{ij}}(x_j)) \leq \frac{\beta_{ij}}{x_j}, & x_j > 0 \\ \frac{\beta_{ij}}{x_j} &\leq \frac{d}{dx_j} (\mu_j^{\alpha_{ij}}(x_j)) \leq -\frac{\beta_{ij}}{x_j}, & x_j < 0. \end{aligned}$$

Assumption 1 for the normalized membership function $\mu_j^{\alpha_{ij}}(x_j)$ seems to be reasonable and the upper bound of inequalities (11) can be fulfilled for the exponential type of membership functions [24] (See Example 2 in Section 5). Fig. 1 shows the region of $\frac{d}{dx_j} (\mu_j^{\alpha_{ij}}(x_j))$ satisfying Assumption 1 with $\beta_{ij} = 0.0125$.

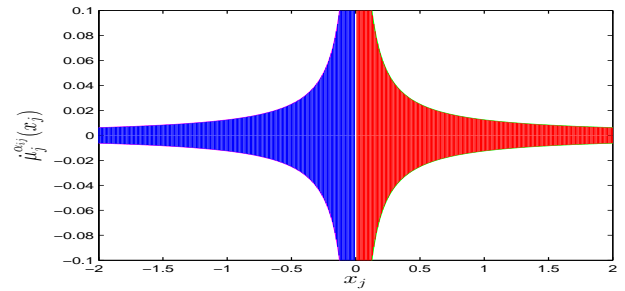


Fig. 1: Region of $\frac{d}{dx_j} (\mu_j^{\alpha_{ij}}(x_j))$ satisfying Assumption 1

It can be shown that the fuzzy basis functions $\{h_i(x)\}_{i=1}^s$ are differentiable. An estimate for all the partial derivatives of these fuzzy basis functions $\{h_i(x)\}_{i=1}^s$ can be derived by (11), and will be used later on.

Lemma 1: Under Assumption 1, the fuzzy basis functions $\{h_i(x)\}_{i=1}^s$ given by (3) are differentiable and satisfy

$$\left| x_j \frac{\partial h_i(x)}{\partial x_j} \right| \leq \beta_{ij}, \quad i \in \mathcal{S}, \quad j \in \mathcal{N}. \quad (12)$$

Proof: By virtue of (2) and (3), one has

$$\begin{aligned} \left| x_j \frac{\partial h_i(x)}{\partial x_j} \right| &= \left| x_j \frac{\partial \left(\prod_{k=1}^n \mu_k^{\alpha_{ik}}(x_k) \right)}{\partial x_j} \right| = \\ \left| x_j \prod_{k \neq j}^n \mu_k^{\alpha_{ik}}(x_k) \frac{d}{dx_j} (\mu_j^{\alpha_{ij}}(x_j)) \right| &\leq \left| x_j \frac{d}{dx_j} (\mu_j^{\alpha_{ij}}(x_j)) \right| \end{aligned}$$

which together with (11) leads to the inequalities (12). \blacksquare

Now, we give the new results of Hessian matrix for the line integral Lyapunov function $V(x)$ in (6) which will be adopted in the following section.

Lemma 2: Consider the fuzzy basis functions $\{h_i(x)\}_{i=1}^s$ in (3) with the normalized membership functions $\mu_j^{\alpha_{ij}}(x_j)$ satisfying (11) in Assumption 1. For matrices $D_i > 0$ defined in (9), a positive definite matrix D with $D - D_i \geq 0$ and $P(x)$ defined in (10), the following inequalities with respect to Hessian matrix hold for $x, y \in \mathbb{R}^n$

$$\begin{aligned} y^\tau \left(\frac{\partial^2 V(x)}{\partial x \partial x^\tau} \right) y &= y^\tau \left(P(x) + \sum_{i=1}^s \frac{\partial h_i(x)}{\partial x} x^\tau D_i \right) y \\ &\leq y^\tau \left(P(x) + \beta D \right) y \end{aligned} \quad (13)$$

$$\beta = \sum_{j=1}^n \sum_{i=1}^s \beta_{ij} \quad (14)$$

with the known constants $\beta_{ij} > 0$ given in (11).

Proof: For the $V(x)$ defined in (6), in terms of Fact 3 We have

$$\frac{\partial V(x)}{\partial t} = 0, \quad \frac{\partial V(x)}{\partial x^\tau} = 2x^\tau P(x). \quad (15)$$

On the other hand, recalling (7)-(9) gives

$$\begin{aligned} 2x^\tau P(x) &= 2(x_1, \dots, x_j, \dots, x_n) \times \\ &\begin{bmatrix} \sum_{i=1}^s h_i d_{11}^{\alpha_{i1}} & \cdots & p_{1j} & \cdots & p_{1n} \\ \vdots & & \vdots & & \vdots \\ p_{j1} & \cdots & \sum_{i=1}^s h_i d_{jj}^{\alpha_{ij}} & \cdots & p_{jn} \\ \vdots & & \vdots & & \vdots \\ p_{n1} & \cdots & p_{nj} & \cdots & \sum_{i=1}^s h_i d_{nn}^{\alpha_{in}} \end{bmatrix} \\ &= 2 \left(x_1 \sum_{i=1}^s h_i d_{11}^{\alpha_{i1}} + \sum_{k=2}^n x_k p_{k1}, \dots, \sum_{k \neq j} x_k p_{kj} + x_j \sum_{i=1}^s h_i d_{jj}^{\alpha_{ij}}, \dots, \sum_{k=1}^{n-1} x_k p_{kn} + x_n \sum_{i=1}^s h_i d_{nn}^{\alpha_{in}} \right). \end{aligned} \quad (16)$$

By (16), the Hessian matrix of the line integral Lyapunov function $V(x)$ can be calculated by

$$\begin{aligned} \frac{\partial^2 V(x)}{\partial x \partial x^\tau} &= \frac{\partial}{\partial x} \left[\frac{\partial V(x)}{\partial x^\tau} \right] = 2 \frac{\partial [x^\tau P(x)]}{\partial x} \\ &= 2 \partial \left(x_1 \sum_{i=1}^s h_i d_{11}^{\alpha_{i1}} + \sum_{k=2}^n x_k p_{k1}, \dots, \sum_{k \neq j} x_k p_{kj} + x_j \times \right. \end{aligned}$$

$$\begin{aligned} &\left. \sum_{i=1}^s h_i d_{jj}^{\alpha_{ij}}, \dots, \sum_{k=1}^{n-1} x_k p_{kn} + x_n \sum_{i=1}^s h_i d_{nn}^{\alpha_{in}} \right) / \partial x \\ &= 2 \begin{bmatrix} \sum_{i=1}^s h_i d_{11}^{\alpha_{i1}} + x_1 \sum_{i=1}^s \frac{\partial h_i}{\partial x_1} d_{11}^{\alpha_{i1}} & \cdots & p_{1n} \\ \vdots & \ddots & \vdots \\ p_{n1} + x_1 \sum_{i=1}^s \frac{\partial h_i}{\partial x_n} d_{11}^{\alpha_{i1}} & \cdots & \sum_{i=1}^s h_i d_{nn}^{\alpha_{in}} + x_n \sum_{i=1}^s \frac{\partial h_i}{\partial x_n} d_{nn}^{\alpha_{in}} \end{bmatrix} \\ &= 2 \times \left\{ \begin{bmatrix} \sum_{i=1}^s h_i d_{11}^{\alpha_{i1}} & \cdots & p_{1n} \\ \vdots & \ddots & \vdots \\ p_{n1} & \cdots & \sum_{i=1}^s h_i d_{nn}^{\alpha_{in}} \end{bmatrix} + \begin{bmatrix} x_1 \sum_{i=1}^s \frac{\partial h_i}{\partial x_1} d_{11}^{\alpha_{i1}} & \cdots & x_n \sum_{i=1}^s \frac{\partial h_i}{\partial x_1} d_{nn}^{\alpha_{in}} \\ \vdots & \ddots & \vdots \\ x_1 \sum_{i=1}^s \frac{\partial h_i}{\partial x_n} d_{11}^{\alpha_{i1}} & \cdots & x_n \sum_{i=1}^s \frac{\partial h_i}{\partial x_n} d_{nn}^{\alpha_{in}} \end{bmatrix} \right\} \\ &= 2 \left(P(x) + \sum_{i=1}^s \frac{\partial h_i}{\partial x} x^\tau D_i \right). \end{aligned} \quad (17)$$

In order to achieve an upper bound of the Hessian matrix, the upper bound of the second part in (18) is needed to be estimated. For any $y \in \mathbb{R}^n$, it is clear by $D_i > 0$ that

$$y^\tau \frac{\partial h_i}{\partial x} x^\tau D_i y = y^\tau D_i^{\frac{1}{2}} D_i^{-\frac{1}{2}} \frac{\partial h_i}{\partial x} x^\tau D_i^{\frac{1}{2}} D_i^{\frac{1}{2}} y. \quad (19)$$

In the derivation above, we drop the argument of $h_i(x)$ for simplicity. In what follows, we will do so in some cases for notational convenience. Since

$$\text{rank} \left(D_i^{-\frac{1}{2}} \frac{\partial h_i}{\partial x} x^\tau D_i^{\frac{1}{2}} \right) \leq \text{rank}(x^\tau) \leq 1 \quad (20)$$

there exist an invertible matrix P such that

$$\begin{aligned} P \left(D_i^{-\frac{1}{2}} \frac{\partial h_i}{\partial x} x^\tau D_i^{\frac{1}{2}} \right) P^{-1} &= \\ \text{diag} \left\{ \text{tr} \left(P D_i^{-\frac{1}{2}} \frac{\partial h_i}{\partial x} x^\tau D_i^{\frac{1}{2}} P^{-1} \right), 0, \dots, 0 \right\}. \end{aligned} \quad (21)$$

It follows from (19) and (21) that

$$\begin{aligned} y^\tau \left(\frac{\partial h_i}{\partial x} x^\tau D_i \right) y &= \left(P^{-\tau} D_i^{\frac{1}{2}} y \right)^\tau \left(P D_i^{-\frac{1}{2}} \frac{\partial h_i}{\partial x} x^\tau D_i^{\frac{1}{2}} P^{-1} \right) \\ &\times \left(P D_i^{\frac{1}{2}} y \right) = \left(P^{-\tau} D_i^{\frac{1}{2}} y \right)^\tau \text{diag} \left\{ \text{tr} \left(P D_i^{-\frac{1}{2}} \frac{\partial h_i}{\partial x} x^\tau D_i^{\frac{1}{2}} P^{-1} \right), \right. \\ &0, \dots, 0 \left. \right\} \left(P D_i^{\frac{1}{2}} y \right) \leq \left| \text{tr} \left(P D_i^{-\frac{1}{2}} \frac{\partial h_i}{\partial x} x^\tau D_i^{\frac{1}{2}} P^{-1} \right) \right| \\ &\left(P^{-\tau} D_i^{\frac{1}{2}} y \right)^\tau \left(P D_i^{\frac{1}{2}} y \right). \end{aligned} \quad (22)$$

In light of the operational property of matrix trace, we have

$$\text{tr}(PD_i^{-\frac{1}{2}} \frac{\partial h_i}{\partial x} x^\tau D_i^{\frac{1}{2}} P^{-1}) = \text{tr} \left(\frac{\partial h_i}{\partial x} x^\tau \right) = x^\tau \frac{\partial h_i}{\partial x}. \quad (23)$$

Combining (22) and (23) yield

$$y^\tau \left(\frac{\partial h_i}{\partial x} x^\tau D_i \right) y \leq \left| \text{tr} \left(\frac{\partial h_i}{\partial x} x^\tau \right) \right| \left(P^{-\tau} D_i^{\frac{1}{2}} y \right)^\tau \times \left(P D_i^{\frac{1}{2}} y \right) = \left| \sum_{j=1}^n x_j \frac{\partial h_i}{\partial x_j} \right| y^\tau D_i y \leq \sum_{j=1}^n \left| x_j \frac{\partial h_i}{\partial x_j} \right| y^\tau D_i y.$$

In terms of (12) in Lemma 1 and $D - D_i \geq 0$, we obtain

$$\begin{aligned} y^\tau \frac{\partial h_i}{\partial x} x^\tau D_i y &\leq \sum_{j=1}^n \beta_{ij} y^\tau D_i y \\ &\leq \sum_{j=1}^n \beta_{ij} y^\tau D y \end{aligned}$$

which together with (14) gives that

$$\begin{aligned} y^\tau \left(\sum_{i=1}^s \frac{\partial h_i}{\partial x} x^\tau D_i \right) y &\leq \sum_{i=1}^s \sum_{j=1}^n \beta_{ij} y^\tau D y \\ &\leq \beta y^\tau D y. \end{aligned}$$

Therefore, the inequality (13) can be obtained easily.

III. STOCHASTIC STABILITY ANALYSIS

In this section, relaxed stability conditions for the unforced Itô stochastic T-S model will be given by using the line integral Lyapunov function $V(x)$. The unforced stochastic T-S model can be presented by

$$dx = \sum_{i=1}^s h_i A_i x dt + \sum_{i=1}^s h_i C_i x dW(t) \quad (24)$$

whose stability conditions are presented by Theorem 1.

Theorem 1: Under Assumption 1, the equilibrium point of the unforced Itô stochastic T-S model based system in (24) is stochastically asymptotically stable in the large, if there exist matrices $\{D_j\}_{j \in \mathcal{S}}$ and \bar{P} being of the forms given in (9), a diagonal matrix D as well as matrices $\{Q_{ij} : Q_{ij}^\tau = Q_{ij} = Q_{ji}\}_{i,j \in \mathcal{S}}$ such that for all $i, j \in \mathcal{S}$, the inequalities hold:

$$P_j = \bar{P} + D_j > 0, \quad D - D_j \geq 0 \quad (25)$$

$$(P_j A_i)^\mathcal{S} + C_i^\tau (P_j + \beta D) C_i + Q_{ij} < 0 \quad (26)$$

$$\Theta_1 = \begin{bmatrix} Q_{11} & \cdots & Q_{1s} \\ \vdots & \ddots & \vdots \\ Q_{s1} & \cdots & Q_{ss} \end{bmatrix} > 0 \quad (27)$$

where β is given in (14).

Proof: Suppose that there exist matrices $\{D_j\}_{j \in \mathcal{S}}$, \bar{P} and D as well as matrices $\{Q_{ij}\}_{i,j \in \mathcal{S}}$ such that the matrix inequalities (25)-(27) hold. Using matrices $\{P_j = \bar{P} + D_j\}_{j \in \mathcal{S}}$ and the fuzzy basis functions $\{h_j\}_{j \in \mathcal{S}}$, one can construct a vector filed $\bar{f}(x)$ on the state space \mathbb{R}^n by

$$\bar{f}(x) = P(x)x = \sum_{j=1}^s h_j P_j x. \quad (28)$$

Given a fixed state $x \in \mathbb{R}^n$ arbitrarily, for a path $\Gamma(0, x)$ from

the origin to x , let

$$V(x) = 2 \int_{\Gamma(0,x)} \bar{f}^\tau(\Psi) d\Psi. \quad (29)$$

One can see from Fact 1 that $V(x)$ is a Lyapunov function candidate. It follows from (15), (18) in Lemma 2 and (24), that

$$\begin{aligned} \mathcal{L}V(x) &= \frac{\partial V(x)}{\partial t} + \frac{\partial V(x)}{\partial x^\tau} \left(\sum_{i=1}^s h_i A_i x \right) \\ &+ \frac{1}{2} \text{tr} \left[\left(\sum_{i=1}^s h_i C_i x \right)^\tau \frac{\partial^2 V(x)}{\partial x \partial x^\tau} \left(\sum_{i=1}^s h_i C_i x \right) \right] \\ &= 2x^\tau P(x) \left(\sum_{i=1}^s h_i A_i x \right) + \frac{1}{2} \text{tr} \left[\left(\sum_{i=1}^s h_i C_i x \right)^\tau \right. \\ &\left. \times 2 \left[P(x) + \sum_{i=1}^s \frac{\partial h_i}{\partial x} x^\tau D_i \right] \left(\sum_{i=1}^s h_i C_i x \right) \right]. \quad (30) \end{aligned}$$

Choosing $y = \left(\sum_{i=1}^s h_i C_i x \right)$ in Lemma 2, in terms of (30), one has

$$\begin{aligned} \mathcal{L}V(x) &\leq 2x^\tau P(x) \left(\sum_{i=1}^s h_i A_i x \right) + \frac{1}{2} \text{tr} \left[\left(\sum_{i=1}^s h_i C_i x \right)^\tau \right. \\ &\left. \times \left(2P(x) + 2\beta D \right) \left(\sum_{i=1}^s h_i C_i x \right) \right] = \sum_{i=1}^s \sum_{j=1}^s \sum_{k=1}^s h_i h_j h_k \\ &\times x^\tau \left[P_j A_i + \frac{1}{2} C_i^\tau (P_j + \beta D) C_k \right]^\mathcal{S} x. \quad (31) \end{aligned}$$

For $i, j, k \in \mathcal{S}$, inequalities (25) and $\beta D > 0$ lead to

$$[C_i^\tau (P_j + \beta D) C_k]^\mathcal{S} \leq C_i^\tau (P_j + \beta D) C_i + C_k^\tau (P_j + \beta D) C_k.$$

Using these inequalities and (30), one has that

$$\mathcal{L}V(x) \leq \sum_{i=1}^s \sum_{j=1}^s h_i h_j x^\tau [(P_j A_i)^\mathcal{S} + C_i^\tau (P_j + \beta D) C_i] x \quad (32)$$

which together with (26) gives

$$\mathcal{L}V < -x^\tau \begin{bmatrix} h_1 I & \cdots & h_s I \end{bmatrix} \Theta_1 \begin{bmatrix} h_1 I \\ \vdots \\ h_s I \end{bmatrix} x.$$

Then it follows from (27) that for $x \neq 0$, $\mathcal{L}V < 0$. Recalling that $V(x)$ is radially unbounded, we can conclude that the equilibrium point of system (24) is stochastically asymptotically stable in the large by Lemma 3 in [7]. ■

Remark 3: For the stability analysis of the unforced Itô stochastic T-S fuzzy system (24), the involved Hessian matrix $\frac{\partial^2 V(x)}{\partial x \partial x^\tau}$ of the line integral $V(x)$ is related to partial derivatives of the basis functions. It is clear from (17) that the entry \mathcal{H}_{ij} in slot (i, j) for Hessian matrix is given by

$$\mathcal{H}_{ij} = \begin{cases} \sum_{i=1}^s h_i d_{jj}^{\alpha_{ij}} + x_j \sum_{i=1}^s \frac{\partial h_i}{\partial x_j} d_{jj}^{\alpha_{ij}}, & i = j \\ P_{ij} + x_j \sum_{i=1}^s \frac{\partial h_i}{\partial x_j} d_{jj}^{\alpha_{ij}}, & i \neq j. \end{cases}$$

So the Hessian matrix is highly dependent on the state x and the partial derivatives of the basis functions, which gives rise

to difficulty and challenging for estimating the upper bound of $\mathcal{LV}(x)$. Fortunately, this Hessian matrix can be decomposed into two terms in (18). The key point is to handle the second term $\sum_{i=1}^s \frac{\partial h_i}{\partial x} x^\tau D_i$ which is involved in (30) of \mathcal{LV} .

Remark 4: To our best knowledge, there is no results on dealing with the Hessian matrix of line integral function, therefore we give a novel Lemma 2 to do so. Facilitating by Assumption 1, an upper bound $y^\tau \beta D y$ of $y^\tau \sum_{i=1}^s \frac{\partial h_i}{\partial x} x^\tau D_i y$ can be obtained. The idea behind this lemma is as follows. It is observed that the rank of matrix $D_i^{-\frac{1}{2}} \frac{\partial h_i}{\partial x} x^\tau D_i^{\frac{1}{2}}$ is less than or equal to 1. So this matrix is equivalent to a diagonal matrix with only one nonzero element $tr(P D_i^{-\frac{1}{2}} \frac{\partial h_i}{\partial x} x^\tau D_i^{\frac{1}{2}} P^{-1}) = x^\tau \frac{\partial h_i}{\partial x}$. This elegant property of matrix with rank one together with Lemma 1 leads to the upper bound $\beta y^\tau D y$. Based on Lemma 2, an estimate of \mathcal{LV} can be achieved which plays an important role on the stability analysis of the unforced stochastic T-S fuzzy system (24).

Similarly, the following corollary based on the common quadratic Lyapunov function can be obtained.

Corollary 1: If there exist positive matrices $\{Q_i\}_{i \in \mathcal{S}} > 0$ and $P > 0$ satisfying inequalities

$$(P A_i)^S + C_i^\tau P C_i + Q_i < 0, \quad i \in \mathcal{S} \quad (33)$$

then the equilibrium point of the unforced Itô stochastic T-S model (24) is stochastically asymptotically stable in the large.

Remark 5: It is noted that for any $i, j \in \mathcal{S}$ if $P_i = P$, $Q_{ii} = Q_i$ and $Q_{ij} = 0$, for $i \neq j$ in inequalities (25)-(27), the conditions in Theorem 1 become conditions in Corollary 1. This means that if inequalities (33) have a set of solutions $\{Q_i\}_{i \in \mathcal{S}}$ and P , then $\{P_j = P\}_{j \in \mathcal{S}}$, $\{Q_{ii} = Q_i\}_{i \in \mathcal{S}}$ and $\{Q_{ij} = 0, i \neq j, i, j \in \mathcal{S}\}$ are solutions to inequalities (25)-(27). However, if the inequalities (25)-(27) have a set of solutions $\{P_j\}_{j \in \mathcal{S}}$, $\{Q_{ij}\}_{i, j \in \mathcal{S}}$, the inequalities (33) do not necessarily have a solution (See Example 1). Thus, the line integral based stochastic stability result is more general than that derived from quadratic Lyapunov function.

The following example is given to illustrate that the line integral based analysis results of stochastic asymptotic stability in Theorem 1 are less conservative than the ones based on quadratic Lyapunov function.

Example 1: For the unforced stochastic T-S model (24), the fuzzy rules are given as follows:

R_1 : If x_1 is F_1^1 and x_2 is F_2^1 , then $dx = A_1 x dt + C_1 x dW(t)$

R_2 : If x_1 is F_1^1 and x_2 is F_2^2 , then $dx = A_2 x dt + C_2 x dW(t)$

R_3 : If x_1 is F_1^2 and x_2 is F_2^1 , then $dx = A_3 x dt + C_3 x dW(t)$

R_4 : If x_1 is F_1^2 and x_2 is F_2^2 , then $dx = A_4 x dt + C_4 x dW(t)$

$$A_1 = \begin{bmatrix} -0.5 & 0 \\ -1 & a \end{bmatrix}, A_2 = \begin{bmatrix} -0.8 & 1 \\ 0 & -1 \end{bmatrix}, A_3 = \begin{bmatrix} -0.9 & 1.09 \\ 0 & -0.8 \end{bmatrix}$$

$$A_4 = \begin{bmatrix} b & 1 \\ 0 & -0.4 \end{bmatrix}, C_1 = \begin{bmatrix} 0.2 & 0 \\ 0 & -0.1 \end{bmatrix}, C_2 = \begin{bmatrix} 0.3 & 0 \\ 0 & -0.2 \end{bmatrix}$$

$$C_3 = \begin{bmatrix} 0.2 & 0 \\ 0 & -0.3 \end{bmatrix}, C_4 = \begin{bmatrix} 0.35 & 0 \\ 0 & -0.1 \end{bmatrix}$$

where a and b are real parameters. Then all ordinal numbers

$\alpha_{ij}, i = 1, \dots, 4; j = 1, 2$ read as

$$\alpha_{11} = 1, \alpha_{21} = 1, \alpha_{31} = 2, \alpha_{41} = 2$$

$$\alpha_{12} = 1, \alpha_{22} = 2, \alpha_{32} = 1, \alpha_{42} = 2$$

with $s_1 = s_2 = 2$.

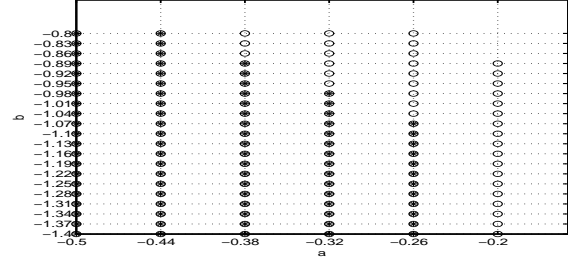


Fig. 2: Stable regions: o—Theorem 1 and *—Corollary 1

The figure above shows the regions of stochastic asymptotic stability. The points marked with “o” and “*” show the regions of stochastic asymptotic stability obtained by using Theorem 1 and Corollary 1, respectively. From Fig. 2, it is clear that the results in Theorem 1 yield larger regions of stochastic stability than the ones in Corollary 1. As expected, stability results derived from line integral function are less conservative than those derived from quadratic Lyapunov function.

IV. FUZZY CONTROLLER DESIGN

In this section, stability analysis and controller design for Itô closed-loop stochastic system will be addressed. More precisely, we are interested in finding a fuzzy controller such that the resulting Itô closed-loop stochastic system is stochastically asymptotically stable. The fuzzy control law can be described as follows:

Controller Rule i :

If x_1 is $F_1^{\alpha_{i1}}$, and \dots , x_n is $F_n^{\alpha_{in}}$, then $u = K_i x$, $i \in \mathcal{S}$. The overall state feedback fuzzy controller is represented by

$$u = \sum_{i=1}^s h_i K_i x. \quad (34)$$

Substituting (34) into (4) yields

$$dx = \sum_{i=1}^s \sum_{j=1}^s h_i h_j A_{ij} x dt + \sum_{i=1}^s h_i C_i x dW(t) \quad (35)$$

where

$$A_{ij} = A_i + B_i K_j. \quad (36)$$

For the closed-loop Itô stochastic system (35), we have the following result.

Theorem 2: Under Assumption 1, the equilibrium point of the closed-loop Itô stochastic system (35) is stochastically asymptotically stable in the large, if there exist matrices $\{D_k\}_{k \in \mathcal{S}}$ and \bar{P} being of the forms given in (9), a diagonal matrix D , as well as matrices $\{\bar{Q}_{ijk} : \bar{Q}_{ijk}^\tau = \bar{Q}_{ijk} = \bar{Q}_{jik}\}_{i, j, k \in \mathcal{S}}$ such that for all $i, j, k \in \mathcal{S}$, the following inequalities hold:

$$P_k = \bar{P} + D_k > 0, \quad D - D_k \geq 0 \quad (37)$$

$$(P_k A_{ij})^S + C_i^T (P_k + \beta D) C_i + \bar{Q}_{ijk} < 0 \quad (38)$$

$$\begin{bmatrix} \bar{Q}_{11k} & \cdots & \bar{Q}_{1sk} \\ \vdots & \ddots & \vdots \\ \bar{Q}_{s1k} & \cdots & \bar{Q}_{ssk} \end{bmatrix} > 0 \quad (39)$$

where β is given in (14).

Since its proof is similar to that of Theorem 1, we omit it.

Remark 6: For determining the control gains K_j , pre-multiplying and post-multiplying P_k^{-1} to inequalities (38) lead to for any $i, j, k \in \mathcal{S}$,

$$(A_{ij} P_k^{-1})^S + P_k^{-1} C_i^T (P_k + \beta D) C_i P_k^{-1} + P_k^{-1} \bar{Q}_{ijk} P_k^{-1} < 0. \quad (40)$$

One can see that the term $A_{ij} P_k^{-1}$ in (40) makes it impossible for obtaining the control gain K_j via change of variables. To overcome the obstacle in determining the control gains K_j , the following lemma is adopted, based on which the term AP can be decoupled by the additional matrix variable Ω .

Lemma 3: [25] Let matrix $A \in \mathbb{R}^{n \times n}$ be given. If there exist matrices $\Omega, W \in \mathbb{R}^{n \times n}$ and positive matrices $P, R \in \mathbb{R}^{n \times n}$ such that the inequality

$$\begin{bmatrix} (A\Omega)^S + R + W & A\Omega & 0 \\ * & -\Omega^S & P - \Omega \\ * & * & -R \end{bmatrix} < 0$$

holds, then we have $W + (AP)^S < 0$.

Using Lemma 3 to (40), a set of inequalities can be obtained, in which both P_k and P_k^{-1} appear simultaneously. Moreover, the structure constraint (37) should be satisfied for P_k . These make the determination of control gains $\{K_j\}_{j \in \mathcal{S}}$ difficult. Motivated by cone complementarity linearization algorithm in [26], the determination for the local gains $\{K_i\}_{i \in \mathcal{S}}$ can be converted to a quadratic optimization problem with linear inequality constraints. So Theorem 3 can be established.

Theorem 3: Under Assumption 1, the equilibrium point of the Itô closed-loop stochastic system in (35) is stochastically asymptotically stable in the large, if there exist matrices \bar{P} and D_k in the forms of (9), diagonal matrices D and \bar{D} , symmetric matrices $\bar{P}_k, R_{ijk}, Q_{ijk}$ with $Q_{ijk}^T = Q_{ijk} = Q_{jik}$, as well as matrices M_j, Ω_j being a set of solutions to the quadratic optimization problem:

$$\text{Min} \left\{ \sum_{k=1}^s \text{tr} [\bar{P}_k (D_k + \bar{P})] + \text{tr} (\bar{D} D) \right\} \quad (41)$$

subject to the following constraints for all $i, j, k \in \mathcal{S}$:

$$D - D_j \geq 0, \bar{P} + D_k > 0, \begin{bmatrix} \bar{P}_k & I \\ I & D_k + \bar{P} \end{bmatrix} \geq 0 \quad (42)$$

$$\Theta_2 = \begin{bmatrix} Q_{11k} & \cdots & Q_{1sk} \\ \vdots & \ddots & \vdots \\ Q_{s1k} & \cdots & Q_{ssk} \end{bmatrix} > 0, \begin{bmatrix} \bar{D} & I \\ I & D \end{bmatrix} \geq 0 \quad (43)$$

$$\begin{bmatrix} \Lambda_{ijk} & \Upsilon_{ij} & 0 & \bar{P}_k C_i^T & \bar{P}_k C_i^T \\ * & -\Omega_j^S & \bar{P}_k - \Omega_j & 0 & 0 \\ * & * & -R_{ijk} & 0 & 0 \\ * & * & * & -\bar{P}_k & 0 \\ * & * & * & * & -\beta^{-1} \bar{D} \end{bmatrix} < 0 \quad (44)$$

$$\Upsilon_{ij} = A_i \Omega_j + B_i M_j, \quad \Lambda_{ijk} = \Upsilon_{ij}^S + R_{ijk} + Q_{ijk} \quad (45)$$

where β is given in (14). In this case, the fuzzy local feedback

gains are given by

$$K_j = M_j \Omega_j^{-1}. \quad (46)$$

Proof: Assume that there exist matrices D_k and \bar{P} in the form of (9), and matrices $M_j, \Omega_j, \bar{P}_k, R_{ijk}, \{Q_{ijk} : Q_{ijk}^T = Q_{ijk} = Q_{jik}\}$ being a set of solutions to the minimization problem (41)-(45). It follows from the cone complementarity linearization algorithm in [26] that the matrices $D_k, \bar{P}, M_j, \Omega_j, R_{ijk}$ and Q_{ijk} satisfy

$$\left. \begin{bmatrix} \Lambda_{ijk} & \Upsilon_{ij} & 0 & X_k C_i^T & X_k C_i^T \\ * & -\Omega_j^S & X_k - \Omega_j & 0 & 0 \\ * & * & -R_{ijk} & 0 & 0 \\ * & * & * & -X_k & 0 \\ * & * & * & * & -D^{-1} \beta^{-1} \end{bmatrix} < 0 \right\} \quad (47)$$

$$\Theta_2 > 0, \quad \bar{P} + D_k > 0, \quad D - D_j \geq 0$$

where $X_k = P_k^{-1}$ with $P_k = \bar{P} + D_k$. Recalling (36) and (46), the first expression of (47) becomes

$$\left. \begin{bmatrix} \tilde{\Lambda}_{ijk} & A_{ij} \Omega_j & 0 & X_k C_i^T & X_k C_i^T \\ * & -\Omega_j^S & X_k - \Omega_j & 0 & 0 \\ * & * & -R_{ijk} & 0 & 0 \\ * & * & * & -X_k & 0 \\ * & * & * & * & -D^{-1} \beta^{-1} \end{bmatrix} < 0 \right\} \quad (48)$$

where $\tilde{\Lambda}_{ijk} = (A_{ij} \Omega_j)^S + R_{ijk} + Q_{ijk}$, which together with the Schur complement equivalence yields

$$\begin{bmatrix} \Phi_{ijk} & A_{ij} \Omega_j & 0 \\ * & -\Omega_j - \Omega_j^T & X_k - \Omega_j \\ * & * & -R_{ijk} \end{bmatrix} < 0 \quad (49)$$

where

$$\Phi_{ijk} = (A_{ij} \Omega_j)^S + R_{ijk} + Q_{ijk} + X_k C_i^T (X_k^{-1} + \beta D) C_i X_k.$$

Applying Lemma 3 to (49), one has

$$(A_{ij} X_k)^S + Q_{ijk} + X_k C_i^T (X_k^{-1} + \beta D) C_i X_k < 0. \quad (50)$$

Pre-multiplying and post-multiplying P_k to (50) lead to

$$(P_k A_{ij})^S + P_k Q_{ijk} P_k + C_i^T (P_k + \beta D) C_i < 0. \quad (51)$$

Letting

$$P_k Q_{ijk} P_k = \bar{Q}_{ijk} \quad (52)$$

and using $Q_{ijk}^T = Q_{ijk} = Q_{jik}$, one can easily check that

$$\bar{Q}_{ijk}^T = P_k Q_{ijk}^T P_k = P_k Q_{ijk} P_k = P_k Q_{jik} P_k = \bar{Q}_{jik} = \bar{Q}_{ijk}.$$

Inequalities (51) together with (52) gives

$$(P_k A_{ij})^S + \bar{Q}_{ijk} + C_i^T (P_k + \beta D) C_i < 0. \quad (53)$$

It follows from (52) and the first expression of (43) that

$$\begin{bmatrix} \bar{Q}_{11k} & \cdots & \bar{Q}_{1sk} \\ \vdots & \ddots & \vdots \\ \bar{Q}_{s1k} & \cdots & \bar{Q}_{ssk} \end{bmatrix} = \begin{bmatrix} P_k Q_{11k} P_k & \cdots & P_k Q_{1sk} P_k \\ \vdots & \ddots & \vdots \\ P_k Q_{s1k} P_k & \cdots & P_k Q_{ssk} P_k \end{bmatrix}$$

$$= \begin{bmatrix} P_k & & \\ & \ddots & \\ & & P_k \end{bmatrix} \Theta_2 \begin{bmatrix} P_k & & \\ & \ddots & \\ & & P_k \end{bmatrix} > 0. \quad (54)$$

The conditions $P_k = \bar{P} + D_k > 0, D - D_j \geq 0$ in (42) together with (53) and (54) prove the conclusion by Theorem 2. ■

Remark 7: One idea behind Theorem 3 is to decouple $A_{ij}X_k$ in (51) by introducing the additional matrix variables Ω_j based on Lemma 3. Thus, by tolerating some conservativeness, the nonlinear inequalities (50) can be expressed as inequalities (48), where $B_iK_j\Omega_j$ in $A_{ij}\Omega_j$ makes the determination of the control gains K_j feasible by change of variables. Another idea behind this theorem is that the nonlinear inequalities (47) in which both X_k ($X_k = P_k^{-1}$) and P_k appear, can be converted into the minimization problem (42)-(45), which can be solved by using the cone complementarity linearization algorithm. However, from Lemma 3 one can see that inequalities (48) are a sufficient condition for the inequalities (50) holding, which means that the existence of solutions for (50) does not guarantee the existence of solutions for (48), so the transformation from (50) to (48) leads to some conservativeness. In addition, it should be pointed out that for fixed j in (44)-(45), the same Ω_j is required to satisfy s^2 inequalities when i, k range from 1 to s , which inevitably results in some conservativeness.

Solving the quadratic optimization problem in Theorem 3 is an iterative procedure which is summarized in the following Iteration algorithm 1. It is clear when LMIs (42)-(45) have no solution, so does the minimization problem (41)-(45). For this reason, it is assumed that LMIs (42)-(45) is feasible in this iteration algorithm.

Iteration algorithm 1:

- (1) Given $\epsilon > 0$ and a natural number n_{max} , determine a feasible solution

$$I_0 = \left(\bar{P}_{10}, \dots, \bar{P}_{s0}, D_{10}, \dots, D_{s0}, \bar{P}(0), \bar{D}_0, D(0), \hat{I}_0 \right)$$

to LMIs (42)-(45) where \hat{I} stands for other matrix variables in Theorem 3 and the index 0's in these symbols denote these data appear in the initial iterative step. The iteration error is defined by

$$E_0 = \sum_{k=1}^s tr [\bar{P}_{k0}(D_{k0} + \bar{P}(0))] + tr(\bar{D}_0 D(0)) - (s+1)n.$$

If $|E_0| < \epsilon$, then exit; or else set $j = 0$ and go to step (2).

- (2) For $j \geq 1$, assume that the data

$$I_j = \left(\bar{P}_{1j}, \dots, \bar{P}_{sj}, D_{1j}, \dots, D_{sj}, \bar{P}(j), \bar{D}_j, D(j), \hat{I}_j \right)$$

are obtained in the j th iteration step. For data I_j obtained in the j th step, solve the LMI problem:

$$\text{Min} \left\{ \sum_{k=1}^s tr[\bar{P}_{kj}(D_k + \bar{P}) + \bar{P}_k(D_{kj} + \bar{P}(j))] + tr(\bar{D}_j D + \bar{D}D(j)) \right\}$$

subject to (42)-(45) for determining its matrix variables $\{\bar{P}_i, D_i, \bar{P}, \hat{I}\}_{i=1}^s$. Letting

$$D_{i,j+1} = D_i, \bar{P}_{i,j+1} = \bar{P}_i, \bar{P}(j+1) = \bar{P}, \hat{I}_{j+1} = \hat{I}$$

then we can obtain the data

$$I_{j+1} = (\bar{P}_{1,j+1}, \dots, \bar{P}_{s,j+1}, D_{1,j+1}, \dots, D_{s,j+1}, \bar{P}(j+1), \bar{D}_{j+1}, D(j+1), \hat{I}_{j+1}).$$

- (3) The j th iteration error is defined by

$$E_j = \sum_{k=1}^s tr [\bar{P}_{k,j+1}(D_{k,j+1} + \bar{P}(j+1))] + tr(\bar{D}_{j+1}D(j+1)) - (s+1)n.$$

If $|E_j| < \epsilon$ or $j = n_{max}$, then exit; or else set $j = j+1$ and go to step (2).

V. NUMERICAL EXAMPLES

Example 2: The Itô stochastic T-S model based control system has the following fuzzy rules:

- R_1 : If x_1 is F_1^1 and x_2 is F_2^1 , then
 $dx = (A_1x + B_1u)dt + C_1xdW(t)$
 R_2 : If x_1 is F_1^1 and x_2 is F_2^2 , then
 $dx = (A_2x + B_2u)dt + C_2xdW(t)$
 R_3 : If x_1 is F_1^2 and x_2 is F_2^1 , then
 $dx = (A_3x + B_3u)dt + C_3xdW(t)$
 R_4 : If x_1 is F_1^2 and x_2 is F_2^2 , then
 $dx = (A_4x + B_4u)dt + C_4xdW(t)$

where all the known matrices are listed as follows:

$$A_1 = \begin{bmatrix} -0.5 & 0 \\ -1 & 1.59 \end{bmatrix}, A_2 = \begin{bmatrix} -0.8 & 1 \\ 0 & 1 \end{bmatrix}, B_1 = \begin{bmatrix} -2 \\ 3 \end{bmatrix}$$

$$A_3 = \begin{bmatrix} -0.9 & 1.09 \\ 0 & 0.8 \end{bmatrix}, A_4 = \begin{bmatrix} -1 & 1 \\ 0 & 0.4 \end{bmatrix}, B_2 = \begin{bmatrix} -2 \\ 2 \end{bmatrix},$$

$$C_1 = \begin{bmatrix} 0.2 & 0 \\ 0 & -0.1 \end{bmatrix}, C_2 = \begin{bmatrix} 0.3 & 0 \\ 0 & -0.2 \end{bmatrix}, B_3 = \begin{bmatrix} -1 \\ 3 \end{bmatrix}$$

$$C_3 = \begin{bmatrix} 0.2 & 0 \\ 0 & -0.3 \end{bmatrix}, C_4 = \begin{bmatrix} 0.35 & 0 \\ 0 & -0.1 \end{bmatrix}, B_4 = \begin{bmatrix} -1.5 \\ 2.6 \end{bmatrix}.$$

Then all ordinal numbers $\alpha_{ij}, i = 1, \dots, 4; j = 1, 2$ read

$$\alpha_{11} = 1, \quad \alpha_{21} = 1, \quad \alpha_{31} = 2, \quad \alpha_{41} = 2$$

$$\alpha_{12} = 1, \quad \alpha_{22} = 2, \quad \alpha_{32} = 1, \quad \alpha_{42} = 2$$

with $s_1 = s_2 = 2$. It is assumed that the membership functions $\{\mu_j^i(x_j), i = 1, 2; j = 1, 2\}$ of the fuzzy sets $\{F_j^i : i, j = 1, 2\}$ in the fuzzy rules are given by

$$w_1^1(x_1) = 0.0169e^{-x_1^2}, \quad w_2^1(x_2) = 0.0024e^{-0.05(x_2-3)^2}$$

$$w_1^2(x_1) = 1 - w_1^1(x_1), \quad w_2^2(x_2) = 1 - w_2^1(x_2).$$

One has by (1) that

$$\mu_1^{\alpha_{11}}(x_1) = \mu_1^{\alpha_{21}}(x_1) = w_1^1(x_1) = 0.0169e^{-x_1^2}$$

$$\mu_1^{\alpha_{31}}(x_1) = \mu_1^{\alpha_{41}}(x_1) = w_1^2(x_1) = 1 - 0.0169e^{-x_1^2}$$

$$\mu_2^{\alpha_{12}}(x_2) = \mu_2^{\alpha_{32}}(x_2) = w_2^1(x_2) = 0.0024e^{-0.05(x_2-3)^2}$$

$$\mu_2^{\alpha_{22}}(x_2) = \mu_2^{\alpha_{42}}(x_2) = w_2^2(x_2) = 1 - 0.0024e^{-0.05(x_2-3)^2}.$$

It can be checked that Assumption 1 is satisfied for all the $\mu_j^{\alpha_{ij}}(x_j), i = 1, \dots, 4; j = 1, 2$ with all upper bounds $\beta_{ij}, i = 1, \dots, 4; j = 1, 2$ listed in Table 1.

β_{11}	β_{21}	β_{31}	β_{41}	β_{12}
0.0125	0.0125	0.0125	0.0125	0.0125
β_{22}	β_{32}	β_{42}	×	×
0.0125	0.0125	0.0125	×	×

Table 1 : Upper bounds β_{ij}


The objective is to design a controller such that the resulting Itô closed-loop stochastic system is stochastically asymptotically stable. Solving the minimization problem (41)-(45), we obtain a set of solutions as follows:

$$\begin{aligned}
 P_1 &= \begin{bmatrix} 0.8004 & 0.1785 \\ 0.1785 & 2.4479 \end{bmatrix}, P_2 = \begin{bmatrix} 0.8217 & 0.1785 \\ 0.1785 & 2.4479 \end{bmatrix} \\
 P_3 &= \begin{bmatrix} 0.8217 & 0.1785 \\ 0.1785 & 2.6144 \end{bmatrix}, P_4 = \begin{bmatrix} 0.8004 & 0.1785 \\ 0.1785 & 2.6144 \end{bmatrix} \\
 \bar{P}_1 &= \begin{bmatrix} 1.2701 & -0.0926 \\ -0.0926 & 0.4153 \end{bmatrix}, \bar{P}_2 = \begin{bmatrix} 1.2365 & -0.0902 \\ -0.0902 & 0.4151 \end{bmatrix} \\
 \bar{P}_3 &= \begin{bmatrix} 1.2353 & -0.0843 \\ -0.0843 & 0.3883 \end{bmatrix}, \bar{P}_4 = \begin{bmatrix} 1.2687 & -0.0866 \\ -0.0866 & 0.3884 \end{bmatrix} \\
 D &= \begin{bmatrix} 1.5380 & 0 \\ 0 & 2.6231 \end{bmatrix}, \bar{D} = \begin{bmatrix} 0.6502 & 0 \\ 0 & 0.3812 \end{bmatrix} \\
 \Omega_1 &= \begin{bmatrix} 1.7249 & 0.0649 \\ -0.2823 & 0.3543 \end{bmatrix}, \Omega_2 = \begin{bmatrix} 1.5810 & 0.1353 \\ -0.3666 & 0.2958 \end{bmatrix} \\
 \Omega_3 &= \begin{bmatrix} 1.7120 & 0.0859 \\ -0.3078 & 0.3397 \end{bmatrix}, \Omega_4 = \begin{bmatrix} 1.9383 & 0.0697 \\ -0.3188 & 0.3510 \end{bmatrix} \\
 M_1 &= \begin{bmatrix} 0.4650 & -0.3815 \end{bmatrix}, M_2 = \begin{bmatrix} 0.3715 & -0.3311 \end{bmatrix} \\
 M_3 &= \begin{bmatrix} 0.3924 & -0.3659 \end{bmatrix}, M_4 = \begin{bmatrix} 0.4414 & -0.3802 \end{bmatrix}.
 \end{aligned}$$


By Theorem 3, the local feedback gains are given by

$$\begin{aligned}
 K_1 &= \begin{bmatrix} 0.0906 & -1.0936 \end{bmatrix}, K_2 = \begin{bmatrix} -0.0222 & -1.1092 \end{bmatrix} \\
 K_3 &= \begin{bmatrix} 0.0340 & -1.0855 \end{bmatrix}, K_4 = \begin{bmatrix} 0.0480 & -1.0927 \end{bmatrix}.
 \end{aligned}$$


To illustrate the results in Theorem 3, Monte Carlo simulations have been carried out by using a discretization approach [7], [27], [28]. Some initial parameters are given as follows: simulation interval $t \in [0, T]$ with $T = 15$, initial values $x_a(0) = (-7, 3)^T$, $x_b(0) = (-5, 5)^T$, $x_c(0) = (-5, 10)^T$, $x_d(0) = (12, 10)^T$, normally distributed variance $\delta t = T/N$ with $N = 2^8$, step size $\Delta t = R\delta t$ with $R = 2$. Figures (a)-(d) depict the state responses along 2, 10, 30 and 50 individual Wiener process paths respectively, as well as their mean values over these paths. These figures also show the stochastic stability of the Itô closed-loop stochastic system in (35).

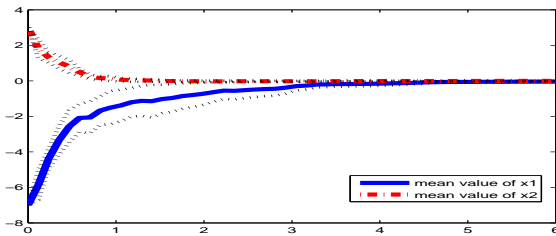


(a) State responses of x_1 and x_2 along 2 paths of Wiener process

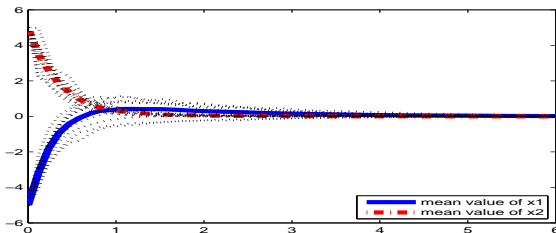

(b) State responses of x_1 and x_2 along 10 paths of Wiener process

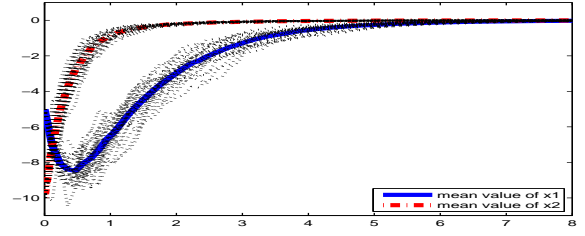

(c) State responses of x_1 and x_2 along 30 paths of Wiener process

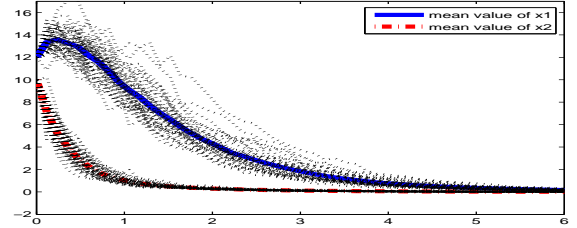

(d) State responses of x_1 and x_2 along 50 paths of Wiener process

VI. CONCLUSION

In this section, the main results and the major features of this paper are summarized as follows. Line integral approach to stability analysis and stabilization is proposed for Itô stochastic T-S models. The stochastic stability analysis of these models needs to handle Hessian matrix of the line integral Lyapunov function. One can see from (18) that the Hessian matrix can be decomposed into two parts: one part is the weighting sum of a set of positive definite matrices P_i ; Another is a sum of x dependent matrices $\frac{\partial h_i}{\partial x} x^T D_i$ with rank one. Invoking the property in (21) of matrix with rank one and applying Lemma 1 lead to the upper bound $\beta y^T D y$ of $y^T \sum_{i=1}^s \frac{\partial h_i(x)}{\partial x} x^T D_i y$. Then an estimate of $\mathcal{L}V$ can also be achieved. It has been shown that the line integral based analysis results of stability are more general than those ones derived from quadratic Lyapunov function due to the fact that a quadratic Lyapunov function is a special line integral. By facilitating the cone complementarity linearization algorithm and introducing some additional matrix variables, a line integral approach is proposed for stabilization of the Itô stochastic T-S model (4).

There is also some conservativeness about the proposed approach to stabilization, one source of which may be that to make controller design feasible, we have to impose certain restrictions on the additional matrix variables. Furthermore, using Lemma 3 to derive the stabilization result in Theorem 3 also results in some conservativeness.

By using the techniques in this paper, the results on the stability and stabilization of the Itô stochastic T-S model can be readily extended to the fuzzy systems with uncertainties of the norm-bounded or linear fractional types. In addition, the problem of output feedback control for this class of systems with (or without) time-delay deserves further attention.

REFERENCES

- [1] G. Feng, "A survey on analysis and design of model-based fuzzy control systems," *IEEE Trans. Fuzzy Syst.*, vol. 14, no. 5, pp. 676-697, Oct. 2006.

- [2] P. -T. Lin, C. -H. Wang and T. -T. Lee, "Time-optimal control of T-S fuzzy models via Lie algebra," *IEEE Trans. Fuzzy Syst.*, vol. 17, no. 4, pp. 737-749, Aug. 2009.
- [3] A. Sala and C. Arino, "Relaxed stability and performance conditions for Takagi-Sugeno fuzzy systems with knowledge on membership-function overlap," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 37, no. 3, pp. 727-732, Jun. 2007.
- [4] T. Takagi and M. Sugeno, "Fuzzy identification of systems and its application to modeling and control," *IEEE Trans. Syst., Man, Cybern.*, vol. 15, pp. 116-132, Jan./Feb. 1985.
- [5] C. -H. Fang, Y. -S. Liu, S. -W. Kau, L. Hong and C. -H. Lee, "A new LMI-based approach to relaxed quadratic stabilization of T-S fuzzy control systems," *IEEE Trans. Fuzzy Syst.*, vol. 14, no. 3, pp. 386-397, Jun. 2006.
- [6] E. Kim and H. Lee, "New approaches to relaxed quadratic stability condition of fuzzy control systems," *IEEE Trans. Fuzzy Syst.*, vol. 8, no. 5, pp. 523-534, Oct. 2000.
- [7] S. Zhou, W. Ren and J. Lam, "Stabilization for T-S model based uncertain stochastic systems," *Inf. Sci.*, vol. 181, no. 4, pp. 779-791, Feb. 2011.
- [8] T. M. Guerra and L. Vermeiren, "LMI-based relaxed non-quadratic stabilization conditions for nonlinear systems in Takagi-Sugeno's form," *Automatica*, vol. 40, no. 5, pp. 823-829, May. 2004.
- [9] T. M. Guerra, M. Bernal and K. Guelton, "Non-quadratic local stabilization for continuous-time Takagi-Sugeno models," *Fuzzy Sets Syst.*, vol. 201, no. 16, pp. 40-54, Aug. 2012.
- [10] L. A. Mozelli, R. M. Palhares and G. S. C. Avellar, "A systematic approach to improve multiple Lyapunov function stability and stabilization conditions for fuzzy systems," *Inf. Sci.*, vol. 179, no. 8, pp. 1149-1162, Mar. 2009.
- [11] S. Zhou, G. Feng, J. Lam and S. Xu, "Robust H_∞ control for discrete fuzzy system via basis dependent Lyapunov functions," *Inf. Sci.*, vol. 174, no. 3-4, pp. 197-217, Aug. 2005.
- [12] S. Zhou, J. Lam and W. X. Zheng, "Control design for fuzzy systems based on relaxed nonquadratic stability and H_∞ performance conditions," *IEEE Trans. Fuzzy Syst.* vol. 15, no. 2, pp. 188-199, Apr. 2007.
- [13] K. Tanaka, T. Hori and H. O. Wang, "A multiple lyapunov function approach to stabilization of fuzzy control systems," *IEEE Trans. Fuzzy Syst.*, vol. 11, no. 4, pp. 582-589, Aug. 2003.
- [14] B. Zhang, S. Xu, G. Zong, and Y. Zou, "Delay-dependent stabilization for stochastic fuzzy systems with time delays," *Fuzzy Sets Syst.*, vol. 158, no. 20, pp. 2238-2250, Oct. 2007.
- [15] B. -J. Rhee and S. Won, "A new fuzzy Lyapunov function approach for a Takagi-Sugeno fuzzy control system design," *Fuzzy Sets Syst.*, Vol. 157, no. 9, pp. 1211-1228, May 2006.
- [16] Q. Gao, G. Feng and Y. Wang, "Universal fuzzy models and universal fuzzy controllers for stochastic nonaffine nonlinear systems," *IEEE Trans. Fuzzy Syst.*, vol. 21, no. 2, pp. 328-341, Apr. 2013.
- [17] L. Hu and A. Yang, "Fuzzy model-based control of nonlinear stochastic systems with time-delay," *Nonlinear Analysis*, vol. 71, no. 12, pp. 2855-2865, Dec. 2009.
- [18] P. Liu and H. Li, "Approximation of stochastic processes by T-S fuzzy systems," *Fuzzy Sets Syst.*, vol. 155, no. 2, pp. 215-235, Oct. 2005.
- [19] M. Malinowski, "Fuzzy and set-valued stochastic differential equations with local Lipschitz condition," *IEEE Trans. Fuzzy Syst.*, vol. 23, no. 5, pp. 1891-1898, Oct. 2015.
- [20] W. -J. Chang, C. -C. Ku and P. -H. Huang, "Robust fuzzy control for uncertain stochastic time-delay Takagi-Sugeno fuzzy models for achieving passivity," *Fuzzy Sets Syst.*, vol. 161, no. 15, pp. 2012-2032, Aug. 2010.
- [21] L. Sheng, M. Gao and H. Yang, "Delay-dependent robust stability for uncertain stochastic fuzzy Hopfield neural networks with time-varying delays," *Fuzzy Sets Syst.*, vol. 160, no. 24, pp. 3503-3517, Dec. 2009.
- [22] X. Mao, "Stochastic differential equations and applications," *Chichester, U.K.: Horwood*, 1997.
- [23] D. Lee and D. Kim, "Relaxed LMI conditions for local stability and local stabilization of continuous-time Takagi-Sugeno fuzzy systems," *IEEE Trans. Circuits Syst.*, vol. 44, no. 3, pp. 394-405, Mar. 2014.
- [24] S. Zhou, G. Feng and C. Feng, "Robust control for a class of uncertain nonlinear systems: adaptive fuzzy approach based on backstepping," *Fuzzy Sets Syst.*, vol. 151, no. 1, pp. 1-20, Apr. 2005.
- [25] J. C. Geromel and R. H. Korogui, "Analysis and synthesis of robust control systems using linear parameter dependent Lyapunov functions," *IEEE Trans. Autom. Control*, vol. 51, no. 12, pp. 1984-1989, Dec. 2006.
- [26] L. El. Ghaoui, F. Oustry, and M. AitRami, "A cone complementarity linearization algorithm for static output-feedback and related problems," *IEEE Trans. Autom. Control*, vol. 42, no. 8, pp. 1171-1176, Aug. 1997.
- [27] D. Higham, "An algorithmic introduction to numerical simulation of stochastic differential equations," *SIAM Review*, vol. 43, no. 3, pp. 525-546, Sep. 2001.
- [28] Y. Niu, D. W. C. Ho and J. Lam, "Robust integral sliding mode control for uncertain stochastic systems with time-varying delay," *Automatica*, vol. 41 no. 5, pp. 873-880, May 2005.